FAIRCHILD
A Schlumberger Company

μA725 Instrumentation Operational Amplifier

Linear Division Operational Amplifiers

Description

The μA725 is a monolithic instrumentation operational amplifier constructed using the Fairchild Planar Epitaxial process. It is intended for precise, low level signal amplification applications where low noise, low drift, and accurate closed loop gain are required. The offset null capability, low power consumption, very high voltage gain as well as wide power supply voltage range provide superior performance for a wide range of instrumentation applications. The μA725 is lead compatible with the popular μA741 operational amplifier.

- **Low Input Noise Current — 0.15 pA/$\sqrt{Hz}$ At 1.0 kHz Typically**
- **High Open Loop Gain — 3,000,000 Typically**
- **Low Input Offset Current — 2.0 nA Typically**
- **Low Input Voltage Drift — 0.6 μV/°C Typically**
- **High Common Mode Rejection — 120 dB**
- **High Input Voltage Range — ±14 V Typically**
- **Wide Power Supply Range — ±3.0 V To ±22 V**
- **Offset Null Capability**


Absolute Maximum Ratings

Storage Temperature Range	
Metal Can	−65°C to +175°C
Molded DIP	−65°C to +150°C
Operating Temperature Range	
Extended (μA725AM, μA725M)	−55°C to +125°C
Commercial (μA725EC, μA725C)	0°C to +70°C
Lead Temperature	
Metal Can (soldering, 60 s)	300°C
Molded DIP (soldering, 10 s)	265°C
Internal Power Dissipation[1, 2]	
8L-Metal Can	1.00 W
8L-Molded DIP	0.93 W
Supply Voltage	±22 V
Differential Input Voltage	±5.0 V
Input Voltage[3]	±22 V
Voltage Between Offset Null and V+	±0.5 V

Notes

1. $T_{J\ Max}$ = 150°C for the Molded DIP, and 175°C for the Metal Can.
2. Ratings apply to ambient temperature at 25°C. Above this temperature, derate the 8L-Metal Can at 6.7 mW/°C, and the 8L-Molded DIP at 7.5 mW/°C.
3. For supply voltages less than ±22 V, the absolute maximum input voltage is equal to the supply voltage.

Connection Diagram 8-Lead Metal Package (Top View)




Lead 4 connected to case.

Order Information

Device Code	Package Code	Package Description
μA725HM	5W	Metal
μA725HC	5W	Metal
μA725AHM	5W	Metal
μA725EHC	5W	Metal


Connection Diagram 8-Lead DIP (Top View)

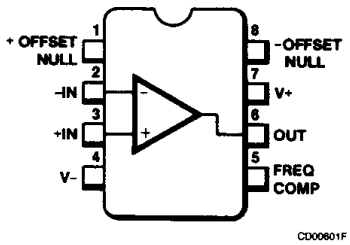

Order Information

Device Code	Package Code	Package Description
μA725TC	9T	Molded DIP

Equivalent Circuit

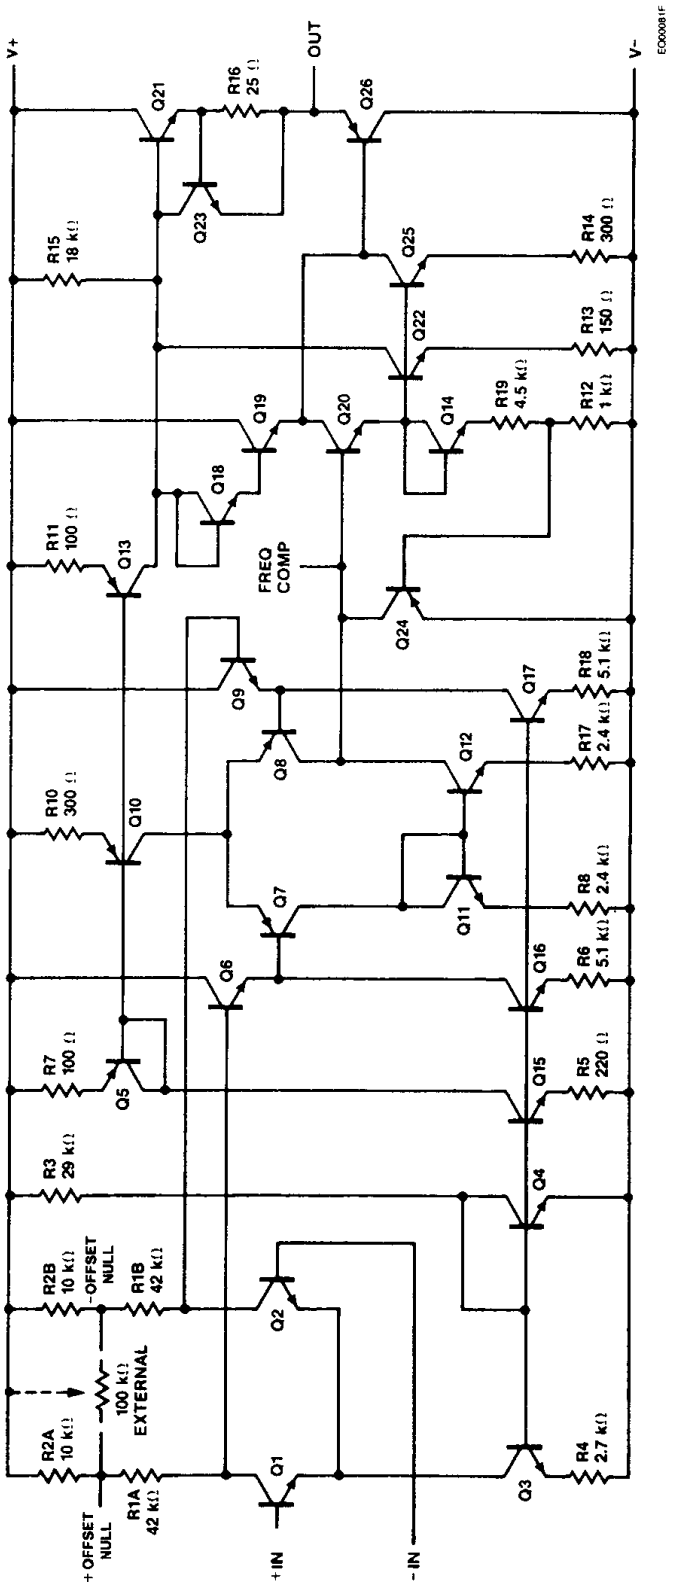

μA725A/E and μA725
Electrical Characteristics $T_A = 25°C$, $V_{CC} = \pm 15$ V, unless otherwise specified.

Symbol	Characteristic	Condition	μA725A/E			μA725			Unit
			Min	Typ	Max	Min	Typ	Max	
V_{IO}	Input Offset Voltage (Without external trim)	$R_S \leq 10$ kΩ			0.5		0.5	1.0	mV
I_{IO}	Input Offset Current				5.0		2.0	20	nA
I_{IB}	Input Bias Current				75		42	100	nA
Z_I	Input Impedance			1.5			1.5		MΩ
P_c	Power Consumption	μA725A/μA725		80	120		80	120	mW
		μA725E			150				
		$V_{CC} = \pm 3.0$ V			6.0				
CMR	Common Mode Rejection	$R_S \leq 10$ kΩ	120	130		110	120		dB
V_{IR}	Input Voltage Range		±13.5	±14		±13.5	±14		V
PSRR	Power Supply Rejection Ratio	$R_S \leq 10$ kΩ		2.0	5.0		2.0	10	μV/V
A_{VS}	Large Signal Voltage Gain	$R_L \geq 2.0$ kΩ, $V_O = \pm 10$ V	1000	3000		1000	3000		V/mV
V_{OP}	Output Voltage Swing	$R_L = 10$ kΩ	±12.5			±12	±13.5		V
		$R_L = 2.0$ kΩ	±10			±10	±13.5		V
e_n	Input Noise Voltage	$f_o = 10$ Hz		15	15		15		nV/√Hz
		$f_o = 100$ Hz		9.0	12		9.0		
		$f_o = 1.0$ kHz		8.0	12		8.0		
i_n	Input Noise Current	$f_o = 10$ Hz		1.0	1.2		1.0		pA/√Hz
		$f_o = 100$ Hz		0.3	0.6		0.3		
		$f_o = 1.0$ kHz		0.15	0.25		0.15		

The following specifications apply over the range of $0°C \leq T_A \leq +70°C$ for μA725E, $-55°C \leq T_A \leq +125°C$ for μA725A and μA725.

V_{IO}	Input Offset Voltage (Without external trim)	$R_S \leq 10$ kΩ			0.75			1.5	mV
$\Delta V_{IO}/\Delta T$	Input Offset Voltage Temperature Sensitivity (Without external trim)	$R_S = 50$ Ω		2.0	2.0		2.0	5.0	μV/°C
$\Delta V_{IO}/\Delta T$	Input Offset Voltage Temperature Sensitivity (With external trim)	$R_S = 50$ Ω		0.6			0.6		μV/°C
I_{IO}	Input Offset Current	$T_A = T_{A\ Max}$			4.0		1.2	20	nA
		$T_A = T_{A\ Min}$		5.0	18		7.5	40	

μA725A/E and μA725 (Cont.)
Electrical Characteristics $V_{CC} = \pm 15$ V, $0°C \leq T_A \leq +70°C$ for μA725E, $-55°C \leq T_A \leq +125°C$ for μA725A and μA725.

Symbol	Characteristic	Condition	μA725A/E			μA725			Unit
			Min	Typ	Max	Min	Typ	Max	
$\Delta I_{IO}/\Delta T$	Input Offset Current Temperature Sensitivity			35	90		35		pA/°C
I_{IB}	Input Bias Current	$T_A = T_{A\ Max}$			70		20	100	nA
		$T_A = T_{A\ Min}$			180		80	200	nA
CMR	Common Mode Rejection	$R_S \leq 10$ kΩ	110			100			dB
PSRR	Power Supply Rejection Ratio	$R_S \leq 10$ kΩ			8.0			20	μV/V
A_{VS}	Large Signal Voltage Gain	$R_L \geq 2.0$ kΩ, $T_A = T_{A\ Max}$	1000			1000			V/mV
		$R_L \geq 2.0$ kΩ, $T_A = T_{A\ Min}$	500			250			V/mV
V_{OP}	Output Voltage Swing	$R_L = 2.0$ kΩ	±10			±10			V

μA725C
Electrical Characteristics $T_A = 25°C$, $V_{CC} = \pm 15$ V, unless otherwise specified.


Symbol	Characteristic	Condition	Min	Typ	Max	Unit
V_{IO}	Input Offset Voltage (Without external trim)	$R_S \leq 10$ kΩ		0.5	2.5	mV
I_{IO}	Input Offset Current			2.0	35	nA
I_{IB}	Input Bias Current			42	125	nA
e_n	Input Noise Voltage	$f_o = 10$ Hz		15		nV/√Hz
		$f_o = 100$ Hz		9.0		
		$f_o = 1.0$ kHz		8.0		
i_n	Input Noise Current	$f_o = 10$ Hz		1.0		pA/√Hz
		$f_o = 100$ Hz		0.3		
		$f_o = 1.0$ kHz		0.15		
Z_I	Input Impedance			1.5		MΩ
V_{IR}	Input Voltage Range		±13.5	±14		V
A_{VS}	Large Signal Voltage Gain	$R_L \geq 2.0$ kΩ, $V_O = \pm 10$ V	250	3000		V/mV
CMR	Common Mode Rejection	$R_S \leq 10$ kΩ	94	120		dB
PSRR	Power Supply Rejection Ratio	$R_S \leq 10$ kΩ		2.0	35	μV/V
V_{OP}	Output Voltage Swing	$R_L = 10$ kΩ	±12	±13.5		V
		$R_L = 2.0$ kΩ	±10	±13.5		
P_C	Power Consumption			80	150	mW

μA725C (Cont.)
Electrical Characteristics $0°C \leq T_A \leq +70°C$, $V_{CC} = \pm 15$ V, unless otherwise specified.


Symbol	Characteristic	Condition	Min	Typ	Max	Unit
V_{IO}	Input Offset Voltage (Without external trim)	$R_S \leq 10$ kΩ			3.5	mV
$\Delta V_{IO}/\Delta T$	Input Offset Voltage Temperature Sensitivity (Without external trim)	$R_S = 50$ Ω		2.0		μV/°C
$\Delta V_{IO}/\Delta T$	Input Offset Voltage Temperature Sensitivity (With external trim)	$R_S = 50$ Ω		0.6		μV/°C
I_{IO}	Input Offset Current	$T_A = T_{A\ Max}$		1.2	35	nA
		$T_A = T_{A\ Min}$		4.0	50	
$\Delta I_{IO}/\Delta T$	Input Offset Current Temperature Sensitivity			10		pA/°C
I_{IB}	Input Bias Current	$T_A = T_{A\ Max}$			125	nA
		$T_A = T_{A\ Min}$			250	
A_{VS}	Large Signal Voltage Gain	$R_L \geq 2.0$ kΩ	125			V/mV
CMR	Common Mode Rejection	$R_S \leq 10$ kΩ		115		dB
PSRR	Power Supply Rejection Ratio	$R_S \leq 10$ kΩ		20		μV/V
V_{OP}	Output Voltage Swing	$R_L = 2.0$ kΩ	±10			V

Typical Performance Curves


Voltage Gain vs Temperature For Supply Voltages For μA725/A

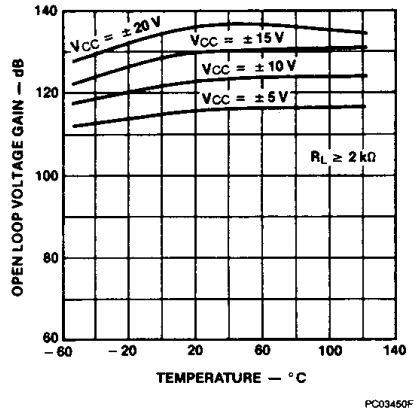


Change In Trimmed Input Offset Voltage vs Temperature For μA725/A

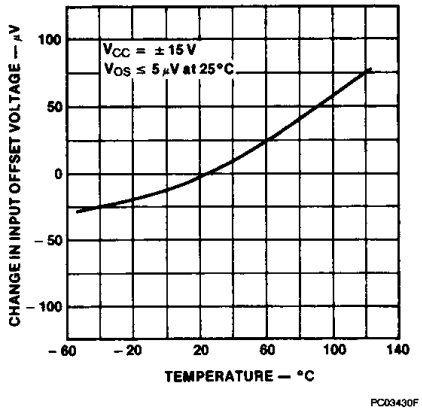


Untrimmed Input Offset Voltage vs Temperature For μA725/A

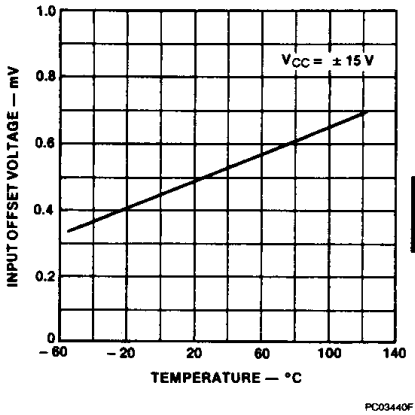


Voltage Gain vs Temperature for Supply Voltages For μA725C/E

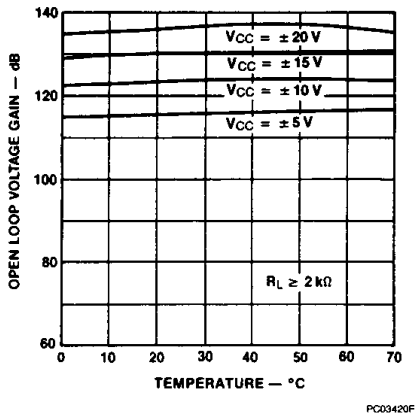


Trimmed Input Offset Voltage vs Temperature For μA725C/E

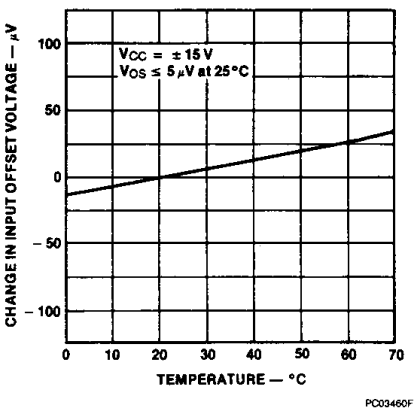


Untrimmed Input Offset Voltage vs Temperature For μA725C/E

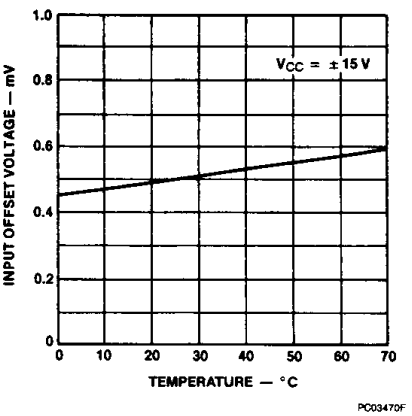


Input Offset Current vs Temperature For μA725/A

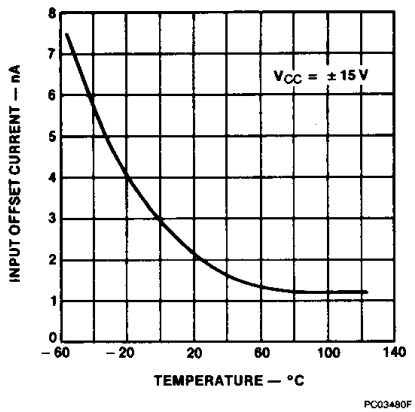

Input Offset Current vs Temperature For μA725C/E

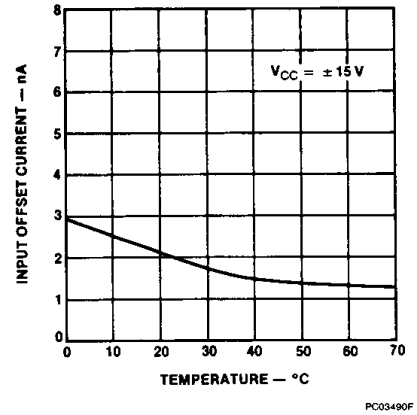


Input Bias Current vs Temperature For μA725/A

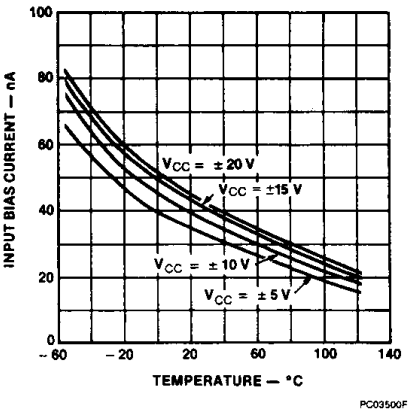


Typical Performance Curves for all Types (Cont.)


Input Bias Current vs Temperature μA725C/E

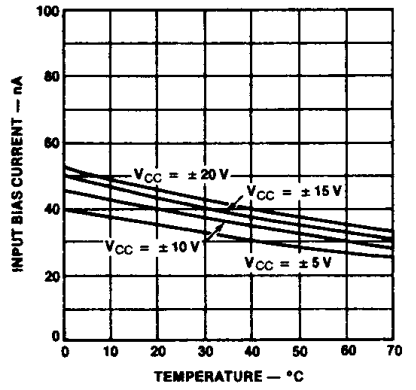


Common Mode Rejection Ratio vs Temperature

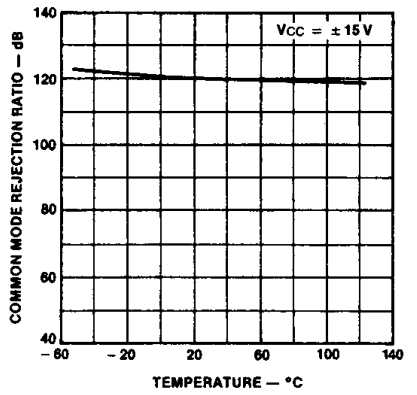


Power Supply Rejection Ratio vs Temperature

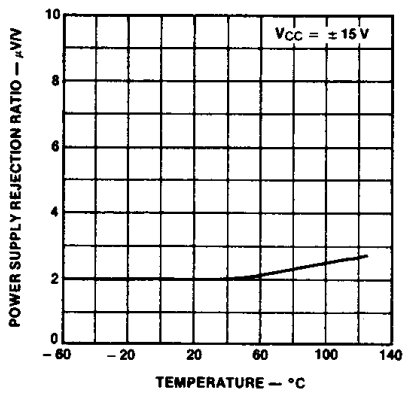


Output Voltage Swing vs Temperature

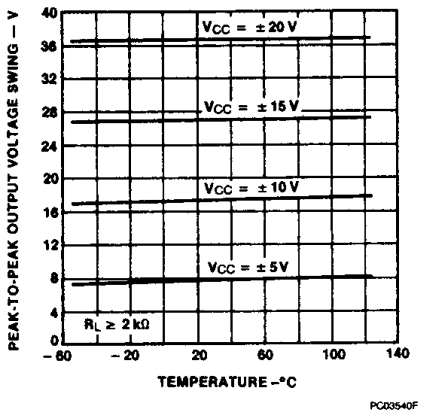


Common Mode Rejection Ratio vs Supply Voltage

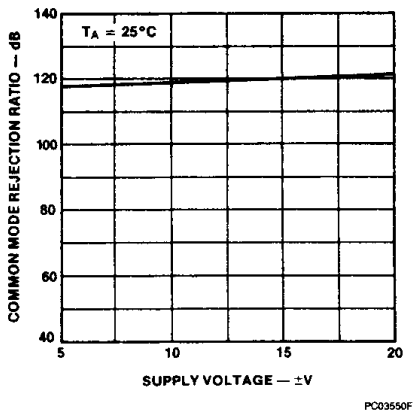


DC Closed Loop Voltage Gain Error vs Source Resistance

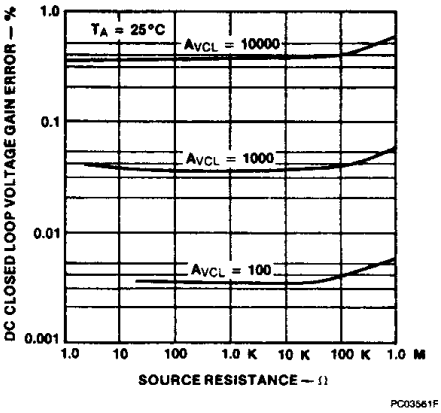


Common Mode Input Voltage Range vs Supply Voltage

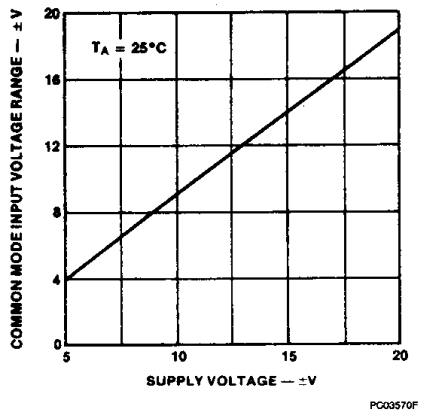

Input Offset Voltage Drift vs Time

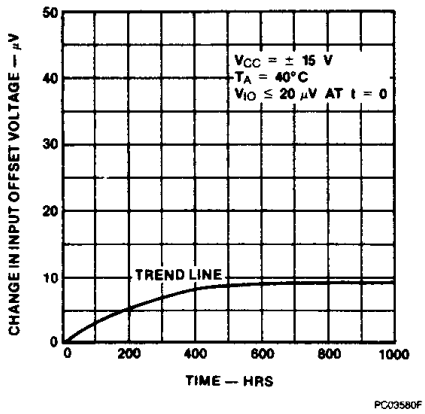


Stabilization Time of Input Offset Voltage From Power Turn-On

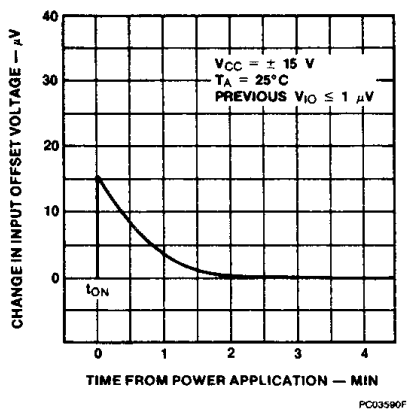


Typical Performance Curves for all Types (Cont.)

Change In Input Offset Voltage Due to Thermal Shock vs Time

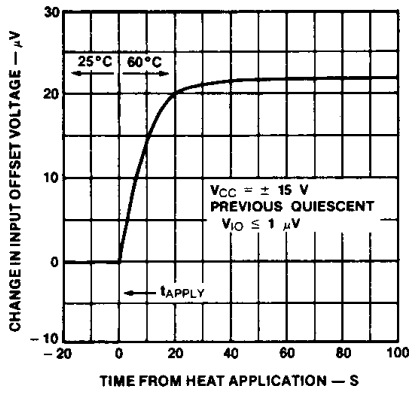


PC03600F

Input Noise Voltage vs Frequency

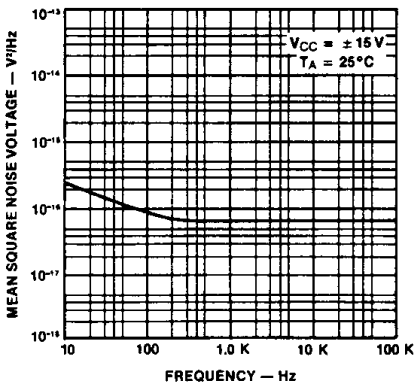


PC03611F

Input Noise Current vs Frequency

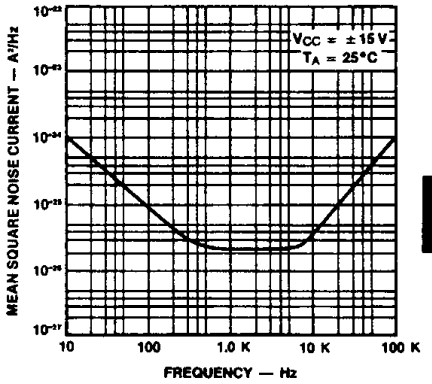


PC03621F

Broadband Noise for Various Bandwidths

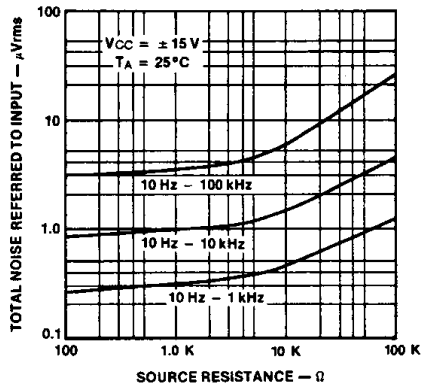


PC03631F

Narrow Band Spot Noise Figure Contours

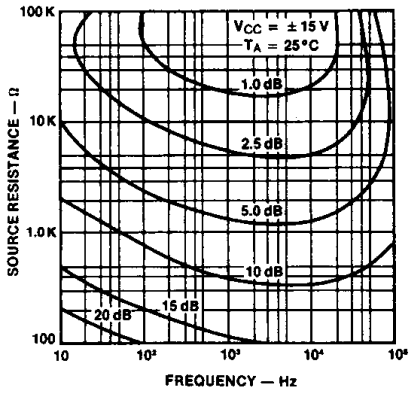


PC03641F

Noise Figure vs Source Resistance

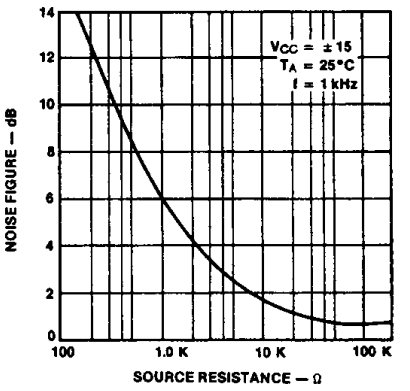


PC03651F

Equivalent Input Noise Voltage Due to External Common Mode Noise vs Frequency

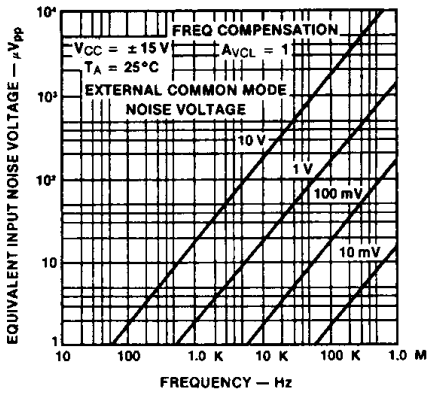

PC03661F


Equivalent Input Ripple Voltage Due to Power Supply Ripple vs Frequency

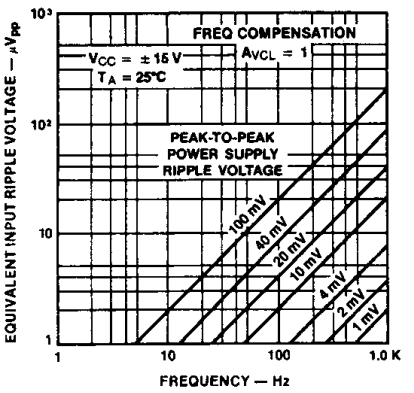


PC03671F

Typical Performance Curves for all Types (Cont.)


Power Consumption vs Temperature

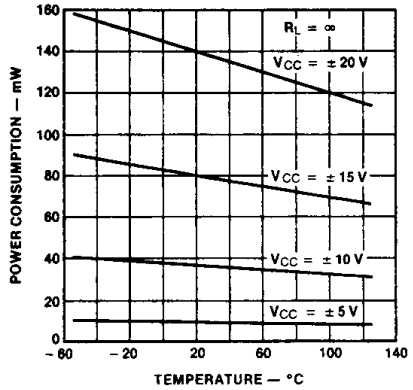


Open Loop Frequency Response For Values of Compensation

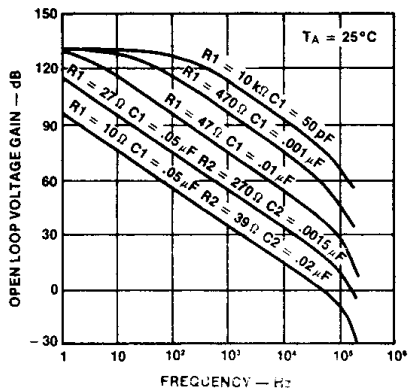


Values for Suggested Compensation Networks vs Various Closed Loop Voltage Gains

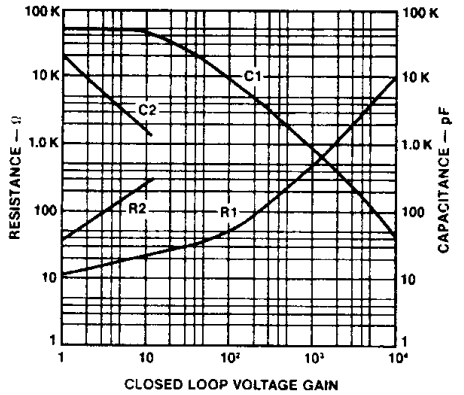


Frequency Response for Various Closed Loop Gains

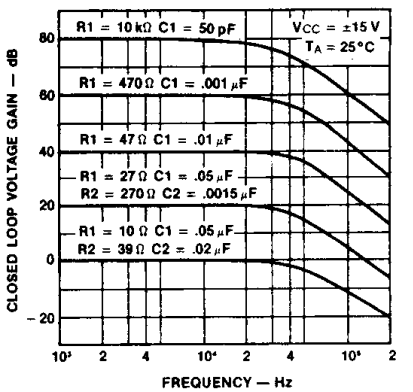

Output Voltage Swing vs Frequency

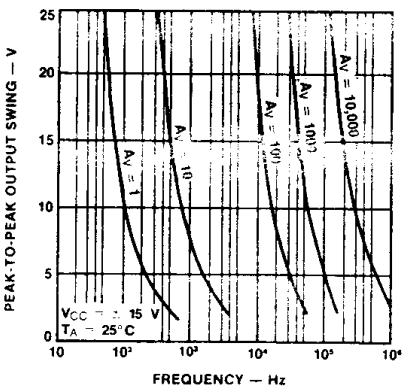


Slew Rate vs Closed Loop Gain

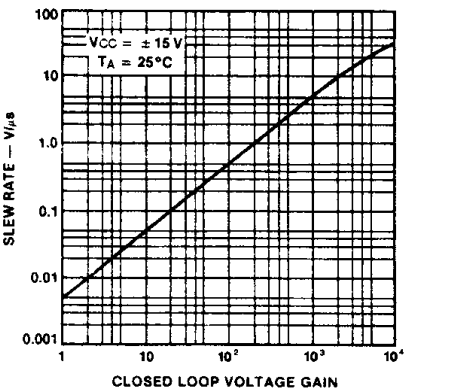


Compensation Component Values

A_V	R_1 (Ω)	C_1 (μF)	R_2 (Ω)	C_2 (μF)
10,000	10 k	50 pF	—	—
1,000	470	.001	—	—
100	47	.01	—	—
10	27	.05	270	.0015
1	10	.05	39	.02

Voltage Offset Null Circuit




Frequency Compensation Circuit




Use $R_3 = 51\Omega$ when the amplifier is operated with capacitive load.

Transient Response Test Circuit

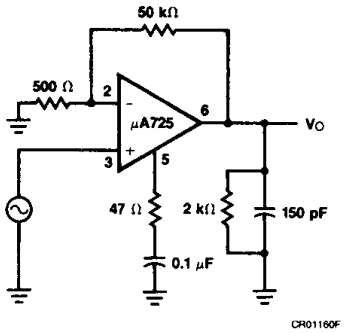


Transient Response

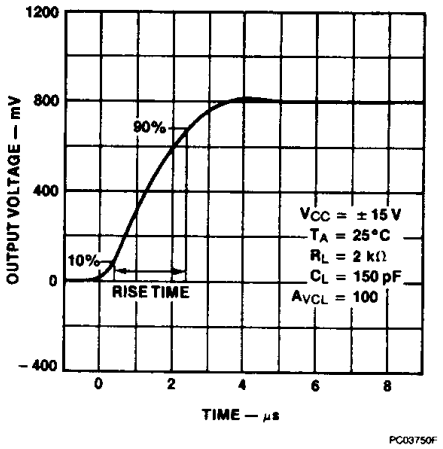


Typical Applications

Precision Amplifier A_{VCL} = 1000

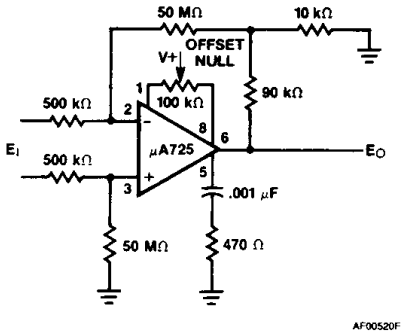


Characteristics
A_V = 1000 = 60 dB
DC Gain Error = 0.05%
Bandwidth = 1 kHz for −0.05% error
Diff. Input Res. = 1 MΩ
Typical amplifying capability
e_n = 10 μV on V_{CM} = 1.0 V
Caution: Minimize Stray Capacitance

Active Filter — Band Pass With 60 dB Gain

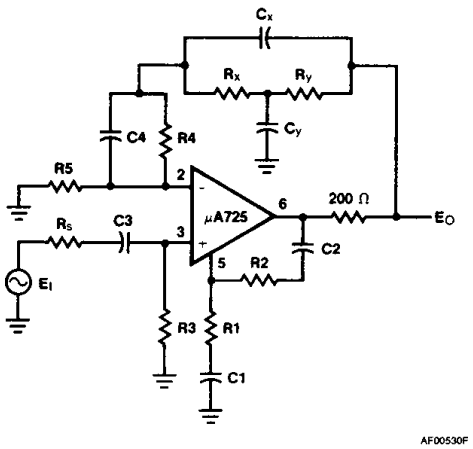


Active Filter Frequency Response

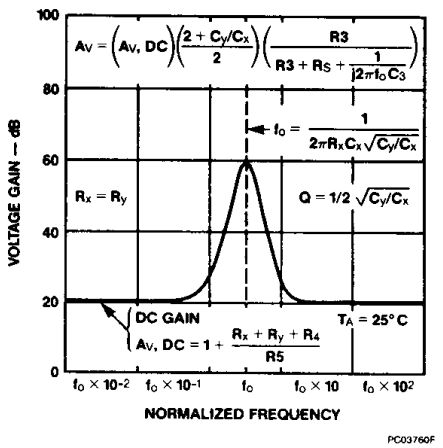


Lead numbers are shown for metal package only.

Typical Applications (Cont.)


Photodiode Amplifier (Note 2)

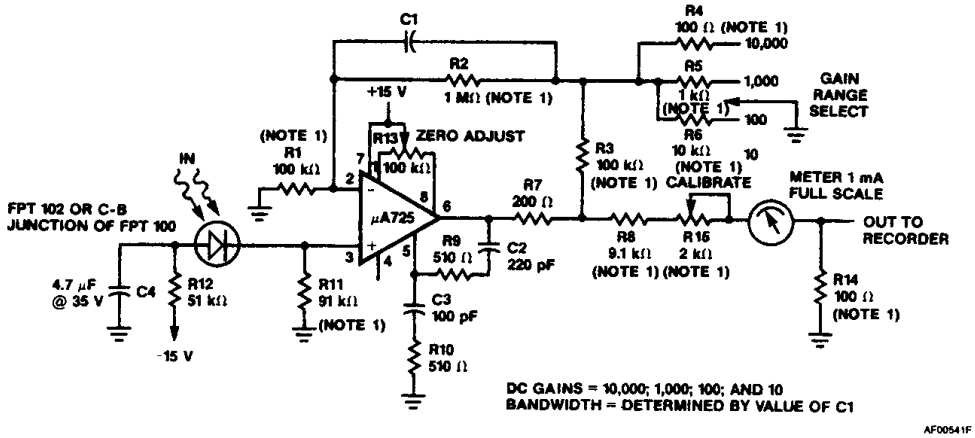

Thermocouple Amplifier (Note 2)

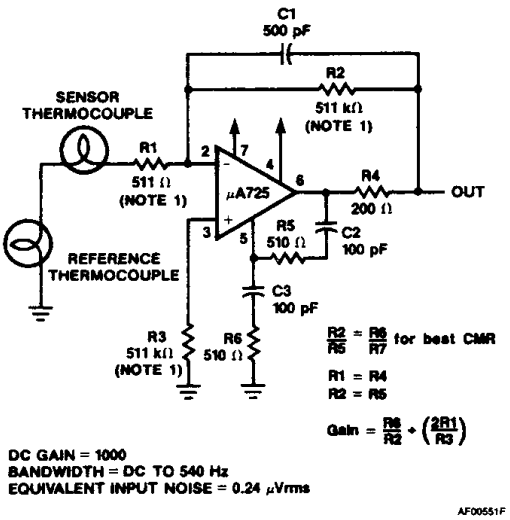

± 100 V Common Mode Range Differential Amplifier (Note 2)

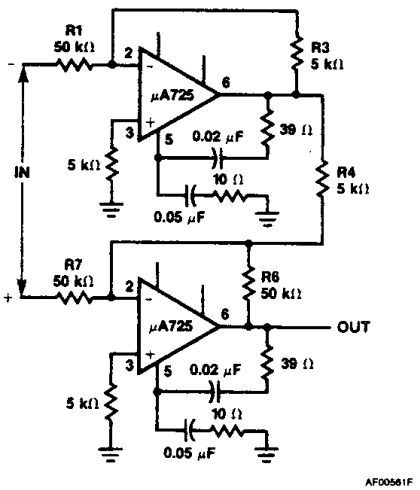


Notes

1. Indicates ± 1% metal film resistors recommended for temperature stability.
2. Lead numbers are shown for metal package only.

Typical Applications (Cont.)

Instrumentation Amplifier With High Common Mode Rejection (Note 1)

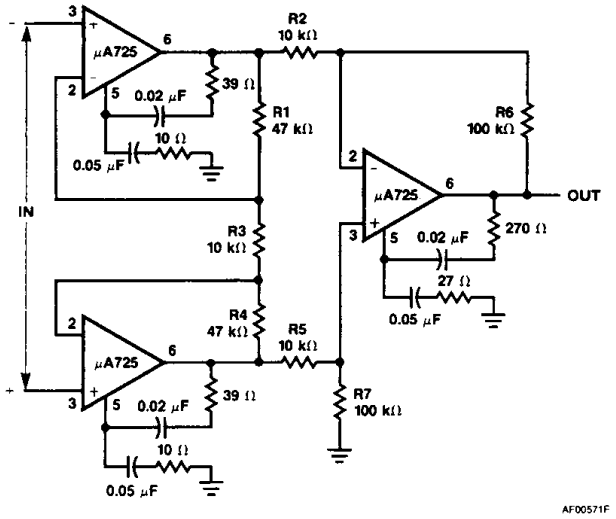

$\frac{R1}{R6} = \frac{R3}{R4}$ for best CMRR

R3 = R4

R1 = R6 = 10 R3

$\text{Gain} = \frac{R6}{R7}$

Note

1. Lead numbers are shown for metal package only.