
Pomona®

Model 1837
Double Banana Plug, Three Terminal Isolation

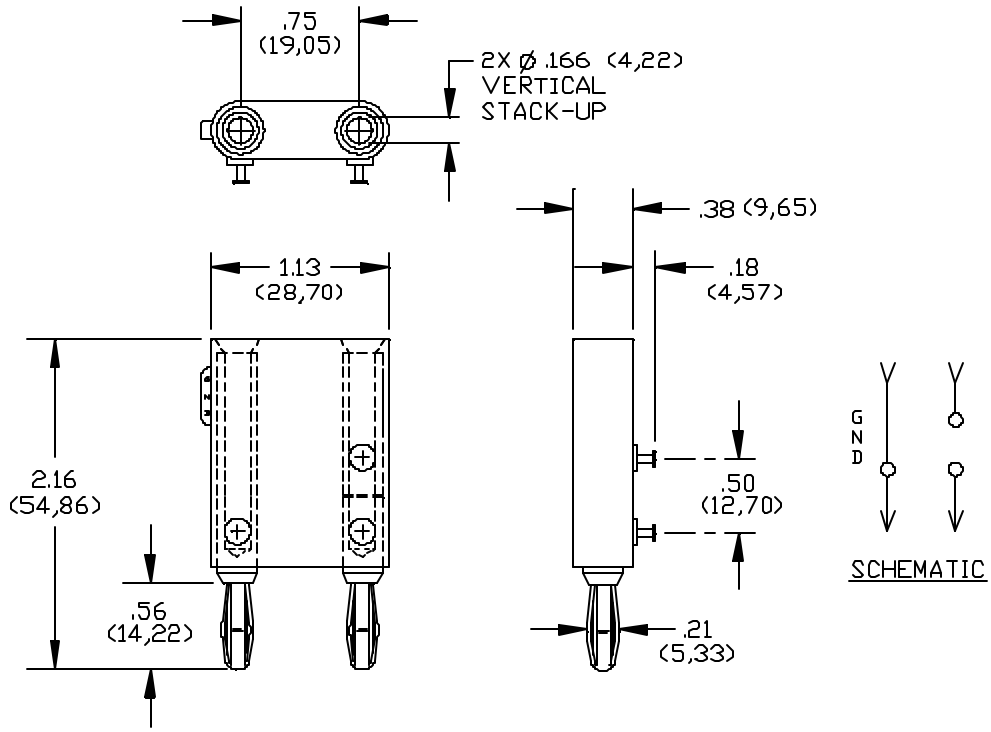

FEATURES:

- Used to make your own attenuator, balun or filter.

MATERIALS:

Upper Connector: Double Banana Jack
Brass per QQ-B-626, Alloy 360, ½ hard.
Finish: Nickel plate per QQ-N-290 Class 2 (.0002/.0003)
Insulation: Polypropylene, molded to banana jacks and banana plug bodies. Color: Blue.
Marking: "POMONA ELECTRONICS, CALIF.", "MODEL 1837"
Lower Connector: Double Banana Plug
Spring - Beryllium Copper per QQ-C-533, Berylco 25, Cond. H.T.
Plug Body – Brass per QQ-B-626, Alloy 360, ½ Hard.
Finish: Nickel plate per QQ-N-290 Class 2 (.0002/.0003)
Solder Turret Terminals:
Brass per QQ-B-626, Alloy 360, ½ Hard.
Finish: Bright tin plated per MIL-T-10727, Type I, (.0001/.0003).

RATINGS:

Operating Temperature: +55°C. (+131°F.) Max.
Operating Voltage: 2500 VDC
Current: 15 Amperes
Contact Resistance: Less than .001 Ohms per banana plug

ORDERING INFORMATION: Model 1837

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA

Sales: 800-490-2361 Fax: 888-403-3360
Technical Assistance: 800-241-2060