



# RMS Power Detector

## ABSOLUTE MAXIMUM RATINGS

V<sub>CC</sub> to GND .....-0.3V to +4.5V  
 ENA, OUT, FILT to GND .....-0.3V to +3.0V  
 RFIN Input Power .....+10dBm  
 Continuous Power Dissipation (T<sub>A</sub> = +70°C)  
 6-Bump WLP (derate 2.9mW/°C above +70°C).....232mW

Operating Temperature Range .....-40°C to +85°C  
 Storage Temperature Range .....-65°C to +160°C  
 Junction Temperature .....+150°C  
 Soldering Temperature (reflow, Note 1).....+260°C

**Note 1:** Refer to Application Note 1891: *Wafer-level packaging (WLP) and its applications*.

Stresses beyond those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.



**CAUTION!** ESD SENSITIVE DEVICE

## PACKAGE THERMAL CHARACTERISTICS (NOTES 2)

6 WLP

Junction-to-Ambient Thermal Resistance (θ<sub>JA</sub>) .....95°C/W

**Note 2:** Package thermal resistances were obtained using the method described in JEDEC specification JESD51-7, using a four-layer board. For detailed information on package thermal considerations, refer to [www.maxim-ic.com/thermal-tutorial](http://www.maxim-ic.com/thermal-tutorial).

## DC ELECTRICAL CHARACTERISTICS

(V<sub>CC</sub> = 2.5V to 4.2V, T<sub>A</sub> = -40°C to +85°C, V<sub>ENA</sub> = 2.7V, no RF signal applied. Typical values are at V<sub>CC</sub> = 2.8V, T<sub>A</sub> = +25°C, unless otherwise noted.) (Note 3)

| PARAMETER                | SYMBOL          | CONDITIONS                                        | MIN | TYP | MAX | UNITS |
|--------------------------|-----------------|---------------------------------------------------|-----|-----|-----|-------|
| Supply Voltage           | V <sub>CC</sub> |                                                   | 2.5 | 2.8 | 4.2 | V     |
| Supply Current           | I <sub>CC</sub> | V <sub>CC</sub> = 2.8V, RF input = -29dBm to 0dBm |     | 5.5 | 8.5 | mA    |
| Shutdown Supply Current  |                 | V <sub>ENA</sub> = 0V                             |     | 0.5 | 10  | μA    |
| ENA Logic-High Threshold | V <sub>IH</sub> |                                                   | 1.1 |     | 2.7 | V     |
| ENA Logic-Low Threshold  | V <sub>IL</sub> |                                                   | 0   |     | 0.6 | V     |
| ENA Input Current        |                 | V <sub>ENA</sub> = 1.1V or 0.6V                   |     | 25  |     | μA    |

## AC ELECTRICAL CHARACTERISTICS

(V<sub>CC</sub> = 2.8V, T<sub>A</sub> = -40°C to +85°C, V<sub>ENA</sub> = 2.7V, f<sub>RF</sub> = 800MHz to 2GHz, unless otherwise noted. Typical values are at T<sub>A</sub> = +25°C.) (Note 3)

| PARAMETER                                  | SYMBOL | CONDITIONS                                                                                       | MIN  | TYP  | MAX  | UNITS |
|--------------------------------------------|--------|--------------------------------------------------------------------------------------------------|------|------|------|-------|
| RF Input Frequency                         |        |                                                                                                  | 800  |      | 2000 | MHz   |
| Maximum Output Voltage                     |        | RFIN at 0dBm                                                                                     | 1.05 | 1.3  | 1.5  | V     |
| Minimum Output Voltage                     |        | No RF input power, V <sub>ENA</sub> = 2.7V                                                       |      | 250  | 450  | mV    |
| Minimum Input Power Level                  |        | +1dB input power step results in V <sub>OUT</sub> increase > 23mV/dB (Note 4)                    |      |      | -29  | dBm   |
| Log Slope                                  |        | [(V <sub>OUT</sub> at -1dBm) - (V <sub>OUT</sub> at -29dBm)]/28                                  | 23   | 33   | 43   | mV/dB |
| Log Conformance Error with 10dB Step       |        | (Notes 4, 5)                                                                                     | -1.0 |      | +1.0 | dB    |
| Power-Detector Accuracy Due to Temperature |        | RF input at -4dBm to -1dBm, T <sub>A</sub> = -20°C to +25°C, and T <sub>A</sub> = +25°C to +85°C |      | ±0.4 |      | dB    |

**Note 3:** Guaranteed by production test at T<sub>A</sub> = +85°C and 800MHz. Guaranteed by design and characterization at T<sub>A</sub> = -40°C and T<sub>A</sub> = +25°C, and over frequency limits.

**Note 4:** Guaranteed by design and characterization.


**Note 5:** Log conformance is defined with respect to 4 calibration points, -1dBm, -7dBm, -19dBm, and -29dBm, at T<sub>A</sub> = +25°C.

# RMS Power Detector


## Typical Operating Characteristics

( $V_{CC} = 2.7V$ ,  $T_A = +25^\circ C$ , WCDMA uplink DPCCH + 1DPDCH, log conformance calculation is referenced to a straight line that is calibrated at -20dBm and 0dBm, unless otherwise noted.)


**OUTPUT VOLTAGE vs. INPUT POWER**

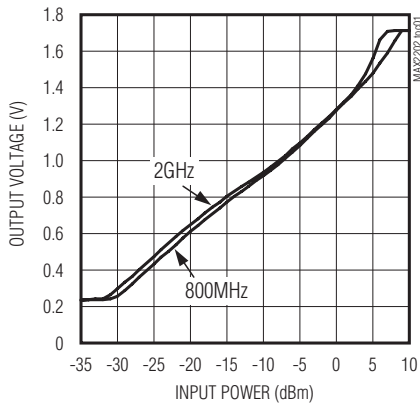


**PCS WCDMA 1+1 vs. 1+5 RMS ERROR  
( $\pm$  DEVIATION FROM MIDPOINT)**

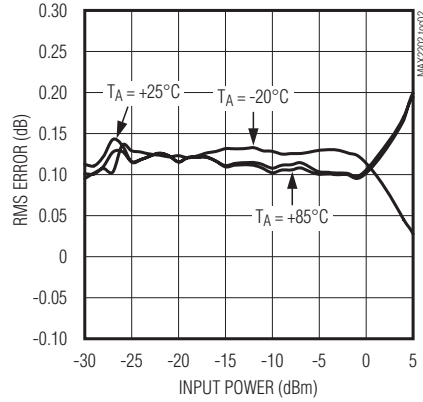


**CELL WCDMA 1 + 1 vs. 1 + 5 RMS ERROR  
( $\pm$  DEVIATION FROM MIDPOINT)**

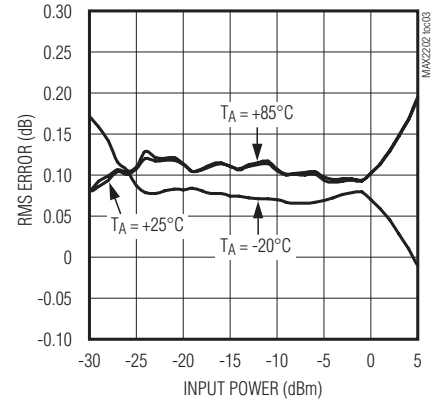


**LOG CONFORMANCE WITH 1dB STEP  
CELLULAR BAND**

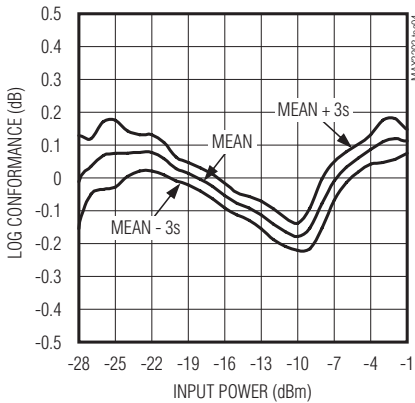


**LOG CONFORMANCE WITH 1dB STEP  
PCS BAND**

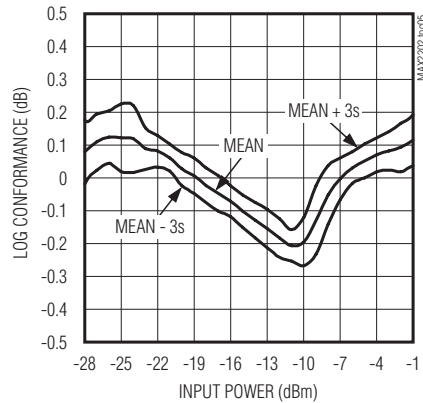


**LOG CONFORMANCE WITH 10dB STEP  
CELLULAR BAND**

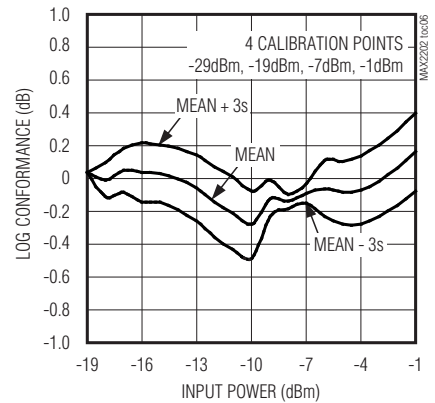

**LOG CONFORMANCE WITH 10dB STEP  
PCS BAND**

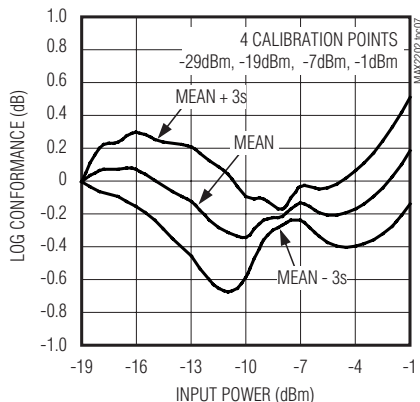

**47-UNIT CELLULAR ROOM-COLD  
TEMPERATURE ERROR**

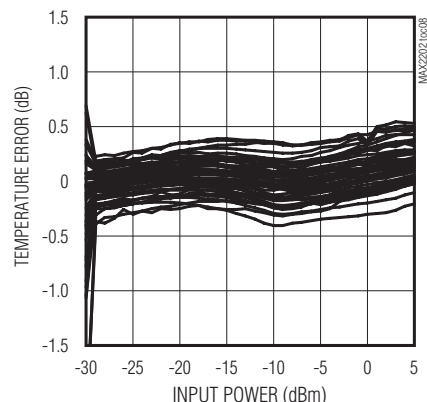


# RMS Power Detector


## Typical Operating Characteristics (continued)

( $V_{CC} = 2.7V$ ,  $T_A = +25^{\circ}C$ , WCDMA uplink DPCCH + 1DPDCH, log conformance calculation is referenced to a straight line that is calibrated at -20dBm and 0dBm, unless otherwise noted.)


**47-UNIT PCS ROOM-COLD  
TEMPERATURE ERROR**

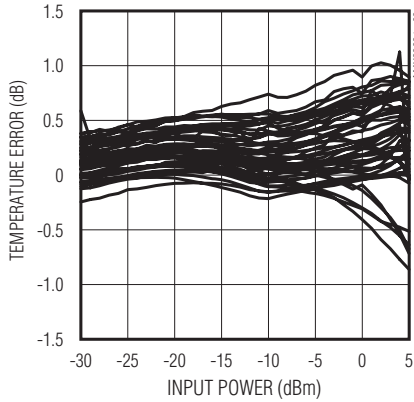


**47-UNIT CELLULAR ROOM-HOT  
TEMPERATURE ERROR**

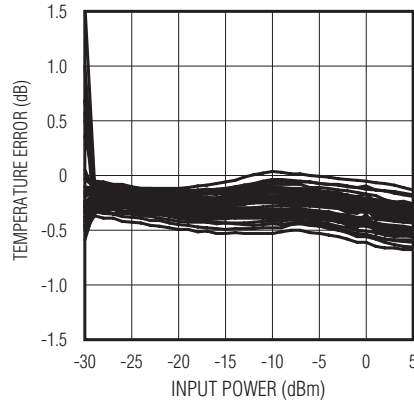


**47-UNIT PCS ROOM-HOT  
TEMPERATURE ERROR**

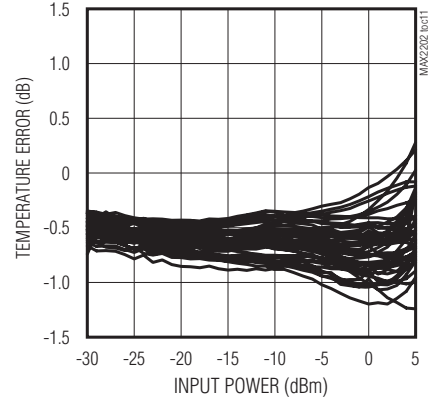


**TURN-ON TIME**

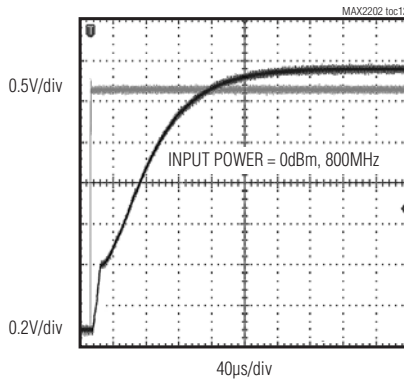


**TURN-ON TIME**

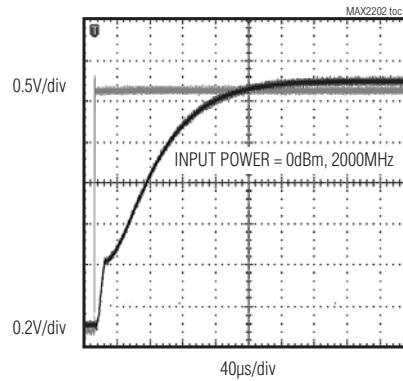


**TURN-ON TIME**

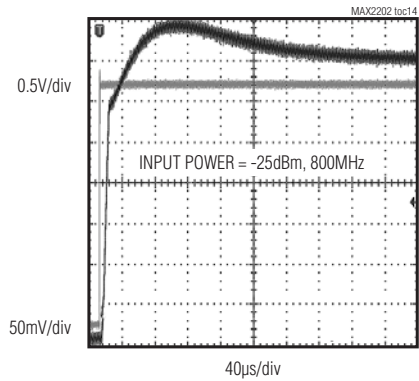

**TURN-ON TIME**

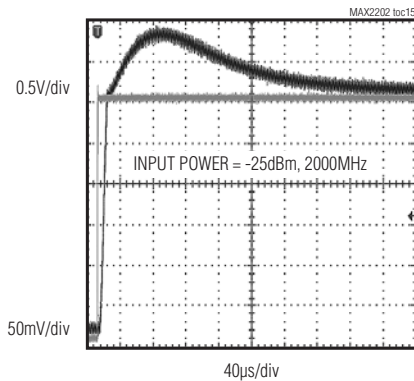


**RFIN S11**

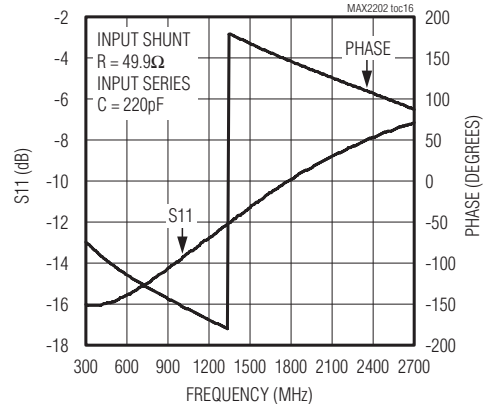

# RMS Power Detector

## Bump Configuration

MAX2202

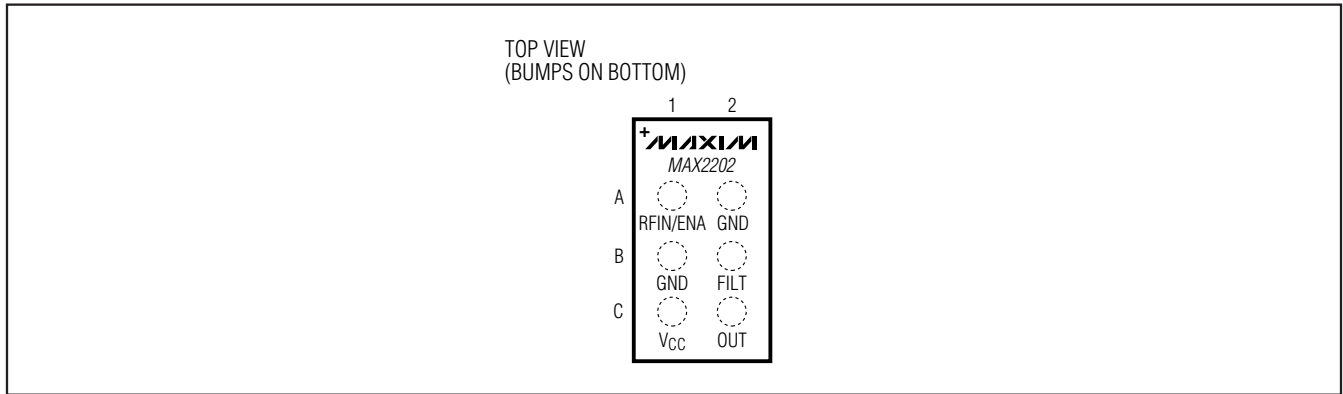

## Bump Description

| BUMP   | NAME     | FUNCTION                                                                                                                                                      |
|--------|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A1     | RFIN/ENA | RF Input and Enable Logic Input. See the <i>Typical Operating Circuit</i> . Drive ENA high to turn on the device. Drive ENA low to place it in shutdown mode. |
| A2, B1 | GND      | Ground. Connect to PCB ground plane.                                                                                                                          |
| B2     | FILT     | Intermediate Filtering Node. Bypass FILT with a capacitor as close as possible to the device.                                                                 |
| C1     | VCC      | Power Supply. Connect to either a regulated supply or battery. Bypass VCC with a capacitor as close as possible to the device.                                |
| C2     | OUT      | Detector Output. Connect an external lowpass RC filter for filtering.                                                                                         |

## Detailed Description

The MAX2202 RMS power detector is designed to operate from 800MHz to 2.0GHz. The device is ideal for LTE, WCDMA, cdma2000, and high-speed downlink/uplink packet access. The device accepts an RF signal at the input and outputs the same voltage regardless of

the peak-average of the input signal. The output voltage and input power is linear in dB. The device has a -29dBm to 0dBm detection range, and every dB change in input power gives 33mV (typ) change in output voltage. Table 1 shows the peak to average of the signals used to test the device.

**Table 1. Peak-to-Average Ratio (PAR\*) of Test Signals**

| MODULATION            | PAR AT DIFFERENT PROBABILITY OF COMPLEMENTARY CUMULATIVE DISTRIBUTION (dB) |      |      |       |
|-----------------------|----------------------------------------------------------------------------|------|------|-------|
|                       | 10%                                                                        | 1%   | 0.1% | 0.01% |
| DPCCH + 1DPDCH        | 4.8                                                                        | 5.8  | 6.2  | 6.5   |
| DPCCH + 5DPDCH        | 6.5                                                                        | 8.4  | 9.2  | 9.8   |
| IS95 Reverse          | 5.5                                                                        | 6.9  | 7.6  | 8.1   |
| IS95 Forward Pilot    | 5.6                                                                        | 7.6  | 8.8  | 9.5   |
| 9-Channel Forward     | 7                                                                          | 10.3 | 12   | 12.7  |
| cdma2000 Pilot + DCCH | 6.8                                                                        | 8.3  | 9.2  | 9.7   |

\*PAR of CW is 3dB.

## RMS Power Detector

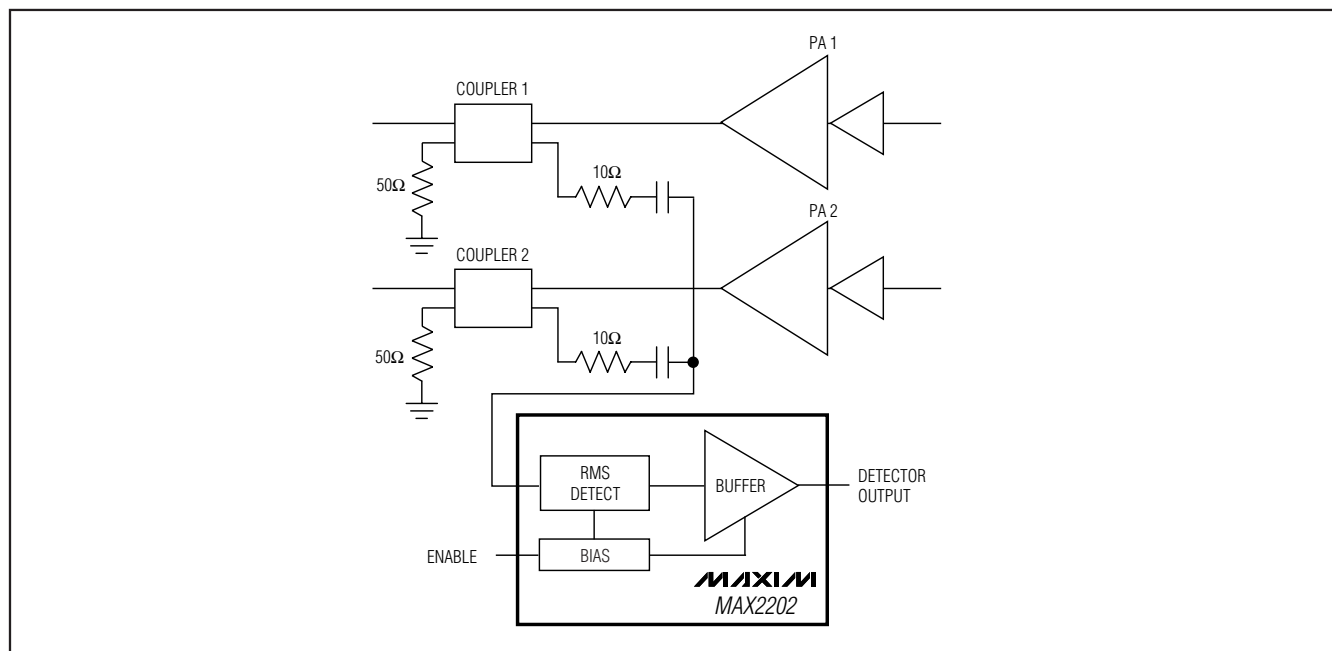


Figure 1. System Level Connection

### Applications Information

#### Detector RF Input

The MAX2202 generally requires a terminating resistor and series capacitor between the directional coupler's output and detector RF input. As shown in the *Typical Operating Characteristics*, an S11 of less than -9dB is possible when a terminating resistor of 50Ω and series capacitor of 220pF are used at the input. S11 of the MAX2202 RFIN port without input matching is shown in Table 2 and can be downloaded from Maxim's website.

In cases where the detector is connected to two or more directional couplers, as shown in Figure 1, the 50Ω terminating resistor can be eliminated.

#### Detector Voltage Output

The output of the MAX2202 goes to an ADC for further processing by the baseband system. Connect a series 10kΩ resistor and a shunt capacitor to the detector output to reduce residual amplitude ripple. The shunt capacitor should be 4.7nF for WCDMA and 15nF for NCDMA.

#### Enable Logic Level

The device features an enable input (ENA) that allows the device to be put into shutdown. For normal operation, drive ENA high. For device shutdown, drive ENA low. The ENA pin is DC biased through a resistor. The value of the resistor is recommended to be greater than

Table 2. RF Input S11

| FREQ (MHz) | S11 (dB) | S11 (PHASE) | FREQ (MHz) | S11 (dB) | S11 (PHASE) |
|------------|----------|-------------|------------|----------|-------------|
| 300        | -1.63    | -34.1       | 1560       | -1.37    | -156.4      |
| 360        | -1.69    | -39.6       | 1620       | -1.35    | -162.4      |
| 420        | -1.75    | -44.9       | 1680       | -1.35    | -168.0      |
| 480        | -1.77    | -50.2       | 1740       | -1.35    | -173.7      |
| 540        | -1.77    | -55.9       | 1800       | -1.36    | -179.2      |
| 600        | -1.75    | -61.4       | 1860       | -1.36    | 175.3       |
| 660        | -1.74    | -66.9       | 1920       | -1.41    | 170.0       |
| 720        | -1.72    | -72.6       | 1980       | -1.35    | 164.8       |
| 780        | -1.70    | -78.6       | 2040       | -1.37    | 159.6       |
| 840        | -1.62    | -84.2       | 2100       | -1.34    | 154.5       |
| 900        | -1.59    | -90.2       | 2160       | -1.36    | 149.2       |
| 960        | -1.53    | -96.2       | 2220       | -1.37    | 144.2       |
| 1020       | -1.52    | -102.2      | 2280       | -1.37    | 139.2       |
| 1080       | -1.45    | -108.4      | 2340       | -1.39    | 134.5       |
| 1140       | -1.46    | -114.5      | 2400       | -1.37    | 129.5       |
| 1200       | -1.40    | -120.5      | 2460       | -1.39    | 124.7       |
| 1260       | -1.40    | -126.5      | 2520       | -1.38    | 119.9       |
| 1320       | -1.39    | -132.6      | 2580       | -1.40    | 115.2       |
| 1380       | -1.37    | -138.9      | 2640       | -1.39    | 110.4       |
| 1440       | -1.35    | -144.6      | 2700       | -1.40    | 105.7       |
| 1500       | -1.37    | -150.6      | —          | —        | —           |

Note: VCC = 2.8V, S11 measured at RFIN bump.

## RMS Power Detector

1k $\Omega$  to avoid loading the RF input signal. There is an internal resistor to GND of approximately 50k $\Omega$ . If the control source high voltage is greater than 2.8V, calculate and use a resistor value that ensures the ENA pin only sees a maximum of 2.7V, which is within specification. In this manner, the device can be driven from a control device with a logic-high greater than 2.8V.

### Evaluation Kit Information

MAX2202 EV kit gerber files, schematic, BOM, and other updates are available on the MAX2202 product page at Maxim's website ([www.maxim-ic.com](http://www.maxim-ic.com)).

### Layout

The device is not particularly sensitive to the layout since it only needs 3dBm for maximum output voltage. However, there are two areas that need attention: the GND pins and the supply bypassing. Connect the GND pins to the PCB ground with a ground via as close as possible, and bypass VCC to ground with a capacitor as close as possible to the part.

### Chip Information

PROCESS: BiCMOS

### Package Information

For the latest package outline information and land patterns (footprints), go to [www.maxim-ic.com/packages](http://www.maxim-ic.com/packages). Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

| PACKAGE TYPE | PACKAGE CODE | OUTLINE NO.             | LAND PATTERN NO.                               |
|--------------|--------------|-------------------------|------------------------------------------------|
| 6 WLP        | W61B1+1      | <a href="#">21-0217</a> | Refer to <a href="#">Application Note 1891</a> |

# RMS Power Detector

## Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION                                                                                                                                                           | PAGES CHANGED |
|-----------------|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| 0               | 9/10          | Initial release                                                                                                                                                       | —             |
| 1               | 2/11          | Updated Log Conformance Error with 10dB Step specifications in <i>AC Electrical Characteristics</i> ; updated TOC 6 and 7 in <i>Typical Operating Characteristics</i> | 2, 3          |

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

8 **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**