

PART NUMBER: VASD1-DIP Series

DESCRIPTION: dc-dc converter

description

Designed to convert fixed voltages into an isolated regulated voltage, the VASD1-DIP series is well suited for providing board-mount local supplies in a wide range of applications, including mixed analog/digital circuits, test & measurement equip., process/machine controls, datacom/telecom fields, etc...

The semi-regulated output can be followed by 3-terminal regulators to provide output protection, in addition to output regulation.

features

- isolated 1 W output
- temperature range: -40°C~+85°C
- unregulated
- high efficiency to 80%
- dual voltage output
- small footprint
- DIP package style
- industry standard pinout
- UL94-V0 package
- no heatsink required
- 1K Vdc isolation
- power density 0.85 W/cm³
- no external component required
- low cost


MODEL

MODEL	input voltage		output voltage (V dc)	output current		efficiency typ. (%)	UL60950-1
	nominal (V dc)	range (V dc)		max. (mA)	min. (mA)		
VASD1-S5-D5-DIP	5	4.5~5.5	±5	±100	±10	72	YES
VASD1-S5-D9-DIP	5	4.5~5.5	±9	±56	±6	77	YES
VASD1-S5-D12-DIP	5	4.5~5.5	±12	±42	±5	79	YES
VASD1-S5-D15-DIP	5	4.5~5.5	±15	±33	±4	80	YES
VASD1-S12-D5-DIP	12	10.8~13.2	±5	±100	±10	72	YES
VASD1-S12-D9-DIP	12	10.8~13.2	±9	±56	±6	78	YES
VASD1-S12-D12-DIP	12	10.8~13.2	±12	±42	±5	79	YES
VASD1-S12-D15-DIP	12	10.8~13.2	±15	±33	±4	78	YES
VASD1-S15-D5-DIP	15	13.5~16.5	±5	±100	±10	72	NO
VASD1-S24-D5-DIP	24	21.6~26.4	±5	±100	±10	73	YES
VASD1-S24-D9-DIP	24	21.6~26.4	±9	±56	±6	79	YES
VASD1-S24-D12-DIP	24	21.6~26.4	±12	±42	±5	80	YES
VASD1-S24-D15-DIP	24	21.6~26.4	±15	±33	±4	80	YES

OUTPUT

parameter	conditions/description	min	nom	max	units
output power		0.1		1	W
voltage accuracy	refer to recommended circuit		±1	±2	%
ripple	@ 20MHz Bandwidth 5/12/15V		50	75	mVpp
	24 V		100	150	mVpp
line regulation	input voltage from low to high			±1.2	%
load regulation	10% to 100% full load 5V		10.5	15	%
	9V		8.3	15	%
	12V		6.8	15	%
	15V		6.3	15	%
temperature coefficient	refer to recommended circuit			0.03	%/°C
switching frequency	100% load, nominal input		100		kHz

note: 1. All specifications measured at TA=25°C, humidity <75%, normal input voltage and rated output load unless otherwise specified.

*V-Infinity reserves the right to make changes to its products or to discontinue any product or service without notice, and to advise customers to verify the most up-to-date product information before placing orders. V-Infinity assumes no liability or responsibility for customer's applications using V-Infinity products other than repair or replacing (at V-I's option) V-Infinity products not meeting V-I's published specifications. Nothing will be covered outside of standard product warranty.

PART NUMBER: VASD1-DIP Series

DESCRIPTION: dc-dc converter


GENERAL SPECIFICATIONS

parameter	conditions/description
output short circuit protection	<1 second
temperature rise at full load	15°C typ., 25°C max.
cooling	free air convection
operating temp. range	-40°C ~ +85°C
storage temp. range	-55°C ~ +125°C
storage humidity range	≤95%
case material	plastic (UL94-V0)
MTBF	>3,500,000 hours

ISOLATION SPECIFICATIONS


parameter	conditions/description	min	nom	max	units
isolation voltage	flash tested for 1 minute		1000		V dc
isolation resistance	test at 500 V dc		1000		MΩ

OUTLINE DIMENSIONS & RECOMMENDED LAYOUT PATTERN



Note:
Unit:mm(inch)
Pin section:0.50*0.30mm(0.020*0.012inch)
Pin tolerances:±0.10mm(±0.004inch)
General tolerances:±0.25mm (±0.010inch)



First Angle Projection 
RECOMMENDED FOOTPRINT
Top view,grid:2.54mm(0.1inch),
diameter:1.00mm



FOOTPRINT DETAILS

Pin	Dual
1	GND
7	NC
8	0V
9	+Vo
11	-Vo
14	Vin

TYPICAL CHARACTERISTICS

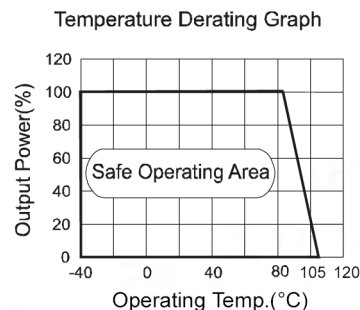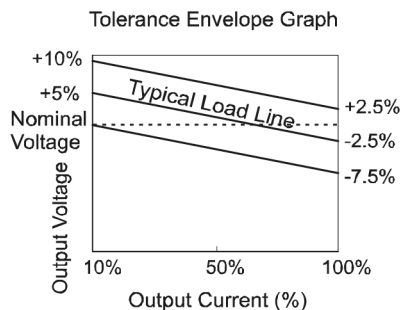

PART NUMBER: VASD1-DIP Series


DESCRIPTION: dc-dc converter

APPLICATION NOTES:

- Requirement on output load
To ensure this module can operate efficiently and reliably, the minimum output load should not be less than 10% of the full load. Also, this product should never be operated under no load conditions. If the actual output power is too small, please connect a resistor with proper resistance at the output end in parallel to increase the load.
- Overload protection
Under normal operating conditions, the output circuit of these products has no protection against overload. The simplest method is to connect a self-recovery fuse in series at the input end or to add a circuit breaker to the circuit.
- Recommended circuit
If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends of the dc-dc converter, see (Figure 1).


- Output voltage regulation and over-voltage protection circuit
The simplest device for output voltage regulation, over-voltage and over-current protection is a linear voltage regulator with overheat protection that is connected to the input or output end in series (Figure 2).

FIGURE 2



No parallel connection or plug and play.

FIGURE 1



It should also be noted that the inductance and the frequency of the "LC" filtering network should be staggered with the dc-dc frequency to avoid mutual interference. However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. For every channel of output, provided that safe and reliable operation is ensured, the recommended capacitance of its filter capacitor see (Table 1).

TABLE 1

Vin (VDC)	Cin (uF)	Vout (VDC)	Cou (uF)
5	4.7	±5	4.7
12	2.2	±9	2.2
15	2.2	±12	1
24	1	±15	0.47

It is not recommended to connect any external capacitor in the application field with less than a 0.5 watt output.