National Semiconductor

LP2956/LP2956A

OBSOLETE
December 7, 2009

Dual Micropower Low-Dropout Voltage Regulators

General Description

The LP2956 is a micropower voltage regulator with very low quiescent current (170 µA typical at light loads) and very low dropout voltage (typically 60 mV at 1 mA load current and 470 mV at 250 mA load current on the main output).

The LP2956 retains all the desirable characteristics of the LP2951, but offers increased output current (main output), an auxiliary LDO adjustable regulated output (75 mA), and additional features.

The auxiliary output is always on (regardless of main output status), so it can be used to power memory circuits.

Quiescent current increases only slightly at dropout, which prolongs battery life.

The error flag goes low if the main output voltage drops out of regulation.

An open-collector auxiliary comparator is included, whose inverting input is tied to the 1.23V reference.

Reverse battery protection is provided.

The parts are available in DIP and surface mount packages.


Features

- Output voltage adjusts from 1.23V to 29V
- Guaranteed 250 mA current (main output)
- Auxiliary LDO (75 mA) adjustable output
- Auxiliary comparator with open-collector output
- Shutdown pin for main output
- Extremely low quiescent current
- Low dropout voltage
- Extremely tight line and load regulation
- Very low temperature coefficient
- Current and thermal limiting
- Reverse battery protection

Applications

- High-efficiency linear regulator
- Low dropout battery-powered regulator
- µP system regulator with switchable high-current V_{CC}

Block Diagram

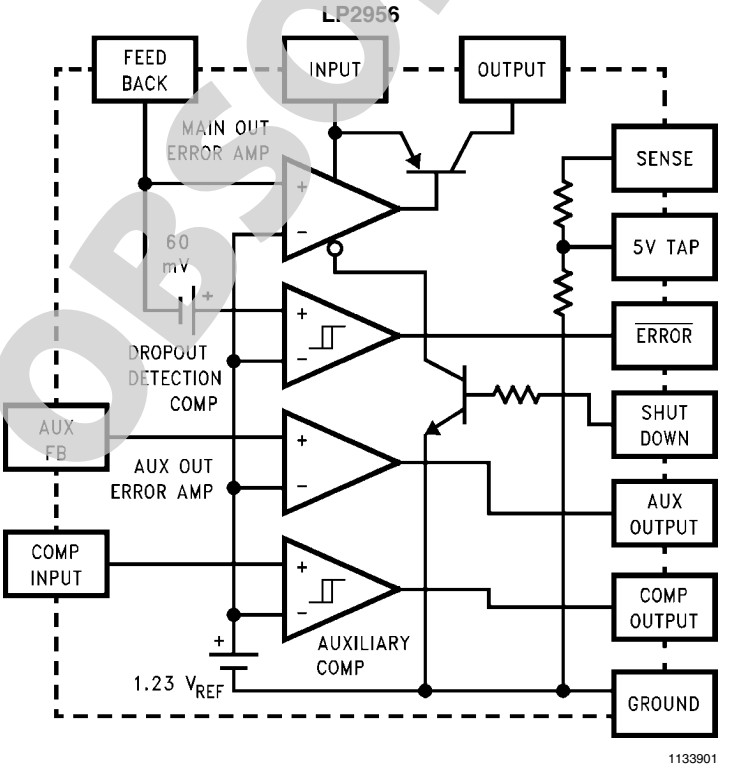


OBSOLETE

© 2009 National Semiconductor Corporation

11339 Version 8 Revision 4 Print Date/Time: 2009/12/07 17:53:15

Connection Diagrams


16–Pin DIP

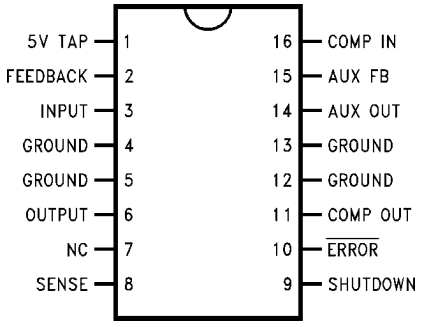

1133902

Order Number LP2956IN or LP2956AIN
See NS Package Number N16A
Order Number LP2956AMJ-QML or 5962-9554701QEA
See NS Package Number J16A

16-Pin Surface Mount

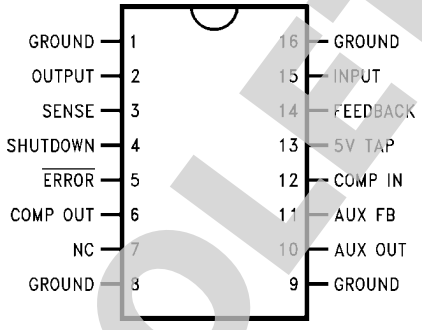

1133903

Order Number LP2956IM or LP2956AIM
See NS Package Number M16A

OBSOLETE

Absolute Maximum Ratings (*Note 1*)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/ Distributors for availability and specifications.

Storage Temperature Range	−65°C to +150°C
Operating Junction Temperature Range	−40°C to +125°C
Lead Temperature (Soldering, 5 seconds)	260°C
Power Dissipation (*Note 2*)	Internally Limited
Input Supply Voltage	−20V to +30V
Feedback Input Voltage (*Note 3*)	−0.3V to +5V
Aux. Feedback Input Voltage (*Note 3*)	−0.3V to +5V
Shutdown Input Voltage (*Note 3*)	−0.3V to +30V
Comparator Input Voltage (*Note 3*, *Note 4*)	−0.3V to +30V
Comparator Output Voltage (*Note 3*, *Note 4*)	−0.3V to +30V
ESD Rating (*Note 16*)	2 kV

Electrical Characteristics

Limits in standard typeface are for T_J = 25°C, and limits in **boldface type** apply over the full operating temperature range. Limits are guaranteed by production testing or correlation techniques using standard Statistical Quality Control (SQC) methods. Unless otherwise specified: V_{IN} = 6V, C_L = 2.2 µF (Main Output) and 10 µF (Auxiliary Output). Feedback pin is tied to 5V Tap pin, C_{IN} = 1 µF, V_{SD} = 0V, Main Output pin is tied to Output Sense pin, Auxiliary Output is programmed for 5V. The main regulator output has a 1 mA load, the auxiliary regulator output has a 100 µA load.

Symbol	Parameter	Conditions	Typical	LP2956AI		LP2956I		Units
				Min	Max	Min	Max	
MAIN OUTPUT								
V_O	Output Voltage		5.0	4.975	5.025	4.950	5.050	V
				4.940	**5.060**	**4.900**	**5.100**	
		1 mA ≤ I_L ≤ 250 mA	5.0	**4.930**	**5.070**	**4.880**	**5.120**	
$\frac{\Delta V_O}{\Delta T}$	Temperature Coefficient	(*Note 5*)	20		**100**		**150**	ppm/°C
$\frac{\Delta V_O}{V_O}$	Line Regulation	V_{IN} = 6V to 30V	0.03		0.1		0.2	%
					0.2		**0.4**	
$\frac{\Delta V_O}{V_O}$	Load Regulation	I_L = 1 mA to 250 mA	0.04		0.16		0.20	%
		I_L = 0.1 mA to 1 mA (*Note 6*)			**0.20**		**0.30**	
V_{IN}–V_O	Dropout Voltage (*Note 7*)	I_L = 1 mA	60		100		100	mV
					150		**150**	
		I_L = 50 mA	240		300		300	
					420		**420**	
		I_L = 100 mA	310		400		400	
					520		**520**	
		I_L = 250 mA	470		600		600	
					800		**800**	
I_{LIMIT}	Current Limit	R_L = 1Ω	380		500		500	mA
					530		**530**	
$\frac{\Delta V_O}{\Delta P_D}$	Thermal Regulation	(*Note 8*)	0.05		0.2		0.2	%/W
e_n	Output Noise Voltage (10 Hz to 100 KHz) I_L = 100 mA	C_L = 2.2 µF	400					µV RMS
		C_L = 33 µF	260					
		C_L = 33 µF (*Note 9*)	80					
V_{FB}	Feedback Pin Voltage		1.23	1.215	1.245	1.205	1.255	V
I_{FB}	Feedback Pin Bias Current		20		40		40	nA
					60		**60**	
I_O (OFF)	Output Leakage In Shutdown	$I_{(SD\ IN)}$ ≥ 1 µA V_{IN} = 30V, V_{OUT} = 0V	3		10		10	µA
					20		**20**	

OBSOLETE

Symbol	Parameter	Conditions	Typical	LP2956AI		LP2956I		Units
				Min	Max	Min	Max	
AUXILIARY OUTPUT								
V_{FB}	Feedback Pin Voltage		1.23	1.22 **1.21**	1.25 **1.26**	1.21 **1.20**	1.26 **1.27**	V
$\frac{\Delta V_{FB}}{\Delta T}$	Feedback Voltage Temperature Coefficient		**20**					ppm/°C
I_{FB}	Feedback Pin Bias Current		10		20 **30**		20 **30**	nA
$\frac{\Delta V_O}{V_O}$	Line Regulation	6V ≤ V_{IN} ≤ 30V	0.07		0.3 **0.5**		0.4 **0.6**	%
$\frac{\Delta V_O}{V_O}$	Load Regulation	I_L = 0.1 mA to 1 mA I_L = 1 mA to 75 mA (*Note 10*)	0.1		0.3 **0.6**		0.4 **1.0**	%
$V_{IN}–V_O$	Dropout Voltage	I_L = 1 mA	100		200 **300**		200 **300**	mV
		I_L = 50 mA	400		600 **700**		600 **700**	mV
		I_L = 75 mA	500		700 **850**		700 **850**	mV
e_n	Output Noise (10 Hz–100 KHz)	C_L = 10 µF	300					µV RMS
		C_L = 33 µF (*Note 9*) I_L = 10 mA	100					
I_{LIM}	Current Limit	V_{OUT} = 0V (*Note 13*)	80		200 **250**		200 **250**	mA
$\frac{\Delta V_O}{\Delta P_D}$	Thermal Regulation	(*Note 8*)	0.2		0.5		0.5	%/W
DROPOUT DETECTION COMPARATOR								
I_{OH}	Output “HIGH” Leakage	V_{OH} = 30V	0.01		1 **2**		1 **2**	µA
V_{OL}	Output “LOW” Voltage	V_{IN} = 4V I_O (COMP) = 400 µA	150		250 **400**		250 **400**	mV
V_{THR} (max)	Upper Threshold Voltage	(*Note 11*)	–240	–320 **–380**	–150 **–100**	–320 **–380**	–150 **–100**	mV
V_{THR} (min)	Lower Threshold Voltage	(*Note 11*)	–350	–450 **–640**	–230 **–160**	–450 **–640**	–230 **–160**	mV
HYST	Hysteresis	(*Note 11*)	110					mV
SHUTDOWN INPUT								
I_{IN}	Input Current to Disable Output	(*Note 12*)	0.03		**0.5**		**0.5**	µA
V_{IH}	Shutdown Input High Threshold	$I_{(SD\ IN)}$ ≥ 1 µA		900 **1200**		900 **1200**		mV
V_{IL}	Shutdown Input Low Threshold	V_O ≥ 4.5V			400 **200**		400 **200**	mV
AUXILIARY COMPARATOR								
V_T(high)	Upper Trip Point	(*Note 14*)	1.236	1.20 **1.19**	1.28 **1.29**	1.20 **1.19**	1.28 **1.29**	V
V_T(low)	Lower Trip Point	(*Note 14*)	1.230	1.19 **1.18**	1.27 **1.28**	1.19 **1.18**	1.27 **1.28**	V
HYST	Hysteresis		6					mV

OBSOLETE

Symbol	Parameter	Conditions	Typical	LP2956AI		LP2956I		Units
				Min	Max	Min	Max	
I_{OH}	Output "HIGH" Leakage	V_{OH} = 30V	0.01		1		1	µA
		V_{IN} (COMP) = 1.3V			**2**		**2**	
V_{OL}	Output "LOW" Voltage	V_{IN} (COMP) = 1.1V	150		250		250	mV
		I_O(COMP) = 400 µA			**400**		**400**	
I_B	Input Bias Current	0 ≤ V_{IN} (COMP) ≤ 5V	10	–30	30	–30	30	nA
				–50	**50**	**–50**	**50**	
GROUND PIN CURRENT								
I_{GND}	Ground Pin Current (*Note 15*)	I_L (Main Out) = 1 mA	170		250		250	µA
		I_L (Aux. Out) = 0.1 mA			**280**		**280**	
		I_L (Main Out) = 50 mA	1.1		2		2	mA
		I_L (Aux. Out) = 1 mA			**2.5**		**2.5**	
		I_L (Main Out) = 100 mA	3		6		6	
		I_L (Aux. Out) = 1 mA			**8**		**8**	
		I_L (Main Out) = 250 mA	16		28		28	
		I_L (Aux. Out) = 1 mA			**33**		**33**	
		I_L (Main Out) = 1 mA	3		6		6	
		I_L (Aux. Out) = 50 mA			**8**		**8**	
		I_L (Main Out) = 1 mA	6		8		8	
		I_L (Aux. Out) = 75 mA			**10**		**10**	
I_{GND}	Ground Pin Current at Dropout (*Note 15*)	V_{IN} = 4.5V			325		325	µA
		I_L (Main Out) = 0.1 mA	270		**350**		**350**	
		I_L (Aux. Out) = 0.1 mA						
I_{GND}	Ground Pin Current at Shutdown (*Note 15*)	No Load on Either Output	120		180		180	
		$I_{(SD\ IN)}$ ≥ 1 µA			**200**		**200**	

OBSOLETE

Note 1: Absolute maximum ratings indicate limits beyond which damage to the component may occur. Electrical specifications do not apply when operating the device outside of its rated operating conditions.

Note 2: The maximum allowable power dissipation is a function of the maximum junction temperature, T_J(max), the junction-to-ambient thermal resistance, θ_{J-A}, and the ambient temperature, T_A. The maximum allowable power dissipation at any ambient temperature is calculated using: P(max) =

$$P(max) = \frac{T_J(max) - T_A}{\theta_{J-A}}$$

.

Exceeding the maximum allowable power dissipation will cause excessive die temperature, and the regulator will go into thermal shutdown. See Application Hints for additional information on heat sinking and thermal resistance.

Note 3: When used in dual-supply systems where the regulator load is returned to a negative supply, the output voltage must be diode-clamped to ground.

Note 4: May exceed the input supply voltage.

Note 5: Output or reference voltage temperature coefficient is defined as the worst case voltage change divided by the total temperature range.

Note 6: Load regulation is measured at constant junction temperature using low duty cycle pulse testing. Two separate tests are performed, one for the range of 100 µA to 1 mA and one for the 1 mA to 250 mA range. Changes in output voltage due to heating effects are covered by the thermal regulation specification.

Note 7: Dropout voltage is defined as the input to output differential at which the output voltage drops 100 mV below the value measured with a 1V differential. At very low values of programmed output voltage, the input voltage minimum of 2V (2.3V over temperature) must be observed.

Note 8: Thermal regulation is the change in output voltage at a time T after a change in power dissipation, excluding load or line regulation effects. Specifications are for a 200 mA load pulse at V_{IN} = 20V (3W pulse) for T = 10 ms on the Main regulator output. For the Auxiliary regulator output, specifications are for a 66 mA load pulse at V_{IN} = 20V (1W pulse) for T = 10 ms.

Note 9: Connect a 0.1 µF capacitor from the output to the feedback pin.

Note 10: Load regulation is measured at constant junction temperature using low duty cycle pulse testing. Two separate tests are performed, one for the range of 100 µA to 1 mA and one for the 1 mA to 75 mA range. Changes in output voltage due to heating effects are covered by the thermal regulation specification.

Note 11: Dropout dectection comparator thresholds are expressed as changes in a 5V output. To express the threshold voltages in terms of a differential at the Feedback terminal, divide by the error amplifier gain = V_{OUT}/V_{REF}.

Note 12: The shutdown input equivalent circuit is the base of a grounded-emitter NPN transistor in series with a current-limiting resistor. Pulling the shutdown input high turns off the main regulator. For more details, see Application Hints.

Note 13: The auxiliary regulator output has foldback limiting, which means the output current reduces with output voltage. The tested limit is for V_{OUT} = 0V, so the output current will be higher at higher output voltages.

Note 14: This test is performed with the auxiliary comparator output sinking 400 µA of current. At the upper trip point, the comparator output must be ≥2.4V. At the low trip point, the comparator output must be ≤ 0.4V.


Note 15: Ground pin current is the regulator quiescent current. The total current drawn from the source is the sum of the ground pin current, output load current, and current through the external resistive dividers (if used).

Note 16: All pins are rated for 2 kV, except for the auxiliary feedback pin which is rated for 1.2 kV (human body model, 100 pF discharged through 1.5 kΩ).

Typical Performance Characteristics


Unless otherwise specified: V_{IN} = 6V, C_L = 2.2 µF (Main Output) and 10 µF (Auxiliary Output), Feedback is tied to 5V Tap pin, C_{IN} = 1 µF, V_{SD} = 0V, Main Output pin is tied to Output Sense pin, Auxiliary Output is programmed for 5V. The main regulator output has a 1 mA load, the auxiliary output has a 100 µA load.

Ground Pin Current

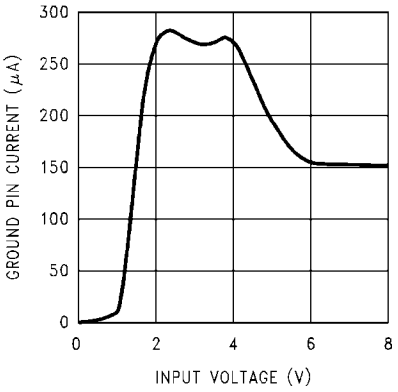


1133918

Ground Pin Current

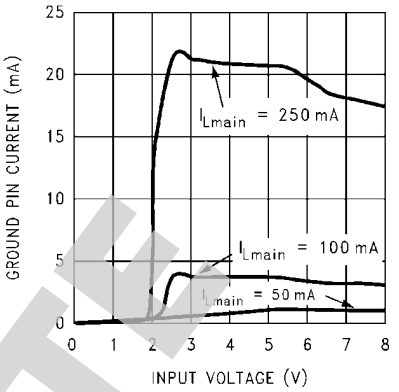


1133919

Ground Pin Current

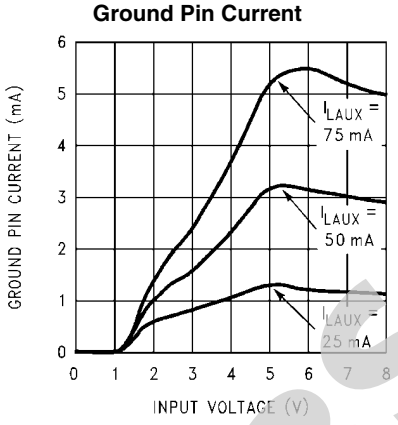


1133920

Ground Pin Current

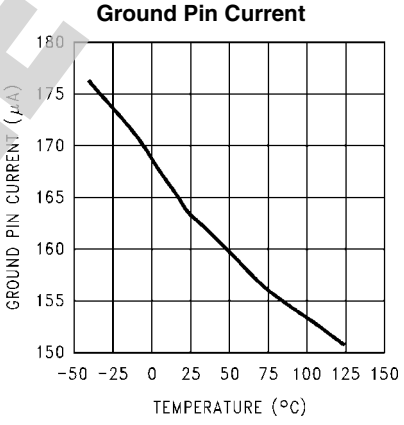


1133921

Ground Pin Current

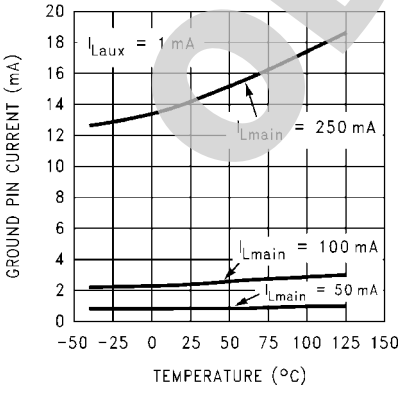

1133922


Ground Pin Current

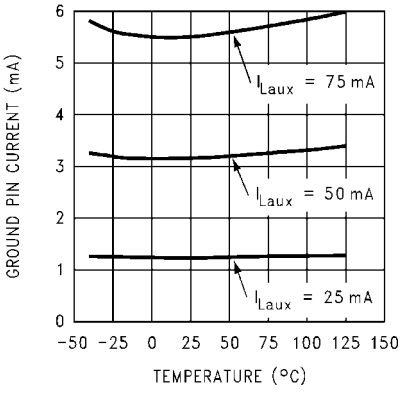

1133923


OBSOLETE

Ground Pin Current vs Main Load

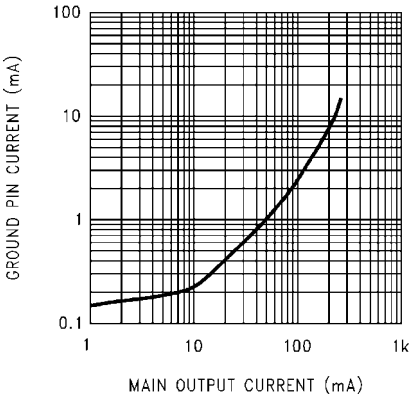


1133924

Dropout Characteristics (Main Regulator)

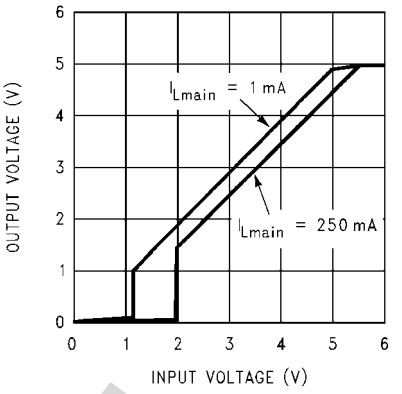


1133925

Dropout Voltage vs Temperature (Main Regulator)

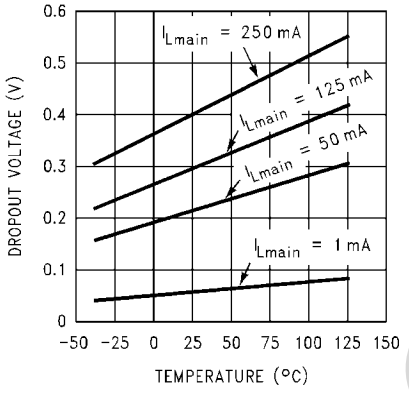


1133926

Current Limit vs Regulator (Main Regulator)

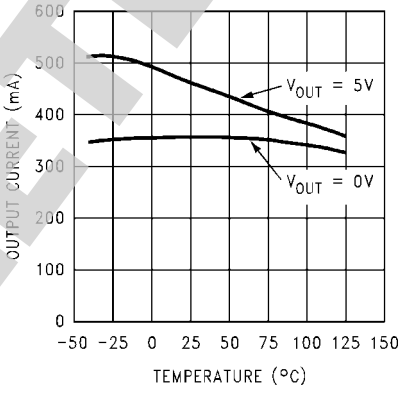


1133927

Enable Transient (Main Regulator)

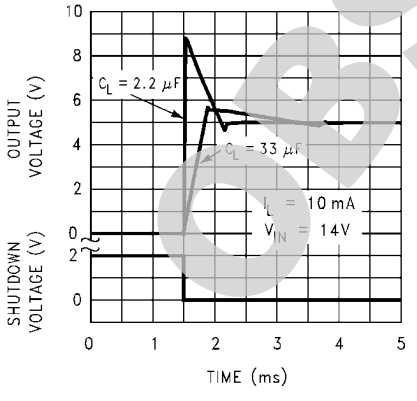

1133928

Enable Transient (Main Regulator)

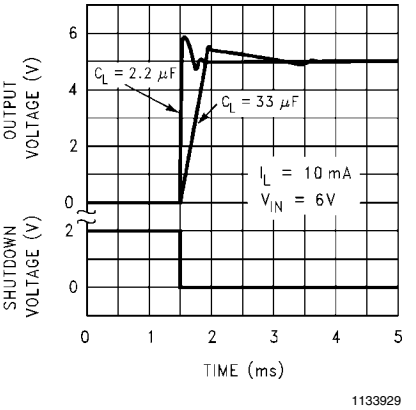


1133929

OBSOLETE


11339 Version 8 Revision 4 Print Date/Time: 2009/12/07 17:53:15

Load Transient Response (Main Regulator)

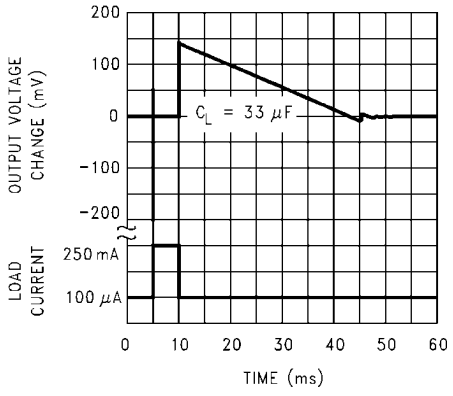


1133930

Load Transient Response (Main Regulator)

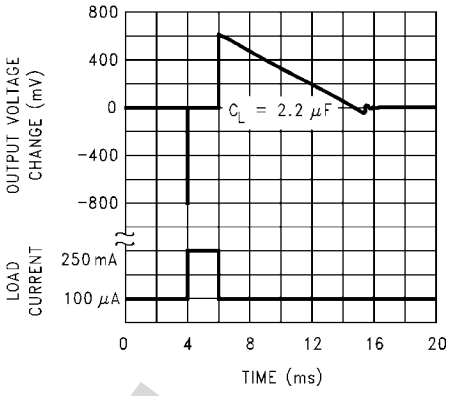


1133931

Line Transient Response (Main Regulator)

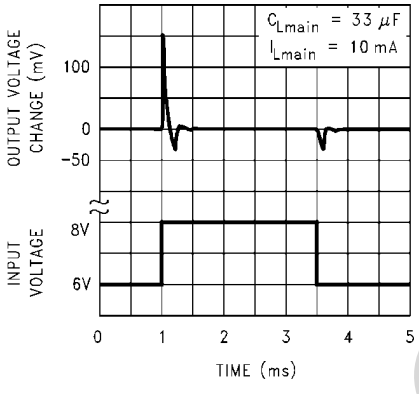


1133932

Line Transient Response (Main Regulator)

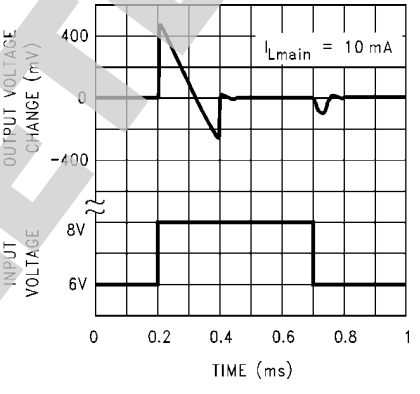


1133933

Ripple Rejection (Main Regulator)

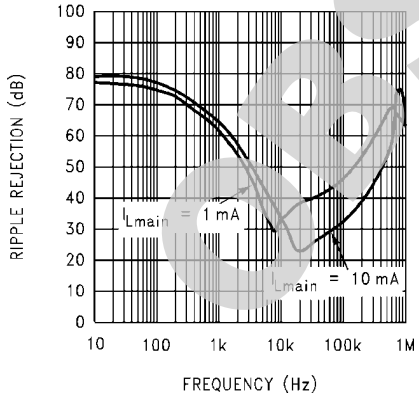

1133934


Ripple Rejection (Main Regulator)

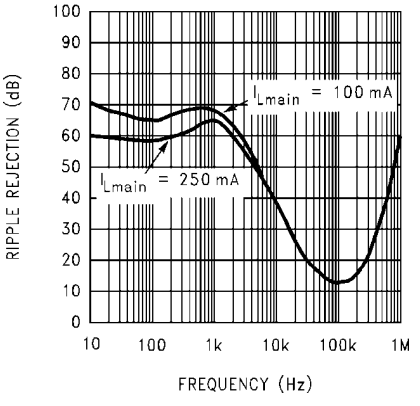

1133935


OBSOLETE

Ripple Rejection (Main Regulator)

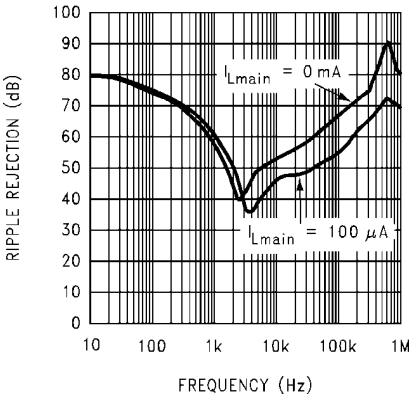


1133936

Thermal Regulation (Main Regulator)

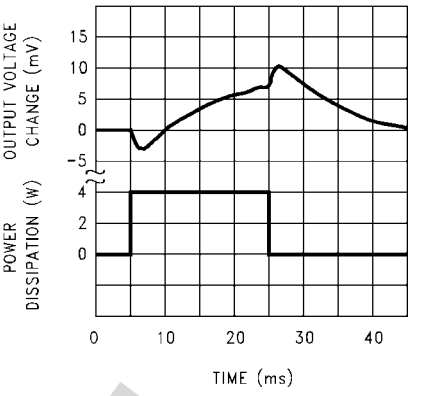


1133937

Output Impedance (Main Regulator)

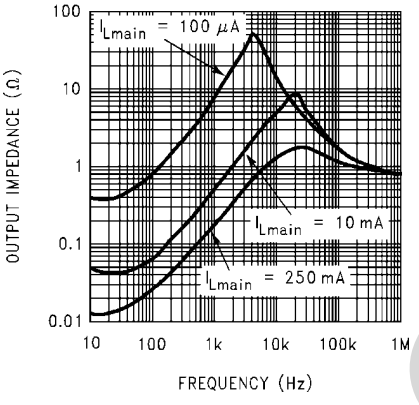


1133938

Output Noise Voltage (Main Regulator)

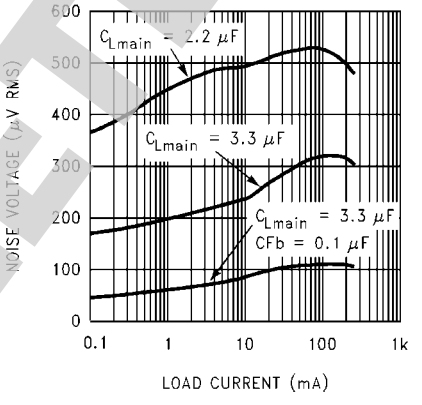


1133939

Feedback Bias Current

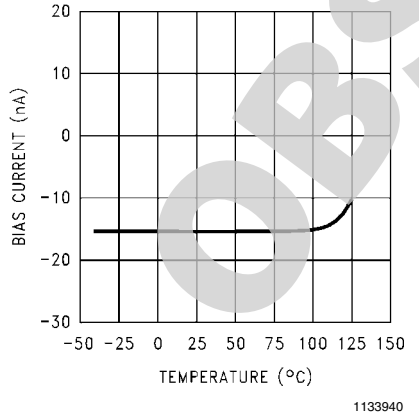

1133940

Divider Resistance

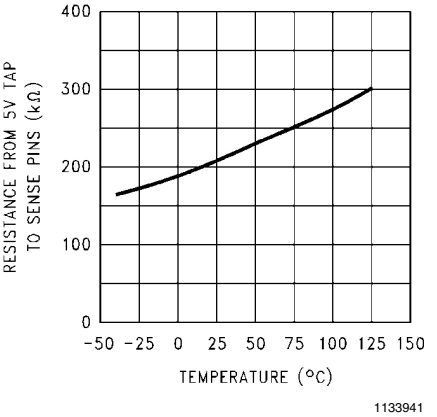


1133941

OBSOLETE


11339 Version 8 Revision 4 Print Date/Time: 2009/12/07 17:53:15

Dropout Characteristics (Auxiliary Regulator)

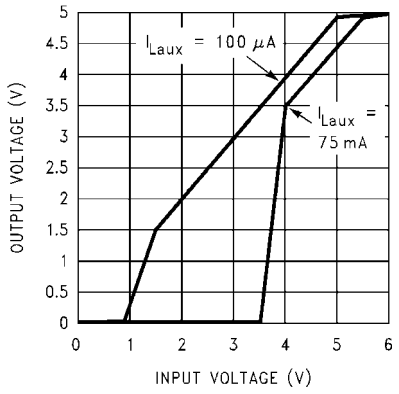


1133942

Dropout vs Temperature (Auxiliary Regulator)

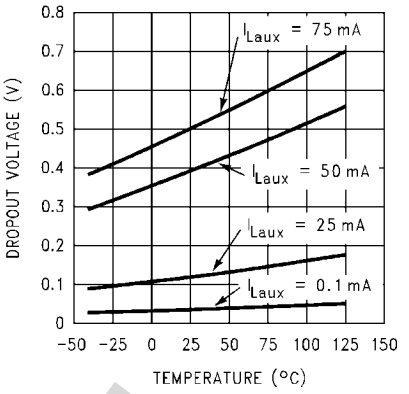


1133943

Current Limit vs Temperature (Auxiliary Regulator)

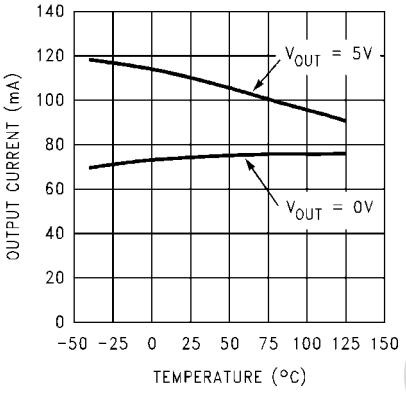


1133944

Line Transient Response (Auxiliary Regulator)

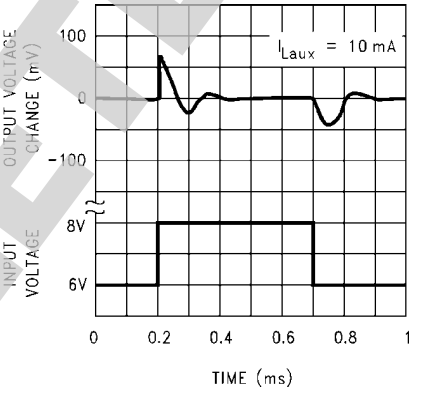


1133945

Load Transient Response (Auxiliary Regulator)

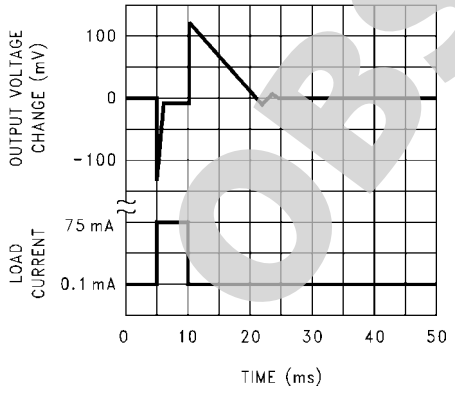

1133946

Load Transient Response (Auxiliary Regulator)

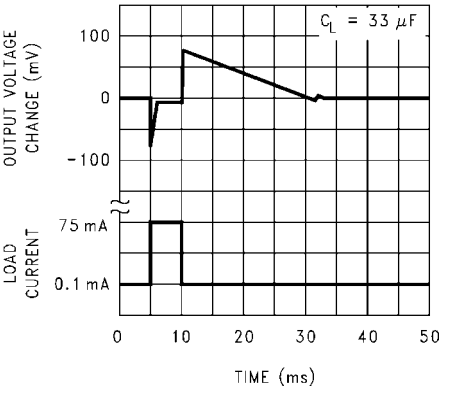


1133947

OBSOLETE


11339 Version 8 Revision 4 Print Date/Time: 2009/12/07 17:53:15

Ripple Rejection (Auxiliary Regulator)

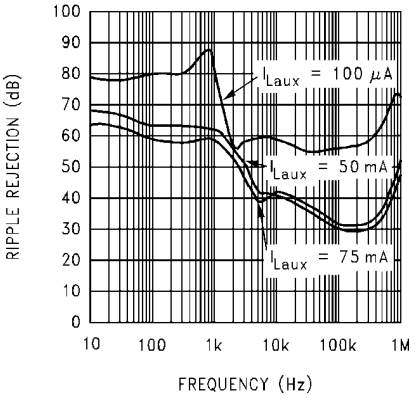


1133948

Output Impedance (Auxiliary Regulator)

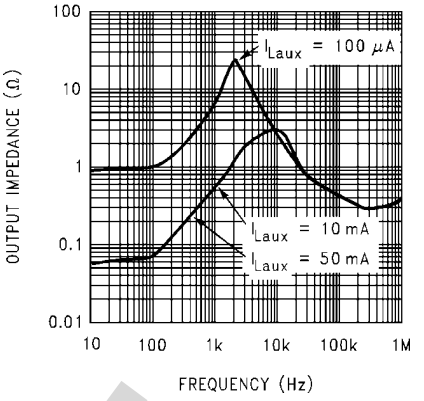


1133949

Output Noise Voltage (Auxiliary Regulator)

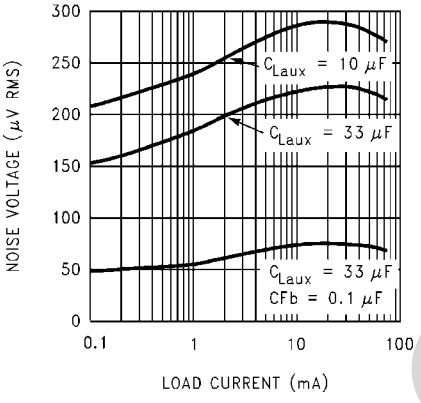


1133950

Auxiliary Comparator Sink Current

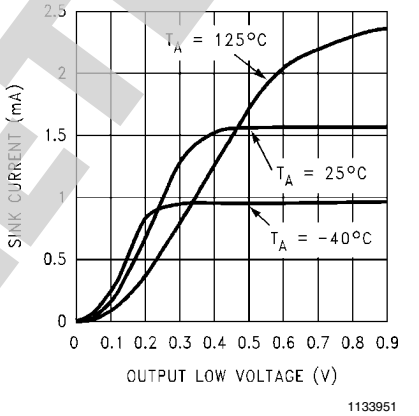


1133951

Error Output Voltage

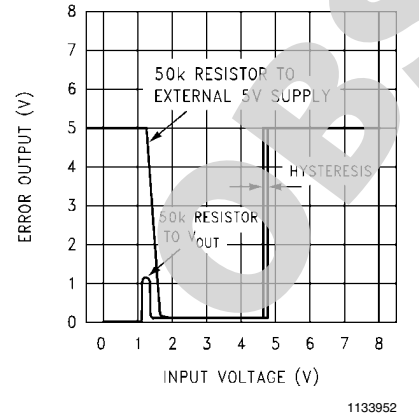

1133952

Dropout Detection Comparator Threshold Voltages

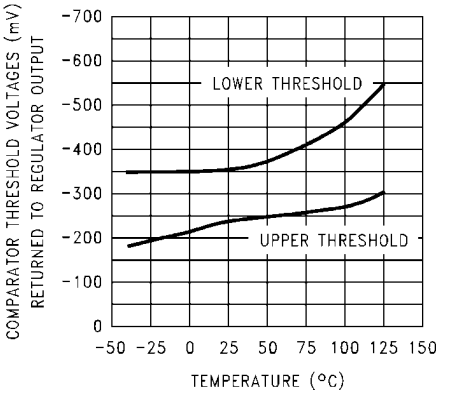

1133953

OBSOLETE

Application Hints

HEATSINK REQUIREMENTS

A heatsink may be required with the LP2956 depending on the maximum power dissipation and maximum ambient temperature of the application. Under all expected operating conditions, the junction temperature must be within the range specified under Absolute Maximum Ratings.

To determine if a heatsink is required, the maximum power dissipated by the regulator, P(max), must be calculated. It is important to remember that if the regulator is powered from a transformer connected to the AC line, the **maximum specified AC input voltage** must be used (since this produces the maximum DC input voltage to the regulator). *Figure 1* shows the voltages and currents which are present in the circuit. The formula for calculating the power dissipated in the regulator is also shown in *Figure 1* (the currents and power due to external resistive dividers are not included, and are typically negligible).

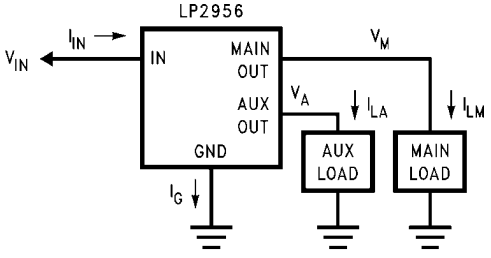


FIGURE 1. Current/Voltage Diagram

The next parameter which must be calculated is the maximum allowable temperature rise, $T_R(max)$. This is calculated by using the formula:

$$T_R(max) = T_J(max) - T_A(max)$$

where: $T_J(max)$ is the maximum allowable junction temperature

$T_A(max)$ is the maximum ambient temperature

Using the calculated values for $T_R(max)$ and P(max), the required value for junction-to-ambient thermal resistance, $\theta_{(J-A)}$, can now be found:


$$\theta_{(J-A)} = T_R(max)/P(max)$$

The heatsink for the LP2956 is made using the PC board copper. The heat is conducted from the die, through the lead frame (inside the part), and out the pins which are soldered to the PC board. The pins used for heat conduction are shown in *Table 1*.

TABLE 1.

Part	Package	Pins
LP2956IN	16-Pin Plastic DIP	4, 5, 12, 13
LP2956AIN	16-Pin Plastic DIP	4, 5, 12, 13
LP2956IM	16-Pin Surface Mt.	1, 8, 9, 16
LP2956AIM	16-Pin Surface Mt.	1, 8, 9, 16

Figure 2 shows copper patterns which may be used to dissipate heat from the LP2956:

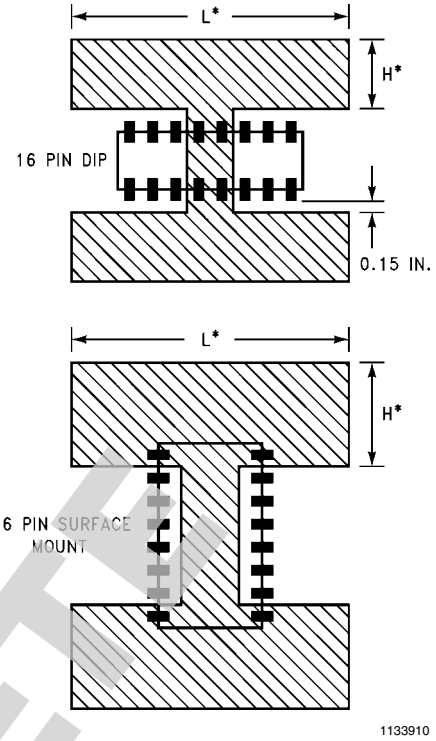

*For best results, use L = 2H

FIGURE 2. Copper Heatsink Patterns

Table 2 shows some typical values of junction-to-ambient thermal resistance (θ_{J-A}) for values of L and W (1 oz. copper).

TABLE 2.

Package	L (In.)	H (In.)	θ_{J-A} (°C/W)
16-Pin Plastic DIP	1	0.5	70
	2	1	60
	3	1.5	58
	4	0.19	66
	6	0.19	66
16-Pin Surface Mount	1	0.5	83
	2	1	70
	3	1.5	67
	6	0.19	69
	4	0.19	71
	2	0.19	73

EXTERNAL CAPACITORS

A 2.2 µF (or greater) capacitor is required between the main output pin and ground to assure stability. The auxiliary output requires 10 µF to ground. Without these capacitors, the part may oscillate. Most types of tantalum or aluminum electrolytics will work here. Film types will work, but are more expensive. Many aluminum electrolytics contain electrolytes which freeze at −30°C, which requires the use of solid tantalums below −25°C. The important characteristic of the capacitors is an ESR of 5Ω (or less) on the main regulator output and an ESR of 1Ω (or less) on the auxiliary regulator output (the ESR may increase by a factor of **20** or **30** as the temperature is reduced from +25°C to −30°C). The value of these capacitors may be increased without limit.

OBSOLETE

The main output requires less capacitance at lighter load currents. This capacitor can be reduced to 0.68 µF for currents below 10 mA or 0.22 µF for currents below 1 mA.

Programming the main output for voltages below 5V requires *more* output capacitance for stability. For the worst-case condition of 1.23V output and 250 mA of load current, a 6.8 µF (or larger) capacitor should be used.

A 1 µF capacitor should be placed from the input pin to ground if there is more than 10 inches of wire between the input and the AC filter capacitor or if a battery input is used.

Stray capacitance to the Feedback terminal can cause instability. This problem is most likely to appear when using high value external resistors to set the output voltage. Adding a 100 pF capacitor between the Output and Feedback pins and increasing the output capacitance to 6.8 µF (or greater) will cure the problem.

MINIMUM LOAD ON MAIN OUTPUT

When setting the main output voltage using an external resistive divider, a minimum current of 10 µA is recommended through the resistors to provide a minimum load.

It should be noted that a minimum load current is specified in several of the electrical characteristic test conditions, so the specified value must be used to obtain test limit correlation.

PROGRAMMING THE MAIN OUTPUT VOLTAGE


The main output may be pin-strapped for 5V operation using its internal resistive divider by tying the Output and Sense pins together and also tying the Feedback and 5V Tap pins together.

Alternatively, it may be programmed for any voltage between the 1.23V reference and the 29V maximum rating using an external pair of resistors (see *Figure 3*). The complete equation for the output voltage is:

$$V_{MAIN\ OUT} = V_{REF} \times \left(1 + \frac{R1}{R2}\right) + (I_{FB} \times R1)$$

where V_{REF} is the 1.23V reference and I_{FB} is the Feedback pin bias current (–20 nA typical). The minimum recommended load current of 1 µA sets an upper limit of 1.2 MΩ on the value of R2 in cases where the regulator must work with no load (see **MINIMUM LOAD**).

If I_{FB} is ignored in the calculation of the output voltage, it will produce a small error in $V_{MAIN\ OUT}$. Choosing R2 = 100 kΩ will reduce this error to 0.16% (typical) while increasing the resistor program current to 12 µA. Since the typical quiescent current is 130 µA, this added current is negligible.

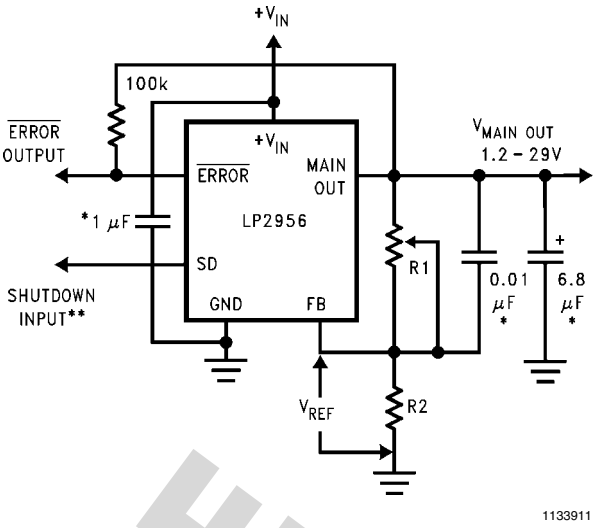

*See Application Hints

**Drive with high to shut down

FIGURE 3. Adjustable Regulator

DROPOUT VOLTAGE

The dropout voltage of the regulator is defined as the minimum input-to-output voltage differential required for the output voltage to stay within 100 mV of the output voltage measured with a 1V differential. The dropout voltage is independent of the programmed output voltage.


DROPOUT DETECTION COMPARATOR

This comparator produces a logic “LOW” whenever the main output falls out of regulation by more than about 5%. This figure results from the comparator's built-in offset of 60 mV divided by the 1.23V reference (refer to block diagram). The 5% low trip level remains constant regardless of the programmed output voltage. An out-of-regulation condition can result from low input voltage, current limiting, or thermal limiting.

Figure 4 gives a timing diagram showing the relationship between the main output voltage, the $\overline{\text{ERROR}}$ output, and input voltage as the input voltage is ramped up and down to a regulator whose main output is programmed for 5V. The $\overline{\text{ERROR}}$ signal becomes low at about 1.3V input. It goes high at about 5V input, where the main output equals 4.75V. Since the dropout voltage is load dependent, the **input** voltage trip points will vary with load current. The **main output** voltage trip point does not vary.

The comparator has an open-collector output which requires an external pull-up resistor. This resistor may be connected to the regulator main output or some other supply voltage. Using the main output prevents an invalid “HIGH” on the comparator output which occurs if it is pulled up to an external voltage while the regulator input voltage is reduced below 1.3V. In selecting a value for the pull-up resistor, note that while the output can sink 400 µA, this current adds to battery drain. Suggested values range from 100 kΩ to 1 MΩ. The resistor is not required if the output is unused.

OBSOLETE

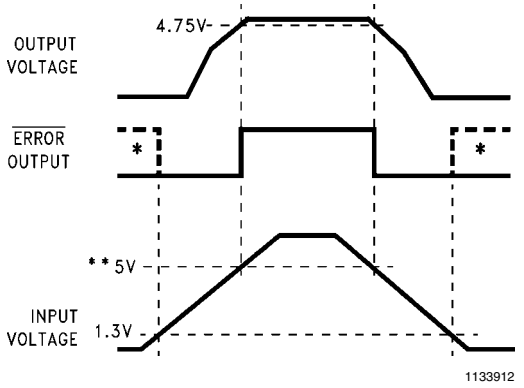

*In shutdown mode, $\overline{\text{ERROR}}$ will go high if it has been pulled up to an external supply. To avoid this invalid response, pull up to regulator output

**Exact value depends on dropout voltage. (See Application Hints)

FIGURE 4. $\overline{\text{ERROR}}$ Output Timing

If a single pull-up resistor is used to the regulator output, the error flag may briefly rise up to about 1.3V as the input voltage ramps up or down through the 0V to 1.3V region.

In some cases, this 1.3V signal may be mis-interpreted as a false high by a µP which is still "alive" with 1.3V applied to it.

To prevent this, the user may elect to use **two** resistors which are equal in value on the error output (one connected to ground and the other connected to the regulator output).

If this two-resistor divider is used, the error output will only be pulled up to about 0.6V (not 1.3V) during power-up or power-down, so it can not be interpreted as a high signal. When the regulator output is at 5V, the error output will be 2.5V, which is still clearly a high signal.

OUTPUT ISOLATION

The regulator outputs can be left connected to an active voltage source (such as a battery) with the regulator input power shut off, as long as the regulator ground pin is connected to ground. If the ground pin is left floating, damage to the regulator can occur if the output is pulled up by an external voltage source.


REDUCING MAIN OUTPUT NOISE

In reference applications it may be advantageous to reduce the AC noise present on the main output. One method is to reduce regulator bandwidth by increasing output capacitance. This is relatively inefficient, since large increases in capacitance are required to get significant improvement.

Noise can be reduced more effectively by a bypass capacitor placed across R1 (refer to *Figure 3*). The formula for selecting the capacitor to be used is:

$$CB = \frac{1}{2\pi\ R1 \times 20\ Hz}$$

This gives a value of about 0.1µF. When this is used, the output capacitor must be 6.8 µF (or greater) to maintain stability. The 0.1 µF capacitor reduces the high frequency noise gain of the circuit to unity, lowering the output noise from 260 µV to 80 µV using a 10 Hz to 100 kHz bandwidth. Also, noise is no longer proportional to the output voltage, so improvements are more pronounced at higher output voltages.

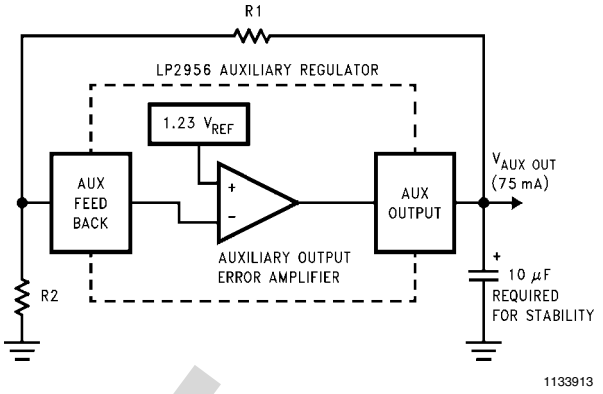

$$V_{AUX\ OUT} = V_{REF}\left(1 + \frac{R1}{R2}\right) + (I_{FB} \times R1)$$

where: V_{REF} = 1.23V and I_{FB} = −10 nA (typical)

FIGURE 5. Auxiliary Adjustable Regulator

AUXILIARY LDO OUTPUT

The LP2956 has an auxiliary LDO regulator output (which can source up to 75 mA) that is adjustable for voltages from 1.23V to 29V.

The output voltage is set by an external resistive divider, as shown in *Figure 5*. The maximum output current is 75 mA, and the output requires 10 µF from the output to ground for stability, regardless of load current.

SHUTDOWN INPUT

The shutdown input equivalent circuit is shown in *Figure 6*. The main regulator output is shut down when the NPN transitor is turned ON.




FIGURE 6. Shutdown Circuitry


The current into the input should be at least 0.5 µA to assure the output shutdown function. A resistor may be placed in series with the input to minimize current draw in shutdown mode, provided this minimum input current requirement is met.

IMPORTANT:

The shutdown input must not be left floating: a pull-down resistor (10 kΩ to 50 kΩ recommended) must be connected between the shutdown input and ground in cases where the input is not actively pulled low.

OBSOLETE


Schematic Diagram

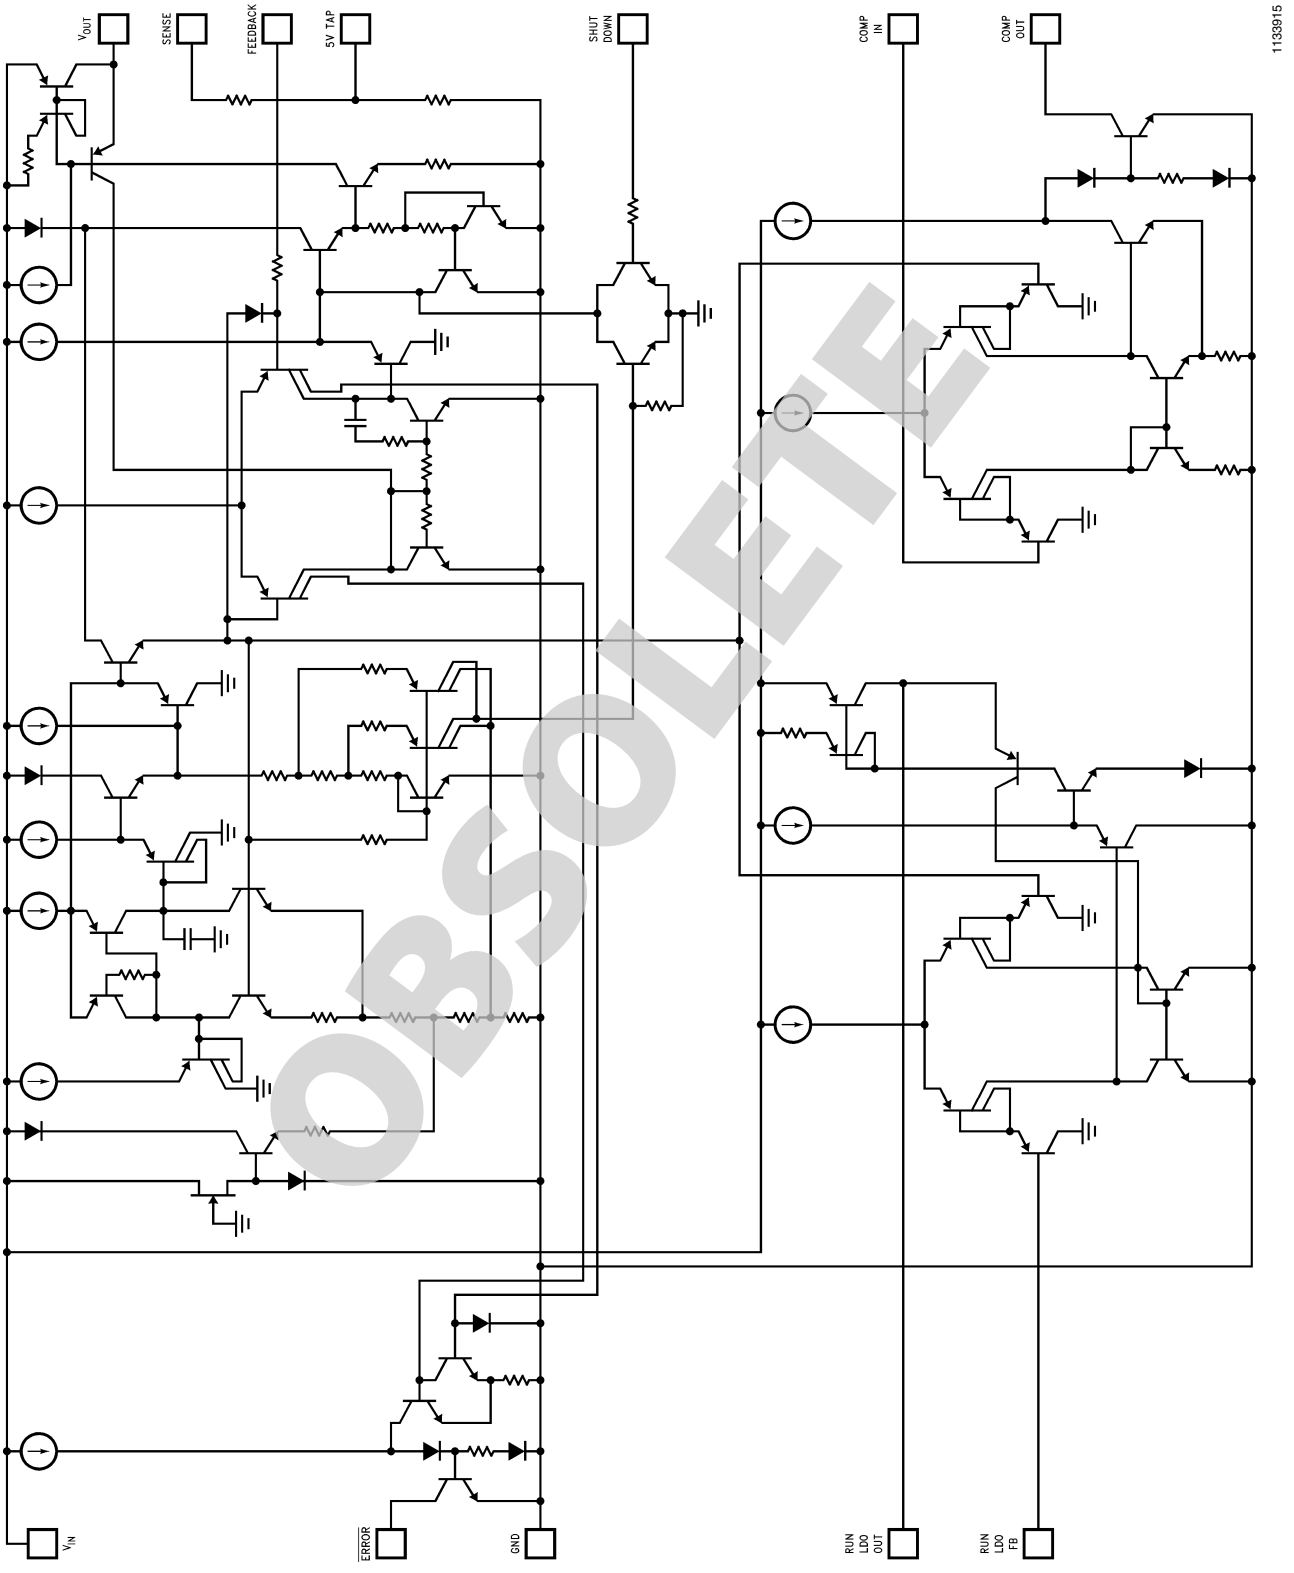

OBSOLETE

11339 Version 8 Revision 4 Print Date/Time: 2009/12/07 17:53:15


Typical Applications

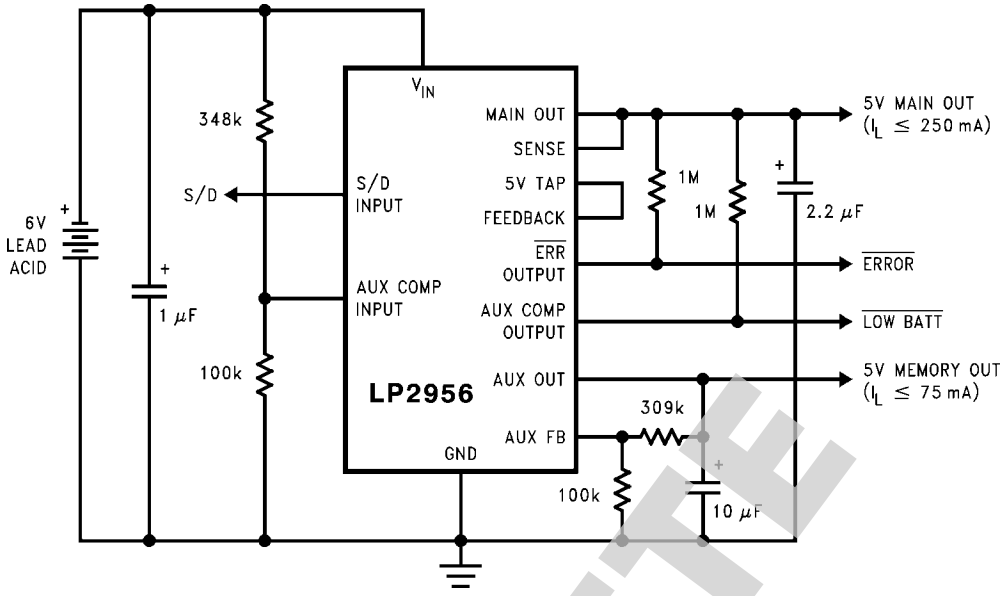

1133916


OBSOLETE

Physical Dimensions inches (millimeters) unless otherwise noted

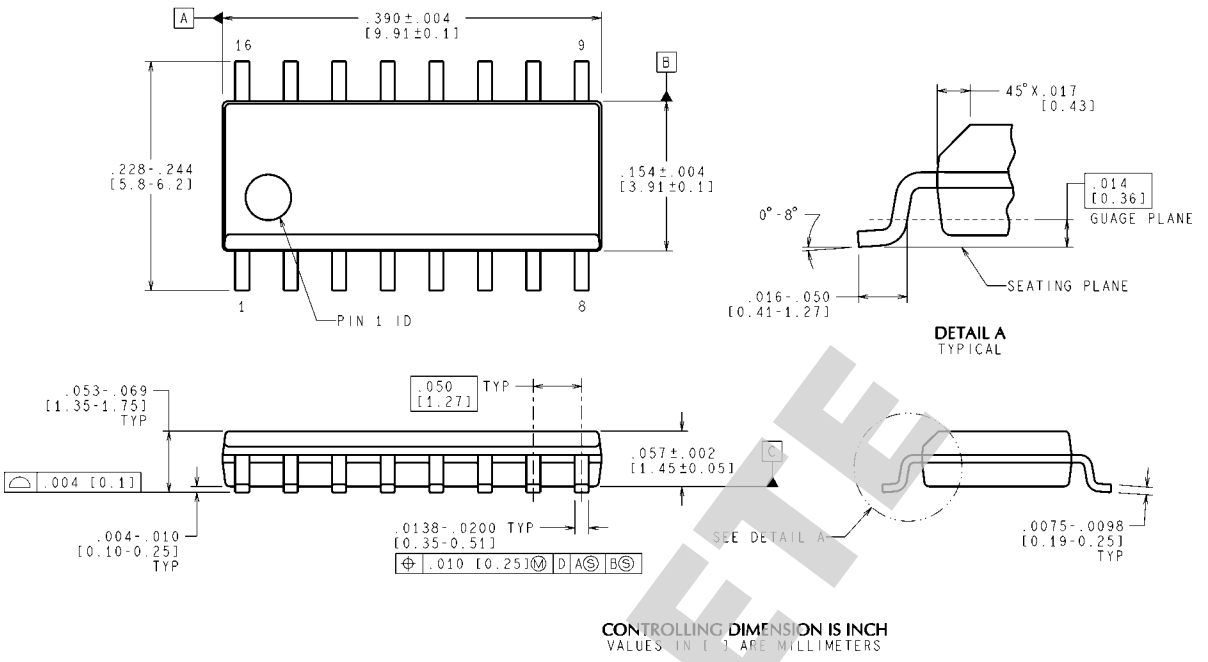

M16A (Rev J)

16-Pin Surface Mount
Order Number LP2956IM or LP2956AIM
NS Package Number M16A

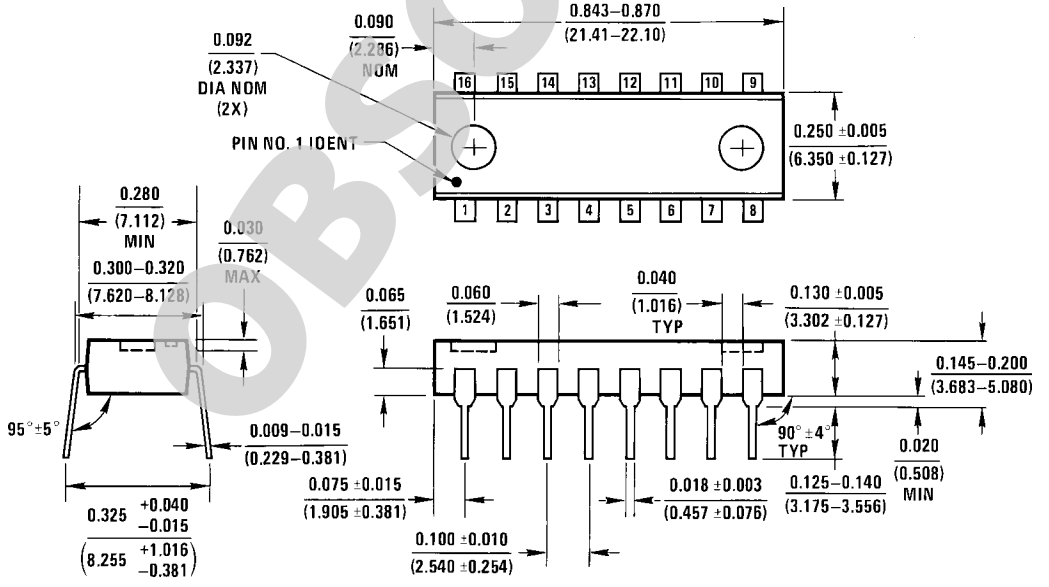


N16A (REV E)

16-Pin Plastic Dual-In-Line Package
Order Number LP2956IN or LP2956AIN
NS Package Number N16A

OBSOLETE

11339 Version 8 Revision 4 Print Date/Time: 2009/12/07 17:53:15

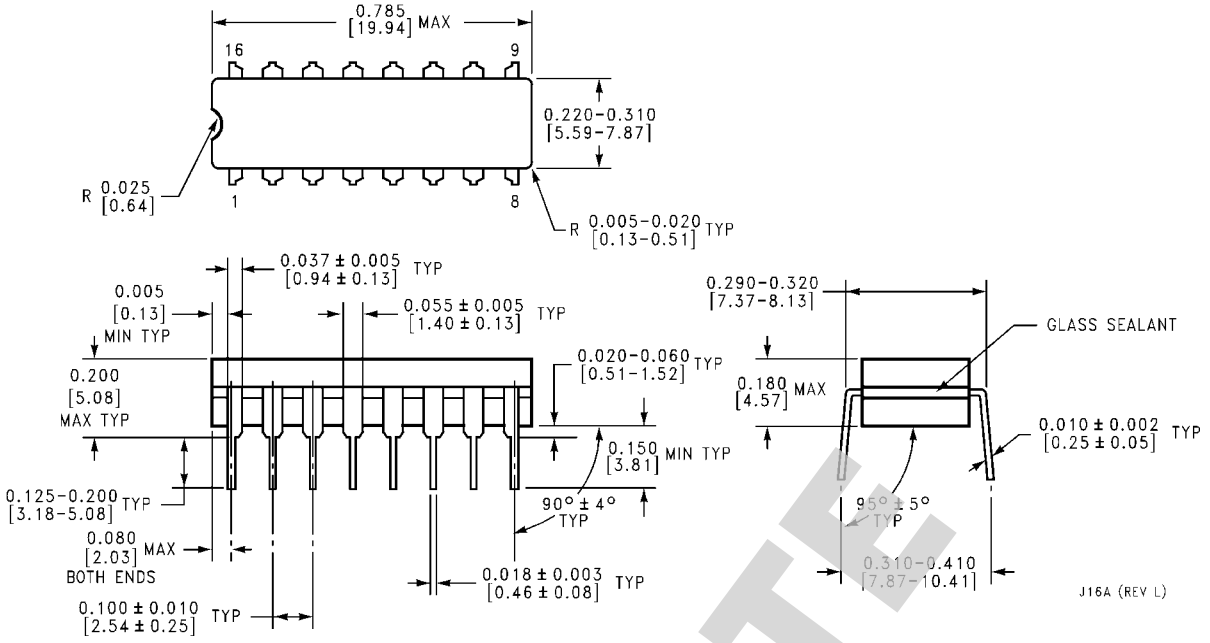

16-Pin Ceramic Dual-In-Line Package
Order Number LP2956AMJ-QML or 5962-9554701QEA
NS Package Number J16A

OBSOLETE

OBSOLETE

11339 Version 8 Revision 4 Print Date/Time: 2009/12/07 17:53:15

Notes

For more National Semiconductor product information and proven design tools, visit the following Web sites at: www.national.com

Products		Design Support	
Amplifiers	www.national.com/amplifiers	WEBENCH® Tools	www.national.com/webench
Audio	www.national.com/audio	App Notes	www.national.com/appnotes
Clock and Timing	www.national.com/timing	Reference Designs	www.national.com/refdesigns
Data Converters	www.national.com/adc	Samples	www.national.com/samples
Interface	www.national.com/interface	Eval Boards	www.national.com/evalboards
LVDS	www.national.com/lvds	Packaging	www.national.com/packaging
Power Management	www.national.com/power	Green Compliance	www.national.com/quality/green
Switching Regulators	www.national.com/switchers	Distributors	www.national.com/contacts
LDOs	www.national.com/ldo	Quality and Reliability	www.national.com/quality
LED Lighting	www.national.com/led	Feedback/Support	www.national.com/feedback
Voltage References	www.national.com/vref	Design Made Easy	www.national.com/easy
PowerWise® Solutions	www.national.com/powerwise	Applications & Markets	www.national.com/solutions
Serial Digital Interface (SDI)	www.national.com/sdi	Mil/Aero	www.national.com/milaero
Temperature Sensors	www.national.com/tempsensors	SolarMagic™	www.national.com/solarmagic
PLL/VCO	www.national.com/wireless	PowerWise® Design University	www.national.com/training

OBSOLETE

THE CONTENTS OF THIS DOCUMENT ARE PROVIDED IN CONNECTION WITH NATIONAL SEMICONDUCTOR CORPORATION ("NATIONAL") PRODUCTS. NATIONAL MAKES NO REPRESENTATIONS OR WARRANTIES WITH RESPECT TO THE ACCURACY OR COMPLETENESS OF THE CONTENTS OF THIS PUBLICATION AND RESERVES THE RIGHT TO MAKE CHANGES TO SPECIFICATIONS AND PRODUCT DESCRIPTIONS AT ANY TIME WITHOUT NOTICE. NO LICENSE, WHETHER EXPRESS, IMPLIED, ARISING BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT.

TESTING AND OTHER QUALITY CONTROLS ARE USED TO THE EXTENT NATIONAL DEEMS NECESSARY TO SUPPORT NATIONAL'S PRODUCT WARRANTY. EXCEPT WHERE MANDATED BY GOVERNMENT REQUIREMENTS, TESTING OF ALL PARAMETERS OF EACH PRODUCT IS NOT NECESSARILY PERFORMED. NATIONAL ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR BUYER PRODUCT DESIGN. BUYERS ARE RESPONSIBLE FOR THEIR PRODUCTS AND APPLICATIONS USING NATIONAL COMPONENTS. PRIOR TO USING OR DISTRIBUTING ANY PRODUCTS THAT INCLUDE NATIONAL COMPONENTS, BUYERS SHOULD PROVIDE ADEQUATE DESIGN, TESTING AND OPERATING SAFEGUARDS.

EXCEPT AS PROVIDED IN NATIONAL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, NATIONAL ASSUMES NO LIABILITY WHATSOEVER, AND NATIONAL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY RELATING TO THE SALE AND/OR USE OF NATIONAL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

Life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

National Semiconductor and the National Semiconductor logo are registered trademarks of National Semiconductor Corporation. All other brand or product names may be trademarks or registered trademarks of their respective holders.

Copyright© 2009 National Semiconductor Corporation

For the most current product information visit us at www.national.com

www.national.com

National Semiconductor Americas Technical Support Center
Email: support@nsc.com
Tel: 1-800-272-9959

National Semiconductor Europe Technical Support Center
Email: europe.support@nsc.com

National Semiconductor Asia Pacific Technical Support Center
Email: ap.support@nsc.com

National Semiconductor Japan Technical Support Center
Email: jpn.feedback@nsc.com