
GALAXY POWER Incorporated

MARS

48V Input, 2.5VDC, 40A Output

Quarter-brick

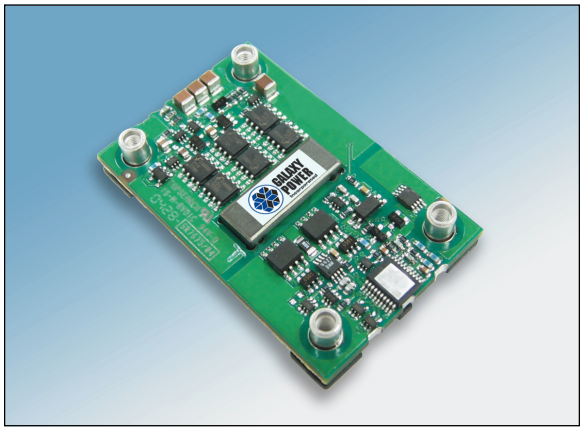

The Mars Series of quarter-brick DC/DC converters offers high current performance with high efficiency at low cost.

GAMW2V540 Features:

48V Input
2.5VDC, 40A Output

High Efficiency:

89% at 2.5V, 40A
90% at 2.5V, 20A

The Mars CoolConverter™ is the most cost-effective 100W quarter-brick on the market.

- Industry Standard Pinout and Footprint
- No Heat Sink Required
- Very Low Common-mode Noise for a Commercial DC/DC Converter
- Two-stage Input Filter
- Constant Switching Frequency
- Remote Sense
- Single Board Design
- Very Low Parts Count
- Optional Baseplate or Low Profile Heatsink for Improved Thermal Performance
- Header with M3 Metal Inserts for Mechanical Connection to PCB
- Two Year Warranty

CONTROL FUNCTIONS

- Uses Patented Power Supply Control and Architecture
- Microprocessor Controlled
- Primary-side Enable, Choice of Logic

PROTECTION FEATURES

- Over Temperature Protection
- Over Voltage Protection
- Over Current Protection
- Over/Under Input Voltage Protection

TYPICAL CHARACTERISTICS

- Output Setpoint Accuracy: ± 1%
- Load Regulation: ± 0.2%
- Line Regulation: ± 0.2%
- Regulation over Line, Load, and Temperature: ± 2%
- Low Output Ripple
- Output Trim

ISO 9001 CERTIFIED ORGANISATION

Certified to ISO 9001:2000

Galaxy Power Inc. ◆ 155 Flanders Road ◆ Westborough, MA 01581 ◆ Telephone: 508-870-9775 ◆ Fax: 508-870-9796 ◆ e-mail: info@galaxypwr.com

GENERAL SPECIFICATIONS

V_{IN} = 48V_{DC}, T_A@25° C, 300 LFM Airflow, V_{OUT}= 2.5V_{DC}, I_{OUT} = Full Load unless otherwise noted.
Available output power depends on ambient temperature and good thermal management. (See application graphs for limits.)

Input Characteristics				
Parameter	***Min***	***Typ***	***Max***	***Units***
Operating Input Voltage	36	48	75	V_{DC}
Input Current (Model Dependent)			3.75	A
Input Capacitance		3		µF
Input Hysteresis, Low Line		2		V_{DC}
Output Characteristics				
Regulation Over Line, Load & Temperature	2.450		2.550	V
Voltage Ripple			20	mV_{RMS}
Voltage Ripple, 20MHz BW			75	mV_{P-P}
Current Range	0		40	A
Current Limit Inception	41.2		56	A
Short Circuit Current, Peak[1]			60	A
Output Transient Response, 50% to 75% load change, 1A/µsec[2]			16	$\%V_{OUT}$
Settling Time to ± 1%			200	µS
Turn-on Time to 98%Vnom			25	mS
Output Overshoot at Turn-on		0		$\%V_{OUT}$
Trim Range	70		110	$\%V_{OUT}$
Overvoltage Protection, Latching		130		$\%V_{OUT}$
Isolation				
Isolation Test Voltage, Input/Output (Basic)	2250			V_{DC}
Isolation Resistance	10			MΩ
Features				
Overtemperature Protection, Thermal Sensor, Latching[3]			110	° C
Switching Frequency, Fixed		250		kHz

Notes:
1. During short circuit, converter will shut down and attempt to restart once per second. The average current during this condition will be very low and the device can be safely left in this condition continuously.
2. Limited by output energy storage. For improved performance see Tuned (T) model information.
3. PCB less than 130° C

GENERAL SPECIFICATIONS

Operating Temperature		–40° C to + 100° C
Storage Temperature		–55° C to + 125° C
Relative Humidity		10% to 95% RH, Non-condensing
Vibration		2 to 9Hz, 3mm disp., 9 to 200Hz, 1g
Material Flammability		UL V-0
Weight		35 grams
MTBF	Telcordia (Bellcore)	TBD

APPROVALS AND STANDARDS

UL and c-UL Recognized Component, TUV**, UL60950, CSA 22.2 No. 950, IEC/EN 60950

EMC Characteristics:

Designed to meet emission and immunity requirements per EN55022, CISPR 22, Class B, and CISPR 24.

** *An external fuse shall be used to comply with the requirements.*

Galaxy Power Inc. ◆ 155 Flanders Road ◆ Westborough, MA 01581 ◆ Telephone: 508-870-9775 ◆ Fax: 508-870-9796 ◆ e-mail: info@galaxypwr.com

COOLCONVERTER™

Galaxy's proprietary CoolConverter™ provides:

- Patented single-stage power conversion architecture, control, and magnetic design allow unprecedented power density and efficiency in an isolated power supply.
- An advanced microcontroller reduces parts count while adding features, performance, and flexibility in the design.
- Low common-mode noise as a result of lower capacitance in the transformer from balanced winding design.

PROTECTION AND CONTROL


Valid Input Voltage Range:

The converter measures the input voltage and will not allow operation outside of the input voltage specification. As shown by the graphs, hysteresis is added to both the high and low voltage to prevent the converter from turning on and off repeatedly when the voltage is held near either voltage extreme. At low line this assures the maximum input current is not exceeded; at high line this assures the semiconductor devices in the converter are not damaged by excessive voltage stress.


ON/OFF Logic Option:

The ON/OFF control logic can be either Negative (standard) or Positive to enable the converter. For Negative logic the ON/OFF pin is brought to below 1.0V with respect to the –INPUT pin to enable the converter. The pull down must be able to sink 100μA. For Positive logic the ON/OFF pin is brought to greater than 4.0V with respect to the –INPUT pin and be limited to less than 10V. To request the Positive logic version, add the suffix (P) to the standard part number. The ON/OFF pin has a built-in pull up resistor of approximately 100kΩ to + 5V.

Undervoltage Hysteresis

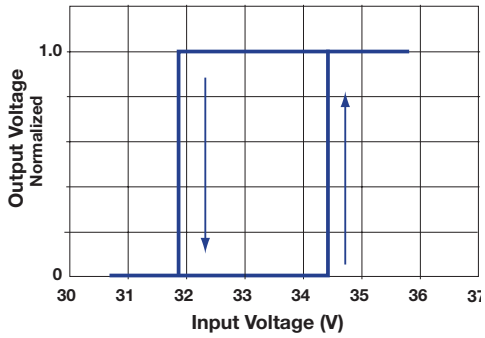

Overvoltage Hysteresis

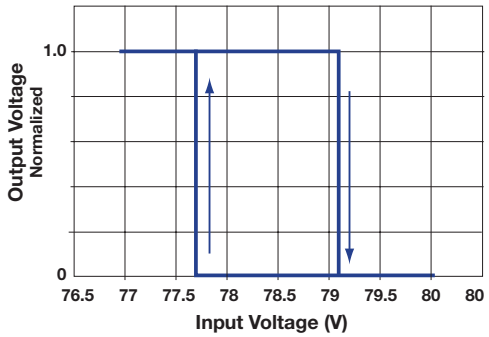

Galaxy Power Inc. ◆ 155 Flanders Road ◆ Westborough, MA 01581 ◆ Telephone: 508-870-9775 ◆ Fax: 508-870-9796 ◆ e-mail: info@galaxypwr.com

Output Over Voltage Protection:

The output voltage is constantly monitored by the microprocessor with a redundant secondary-side measurement circuit that both shuts down the duty cycle and triggers the microprocessor to shut down. If the output voltage exceeds the over-voltage specification, the microprocessor will latch the converter off. To turn the converter on requires either cycling the ON/OFF pin or power to the converter. This advanced feature prevents the converter from damaging the load if there is a converter failure or application error. If non-latching is required, consult factory.

Thermal Shutdown:

The printed circuit board temperature is measured using a semiconductor sensor. If the maximum rated temperature is exceeded, the converter is latched off. To re-enable the converter requires cycling the ON/OFF pin or power to the converter. If non-latching is required, consult factory.

Control Options:

As the behavior of the circuit is determined by firmware in the microcontroller, specific customer requirements such as

- non-latching thermal protection
- custom valid input voltage range
- controlled delay from initiating an ON/OFF signal for power sequencing

can be accomplished with no change to hardware.

The standard behavior was chosen based on system design experience but we understand that customers often have their own requirements.

Please consult Galaxy Power for your special needs.


Remote Sense:

The output voltage is regulated at the point where the sense pins connect to the power output pins. Total sense compensation should not exceed 0.4V or 10% of Vout, whichever is greater.

Safety:

An external input fuse must always be used to meet these safety requirements.

External Output Trimming

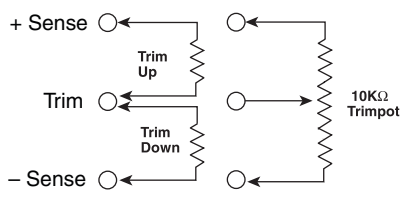


Trim:

To trim the output voltage higher, connect the required trim resistor from the Trim pin to the + Sense pin. To trim the output voltage lower, connect the required trim resistor from the Trim pin to the –Sense pin.


Trim-up

$$R_{TRIM\text{-}UP} = \left\{ \frac{2.5\ (100 + \Delta\%)}{1.225\Delta\%} - \frac{(100 + 2\Delta\%)}{\Delta\%} \right\} 5.11k\Omega$$

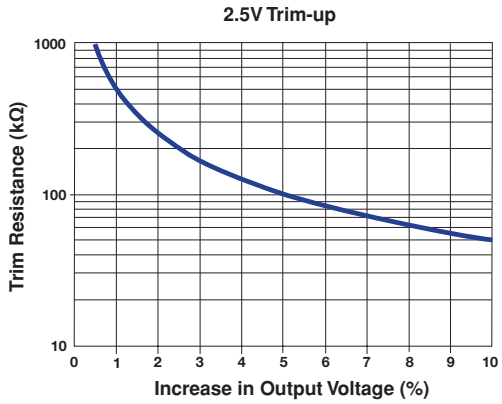


Trim-down

$$R_{TRIM\text{-}DOWN} = \left\{ \frac{100}{\Delta\%} - 2 \right\} 5.11k\Omega$$

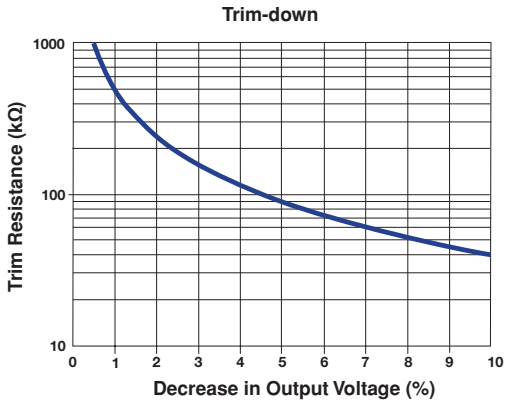


Galaxy Power Inc. ◆ 155 Flanders Road ◆ Westborough, MA 01581 ◆ Telephone: 508-870-9775 ◆ Fax: 508-870-9796 ◆ e-mail: info@galaxypwr.com


Efficiency

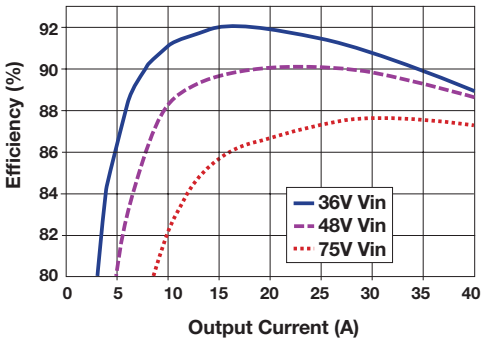

Power Dissipation

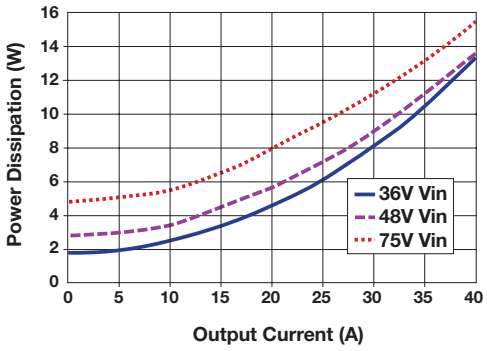


Start Up

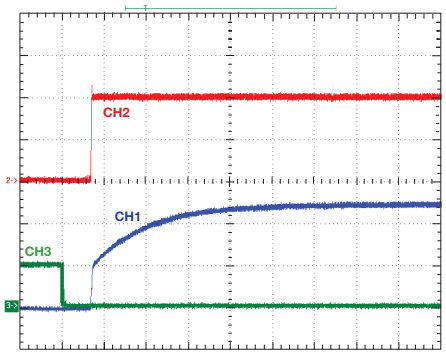


1) Vout 1V/div 4mS/div
2) Iout 10A/div
3) Enable 5V/div

Voltage Ripple

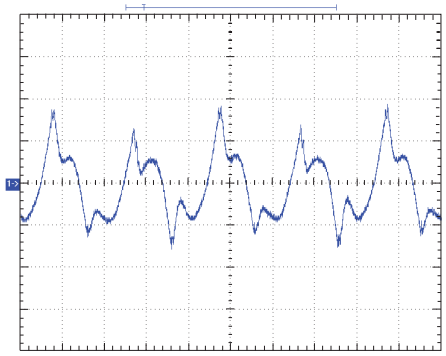


1) Vout 20mV/div 2µS/div
10µF ext cap 20MHz BW

Transient Response

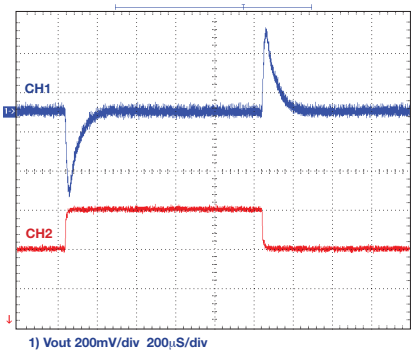


1) Vout 200mV/div 200µS/div
2) Iout 10A/div

Line/Load Regulation

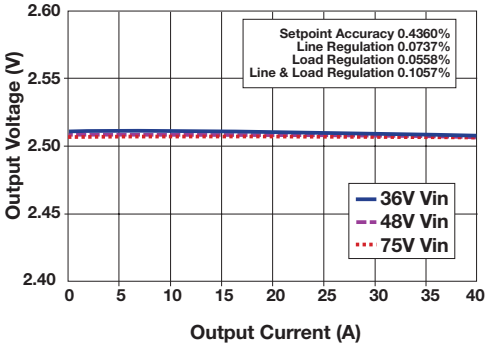


Galaxy Power Inc. ◆ 155 Flanders Road ◆ Westborough, MA 01581 ◆ Telephone: 508-870-9775 ◆ Fax: 508-870-9796 ◆ e-mail: info@galaxypwr.com

Back Bias

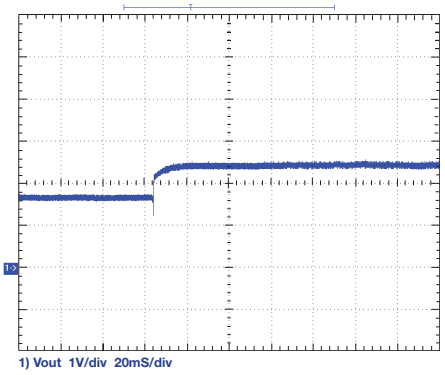


Over-current Protection

Note: Over-current protection is blip-mode (aka hiccup).

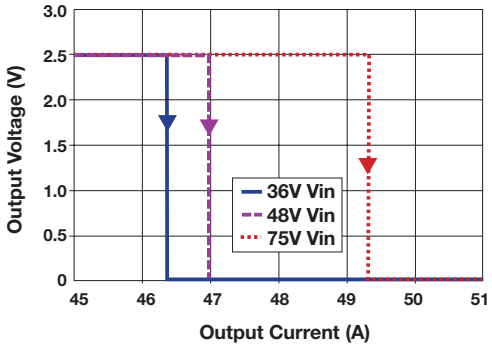


Thermal Derating

Crosswise Airflow

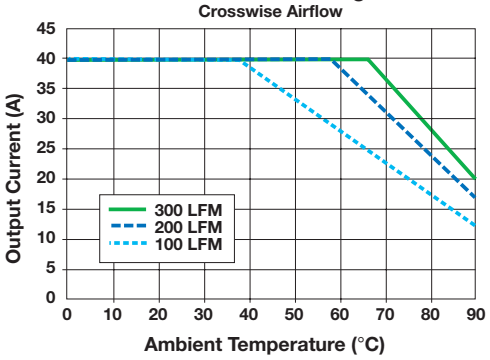


Thermal Derating

Lengthwise Airflow

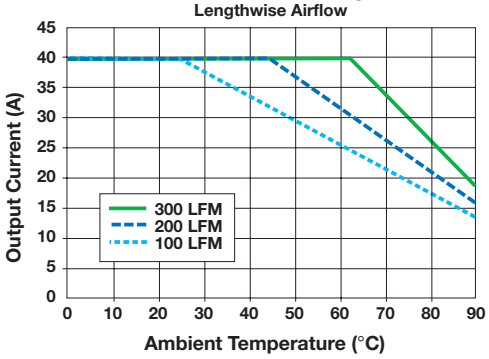



Over Voltage Protection

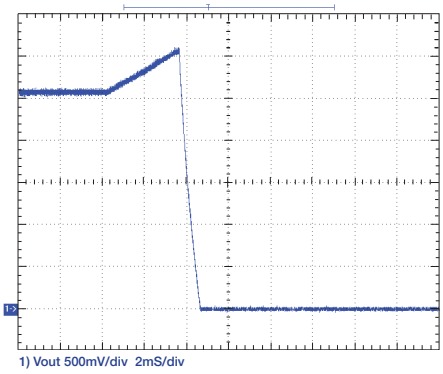

Galaxy Power Inc. ◆ 155 Flanders Road ◆ Westborough, MA 01581 ◆ Telephone: 508-870-9775 ◆ Fax: 508-870-9796 ◆ e-mail: info@galaxypwr.com

PACKAGE DETAIL

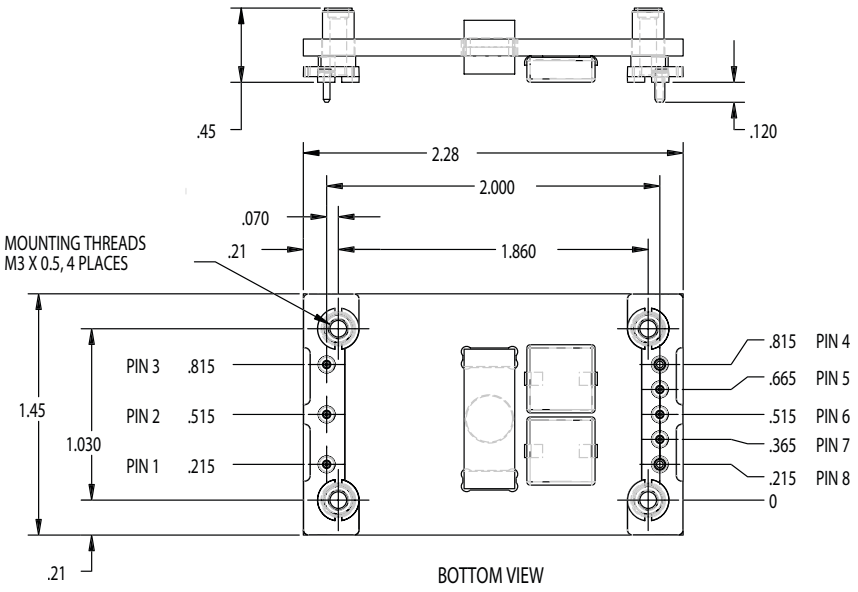

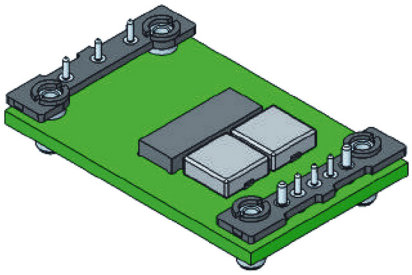

Pin Configuration (Bottom View)

Pin	*Function*	*Pin Dia. (in.)*
1	+ Input	0.040
2	On/Off	0.040
3	– Input	0.040
4	– Output	0.060
5	– Sense	0.040
6	Trim	0.040
7	+ Sense	0.040
8	+ Output	0.060

Notes:

1. Mechanical tolerances:
x.xxx in. = ± 0.005 in.
x.xx in. = ± 0.01 in.
2. Pin material: brass with tin/lead plating over nickel
3. Workmanship: Meets or exceeds IPC-A-610B Class II
4. "A" = 0.040" dia. pins
5. "B" = 0.060" dia. pins
6. Min. screw length for heatsink attachment
= 4.5mm + heatsink flange + locking hardware.

ORDERING INFORMATION

Standard Model Number	*Input Voltage*	*Output Voltage*	*Max Current*
GAMW2V540*	48V	2.5V	40A

** Options:*
P = Positive Logic Version; High = On
E = 0.18" Pins (± .01")
M = 0.145" Pins (± .01")
S = 0.12" Pins (± .01")
*T = Tuned model***

****T (Tuned Model) Option**

Designed for higher di/dt and ΔI applications, the transient response has been modified to take advantage of the capacitance on the customer's PCB. This unit requires a minimum load capacitance of 5600μF with an impedance magnitude of less than 0.005Ω at 15kHz. It offers a minimum 3X improvement in the peak response compared to a standard unit.

Example Part No.:
(All options shown)

GAMW2V540 PST

Part Number

Options:
Positive Logic Version
Optional Pin Lengths
E = 0.18"
M = 0.145"
S = 0.12"
Tuned Model

Galaxy Power Inc. warrants to the original purchaser that the products conform to this data sheet and are free from material and workmanship defects for a period of two (2) years from the date of manufacture, if this product is used within specified conditions. Galaxy Power Inc. reserves the right to make changes to the product(s) or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such products or information. For additional details on this limited warranty consult the factory.

Galaxy Power Inc. ◆ 155 Flanders Road ◆ Westborough, MA 01581 ◆ Telephone: 508-870-9775 ◆ Fax: 508-870-9796 ◆ e-mail: info@galaxypwr.com