

STRUCTURE            Silicon Monolithic Integrated Circuit

TYPE                 Bipolar System Power Supply

PRODUCT SERIES    **B A 4 9 1 1**

FEATURES            • Terminal for micro controller power supply hold  
                              • 5ch Regulator Outputs  
                              • 2ch High Side Switches

○ABSOLUTE MAXIMUM RATINGS(Ta=25°C)

| Parameter                    | Symbol   | Limits   | Unit |
|------------------------------|----------|----------|------|
| Supply Voltage               | VCC      | 36       | V    |
| Power Dissipation            | Pd       | 3400     | mW   |
| Operating Temperature Range  | Topr     | -30~+85  | °C   |
| Storage Temperature Range    | Tstg     | -55~+150 | °C   |
| Maximum Junction Temperature | Tjmax    | 150      | °C   |
| Peak Supply Voltage          | VCC PEAK | 50 (*1)  | V    |

(\*1)tr≥1msec Bias voltage less than 200msec

○RECOMMENDED OPERATING RANGES(Ta=25°C)

| Parameter                    | Limits  | Unit | Comment                   |
|------------------------------|---------|------|---------------------------|
| Recommended Supply Voltage 1 | 10~18   | V    | Except VDD and ILM output |
| Recommended Supply Voltage 2 | 8.2~18  | V    | VDD output                |
| Recommended Supply Voltage 3 | 11.4~18 | V    | ILM output                |

\*This product is not designed for protection against radioactive rays.

\*The product described in this specification is a strategic product (and/or service) subject to COCOM regulations. It should not be exported without authorization from the appropriate government.

\*Status of this document

The Japanese version of this document is the formal specification.

A customer may use this translation version only for a reference to help reading the formal version.

If there are any differences in translation version of this document, formal version takes priority.


# ○ELECTRICAL CHARACTERISTICS(Unless otherwise specified Ta=25°C,VCC= 14.4V)

| Parameter                 | Symbol | Limits |      |      | Unit | Conditon                             |
|---------------------------|--------|--------|------|------|------|--------------------------------------|
|                           |        | Min.   | Typ. | Max. |      |                                      |
| Standby Circuit Current 1 | Ist1   | –      | 100  | 150  | μA   | VCC=13.2V                            |
| Standby Circuit Current 2 | Ist2   | –      | 100  | 150  | μA   |                                      |
| Output Voltage (VDD) 1    | V01    | 4.80   | 5.00 | 5.20 | V    | I0=300mA VCC=10~18V                  |
| Dropout Voltage 1         | ΔV01   | –      | 0.4  | 0.7  | V    | I0=300mA, VBU–V01                    |
| Dropout Voltage 2         | ΔV01'  | –      | 2.5  | 3.0  | V    | I0=300mA, VCC–V01                    |
| Peak Output Current       | I01    | 300    | –    | –    | mA   | V01≥4.8V                             |
| Ripple Rejection          | R.R1   | –      | 55   | –    | dB   | f=100Hz, VRR=–10dBV                  |
| Low Vcc Output Voltage    | V01'   | 3.7    | 4.0  | –    | V    | VCC=5V, I0=10mA                      |
| Output Voltage (AUDIO) 2  | V02    | 7.8    | 8.12 | 8.3  | V    | I02=200mA, VCC=10~18V, –30°C~80°C *1 |
| Dropout Voltage 3         | ΔV02   | –      | 0.4  | 0.7  | V    | I02=200mA, VCC–V02                   |
| Peak Output Current       | I02    | 200    | –    | –    | mA   | V0 2≥7.8V                            |
| Ripple Rejection          | R.R2   | –      | 55   | –    | dB   | f=100Hz, VRR=–10dBV                  |
| Dropout Voltage (P.CON) 3 | ΔV03   | –      | 0.4  | 0.7  | V    | I03=200mA                            |
| Peak Output Current       | I03    | 300    | –    | –    | mA   | V03≥13.7V                            |
| Dropout Voltage (P.ANT) 4 | ΔV04   | –      | 0.4  | 0.7  | V    | I04=200mA                            |
| Peak Output Current       | I04    | 300    | –    | –    | mA   | V04≥13.7V                            |
| Output Voltage (AM) 5     | V05    | 7.5    | 7.9  | 8.3  | V    | I05=50mA, VCC=10~18V, –30°C~80°C *1  |
| Dropout Voltage           | ΔV05   | –      | 0.4  | 0.7  | V    | I05=50mA                             |
| Peak Output Current       | I05    | 50     | –    | –    | mA   | V05≥7.5V                             |
| Ripple Rejection          | R.R5   | –      | 55   | –    | dB   | f=100Hz, VRR=–10dBV                  |
| Output Voltage (FM) 6     | V06    | 7.8    | 8.12 | 8.3  | V    | I06=50mA, VCC=10~18V, –30°C~80°C *1  |
| Dropout Voltage           | ΔV06   | –      | 0.4  | 0.7  | V    | I06=50mA, VCC–V06                    |
| Peak Output Current       | I06    | 50     | –    | –    | mA   | V06≥7.8V                             |
| Ripple Rejection          | R.R6   | –      | 55   | –    | dB   | f=100Hz, VRR=–10dBV                  |
| Output Voltage (ILM) 7    | V07    | 9.9    | 10.3 | 10.7 | V    | I07=250mA, VCC=10~18V                |
| Dropout Voltage           | ΔV07   | –      | 0.4  | 0.7  | V    | I07=250mA, VCC–V07                   |
| Peak Output Current       | I07    | 250    | –    | –    | mA   | V07≥9.9V                             |
| Ripple Rejection          | R.R7   | –      | 50   | –    | dB   | f=100Hz, VRR=–10dBV                  |
| Input Pin (SW1)           |        |        |      |      |      |                                      |
| Standby Input Voltage     | Vth1-1 | –      | –    | 1.0  | V    |                                      |
| AUDIO ON                  | Vth1-2 | 1.5    | –    | 3.0  | V    |                                      |
| AUDIO, P-CON ON           | Vth1-3 | 3.5    | –    | 5.0  | V    |                                      |
| AUDIO, P-CON, P-ANT ON    | Vth1-4 | 7.0    | –    | VCC  | V    |                                      |
| SW1 Input Impedance       | Rin1   | 100    | –    | –    | kΩ   |                                      |
| Input Pin (SW2)           |        |        |      |      |      |                                      |
| Standby Input Voltage     | Vth2-1 | –      | –    | 1.0  | V    |                                      |
| ILM, FM ON                | Vth2-2 | 2.0    | –    | 3.0  | V    |                                      |
| ILM, AM ON                | Vth2-3 | 4.0    | –    | VCC  | V    |                                      |
| SW2 Input Impedance       | Rin2   | 100    | –    | –    | kΩ   |                                      |

\*1 Design Guarantee (Output Inspection is not done on all products)


- Use Peak Output Current less than Limits Min. values.

○BLOCK DIAGRAM

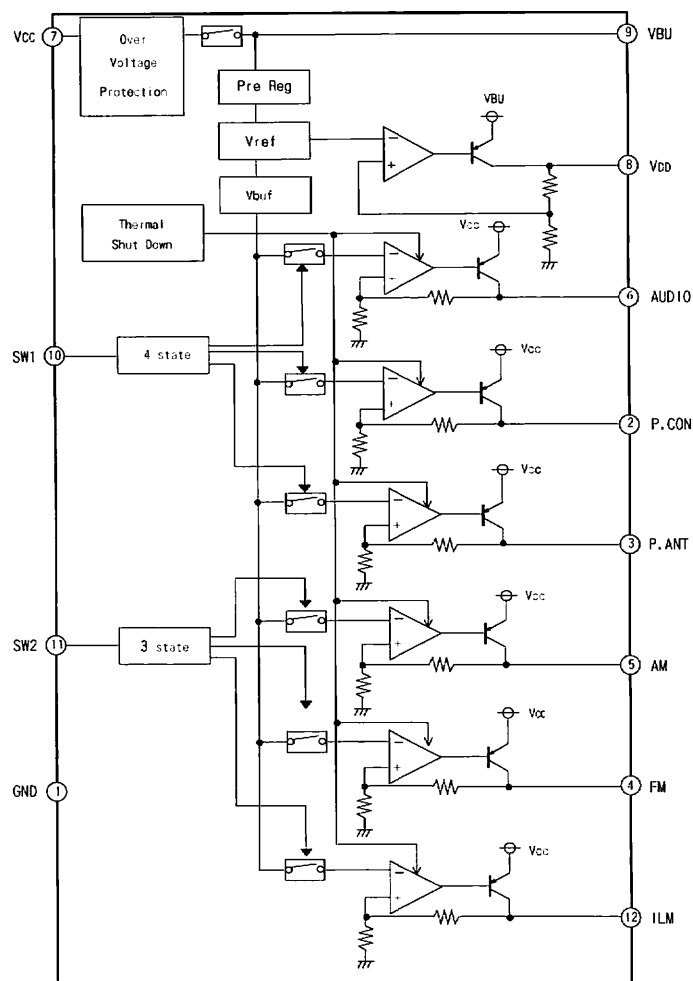

※Refer to the Technical Note about the details of the application.

○PHYSICAL DIMENSIONS • MARKING

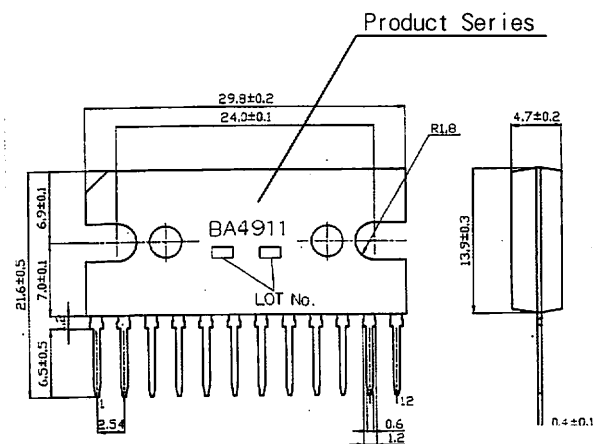

SIP-M12 (Unit:mm)

○PIN NO. / PIN NAME

| PIN NO. | PIN NAME |
|---------|----------|
| 1       | GND      |
| 2       | P. CON   |
| 3       | P. ANT   |
| 4       | FM       |
| 5       | AM       |
| 6       | AUDIO    |
| 7       | VCC      |
| 8       | VDD      |
| 9       | VBU      |
| 10      | SW1      |
| 11      | SW2      |
| 12      | ILM      |

## NOTES FOR USE

### 1. Over Voltage Protection Circuit

The Over Voltage Protection Circuit function is that when the difference voltage of VIN1 and GND exceeds over about 27V (room temperature), the each output turn off. Please be sure of the power supply voltage range you use.

### 2. The oscillation stopper of output capacitor

Please use the oscillation stopper between the every output and GND. The capacitor is over 10  $\mu$ F and recommended the small temperature change Tantalum Electronic Capacitor.

In case of the capacitor temperature change is big, it may get characteristic improvement to use the serial 1  $\mu$ F ceramic capacitor and 1  $\Omega$  resistor in parallel.

### 3. Over Current Protection Circuit

Each output, has the Over Current Protection circuit that is enough for the each output current ability, and it protects the IC destruction against the huge current load.

The protection circuit is fold back type current limiter and designed not as to occur the Latch Up by the huge current in a moment by the huge capacitor.


But, these protection circuits are effective for preventing destruction by unexpected accident. Please don't use in the situation of continuous protection circuit on and off. And for the peak current ability, because this chip has minus characteristic, be careful for the thermal design.

### 4. Thermal Shut Down Circuit

The Thermal Shut Down circuit is built in IC to prevent the damage due to over heating. Therefore, all the output except VDD are turned off when it works, and turned on when the temperature goes down to the specified level. But, built-in the IC a temperature control circuit to protect itself. Make sure of the thermal design under 150°C.

### 5. P.CON, P.ANT terminals short to GND


In case of the P.CON(2pin), P.ANT(3pin) connects to Battery (-) terminal (short to GND) and IC GND (1pin) is Open, The parasitic element occurs in the IC and IC might be destroyed. We recommend to take countermeasure as the using shotteky diode between P.CON, P.ANT and GND.

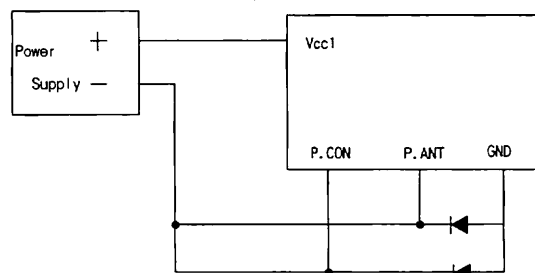

6. In the application, in case of the each terminal is lower than GND, it recommend to use the bypass circuit.

7. We recommend using Diode for protection purpose in case of output pin connected with large loads of impedance or reverse current at initial stages or output off stage.

(Example)

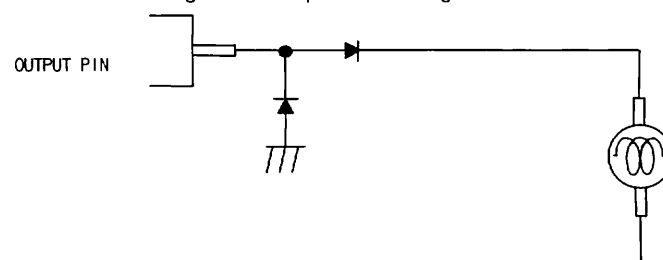

Rev. A

### Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

#### About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.

Thank you for your accessing to ROHM product informations.  
More detail product informations and catalogs are available,  
please contact your nearest sales office.

Please contact our sales offices for details ;

|                         |                           |                            |
|-------------------------|---------------------------|----------------------------|
| U.S.A / San Diego       | TEL : +1(858)625-3630     | FAX : +1(858)625-3670      |
| Atlanta                 | TEL : +1(770)754-5972     | FAX : +1(770)754-0691      |
| Dallas                  | TEL : +1(972)312-8818     | FAX : +1(972)312-0330      |
| Germany / Dusseldorf    | TEL : +49(2154)9210       | FAX : +49(2154)921400      |
| United Kingdom / London | TEL : +44(1)908-282-666   | FAX : +44(1)908-282-528    |
| France / Paris          | TEL : +33(0)1 56 97 30 60 | FAX : +33(0) 1 56 97 30 80 |
| China / Hong Kong       | TEL : +852(2)740-6262     | FAX : +852(2)375-8971      |
| Shanghai                | TEL : +86(21)6279-2727    | FAX : +86(21)6247-2066     |
| Dalian                  | TEL : +86(411)8230-8549   | FAX : +86(411)8230-8537    |
| Beijing                 | TEL : +86(10)8525-2483    | FAX : +86(10)8525-2489     |
| Taiwan / Taipei         | TEL : +866(2)2500-6956    | FAX : +866(2)2503-2869     |
| Korea / Seoul           | TEL : +82(2)8182-700      | FAX : +82(2)8182-715       |
| Singapore               | TEL : +65-6332-2322       | FAX : +65-6332-5662        |
| Malaysia / Kuala Lumpur | TEL : +60(3)7958-8355     | FAX : +60(3)7958-8377      |
| Philippines / Manila    | TEL : +63(2)807-6872      | FAX : +63(2)809-1422       |
| Thailand / Bangkok      | TEL : +66(2)254-4890      | FAX : +66(2)256-6334       |

Japan /  
(Internal Sales)

|                                                   |                                                                                              |                        |
|---------------------------------------------------|----------------------------------------------------------------------------------------------|------------------------|
| Tokyo                                             | 2-1-1, Yaesu, Chuo-ku, Tokyo 104-0082                                                        |                        |
|                                                   | TEL : +81(3)5203-0321                                                                        | FAX : +81(3)5203-0300  |
| Yokohama                                          | 2-4-8, Shin Yokohama, Kohoku-ku, Yokohama, Kanagawa 222-8575                                 |                        |
|                                                   | TEL : +81(45)476-2131                                                                        | FAX : +81(45)476-2128  |
| Nagoya                                            | Dainagayo Building 9F 3-28-12, Meieki, Nakamura-ku, Nagoya, Aichi 450-0002                   |                        |
|                                                   | TEL : +81(52)581-8521                                                                        | FAX : +81(52)561-2173  |
| Kyoto                                             | 579-32 Higashi Shiokouji-cho, Karasuma Nishi-iru, Shiokoujidori, Shimogyo-ku, Kyoto 600-8216 |                        |
|                                                   | TEL : +81(75)311-2121                                                                        | FAX : +81(75)314-6559  |
| (Contact address for overseas customers in Japan) |                                                                                              |                        |
| Yokohama                                          | TEL : +81(45)476-9270                                                                        | FAX : +81(045)476-9271 |