



# ZF-0916-3


The ZF-0916-3 filter is designed to be used in systems that are required to work in the tempest environment or to meet the requirements of Mil-Std-461D, E, or F.

"Feed-Through capacitors" and sealed construction provide excellent insertion loss from less than 10 KHz to beyond 1.0 GHz.

The filter has been designed to meet the following:  
**Humidity:** Mil-Std-810, Method 504.3, Procedure I.  
 95 % humidity, non-condensating

**Shock:** Mil-Std-810, Method 516.4, Procedures IV & VI  
**Vibration:** Mil-Std-810, Method 514.4, Category 8

RohS compliant


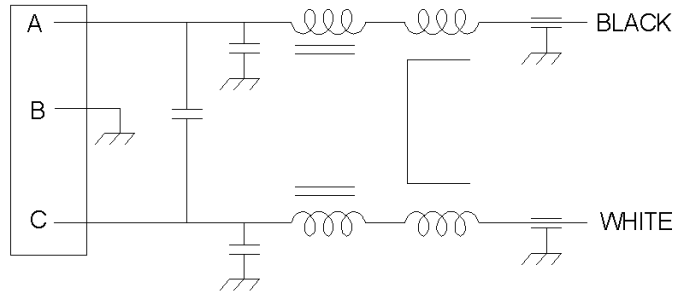


Operating Voltage = \_\_\_\_\_ 125/250 Vac, 50/60 Hz  
 = \_\_\_\_\_ 125 Vac, 400 Hz

Max. Operating Current = \_\_\_\_\_ 3 Amp  
 Operating Temperature = \_\_\_\_\_ -40—60°C

Diel. Withstand (Line—Case) = \_\_\_\_\_ 1500 Vac. (1.0 Min)  
 Diel. Withstand (Line—Neut) = \_\_\_\_\_ 1500 Vdc. (1.0 Min)  
 Capacitance, (Each line—case) = \_\_\_\_\_ 0.02 µF  
 Leakage Current = \_\_\_\_\_ 125V, 60 Hz: 1.15 mA Max  
 = \_\_\_\_\_ 125V, 400 Hz: 7.55 mA Max  
 = \_\_\_\_\_ 250 V, 50 Hz: 1.90 mA Max

Calculated MTBF = \_\_\_\_\_ 1,498,251 Hrs GB @ 30°C

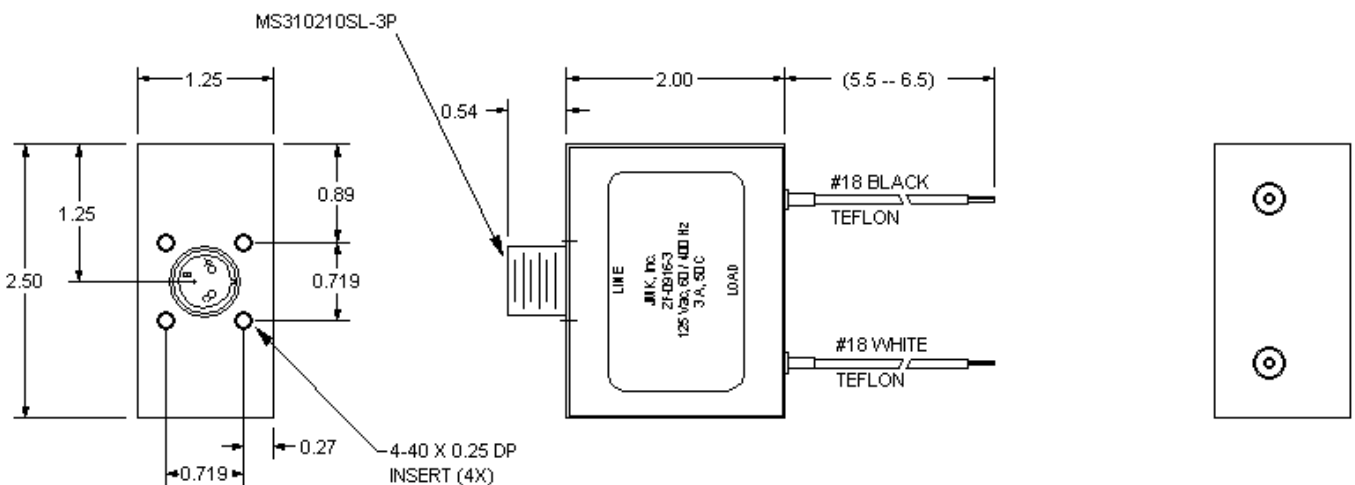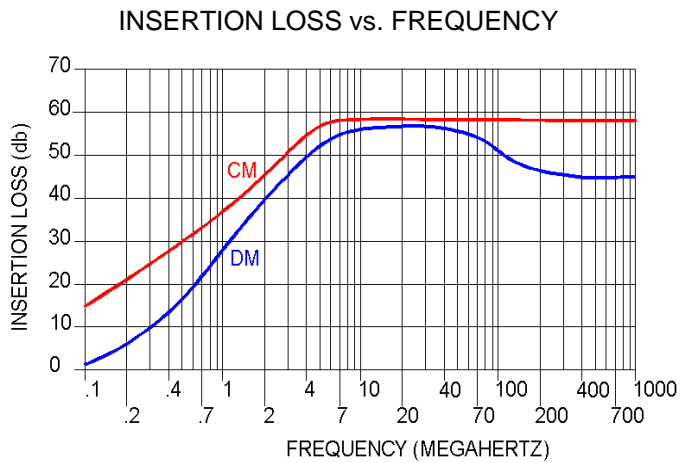

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115  
 email: info@jmkfilters.com  
 EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 Fax: 44-(0) 141 589 1884