

# High Voltage Synchronous N-Channel MOSFET Driver

## FEATURES

- Bootstrap Supply Voltage to 114V
- Wide  $V_{CC}$  Voltage: 4.5V to 13.5V
- Adaptive Shoot-Through Protection
- 1.4A Peak Top Gate Pull-Up Current
- 1.75A Peak Bottom Gate Pull-Up Current
- $1.5\Omega$  Top Gate Driver Pull-Down
- $0.75\Omega$  Bottom Gate Driver Pull-Down
- 5ns Top Gate Fall Time Driving 1nF Load
- 8ns Top Gate Rise Time Driving 1nF Load
- 3ns Bottom Gate Fall Time Driving 1nF Load
- 6ns Bottom Gate Rise Time Driving 1nF Load
- Drives Both High and Low Side N-Channel MOSFETs
- Undervoltage Lockout
- Thermally Enhanced 8-Pin MSOP Package

## APPLICATIONS

- Distributed Power Architectures
- Automotive Power Supplies
- High Density Power Modules
- Telecommunication Systems

LT, LT, LTC, LTM, Linear Technology and the Linear logo are registered trademarks and No R<sub>SENSE</sub> is a trademark of Linear Technology Corporation. All other trademarks are the property of their respective owners. Protected by U.S. Patents, including 6677210.

## DESCRIPTION

The LTC<sup>®</sup>4444-5 is a high frequency high voltage gate driver that drives two N-channel MOSFETs in a synchronous DC/DC converter with supply voltages up to 100V. This powerful driver reduces switching losses in MOSFETs with high gate capacitance.

The LTC4444-5 is configured for two supply-independent inputs. The high side input logic signal is internally level-shifted to the bootstrapped supply, which may function at up to 114V above ground.


The LTC4444-5 contains undervoltage lockout circuits that disable the external MOSFETs when activated. Adaptive shoot-through protection prevents both MOSFETs from conducting simultaneously.

For a similar driver in this product family, please refer to the chart below.


| PARAMETER                | LTC4444-5     | LTC4446       | LTC4444       |
|--------------------------|---------------|---------------|---------------|
| Shoot-Through Protection | Yes           | No            | Yes           |
| Absolute Max TS          | 100V          | 100V          | 100V          |
| MOSFET Gate Drive        | 4.5V to 13.5V | 7.2V to 13.5V | 7.2V to 13.5V |
| $V_{CC}$ UV <sup>+</sup> | 4V            | 6.6V          | 6.6V          |
| $V_{CC}$ UV <sup>-</sup> | 3.5V          | 6.15V         | 6.15V         |

## TYPICAL APPLICATION

High Input Voltage Buck Converter

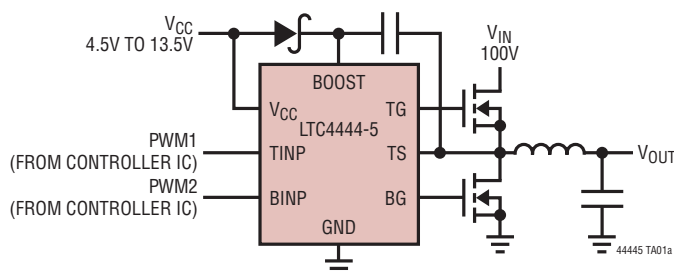

LTC4444-5 Driving a 1000pF Capacitive Load

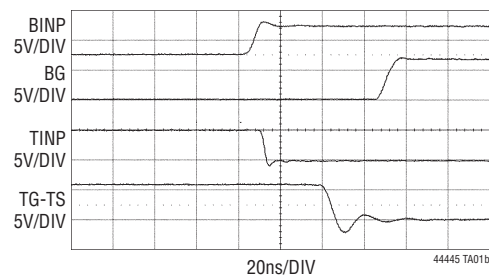


## ABSOLUTE MAXIMUM RATINGS

(Note 1)

Supply Voltage

|                                                           |                |
|-----------------------------------------------------------|----------------|
| $V_{CC}$ .....                                            | -0.3V to 14V   |
| BOOST – TS.....                                           | -0.3V to 14V   |
| TINP Voltage.....                                         | -2V to 14V     |
| BINP Voltage.....                                         | -2V to 14V     |
| BOOST Voltage.....                                        | -0.3V to 114V  |
| TS Voltage.....                                           | -5V to 100V    |
| Operating Junction Temperature Range<br>(Notes 2, 3)..... | -55°C to 150°C |
| Storage Temperature Range.....                            | -65°C to 150°C |
| Lead Temperature (Soldering, 10 sec).....                 | 300°C          |

## PIN CONFIGURATION

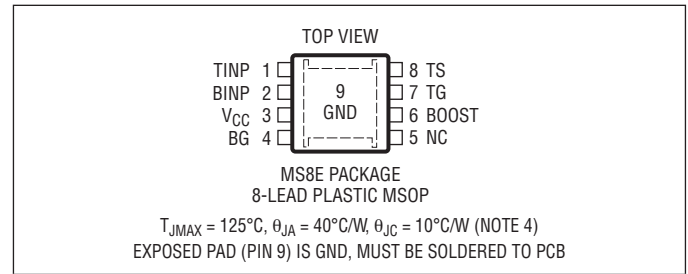

## ORDER INFORMATION

| LEAD FREE FINISH    | TAPE AND REEL         | PART MARKING* | PACKAGE DESCRIPTION | TEMPERATURE RANGE |
|---------------------|-----------------------|---------------|---------------------|-------------------|
| LTC4444EMS8E-5#PBF  | LTC4444EMS8E-5#TRPBF  | LTDPY         | 8-Lead Plastic MSOP | -40°C to 125°C    |
| LTC4444IMS8E-5#PBF  | LTC4444IMS8E-5#TRPBF  | LTDPY         | 8-Lead Plastic MSOP | -40°C to 125°C    |
| LTC4444HMS8E-5#PBF  | LTC4444HMS8E-5#TRPBF  | LTDPY         | 8-Lead Plastic MSOP | -40°C to 150°C    |
| LTC4444MPMS8E-5#PBF | LTC4444MPMS8E-5#TRPBF | LTDFD         | 8-Lead Plastic MSOP | -55°C to 150°C    |

Consult LTC Marketing for parts specified with wider operating temperature ranges. \*The temperature grade is identified by a label on the shipping container. Consult LTC Marketing for information on non-standard lead based finish parts.

For more information on lead free part marking, go to: <http://www.linear.com/leadfree/>

For more information on tape and reel specifications, go to: <http://www.linear.com/tapeandreel/>

**ELECTRICAL CHARACTERISTICS** The ● denotes the specifications which apply over the full operating junction temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$  (Note 2).  $V_{CC} = V_{BOOST} = 6\text{V}$ ,  $V_{TS} = \text{GND} = 0\text{V}$ , unless otherwise noted.

| SYMBOL                                         | PARAMETER                      | CONDITIONS                                        | MIN              | TYP          | MAX          | UNITS         |
|------------------------------------------------|--------------------------------|---------------------------------------------------|------------------|--------------|--------------|---------------|
| <b>Gate Driver Supply, <math>V_{CC}</math></b> |                                |                                                   |                  |              |              |               |
| $V_{CC}$                                       | Operating Voltage              |                                                   | 4.5              |              | 13.5         | V             |
| $I_{VCC}$                                      | DC Supply Current              | TINP = BINP = 0V                                  |                  | 320          | 520          | $\mu\text{A}$ |
| UVLO                                           | Undervoltage Lockout Threshold | $V_{CC}$ Rising<br>$V_{CC}$ Falling<br>Hysteresis | ● 3.60<br>● 3.20 | 4.00<br>3.55 | 4.40<br>3.90 | V<br>V<br>mV  |
| <b>Bootstrapped Supply (BOOST – TS)</b>        |                                |                                                   |                  |              |              |               |
| $I_{BOOST}$                                    | DC Supply Current              | TINP = BINP = 0V                                  |                  | 0.1          | 2            | $\mu\text{A}$ |
| <b>Input Signal (TINP, BINP)</b>               |                                |                                                   |                  |              |              |               |
| $V_{IH(BG)}$                                   | BG Turn-On Input Threshold     | BINP Ramping High                                 | ● 2.25           | 2.75         | 3.25         | V             |
| $V_{IL(BG)}$                                   | BG Turn-Off Input Threshold    | BINP Ramping Low                                  | ● 1.85           | 2.3          | 2.75         | V             |
| $V_{IH(TG)}$                                   | TG Turn-On Input Threshold     | TINP Ramping High                                 | ● 2.25           | 2.75         | 3.25         | V             |
| $V_{IL(TG)}$                                   | TG Turn-Off Input Threshold    | TINP Ramping Low                                  | ● 1.85           | 2.3          | 2.75         | V             |

## ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating junction temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$  (Note 2).  $V_{CC} = V_{BOOST} = 6\text{V}$ ,  $V_{TS} = \text{GND} = 0\text{V}$ , unless otherwise noted.

| SYMBOL                                                                                                        | PARAMETER                     | CONDITIONS                                                      | MIN | TYP        | MAX     | UNITS         |
|---------------------------------------------------------------------------------------------------------------|-------------------------------|-----------------------------------------------------------------|-----|------------|---------|---------------|
| $I_{TINP(BINP)}$                                                                                              | Input Pin Bias Current        |                                                                 |     | $\pm 0.01$ | $\pm 2$ | $\mu\text{A}$ |
| <b>High Side Gate Driver Output (TG)</b>                                                                      |                               |                                                                 |     |            |         |               |
| $V_{OH(TG)}$                                                                                                  | TG High Output Voltage        | $I_{TG} = -10\text{mA}$ , $V_{OH(TG)} = V_{BOOST} - V_{TG}$     |     | 0.7        |         | V             |
| $V_{OL(TG)}$                                                                                                  | TG Low Output Voltage         | $I_{TG} = 100\text{mA}$ , $V_{OL(TG)} = V_{TG} - V_{TS}$        | ●   | 150        | 300     | mV            |
| $I_{PU(TG)}$                                                                                                  | TG Peak Pull-Up Current       |                                                                 | ●   | 1          | 1.4     | A             |
| $R_{DS(TG)}$                                                                                                  | TG Pull-Down Resistance       |                                                                 | ●   | 1.5        | 3.0     | $\Omega$      |
| <b>Low Side Gate Driver Output (BG)</b>                                                                       |                               |                                                                 |     |            |         |               |
| $V_{OH(BG)}$                                                                                                  | BG High Output Voltage        | $I_{BG} = -10\text{mA}$ , $V_{OH(BG)} = V_{CC} - V_{BG}$        |     | 0.7        |         | V             |
| $V_{OL(BG)}$                                                                                                  | BG Low Output Voltage         | $I_{BG} = 100\text{mA}$                                         | ●   | 75         | 150     | mV            |
| $I_{PU(BG)}$                                                                                                  | BG Peak Pull-Up Current       |                                                                 | ●   | 1.15       | 1.75    | A             |
| $R_{DS(BG)}$                                                                                                  | BG Pull-Down Resistance       |                                                                 | ●   | 0.75       | 1.5     | $\Omega$      |
| <b>Switching Time [BINP (TINP) is Tied to Ground While TINP (BINP) is Switching. Refer to Timing Diagram]</b> |                               |                                                                 |     |            |         |               |
| $t_{PLH(TG)}$                                                                                                 | TG Low-High Propagation Delay |                                                                 | ●   | 33         | 60      | ns            |
| $t_{PHL(TG)}$                                                                                                 | TG High-Low Propagation Delay |                                                                 | ●   | 24         | 45      | ns            |
| $t_{PLH(BG)}$                                                                                                 | BG Low-High Propagation Delay |                                                                 | ●   | 27         | 50      | ns            |
| $t_{PHL(BG)}$                                                                                                 | BG High-Low Propagation Delay |                                                                 | ●   | 15         | 35      | ns            |
| $t_r(TG)$                                                                                                     | TG Output Rise Time           | 10% – 90%, $C_L = 1\text{nF}$<br>10% – 90%, $C_L = 10\text{nF}$ |     | 8<br>80    |         | ns<br>ns      |
| $t_f(TG)$                                                                                                     | TG Output Fall Time           | 10% – 90%, $C_L = 1\text{nF}$<br>10% – 90%, $C_L = 10\text{nF}$ |     | 5<br>50    |         | ns<br>ns      |
| $t_r(BG)$                                                                                                     | BG Output Rise Time           | 10% – 90%, $C_L = 1\text{nF}$<br>10% – 90%, $C_L = 10\text{nF}$ |     | 6<br>60    |         | ns<br>ns      |
| $t_f(BG)$                                                                                                     | BG Output Fall Time           | 10% – 90%, $C_L = 1\text{nF}$<br>10% – 90%, $C_L = 10\text{nF}$ |     | 3<br>30    |         | ns<br>ns      |

**Note 1:** Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

**Note 2:** The LTC4444-5 is tested under pulsed load conditions such that  $T_J \approx T_A$ . The LTC4444E-5 is guaranteed to meet specifications from  $0^\circ\text{C}$  to  $85^\circ\text{C}$  junction temperature. Specifications over the  $-40^\circ\text{C}$  to  $125^\circ\text{C}$  operating junction temperature range are assured by design, characterization and correlation with statistical process controls. The LTC4444I-5 is guaranteed over the  $-40^\circ\text{C}$  to  $125^\circ\text{C}$  operating temperature range, LTC4444H-5 is guaranteed over the  $-40^\circ\text{C}$  to  $150^\circ\text{C}$  operating temperature range and the LTC4444MP-5 is tested and guaranteed over the full  $-55^\circ\text{C}$  to  $150^\circ\text{C}$  operating junction temperature range.

High junction temperatures degrade operating lifetimes; operating lifetime is derated for junction temperatures greater than  $125^\circ\text{C}$ . Note that the maximum ambient temperature consistent with these specifications is determined by specific operating conditions in conjunction with board layout, the rated package thermal impedance and other environmental factors.

**Note 3:** The junction temperature ( $T_J$ , in  $^\circ\text{C}$ ) is calculated from the ambient temperature ( $T_A$ , in  $^\circ\text{C}$ ) and power dissipation ( $P_D$ , in watts) according to the formula:


$$T_J = T_A + (P_D \cdot \theta_{JA})$$

where  $\theta_{JA}$  (in  $^\circ\text{C}/\text{W}$ ) is the package thermal impedance.


**Note 4:** Failure to solder the exposed back side of the MS8E package to the PC board will result in a thermal resistance much higher than  $40^\circ\text{C}/\text{W}$ .

## TYPICAL PERFORMANCE CHARACTERISTICS


**V<sub>CC</sub> Supply Quiescent Current vs Voltage**

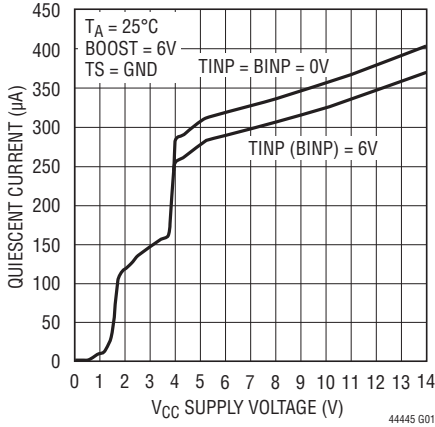


**BOOST-TS Supply Quiescent Current vs Voltage**

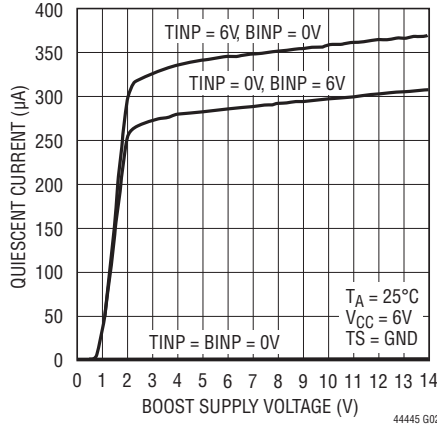


**V<sub>CC</sub> Supply Current vs Temperature**

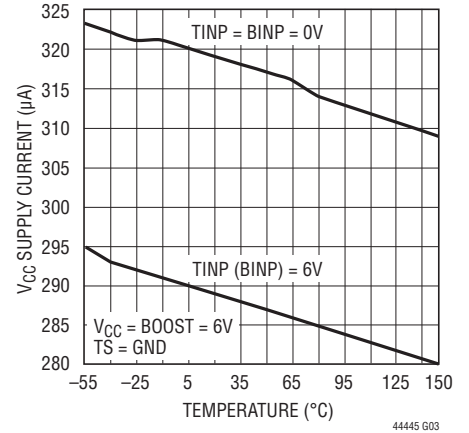


**Boost Supply Current vs Temperature**

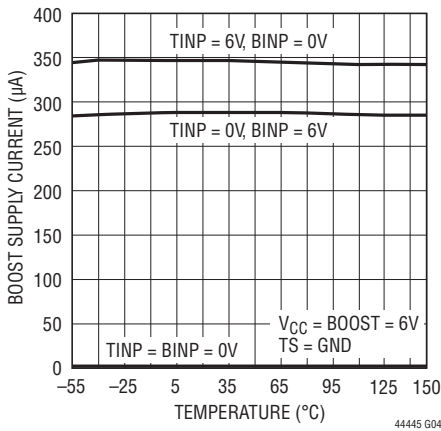


**Output Low Voltage (V<sub>OL</sub>) vs Supply Voltage**

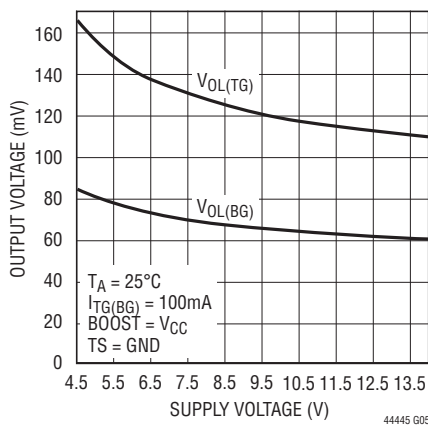


**Output High Voltage (V<sub>OH</sub>) vs Supply Voltage**

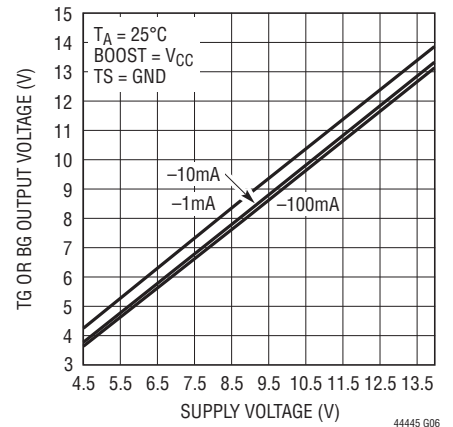


**Input Thresholds (TINP, BINP) vs Supply Voltage**

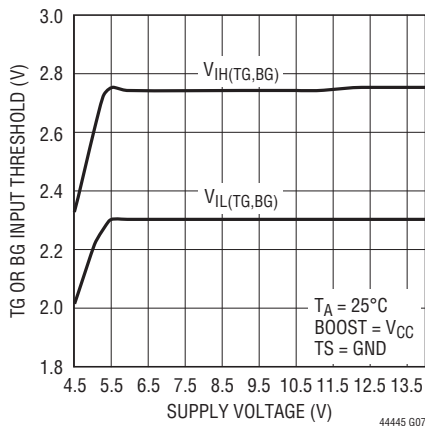

**Input Thresholds (TINP, BINP) vs Temperature**

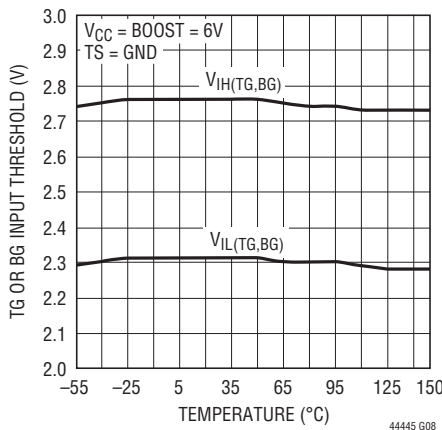


**Input Thresholds (TINP, BINP) Hysteresis vs Voltage**

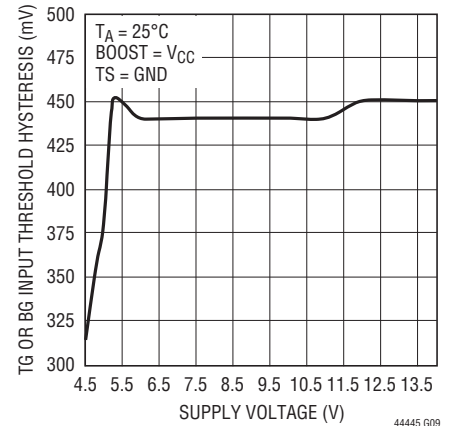


# TYPICAL PERFORMANCE CHARACTERISTICS


**Input Thresholds (TINP, BINP)  
Hysteresis vs Temperature**

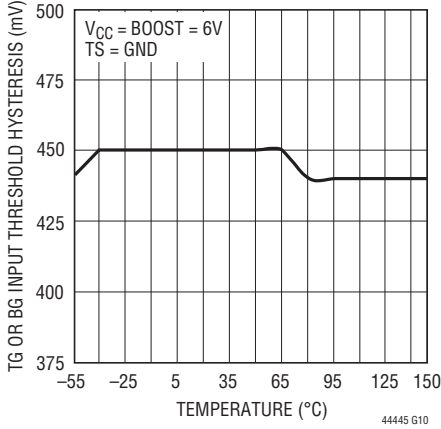


**V<sub>CC</sub> Undervoltage Lockout  
Thresholds vs Temperature**

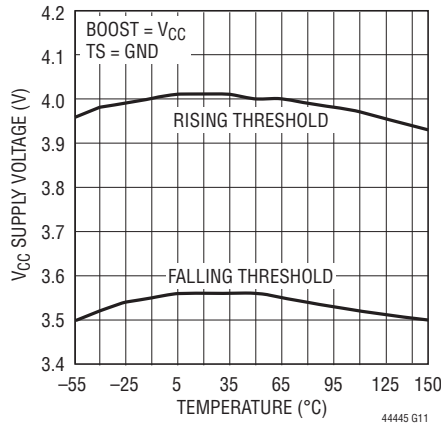


**Rise and Fall Time  
vs V<sub>CC</sub> Supply Voltage**

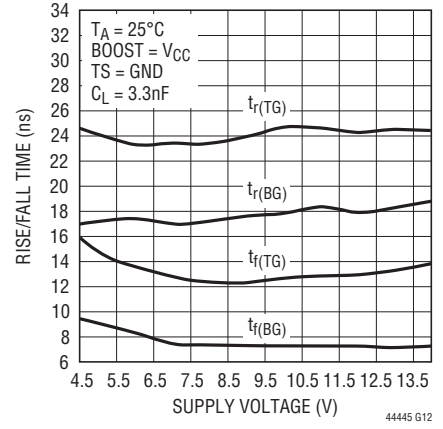


**Rise and Fall Time  
vs Load Capacitance**

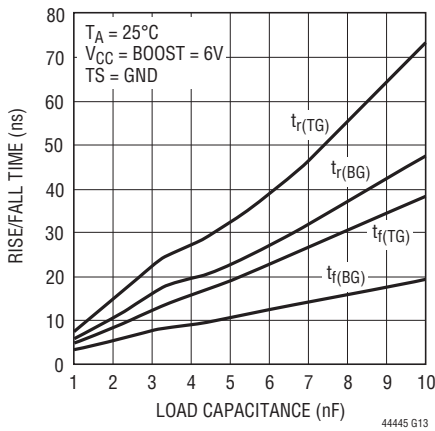


**Peak Driver (TG, BG) Pull-Up  
Current vs Temperature**

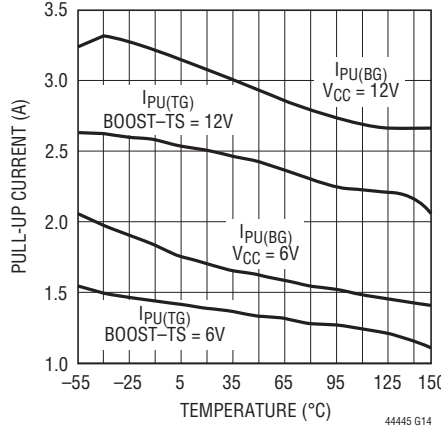


**Output Driver Pull-Down  
Resistance vs Temperature**

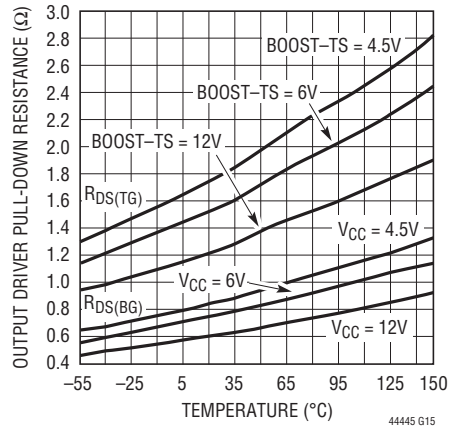



**Propagation Delay  
vs V<sub>CC</sub> Supply Voltage**

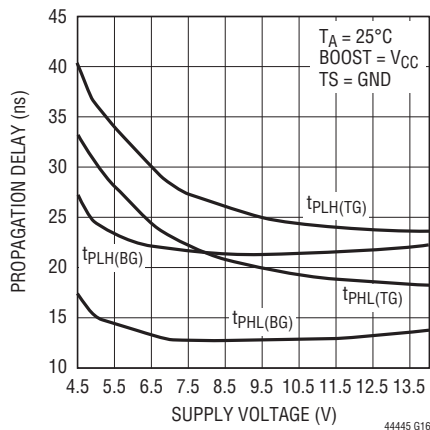

**Propagation Delay vs Temperature**

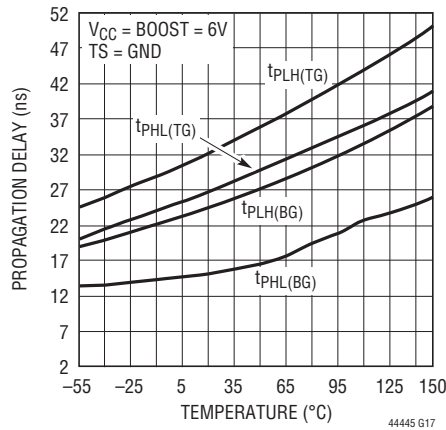

## TYPICAL PERFORMANCE CHARACTERISTICS

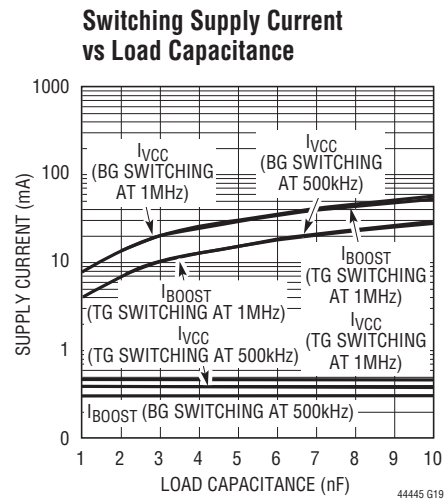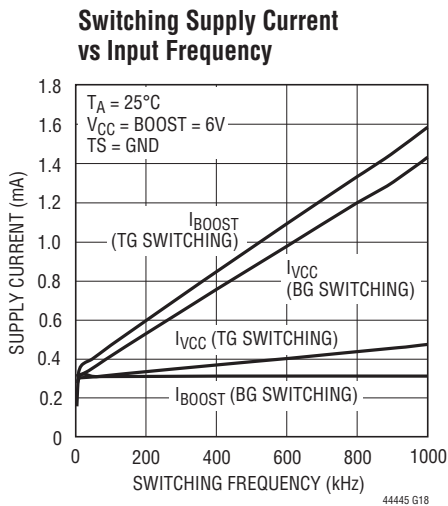

## PIN FUNCTIONS

**TINP (Pin 1):** High Side Input Signal. Input referenced to GND. This input controls the high side driver output (TG).

**BINP (Pin 2):** Low Side Input Signal. This input controls the low side driver output (BG).

**V<sub>CC</sub> (Pin 3):** Supply. This pin powers input buffers, logic and the low side gate driver output directly and the high side gate driver output through an external diode connected between this pin and BOOST (Pin 6). A low ESR ceramic bypass capacitor should be tied between this pin and GND (Pin 9).

**BG (Pin 4):** Low Side Gate Driver Output (Bottom Gate). This pin swings between V<sub>CC</sub> and GND.

**NC (Pin 5):** No Connect. No connection required.


**BOOST (Pin 6):** High Side Bootstrapped Supply. An external capacitor should be tied between this pin and TS (Pin 8). Normally, a bootstrap diode is connected between V<sub>CC</sub> (Pin 3) and this pin. Voltage swing at this pin is from V<sub>CC</sub> - V<sub>D</sub> to V<sub>IN</sub> + V<sub>CC</sub> - V<sub>D</sub>, where V<sub>D</sub> is the forward voltage drop of the bootstrap diode.

**TG (Pin 7):** High Side Gate Driver Output (Top Gate). This pin swings between TS and BOOST.

**TS (Pin 8):** High Side MOSFET Source Connection (Top Source).


**GND (Exposed Pad Pin 9):** Ground. Must be soldered to PCB ground for optimal thermal performance.

## BLOCK DIAGRAM

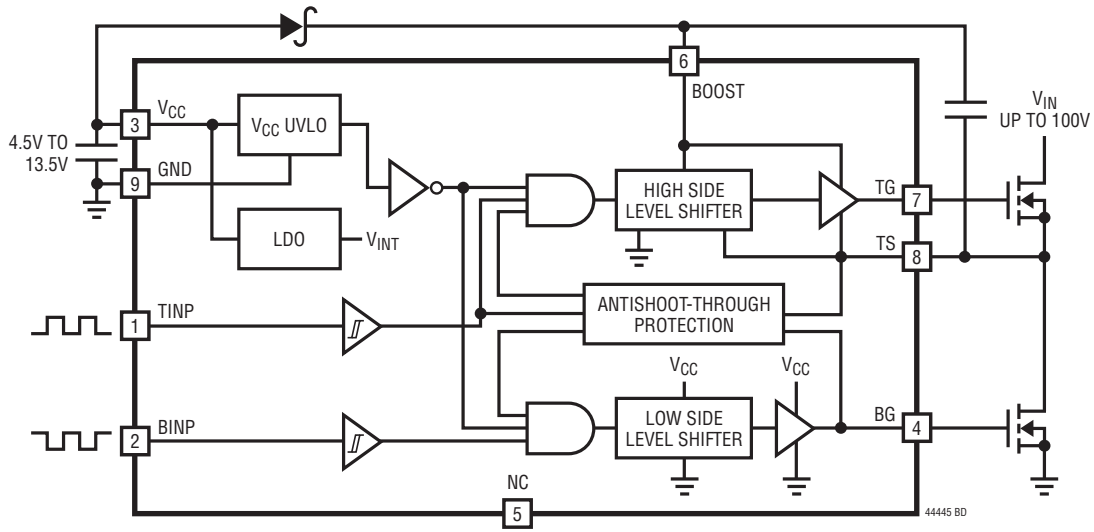


## TIMING DIAGRAMS

### Adaptive Shoot-Through Protection

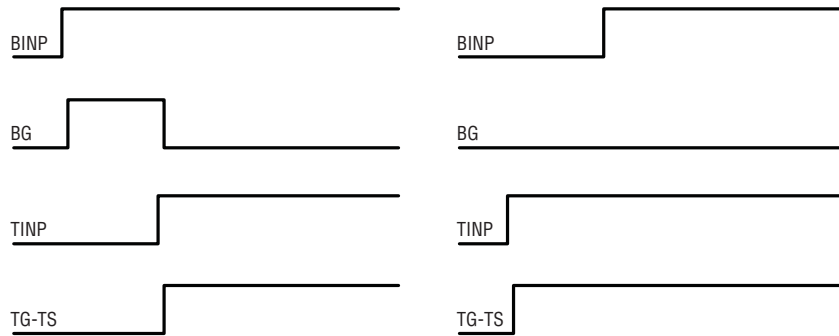

44445 TD01

### Switching Time

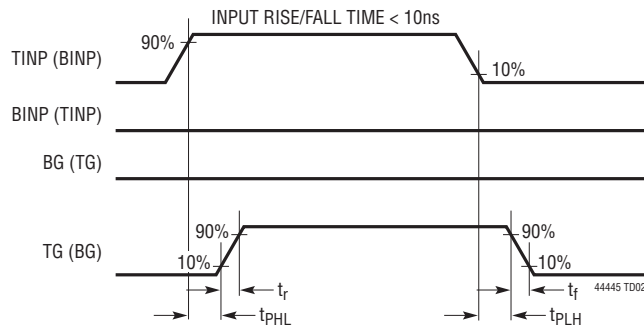

44445 TD02

## OPERATION

### Overview

The LTC4444-5 receives ground-referenced, low voltage digital input signals to drive two N-channel power MOSFETs in a synchronous buck power supply configuration. The gate of the low side MOSFET is driven either to  $V_{CC}$  or GND, depending on the state of the input. Similarly, the gate of the high side MOSFET is driven to either BOOST or TS by a supply bootstrapped off of the switching node (TS).

### Input Stage

The LTC4444-5 employs CMOS compatible input thresholds that allow a low voltage digital signal to drive standard power MOSFETs. The LTC4444-5 contains an internal voltage regulator that biases both input buffers for high side and low side inputs, allowing the input thresholds ( $V_{IH} = 2.75V$ ,  $V_{IL} = 2.3V$ ) to be independent of variations in  $V_{CC}$ . The 450mV hysteresis between  $V_{IH}$  and  $V_{IL}$  eliminates false triggering due to noise during switching transitions. However, care should be taken to keep both input pins (TINP and BINP) from any noise pickup, especially in high frequency, high voltage applications. The LTC4444-5 input buffers have high input impedance and draw negligible input current, simplifying the drive circuitry required for the inputs.

### Output Stage

A simplified version of the LTC4444-5's output stage is shown in Figure 1. The pull-up devices on the BG and TG outputs are NPN bipolar junction transistors (Q1 and Q2). The BG and TG outputs are pulled up to within an NPN  $V_{BE}$  ( $\sim 0.7V$ ) of their positive rails ( $V_{CC}$  and BOOST, respectively). Both BG and TG have N-channel MOSFET pull-down devices (M1 and M2) which pull BG and TG down to their negative rails, GND and TS. The large voltage swing of the BG and TG output pins is important in driving external power MOSFETs, whose  $R_{DS(ON)}$  is inversely proportional to the gate overdrive voltage ( $V_{GS} - V_{TH}$ ).

### Rise/Fall Time

The LTC4444-5's rise and fall times are determined by the peak current capabilities of Q1 and M1. The predriver that drives Q1 and M1 uses a nonoverlapping transition scheme to minimize cross-conduction currents. M1 is fully turned off before Q1 is turned on and vice versa.

Since the power MOSFET generally accounts for the majority of the power loss in a converter, it is important to quickly turn it on or off, thereby minimizing the transition time in its linear region. An additional benefit of a strong

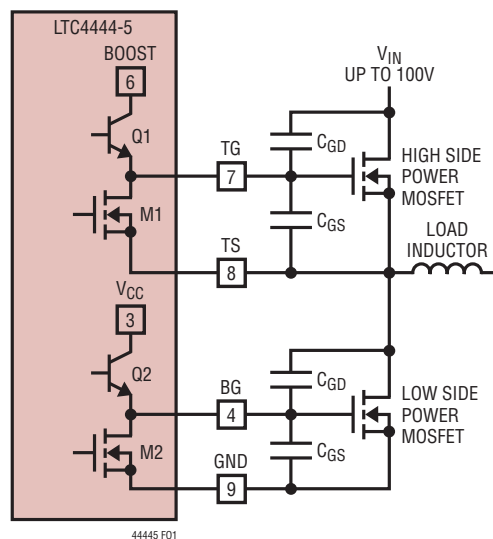


Figure 1. Capacitance Seen by BG and TG During Switching



## OPERATION

pull-down on the driver outputs is the prevention of cross-conduction current. For example, when BG turns the low side (synchronous) power MOSFET off and TG turns the high side power MOSFET on, the voltage on the TS pin will rise to  $V_{IN}$  very rapidly. This high frequency positive voltage transient will couple through the  $C_{GD}$  capacitance of the low side power MOSFET to the BG pin. If there is an insufficient pull-down on the BG pin, the voltage on the BG pin can rise above the threshold voltage of the low side power MOSFET, momentarily turning it back on. With both the high side and low side MOSFETs conducting, significant cross-conduction current will flow through the MOSFETs from  $V_{IN}$  to ground and will cause substantial power loss. A similar effect occurs on TG due to the  $C_{GS}$  and  $C_{GD}$  capacitances of the high side MOSFET.

The powerful output driver of the LTC4444-5 reduces the switching losses of the power MOSFET, which increase with transition time. The LTC4444-5's high side driver is capable of driving a 1nF load with 8ns rise and 5ns fall times using a bootstrapped supply voltage  $V_{BOOST-TS}$  of 12V while its low side driver is capable of driving a 1nF load with 6ns rise and 3ns fall times using a supply voltage  $V_{CC}$  of 12V.

### Undervoltage Lockout (UVLO)

The LTC4444-5 contains an undervoltage lockout detector that monitors  $V_{CC}$  supply. When  $V_{CC}$  falls below 3.55V, the output pins BG and TG are pulled down to GND and TS, respectively. This turns off both external MOSFETs. When  $V_{CC}$  has adequate supply voltage, normal operation will resume.

### Adaptive Shoot-Through Protection

Internal adaptive shoot-through protection circuitry monitors the voltages on the external MOSFETs to ensure that they do not conduct simultaneously. This feature improves efficiency by eliminating cross-conduction current from flowing from the  $V_{IN}$  supply through both of the MOSFETs to ground during a switch transition. If both TINP and BINP are high at the same time, BG will be kept off and TG will be turned on (refer to the Timing Diagram). If BG is still high when TINP turns on, TG will not be turned on until BG goes low.

When TINP turns off, the adaptive shoot-through protection circuitry monitors the level of the TS pin. BG can be turned on if the TS pin goes low. If the TS pin stays high, BG will be turned on 150ns after TINP turns off.

## APPLICATIONS INFORMATION

### Power Dissipation

To ensure proper operation and long-term reliability, the LTC4444-5 must not operate beyond its maximum temperature rating. Package junction temperature can be calculated by:

$$T_J = T_A + P_D (\theta_{JA})$$

where:

$T_J$  = Junction temperature

$T_A$  = Ambient temperature

$P_D$  = Power dissipation

$\theta_{JA}$  = Junction-to-ambient thermal resistance

Power dissipation consists of standby and switching power losses:

$$P_D = P_{DC} + P_{AC} + P_{QG}$$

where:

$P_{DC}$  = Quiescent power loss

$P_{AC}$  = Internal switching loss at input frequency,  $f_{IN}$

$P_{QG}$  = Loss due turning on and off the external MOSFET with gate charge QG at frequency  $f_{IN}$

The LTC4444-5 consumes very little quiescent current. The DC power loss at  $V_{CC} = 12V$  and  $V_{BOOST-TS} = 12V$  is only  $(350\mu A)(12V) = 4.2mW$ .

## APPLICATIONS INFORMATION

At a particular switching frequency, the internal power loss increases due to both AC currents required to charge and discharge internal node capacitances and cross-conduction currents in the internal logic gates. The sum of the quiescent current and internal switching current with no load are shown in the Typical Performance Characteristics plot of Switching Supply Current vs Input Frequency.

The gate charge losses are primarily due to the large AC currents required to charge and discharge the capacitance of the external MOSFETs during switching. For identical pure capacitive loads  $C_{LOAD}$  on TG and BG at switching frequency  $f_{IN}$ , the load losses would be:

$$P_{CLOAD} = (C_{LOAD})(f_{IN})[(V_{BOOST-TS})^2 + (V_{CC})^2]$$

In a typical synchronous buck configuration,  $V_{BOOST-TS}$  is equal to  $V_{CC} - V_D$ , where  $V_D$  is the forward voltage drop across the diode between  $V_{CC}$  and BOOST. If this drop is small relative to  $V_{CC}$ , the load losses can be approximated as:

$$P_{CLOAD} = 2(C_{LOAD})(f_{IN})(V_{CC})^2$$

Unlike a pure capacitive load, a power MOSFET's gate capacitance seen by the driver output varies with its  $V_{GS}$  voltage level during switching. A MOSFET's capacitive load power dissipation can be calculated using its gate charge,  $Q_G$ . The  $Q_G$  value corresponding to the MOSFET's  $V_{GS}$  value ( $V_{CC}$  in this case) can be readily obtained from the manufacturer's  $Q_G$  vs  $V_{GS}$  curves. For identical MOSFETs on TG and BG:

$$P_{QG} = 2(V_{CC})(Q_G)(f_{IN})$$

To avoid damage due to power dissipation, the LTC4444-5 includes a temperature monitor that will pull BG and TG low if the junction temperature rises above 160°C. Normal operation will resume when the junction temperature cools to less than 135°C.

### Bypassing and Grounding


The LTC4444-5 requires proper bypassing on the  $V_{CC}$  and  $V_{BOOST-TS}$  supplies due to its high speed switching (nanoseconds) and large AC currents (Amperes). Careless component placement and PCB trace routing may cause excessive ringing.

To obtain the optimum performance from the LTC4444-5:


- A. Mount the bypass capacitors as close as possible between the  $V_{CC}$  and GND pins and the BOOST and TS pins. The leads should be shortened as much as possible to reduce lead inductance.
- B. Use a low inductance, low impedance ground plane to reduce any ground drop and stray capacitance. Remember that the LTC4444-5 switches greater than 3A peak currents and any significant ground drop will degrade signal integrity.
- C. Plan the power/ground routing carefully. Know where the large load switching current is coming from and going to. Maintain separate ground return paths for the input pin and the output power stage.
- D. Keep the copper trace between the driver output pin and the load short and wide.
- E. Be sure to solder the Exposed Pad on the back side of the LTC4444-5 package to the board. Correctly soldered to a 2500mm<sup>2</sup> double sided 1oz copper board, the LTC4444-5 has a thermal resistance of approximately 40°C/W for the MS8E package. Failure to make good thermal contact between the exposed back side and the copper board will result in thermal resistances far greater than 40°C/W.

# TYPICAL APPLICATION

## LTC3780 High Efficiency 36V to 72V $V_{IN}$ to 48V/6A Buck-Boost DC/DC Converter

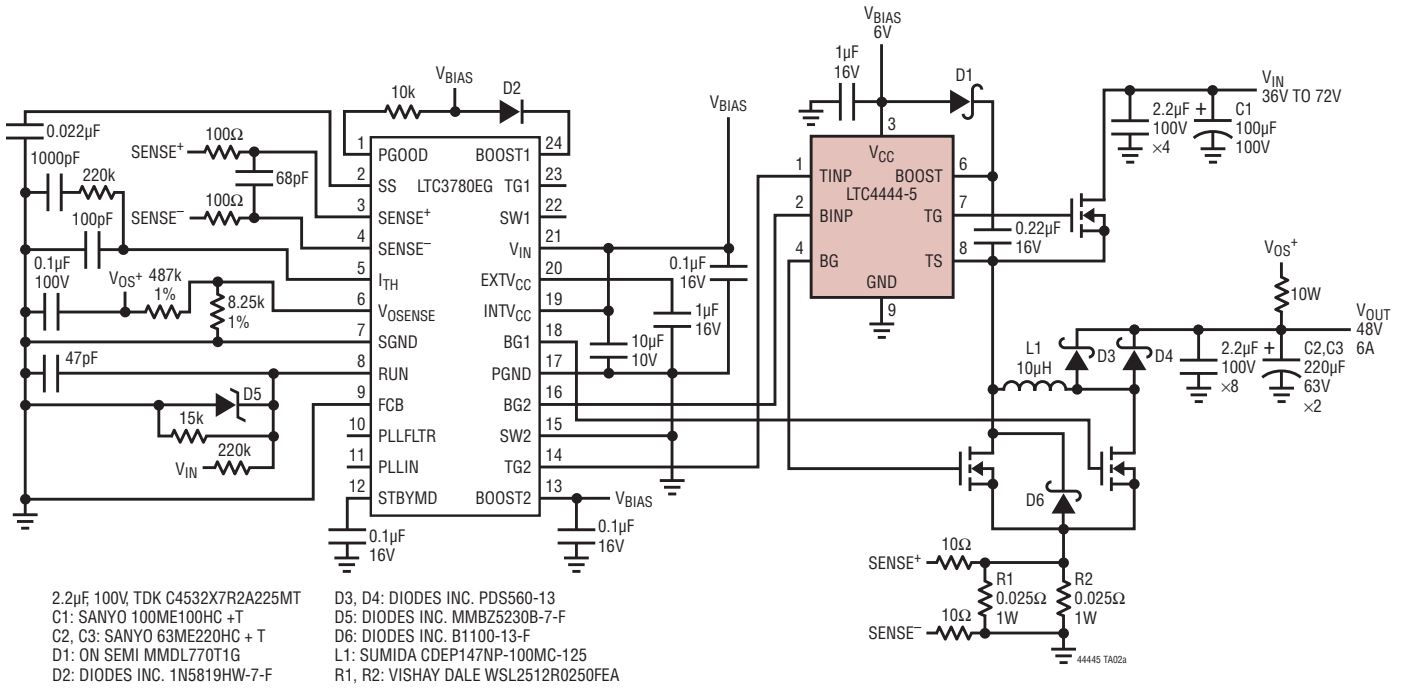


Efficiency

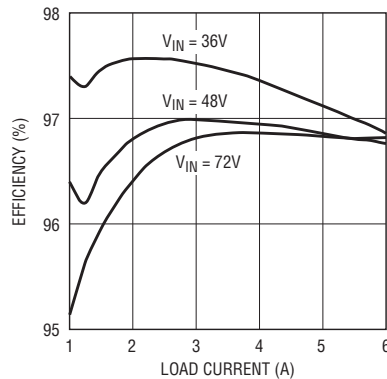

44445 TA02b

**PACKAGE DESCRIPTION**

**MS8E Package**  
**8-Lead Plastic MSOP, Exposed Die Pad**  
 (Reference LTC DWG # 05-08-1662 Rev I)

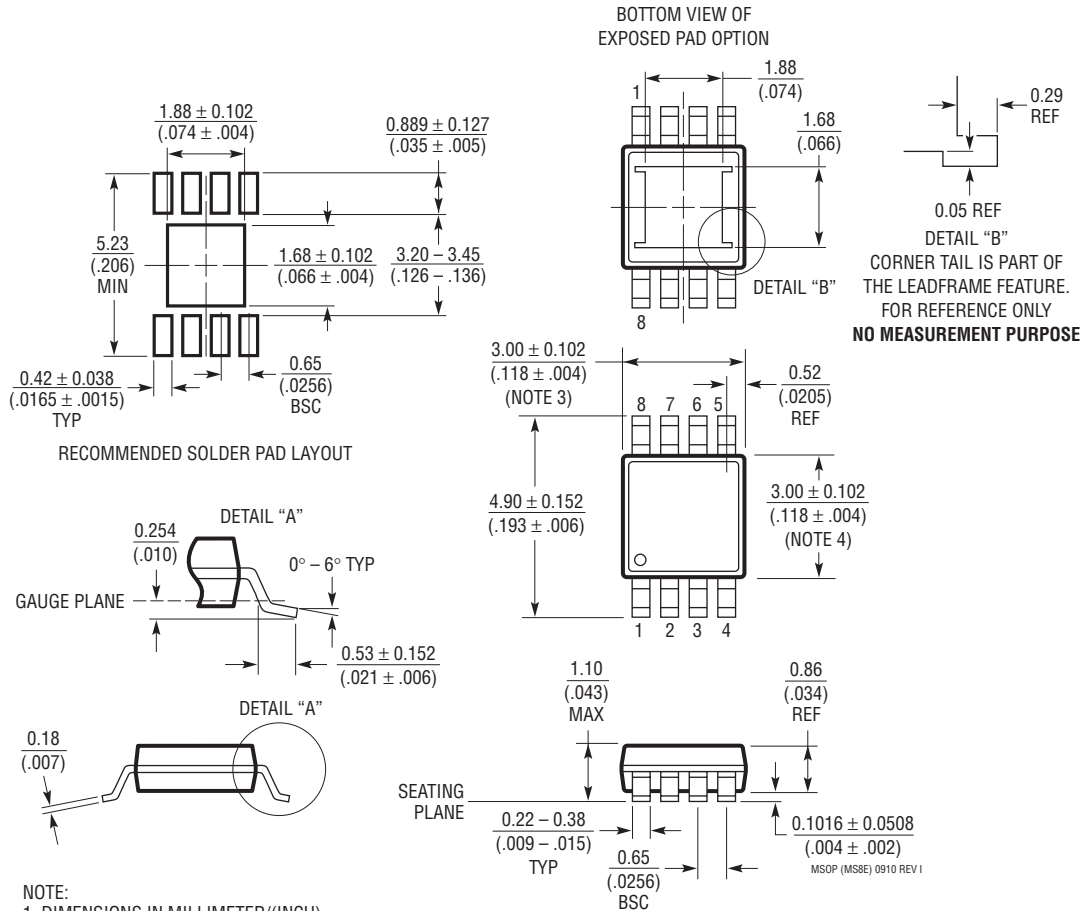


- NOTE:
1. DIMENSIONS IN MILLIMETER/(INCH)
  2. DRAWING NOT TO SCALE
  3. DIMENSION DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH, PROTRUSIONS OR GATE BURRS SHALL NOT EXCEED 0.152mm (.006") PER SIDE
  4. DIMENSION DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSIONS. INTERLEAD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.152mm (.006") PER SIDE
  5. LEAD COPLANARITY (BOTTOM OF LEADS AFTER FORMING) SHALL BE 0.102mm (.004") MAX
  6. EXPOSED PAD DIMENSION DOES NOT INCLUDE MOLD FLASH. MOLD FLASH ON E-PAD SHALL NOT EXCEED 0.254mm (.010") PER SIDE.

**REVISION HISTORY** (Revision history begins at Rev B)

| REV | DATE  | DESCRIPTION                                              | PAGE NUMBER |
|-----|-------|----------------------------------------------------------|-------------|
| B   | 06/10 | Updates to Description                                   | 1           |
|     |       | Updates to temperature ranges in Order Information       | 2           |
|     |       | Updates to Notes 2 and 3 in Electrical Characteristics   | 3           |
|     |       | Updates to graphs G03, G04, G08, G10, G11, G14, G15, G17 | 4, 5, 6     |
|     |       | Updates to Pin 9 text in Pin Functions                   | 6           |
|     |       | Updates to Block Diagram                                 | 7           |
|     |       | Updates to Timing Diagram section                        | 7           |
|     |       | Updates to "Adaptive Shoot-Through Protection" paragraph | 9           |
|     |       | Updates to Related Parts                                 | 12          |
| C   | 01/11 | H-grade part added. Reflected throughout the data sheet. | 1 to 14     |

## TYPICAL APPLICATION

### LTC3780 High Efficiency 8V to 80V $V_{IN}$ to 12V/5A Buck-Boost DC/DC Converter

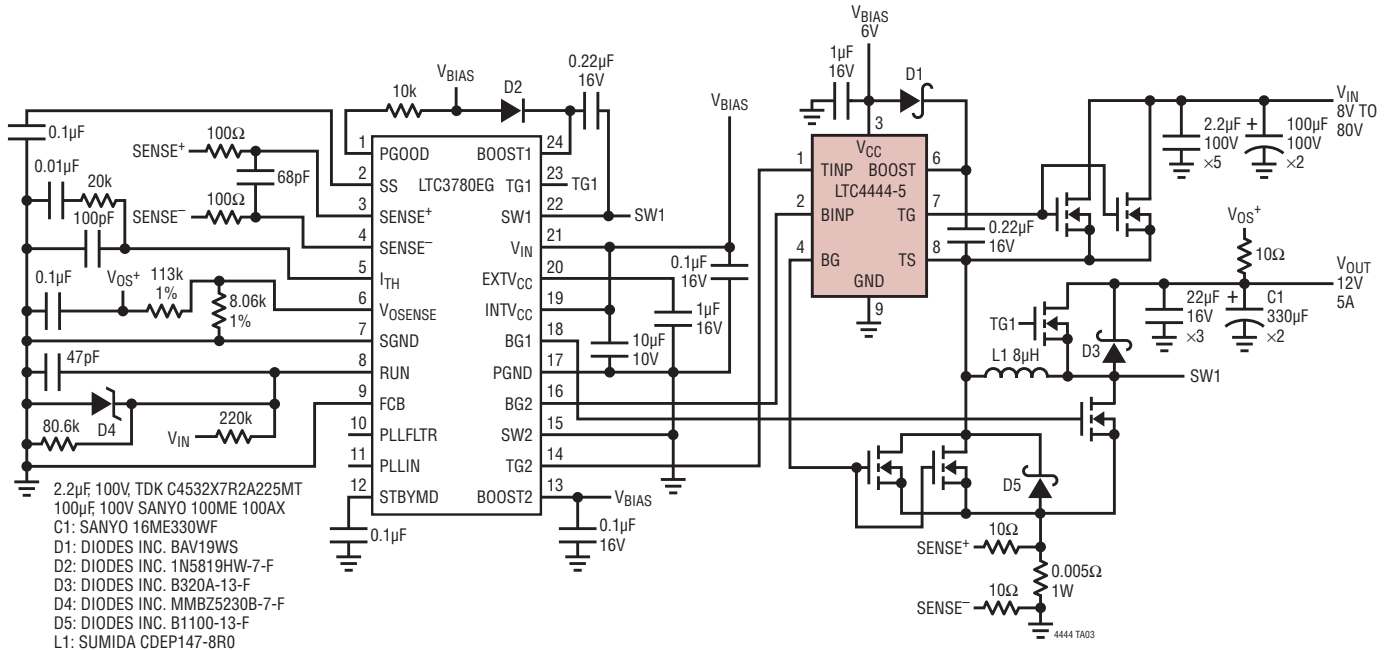

## RELATED PARTS

| PART NUMBER       | DESCRIPTION                                                                       | COMMENTS                                                                                                 |
|-------------------|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|
| LTC4446           | High Voltage Synchronous N-Channel MOSFET Driver without Shoot-Through Protection | Up to 100V Supply Voltage, $7.2V \leq V_{CC} \leq 13.5V$ , 3A Peak Pull-Up/ 0.55 $\Omega$ Peak Pull-Down |
| LTC4440/LTC4440-5 | High Speed, High Voltage, High Side Gate Driver                                   | Up to 80V Supply Voltage, $8V \leq V_{CC} \leq 15V$ , 2.4A Peak Pull-Up/ 1.5 $\Omega$ Peak Pull-Down     |
| LTC4442           | High Speed Synchronous N-Channel MOSFET Driver                                    | Up to 38V Supply Voltage, $6V \leq V_{CC} \leq 9.5V$ , 3.2A Peak Pull-Up/ 4.5A Peak Pull-Down            |
| LTC4449           | High Speed Synchronous N-Channel MOSFET Driver                                    | Up to 38V Supply Voltage, $4.5V \leq V_{CC} \leq 6.5V$ , 3.2A Peak Pull-Up/ 4.5A Peak Pull-Down          |
| LTC4441/LTC4441-1 | N-Channel MOSFET Gate Driver                                                      | Up to 25V Supply Voltage, $5V \leq V_{CC} \leq 25V$ , 6A Peak Output Current                             |
| LTC1154           | High Side Micropower MOSFET Driver                                                | Up to 18V Supply Voltage, 85 $\mu$ A Quiescent Current, H-Grade Available                                |