

DN2470 Based Linear Regulator Input Voltage Range Extender Evaluation Board User's Guide

© 2016 Microchip Technology Inc.

Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE**.** Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights unless otherwise stated.

Microchip received ISO/TS-16949:2009 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELOQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.

QUALITY MANAGEMENT SYSTEM
CERTIFIED BY DNV
═ ISO/TS 16949 ═

Trademarks

The Microchip name and logo, the Microchip logo, AnyRate, dsPIC, FlashFlex, flexPWR, Heldo, JukeBlox, KEELOQ, KEELOQ logo, Kleer, LANCheck, LINK MD, MediaLB, MOST, MOST logo, MPLAB, OptoLyzer, PIC, PICSTART, PIC32 logo, RightTouch, SpyNIC, SST, SST Logo, SuperFlash and UNI/O are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

ClockWorks, The Embedded Control Solutions Company, ETHERSYNCH, Hyper Speed Control, HyperLight Load, IntelliMOS, mTouch, Precision Edge, and QUIET-WIRE are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Analog-for-the-Digital Age, Any Capacitor, AnyIn, AnyOut, BodyCom, chipKIT, chipKIT logo, CodeGuard, dsPICDEM, dsPICDEM.net, Dynamic Average Matching, DAM, ECAN, EtherGREEN, In-Circuit Serial Programming, ICSP, Inter-Chip Connectivity, JitterBlocker, KleerNet, KleerNet logo, MiWi, motorBench, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICkit, PICtail, PureSilicon, RightTouch logo, REAL ICE, Ripple Blocker, Serial Quad I/O, SQI, SuperSwitcher, SuperSwitcher II, Total Endurance, TSHARC, USBCheck, VariSense, ViewSpan, WiperLock, Wireless DNA, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

Silicon Storage Technology is a registered trademark of Microchip Technology Inc. in other countries.

GestIC is a registered trademarks of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2016, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

ISBN: 978-1-5224-0358-6

© 2016 Microchip Technology Inc.

Object of Declaration: DN2470 Based Linear Regulator Input Voltage Range Extender Evaluation Board

EU Declaration of Conformity

Manufacturer: Microchip Technology Inc.
2355 W. Chandler Blvd.
Chandler, Arizona, 85224-6199
USA

This declaration of conformity is issued by the manufacturer.

The development/evaluation tool is designed to be used for research and development in a laboratory environment. This development/evaluation tool is not a Finished Appliance, nor is it intended for incorporation into Finished Appliances that are made commercially available as single functional units to end users under EU EMC Directive 2004/108/EC and as supported by the European Commission's Guide for the EMC Directive 2004/108/EC (8th February 2010).

This development/evaluation tool complies with EU RoHS2 Directive 2011/65/EU.

This development/evaluation tool, when incorporating wireless and radio-telecom functionality, is in compliance with the essential requirement and other relevant provisions of the R&TTE Directive 1999/5/EC and the FCC rules as stated in the declaration of conformity provided in the module datasheet and the module product page available at www.microchip.com.

For information regarding the exclusive, limited warranties applicable to Microchip products, please see Microchip's standard terms and conditions of sale, which are printed on our sales documentation and available at www.microchip.com.

Signed for and on behalf of Microchip Technology Inc. at Chandler, Arizona, USA

Derek Carlson
VP Development Tools

12-Sep-14
Date

NOTES:

© 2016 Microchip Technology Inc.

DN2470 BASED LINEAR REGULATOR INPUT VOLTAGE RANGE EXTENDER EVALUATION BOARD USER'S GUIDE

Table of Contents

Preface 6

Introduction 6

Document Layout 6

Conventions Used in this Guide 7

Recommended Reading 8

The Microchip Web Site 8

Customer Support 8

Document Revision History 8

Chapter 1. Product Overview

1.1 Introduction 9

1.2 DN2470 Device Overview 9

1.3 What is the DN2470 Based Linear Regulator Input Voltage Range Extender Evaluation Board? 9

1.4 What the DN2470 Based Linear Regulator Input Voltage Range Extender Evaluation Board Kit Contains 10

Chapter 2. Installation and Operation

2.1 Getting Started 11

2.2 Setup and Operation Procedure 11

Appendix A. Schematic and Layouts

A.1 Introduction 13

A.2 Board – Schematic 14

A.3 Board – Top Silk 15

A.4 Board – Top Copper and Silk 16

A.5 Board – Top Copper 17

A.6 Board – Bottom Copper 18

Appendix B. Bill of Materials (BOM) 19

Appendix C. DN2470 Characterization Plots

C.1 Heat Sink 21

C.2 Pad Temperature 21

C.3 Overtemperature Protection Using PTC 22

Worldwide Sales and Service 24

NOTES:

© 2016 Microchip Technology Inc.

DN2470 BASED LINEAR REGULATOR INPUT VOLTAGE RANGE EXTENDER EVALUATION BOARD USER'S GUIDE

Preface

NOTICE TO CUSTOMERS

All documentation becomes dated, and this manual is no exception. Microchip tools and documentation are constantly evolving to meet customer needs, so some actual dialogs and/or tool descriptions may differ from those in this document. Please refer to our web site (www.microchip.com) to obtain the latest documentation available.

Documents are identified with a "DS" number. This number is located on the bottom of each page, in front of the page number. The numbering convention for the DS number is "DSXXXXXXXXA", where "XXXXXXXX" is the document number and "A" is the revision level of the document.

For the most up-to-date information on development tools, see the MPLAB® IDE online help. Select the Help menu, and then Topics to open a list of available online help files.

INTRODUCTION

This chapter contains general information that will be useful to know before using the DN2470 Based Linear Regulator Input Voltage Range Extender Evaluation Board User's Guide. Items discussed in this chapter include:

- Document Layout
- Conventions Used in this Guide
- Recommended Reading
- The Microchip Web Site
- Customer Support
- Document Revision History

DOCUMENT LAYOUT

This document describes how to use the DN2470 Based Linear Regulator Input Voltage Range Extender Evaluation Board User's Guide as a development tool.

- **Chapter 1. "Product Overview"** – Important information about the DN2470 Based Linear Regulator Input Voltage Range Extender Evaluation Board User's Guide.
- **Chapter 2. "Installation and Operation"** – This chapter includes a detailed description of each function of the demonstration board and instructions on how to use the board.
- **Appendix A. "Schematic and Layouts"** – Shows the schematic and layout diagrams for the DN2470 Based Linear Regulator Input Voltage Range Extender Evaluation Board User's Guide.
- **Appendix B. "Bill of Materials (BOM)"** – Lists the parts used to build the DN2470 Based Linear Regulator Input Voltage Range Extender Evaluation Board User's Guide.
- **Appendix C. "DN2470 Characterization Plots"** – Describes the various plots and waveforms for the DN2470 Based Linear Regulator Input Voltage Range Extender Evaluation Board User's Guide.

CONVENTIONS USED IN THIS GUIDE

This manual uses the following documentation conventions:

DOCUMENTATION CONVENTIONS

Description	Represents	Examples
Arial font:		
Italic characters	Referenced books	*MPLAB® IDE User's Guide*
	Emphasized text	...is the *only* compiler...
Initial caps	A window	the Output window
	A dialog	the Settings dialog
	A menu selection	select Enable Programmer
Quotes	A field name in a window or dialog	"Save project before build"
Underlined, italic text with right angle bracket	A menu path	*File>Save*
Bold characters	A dialog button	Click **OK**
	A tab	Click the **Power** tab
N'Rnnnn	A number in verilog format, where N is the total number of digits, R is the radix and n is a digit.	4'b0010, 2'hF1
Text in angle brackets < >	A key on the keyboard	Press <Enter>, <F1>
Courier New font:		
Plain Courier New	Sample source code	`#define START`
	Filenames	`autoexec.bat`
	File paths	`c:\mcc18\h`
	Keywords	`_asm, _endasm, static`
	Command-line options	`-Opa+, -Opa-`
	Bit values	`0, 1`
	Constants	`0xFF, 'A'`
Italic Courier New	A variable argument	*`file`*`.o`, where *`file`* can be any valid filename
Square brackets [ ]	Optional arguments	`mcc18 [options]` *`file`* `[options]`
Curly brackets and pipe character: { | }	Choice of mutually exclusive arguments; an OR selection	`errorlevel {0|1}`
Ellipses...	Replaces repeated text	`var_name [, var_name...]`
	Represents code supplied by user	`void main (void) { ... }`

© 2016 Microchip Technology Inc.

RECOMMENDED READING

This user's guide describes how to use the DN2470 Based Linear Regulator Input Voltage Range Extender Evaluation Board User's Guide. Other useful documents are listed below. The following Microchip documents are available and recommended as supplemental reference resources.

DN2470 Data Sheet – "*N-Channel, Depletion-Mode, Vertical DMOS FET*" (DS20005410)

MCP1754 Data Sheet – *"150 mA,16V, High-Performance LDO"* (DS20002276)

MCP1755 Data Sheet – *"300 mA,16V, High-Performance LDO"* (DS25160)

MCP1790 Data Sheet – *"70 mA, High Voltage Regulator"* (DS20002075)

THE MICROCHIP WEB SITE

Microchip provides online support via our web site at www.microchip.com. This web site is used as a means to make files and information easily available to customers. Accessible by using your favorite Internet browser, the web site contains the following information:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQs), technical support requests, online discussion groups, Microchip consultant program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

CUSTOMER SUPPORT

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Field Application Engineer (FAE)
- Technical Support

Customers should contact their distributor, representative or field application engineer (FAE) for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in the back of this document.

Technical support is available through the web site at:
http://www.microchip.com/support

DOCUMENT REVISION HISTORY

Revision A (March 2016)

- Initial release of this document.

DN2470 BASED LINEAR REGULATOR INPUT VOLTAGE RANGE EXTENDER EVALUATION BOARD USER'S GUIDE

Chapter 1. Product Overview

1.1 INTRODUCTION

This chapter provides an overview of the DN2470 Based Linear Regulator Input Voltage Range Extender Evaluation Board and covers the following topics:

- DN2470 Device Overview
- What is the DN2470 Based Linear Regulator Input Voltage Range Extender Evaluation Board?
- What the DN2470 Based Linear Regulator Input Voltage Range Extender Evaluation Board Kit Contains

1.2 DN2470 DEVICE OVERVIEW

The DN2470 is a low-threshold depletion-mode (normally-on) vertical FET. Vertical DMOS FETs are suited for a wide range of switching and amplifying applications where high breakdown voltage, high input impedance, low input capacitance and fast switching speeds are required.

The DN2470 has a 700V voltage breakdown with a 42 ohms drain-to-source On-state resistance and 500 mA saturated drain-to-source current when operating over typical conditions. The device is packaged in a TO-252 (D-PAK) and it is designed to operate in a temperature range of -55°C to +150°C (refer to the DN2470 data sheet for more information).

1.3 WHAT IS THE DN2470 BASED LINEAR REGULATOR INPUT VOLTAGE RANGE EXTENDER EVALUATION BOARD?

The DN2470 Based Linear Regulator Input Voltage Range Extender Evaluation Board presents the universal off-line linear regulation using the 700V depletion-mode FET DN2470. The board features off-line regulation using three different selectable LDOs: MCP1754, MCP1755 and MCP1790, offered in various package options. The evaluation board operates with 50 Hz 230 VAC or 60 Hz 120 VAC AC lines and sources 10 mA typical output current (LDO's output current).

Figure 1-1 presents the evaluation board block diagram.

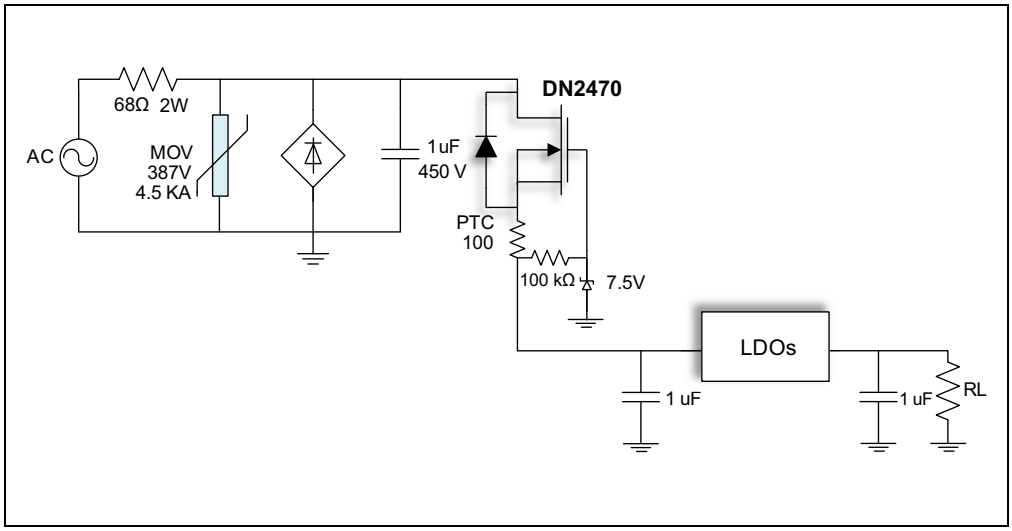


FIGURE 1-1: *DN2470 Evaluation Board Block Diagram.*

1.3.1 Evaluation Board Features

- 120 and 230 VAC Off-line Regulation
- Typical Output Current of 10 mA
- Maximum Output Current Thermally Limited
- Transient Survivability of 2.5 kV
- Overtemperature Protection; Typically +105°C
- Output Voltage Range of 3-5V
- Three Different Selectable LDOs:
  - MCP1754 (3.3V)
  - MCP1755 (5.0V)
  - MCP1790 (3.0V)

1.4 WHAT THE DN2470 BASED LINEAR REGULATOR INPUT VOLTAGE RANGE EXTENDER EVALUATION BOARD KIT CONTAINS

The DN2470 Based Linear Regulator Input Voltage Range Extender Evaluation Board kit includes:

- DN2470 Based Linear Regulator Input Voltage Range Extender Evaluation Board User's Guide (ADM00682)
- Important Information Sheet

NOTES:

© 2016 Microchip Technology Inc.

Chapter 2. Installation and Operation

2.1 GETTING STARTED

The DN2470 Based Linear Regulator Input Voltage Range Extender Evaluation Board is fully assembled and tested.

2.1.1 Tools Required for Operation

The tools required for operation include:

- AC Line connection or DC power supply
- An oscilloscope and/or a multimeter to observe the waveforms and measure electrical parameters

2.2 SETUP AND OPERATION PROCEDURE

To prepare the DN2470 Based Linear Regulator Input Voltage Range Extender Evaluation Board for operation, the steps below must be followed carefully.

WARNING
Before beginning board setup, fully read this document, the DN2470 Based Linear Regulator Input Voltage Range Extender Evaluation Board User's Guide.

CAUTION
Hazardous voltages are present when connected to AC Lines.

1. Select an LDO by placing a jumper on J3 connector. If VIN1 or VIN2 are selected, $\overline{SHDN}$ must be shorted to VIN (J5 or J7).
2. Connect a Load if needed at VOUT.
3. Connect the AC Line (120 or 230 VAC) or DC power supply to J1.

Note: Do not touch exposed areas when operating the board. Avoid touching the heat sink, the drain-exposed pad or the input resistor.

Selecting Different LDO

To select a different LDO, the AC Line or DC power supply has to be removed first.

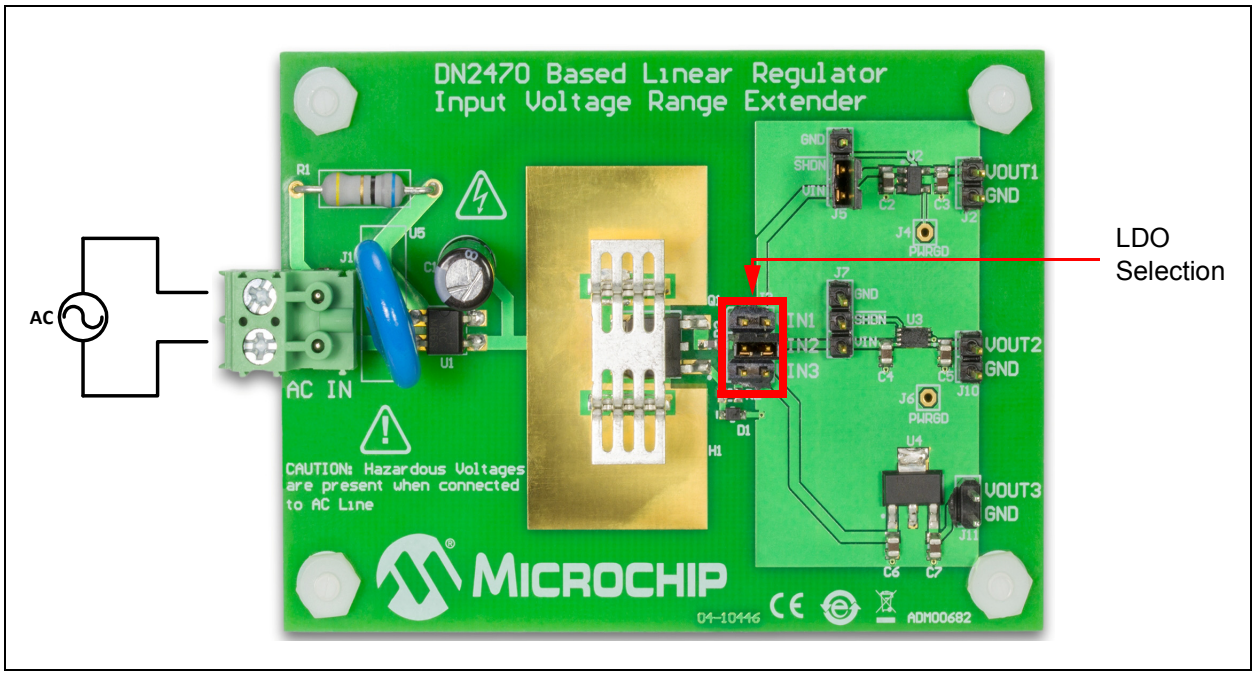


FIGURE 2-1: *DN2470 Based Linear Regulator Input Voltage Range Extender Evaluation Board.*

© 2016 Microchip Technology Inc.

Appendix A. Schematic and Layouts


A.1 INTRODUCTION

This appendix contains the following schematics and layouts for of the DN2470 Based Linear Regulator Input Voltage Range Extender Evaluation Board:

- Board – Schematic
- Board – Top Silk
- Board – Top Copper and Silk
- Board – Top Copper
- Board – Bottom Copper


© 2016 Microchip Technology Inc.

A.2 BOARD – SCHEMATIC

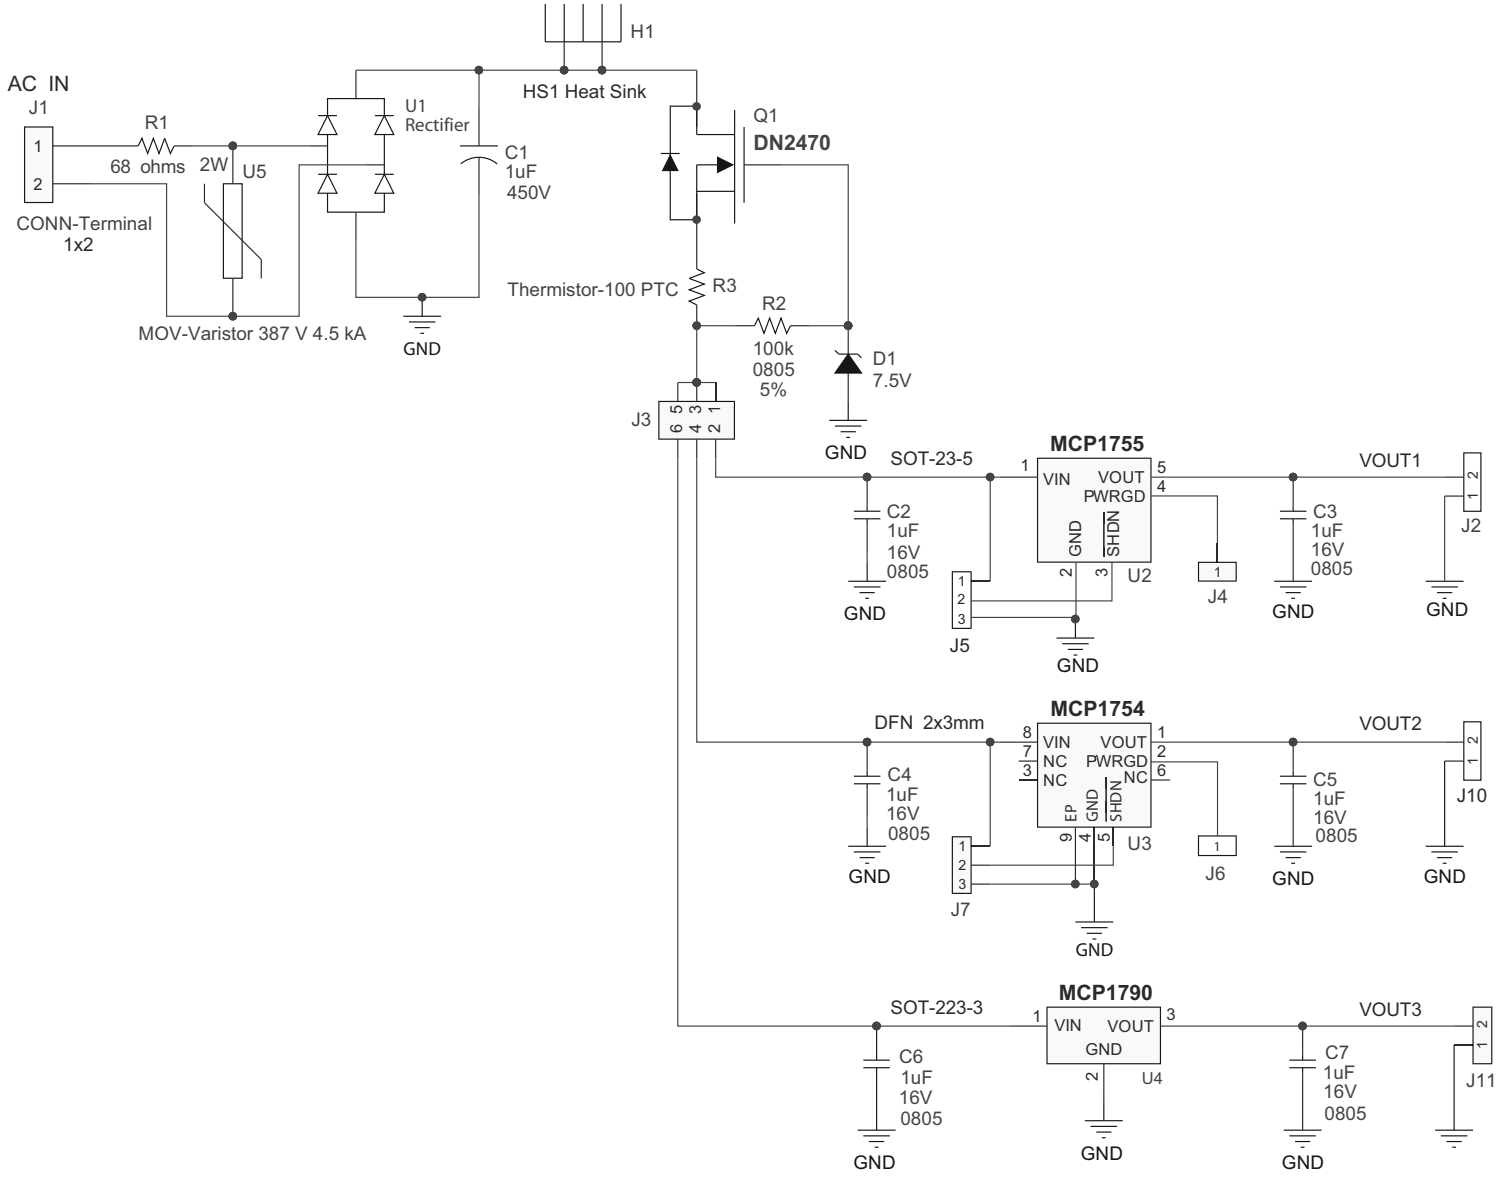


© 2016 Microchip Technology Inc.

A.3 BOARD – TOP SILK

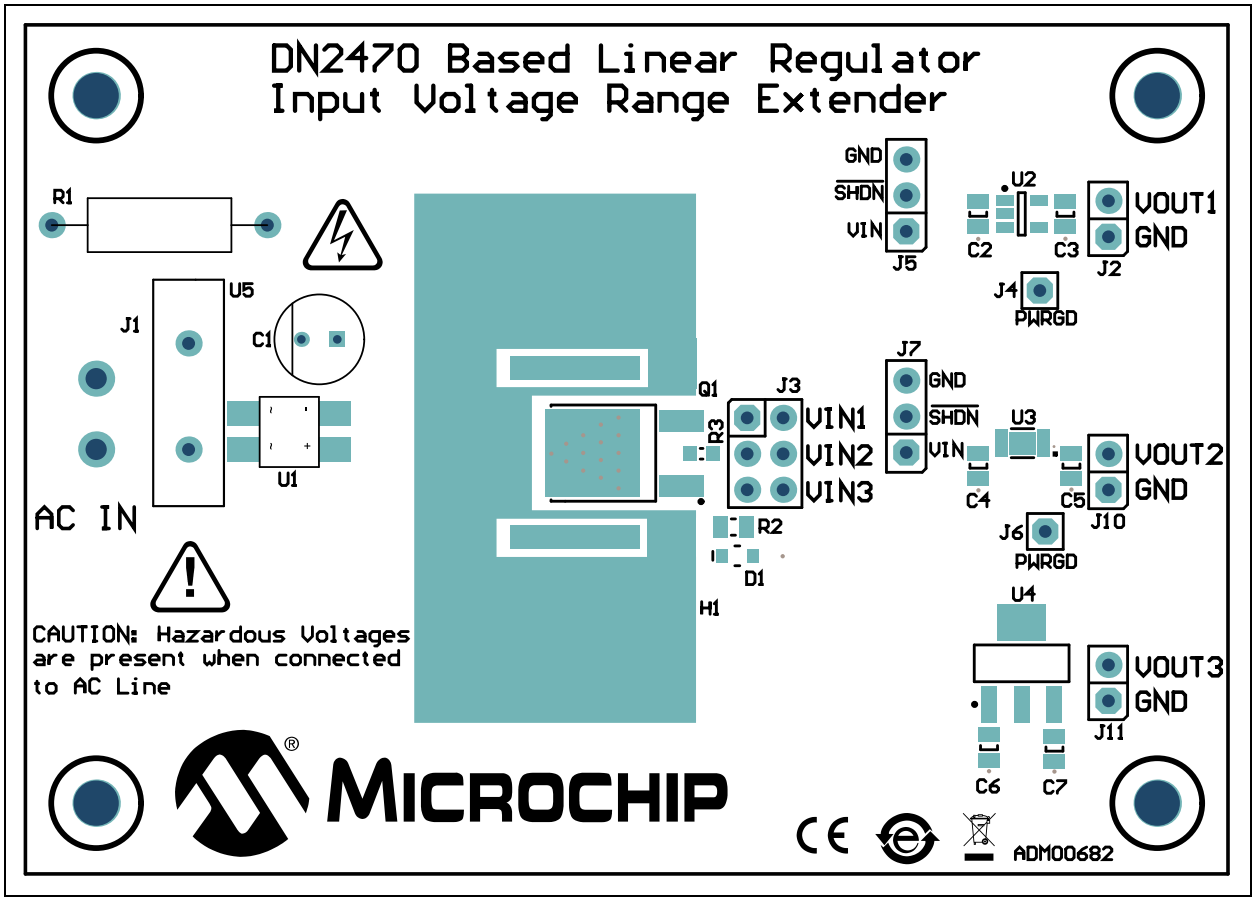


A.4 BOARD – TOP COPPER AND SILK

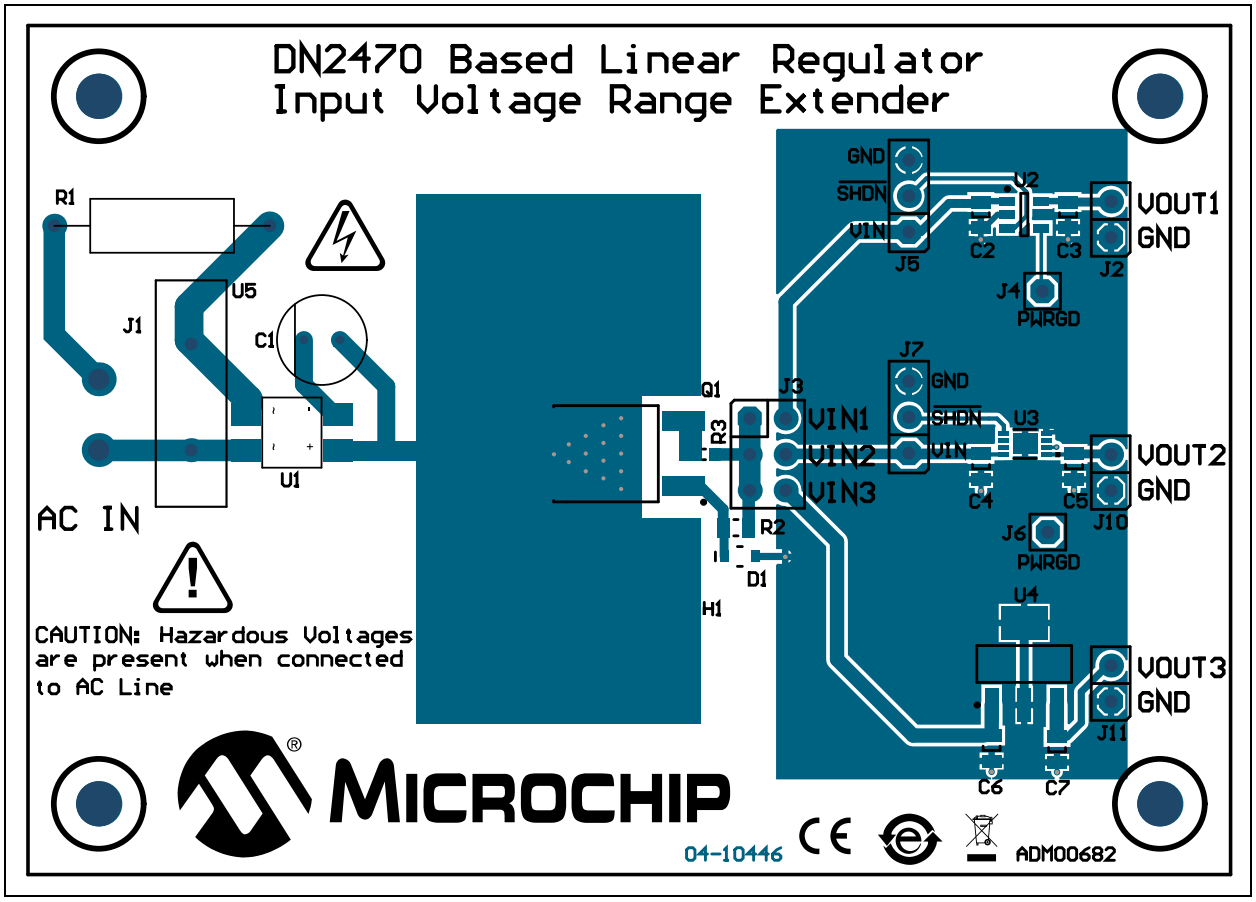


© 2016 Microchip Technology Inc.

A.5 BOARD – TOP COPPER

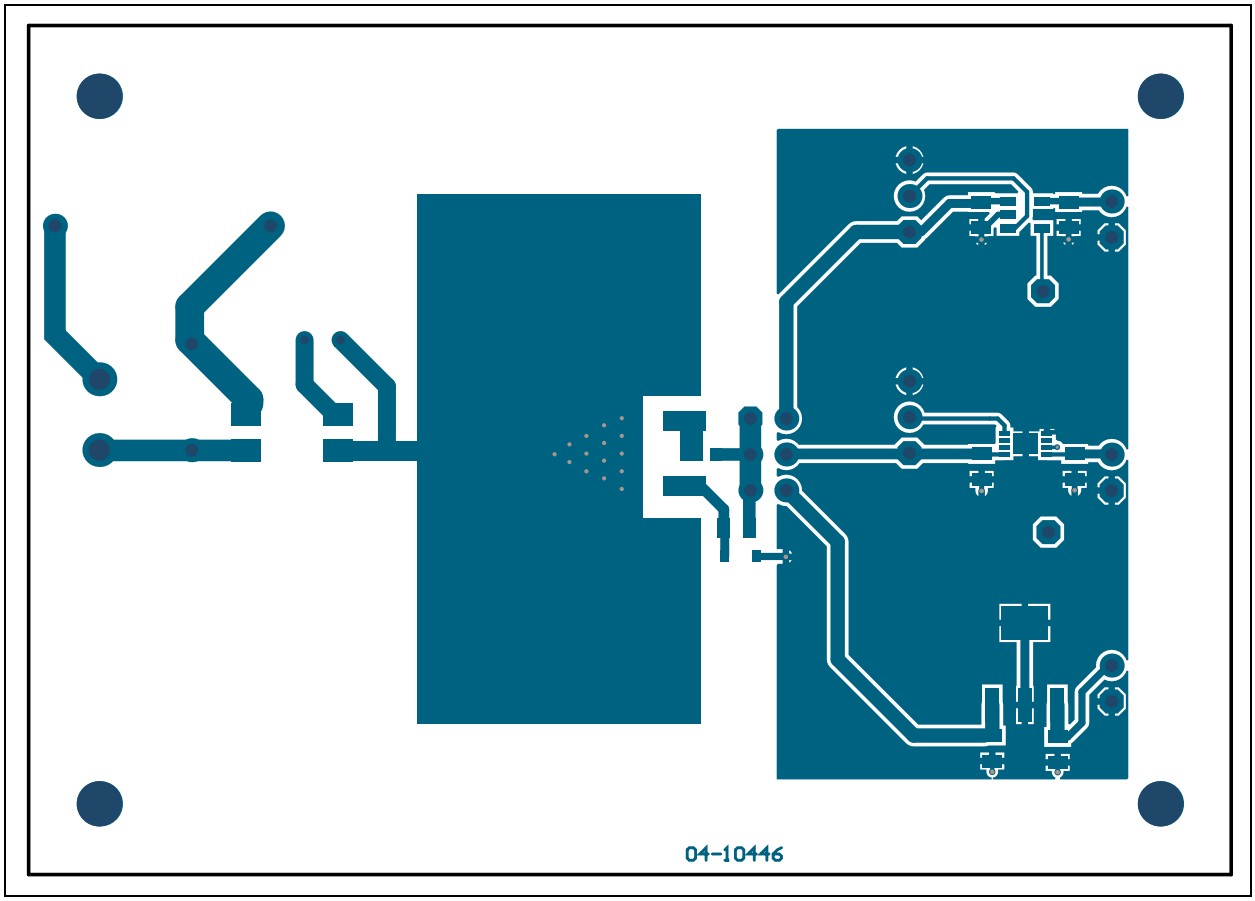

A.6 BOARD – BOTTOM COPPER

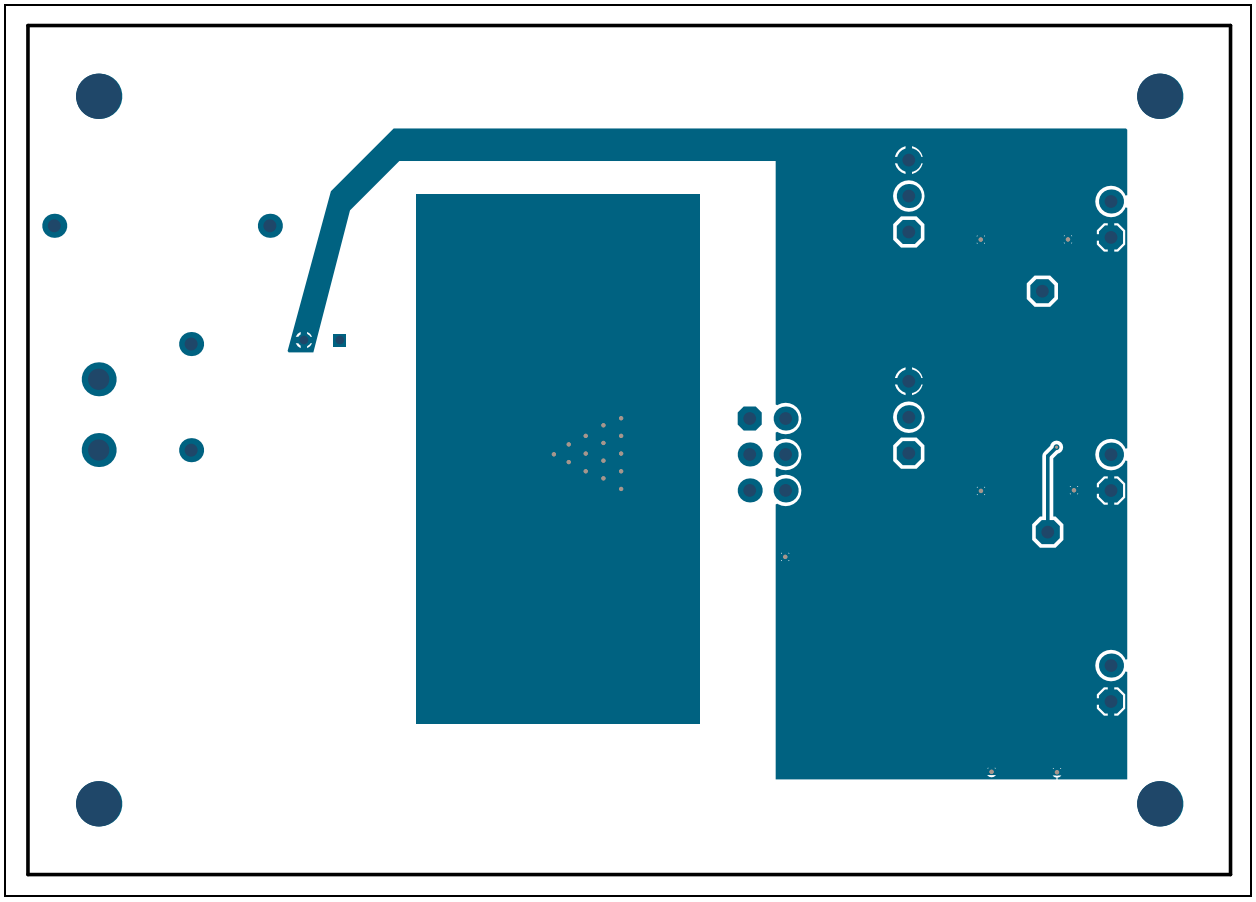

© 2016 Microchip Technology Inc.

Appendix B. Bill of Materials (BOM)

TABLE B-1: BILL OF MATERIALS (BOM)


Qty.	Reference	Description	Manufacturer	Part Number
1	C1	Capacitor 1 µF 450V	Rubycon Corporation	450PX1MEFC6.3X11
6	C2, C3, C4, C5, C6, C7	Capacitor, 1 µF 16V	Kemet	C0805C105K4RACTU
1	D1	Zener Diode 7.5V	Diodes Incorporated®	BZT52C7V5S-7-F
1	H1	HS1 Heat Sink	Aavid Thermalloy	573100D00000G
1	J1	Connector Terminal 1X2	PHOENIX CONTACT	1933189
3	J2, J10, J11	2 Pos. Header Connector	Molex®	0022284020
1	J3	6 Pos. Dual Connector	Samtec Inc	TSW-103-08-L-D
2	J4, J6	1 Pos. Header Connector - NOT INSTALLED	TE Connectivity Ltd.	5-146280-1
2	J5, J7	3 Pos. Header Connector	Samtec, Inc.	TSW-103-07-T-S
4	N/A	Hex Standoff 4-40 Nylon 1/2	Keystone Electronics Corp.	4802
4	N/A	Hex Nut 1/4" Nylon	Keystone Electronics Corp.	9605
1	N/A (Mounts on J1)	Terminal Block Plug 2 Pos.	PHOENIX CONTACT	1934861
1	PCB	DN2470 Based Linear Regulator Input Voltage Range Extender Evaluation Board – Printed Circuit Board	—	04-10446
1	Q1	DN2470	Microchip Technology Inc.	**DN2470K4-G**
1	R1	68 Ohms 2W	TT Electronics Plc.	ULW2-68RJA25
1	R2	Resistor 100k	Yageo Corporation	RC0805JR-07100KL
1	R3	Thermistor-100 PTC	Murata Electronics North America, Inc.	PRG18BB101MB1RB
1	U1	Rectifier 0.5A 400V	Micro Commercial Components	MB4S-TP
1	U2	MCP1755	Microchip Techonology Inc.	**MCP1755T-3302E/OT**
1	U3	MCP1754	Microchip Techonology Inc.	**MCP1754-5002E/MC**
1	U4	MCP1790	Microchip Techonology Inc.	**MCP1790-3002E/DB**
1	U5	Varistor 387V 4.5kA -14 mm Disc	Bourns, Inc.	MOV-14D431K

Note 1: The components listed in this Bill of Materials are representative of the PCB assembly. The released BOM used in manufacturing uses all RoHS-compliant components.


NOTES:

Appendix C. DN2470 Characterization Plots


C.1 HEAT SINK

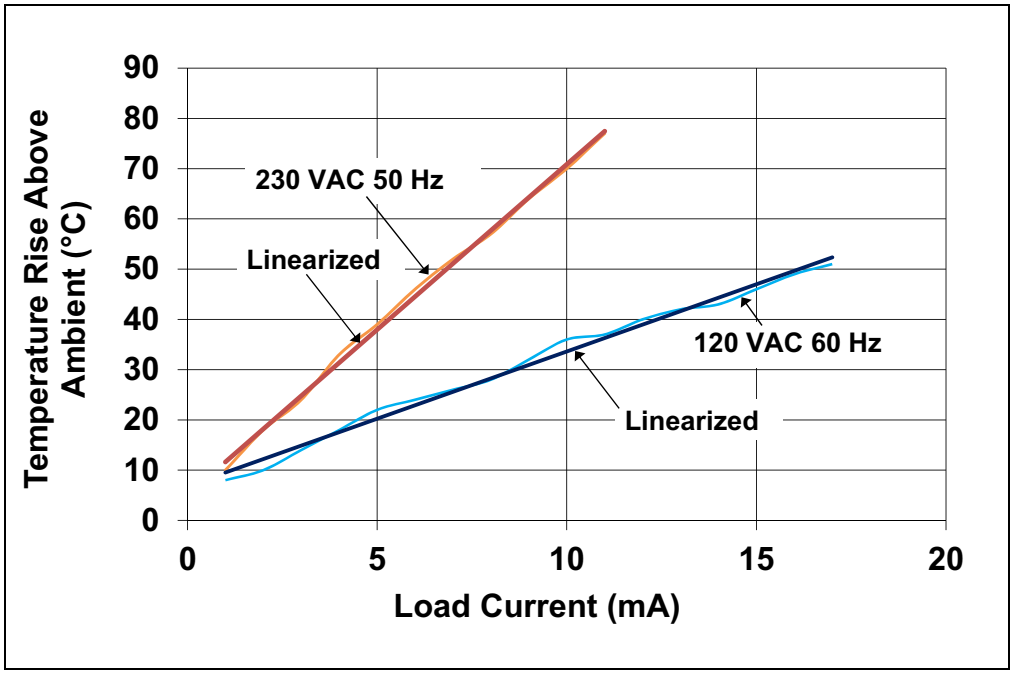

C.2 PAD TEMPERATURE

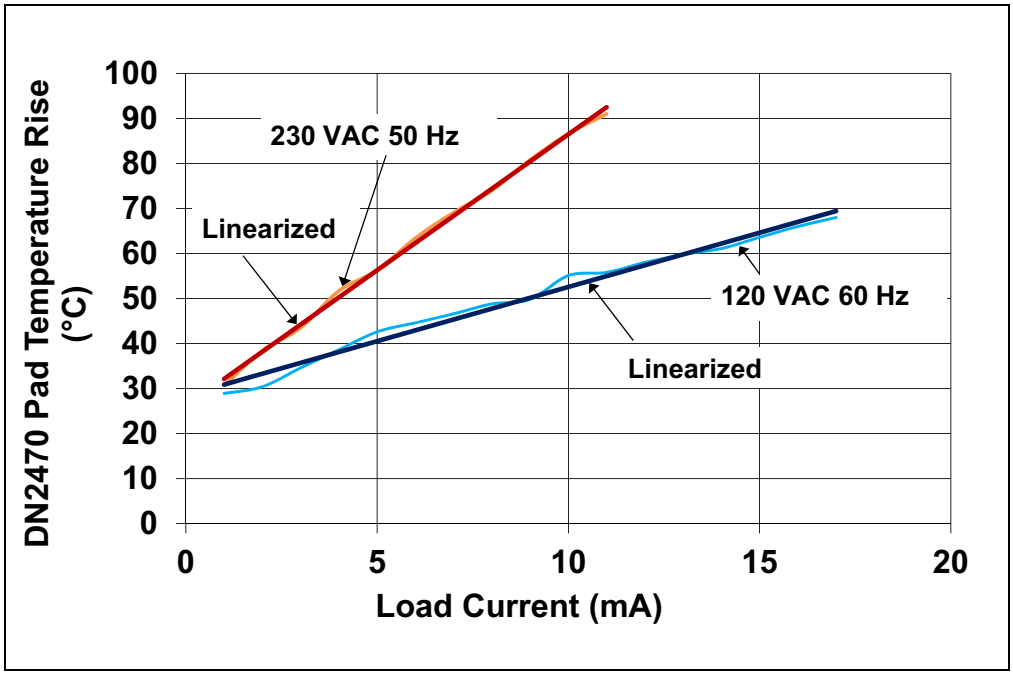

C.3 OVERTEMPERATURE PROTECTION USING PTC

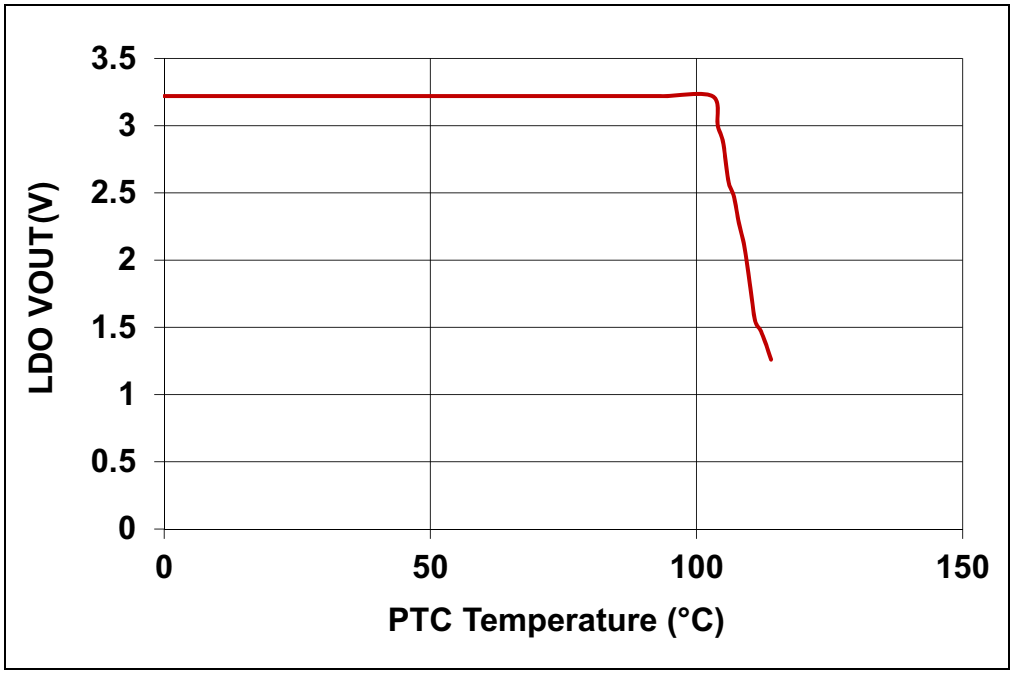

NOTES:

Worldwide Sales and Service

AMERICAS

Corporate Office
2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277
Technical Support:
http://www.microchip.com/support
Web Address:
www.microchip.com

Atlanta
Duluth, GA
Tel: 678-957-9614
Fax: 678-957-1455

Austin, TX
Tel: 512-257-3370

Boston
Westborough, MA
Tel: 774-760-0087
Fax: 774-760-0088

Chicago
Itasca, IL
Tel: 630-285-0071
Fax: 630-285-0075

Cleveland
Independence, OH
Tel: 216-447-0464
Fax: 216-447-0643

Dallas
Addison, TX
Tel: 972-818-7423
Fax: 972-818-2924

Detroit
Novi, MI
Tel: 248-848-4000

Houston, TX
Tel: 281-894-5983

Indianapolis
Noblesville, IN
Tel: 317-773-8323
Fax: 317-773-5453

Los Angeles
Mission Viejo, CA
Tel: 949-462-9523
Fax: 949-462-9608

New York, NY
Tel: 631-435-6000

San Jose, CA
Tel: 408-735-9110

Canada - Toronto
Tel: 905-673-0699
Fax: 905-673-6509

ASIA/PACIFIC

Asia Pacific Office
Suites 3707-14, 37th Floor
Tower 6, The Gateway
Harbour City, Kowloon

Hong Kong
Tel: 852-2943-5100
Fax: 852-2401-3431

Australia - Sydney
Tel: 61-2-9868-6733
Fax: 61-2-9868-6755

China - Beijing
Tel: 86-10-8569-7000
Fax: 86-10-8528-2104

China - Chengdu
Tel: 86-28-8665-5511
Fax: 86-28-8665-7889

China - Chongqing
Tel: 86-23-8980-9588
Fax: 86-23-8980-9500

China - Dongguan
Tel: 86-769-8702-9880

China - Hangzhou
Tel: 86-571-8792-8115
Fax: 86-571-8792-8116

China - Hong Kong SAR
Tel: 852-2943-5100
Fax: 852-2401-3431

China - Nanjing
Tel: 86-25-8473-2460
Fax: 86-25-8473-2470

China - Qingdao
Tel: 86-532-8502-7355
Fax: 86-532-8502-7205

China - Shanghai
Tel: 86-21-5407-5533
Fax: 86-21-5407-5066

China - Shenyang
Tel: 86-24-2334-2829
Fax: 86-24-2334-2393

China - Shenzhen
Tel: 86-755-8864-2200
Fax: 86-755-8203-1760

China - Wuhan
Tel: 86-27-5980-5300
Fax: 86-27-5980-5118

China - Xian
Tel: 86-29-8833-7252
Fax: 86-29-8833-7256

ASIA/PACIFIC

China - Xiamen
Tel: 86-592-2388138
Fax: 86-592-2388130

China - Zhuhai
Tel: 86-756-3210040
Fax: 86-756-3210049

India - Bangalore
Tel: 91-80-3090-4444
Fax: 91-80-3090-4123

India - New Delhi
Tel: 91-11-4160-8631
Fax: 91-11-4160-8632

India - Pune
Tel: 91-20-3019-1500

Japan - Osaka
Tel: 81-6-6152-7160
Fax: 81-6-6152-9310

Japan - Tokyo
Tel: 81-3-6880- 3770
Fax: 81-3-6880-3771

Korea - Daegu
Tel: 82-53-744-4301
Fax: 82-53-744-4302

Korea - Seoul
Tel: 82-2-554-7200
Fax: 82-2-558-5932 or
82-2-558-5934

Malaysia - Kuala Lumpur
Tel: 60-3-6201-9857
Fax: 60-3-6201-9859

Malaysia - Penang
Tel: 60-4-227-8870
Fax: 60-4-227-4068

Philippines - Manila
Tel: 63-2-634-9065
Fax: 63-2-634-9069

Singapore
Tel: 65-6334-8870
Fax: 65-6334-8850

Taiwan - Hsin Chu
Tel: 886-3-5778-366
Fax: 886-3-5770-955

Taiwan - Kaohsiung
Tel: 886-7-213-7828

Taiwan - Taipei
Tel: 886-2-2508-8600
Fax: 886-2-2508-0102

Thailand - Bangkok
Tel: 66-2-694-1351
Fax: 66-2-694-1350

EUROPE

Austria - Wels
Tel: 43-7242-2244-39
Fax: 43-7242-2244-393

Denmark - Copenhagen
Tel: 45-4450-2828
Fax: 45-4485-2829

France - Paris
Tel: 33-1-69-53-63-20
Fax: 33-1-69-30-90-79

Germany - Dusseldorf
Tel: 49-2129-3766400

Germany - Karlsruhe
Tel: 49-721-625370

Germany - Munich
Tel: 49-89-627-144-0
Fax: 49-89-627-144-44

Italy - Milan
Tel: 39-0331-742611
Fax: 39-0331-466781

Italy - Venice
Tel: 39-049-7625286

Netherlands - Drunen
Tel: 31-416-690399
Fax: 31-416-690340

Poland - Warsaw
Tel: 48-22-3325737

Spain - Madrid
Tel: 34-91-708-08-90
Fax: 34-91-708-08-91

Sweden - Stockholm
Tel: 46-8-5090-4654

UK - Wokingham
Tel: 44-118-921-5800
Fax: 44-118-921-5820

07/14/15

© 2016 Microchip Technology Inc.