

# LTC7862

## 140V High Efficiency Switching Surge Stopper

### DESCRIPTION

Demonstration circuit 2674A is a 140V high efficiency switching surge stopper featuring the [LTC®7862](#). The board operates from an input voltage range of 8V to 140V, and provides a 8V to 34V output from 0A to 10A. Its output voltage is programmed to be clamped at 34V (typical) with a minimum ride-through duration of 500ms to allow the load to operate through the input overvoltage events. Its output current is limited to protect against output short-circuit faults. A soft-start feature is utilized to control its output voltage slew rate at start-up and input voltage transients. This feature reduces current surge and output voltage overshoot. The demonstration board is able to achieve low insertion drop (210mV typical) by utilizing the low  $R_{DS(ON)}$  N-channel MOSFETs and low DCR inductor. This board also includes optional reverse polarity protection circuit which protects the downstream loads up to -40V. The demonstration circuit is suitable for a wide range of automotive, industrial, and telecom applications.

The LTC7862 high efficiency switching surge stopper protects loads from input high voltage transients. During an input overvoltage event, the LTC7862 controls the gate of two external N-channel MOSFETs and operate as a switching DC/DC step-down regulator. The output voltage is maintained at a safe level, allowing the loads to continue to operate through the input overvoltage events.

During normal operation, the LTC7862 turns on the top external N-channel MOSFET continuously, passing the input voltage through to the output with minimal voltage drop. The LTC7862 also limits the maximum output current to protect against overcurrent and short-circuit faults. A programmable timer limits the time that the LTC7862 can spend switching during an overvoltage, overcurrent, or startup condition. When the timer expires, the external MOSFETs are turned off for a cooldown period and then the LTC7862 restarts. The timer limits how long the LTC7862 can switch when the power loss is relatively high, the components and thermal design can be optimized for normal pass-through operation.

The LTC7862 data sheet gives a complete description of the part, operation and application information. The data sheet must be read in conjunction with this demo manual for DC2674A. Proper board layout is essential for maximum thermal and electrical performance. See the data sheet sections for details. The LTC7862 is available in 20-lead TSSOP and QFN packages and two operating junction temperature grades: industrial (-40°C to 125°C) and high temperature automotive (-40°C to 150°C).

**Design files for this circuit board are available at <http://www.analog.com/DC2674A>**

All registered trademarks and trademarks are the property of their respective owners.

### PERFORMANCE SUMMARY

Specifications are at  $T_A = 25^\circ\text{C}$

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
$V_{IN}$	Input Voltage	Normal Operation	8		32	V
		500ms Ride-Through	8		140	V
		DC Survival	0		140	V
$V_{INRPP}$	Reverse Polarity Protection	DC Survival	-40			V
$V_{OUT}$	Output Regulation Voltage		32.7	34.0	35.0	V
$I_{OUT}$	Output Current Range, Continuous	Free Air	0		10	A
$I_{LIMIT}$	Current Limit	$V_{IN} = 28\text{V}$	13.3	15.4	17.6	A

## PERFORMANCE SUMMARY

Specifications are at  $T_A = 25^\circ\text{C}$

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
$V_{IN} - V_{OUT}$	Insertion Drop	$V_{IN} = 28\text{V}$ , $I_{OUT} = 10\text{A}$		210		mV
$V_{INRPP} - V_{OUT}$	Insertion Drop with Reverse Polarity Protection Circuit	$V_{INRPP} = 28\text{V}$ , $I_{OUT} = 10\text{A}$		250		mV
$F_{SW}$	Switching (Clock) Frequency			535		kHz
$V_{OUT\text{ P-P}}$	Output Ripple	$V_{IN} = 40\text{V}$ , $V_{OUT} = 32\text{V}$ , $I_{OUT} = 10\text{A}$ (20MHz BW)		150		mV <sub>P-P</sub>
	Approximate Size	Component Area • Top Component Height		44 × 46 × 12		mm

## QUICK START PROCEDURE

Refer to Figure 1 for proper measurement equipment setup and follow the procedure below.

**NOTE:** When measuring the output voltage during switching transitions, care must be taken to avoid a long ground lead on the oscilloscope probe. Measure the output voltage ripple by touching the probe tip and ground ring directly across the output capacitor as shown in Figure 1.

1. Place SW1 to ON position.
2. Choose an input power supply that is capable of 8V to 140V and 15A. Set its output voltage to 10V. Then turn off the supply.
3. With power off, connect the input power supply to the input terminals  $V_{IN}$  and GND.
4. Connect the voltmeters capable of measuring at least 150V to input terminals  $V_{IN}$  to GND and output terminals  $V_{OUT}$  to GND.
5. Turn on the input power supply.

**NOTE:** Make sure that the input voltage never exceeds 140V.

6. Check the voltage across  $V_{OUT}$  to GND. The voltage reading should be close to input voltage. Turn off the input power supply.
7. Once the proper output voltage is established, connect a variable load capable of 10A at 35V to the output terminals  $V_{OUT}$  to GND. Set the current to 0A.
8. Turn on the input power supply.

**NOTE:** If there is no output, temporarily disconnect the load to make sure that the load is not set too high.

9. Once the proper output voltage is established, adjust the load up to 10A and/or input power supply within the operating range up to 32V and observe the output voltage and other desired parameters.
10. Now apply an input voltage between 35V and 140V. Observe the output voltage and fault timer operation.
11. If desired, you may apply input transient profiles in the range of 0V to 140V and observe the output to illustrate operation of the circuit to prevent input surges from reaching the output.

**NOTE:** The input voltage range is up to 140V but hot-plugging with long leads may result in input voltages in excess of 140V.

# QUICK START PROCEDURE

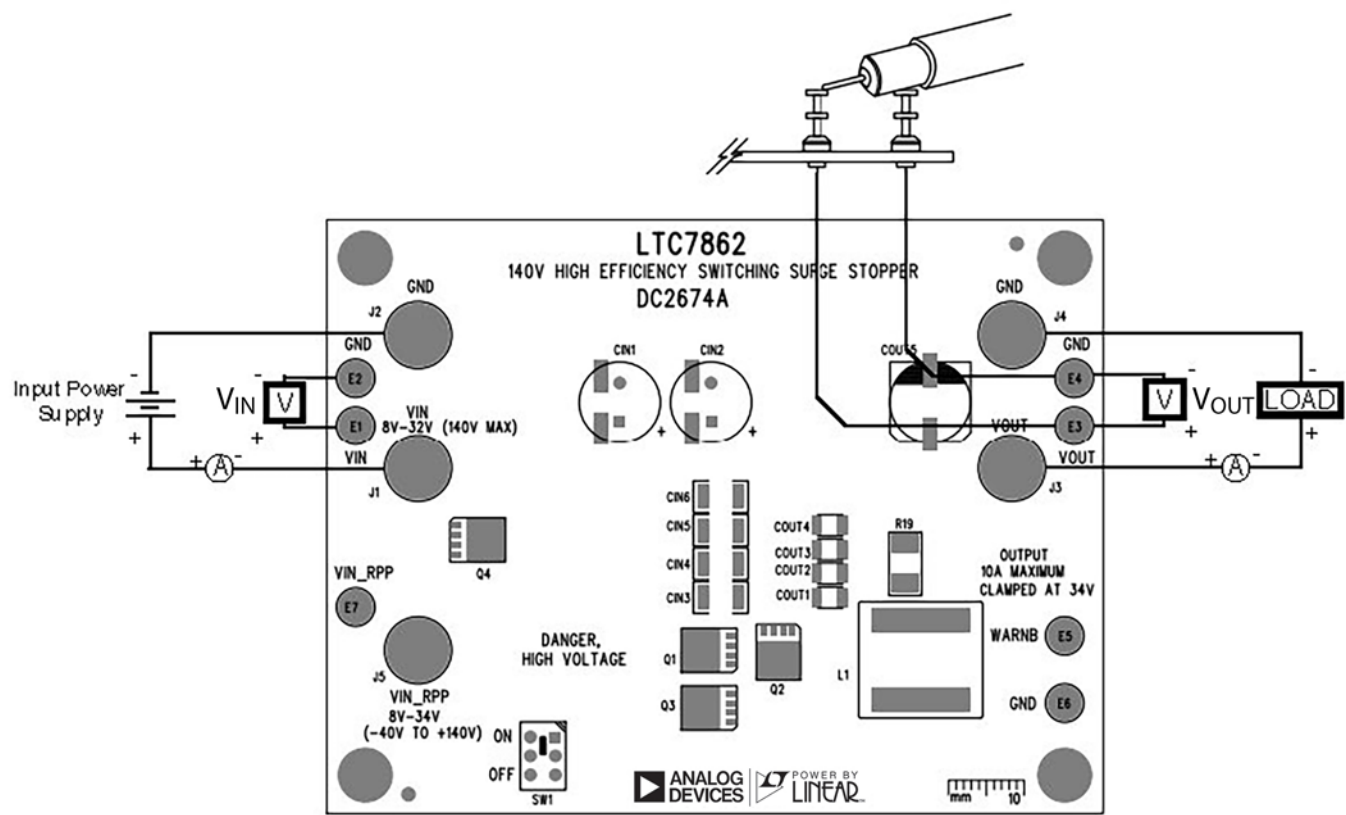


Figure 1. Proper Measurement Equipment Setup


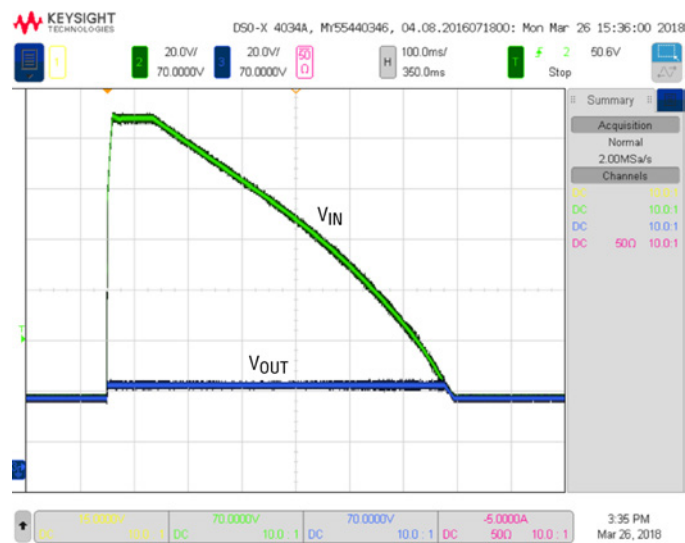



Figure 2. Output Response Waveform with 28V to 140V Input Surge (CH2 VIN 20V/DIV, CH3 VOUT 20V/DIV, 100ms/DIV)

# DEMO MANUAL DC2674A

## QUICK START PROCEDURE

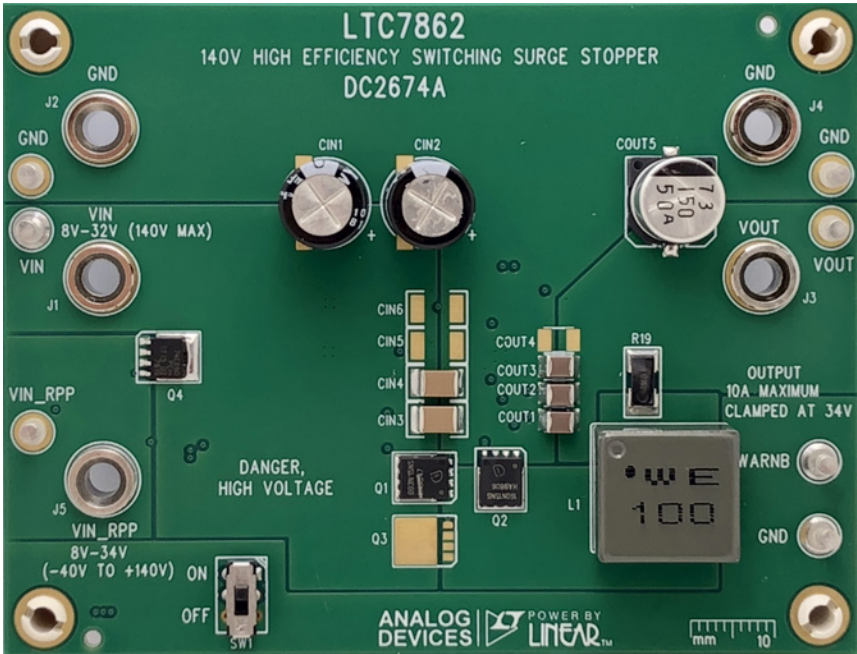


(a) Top View

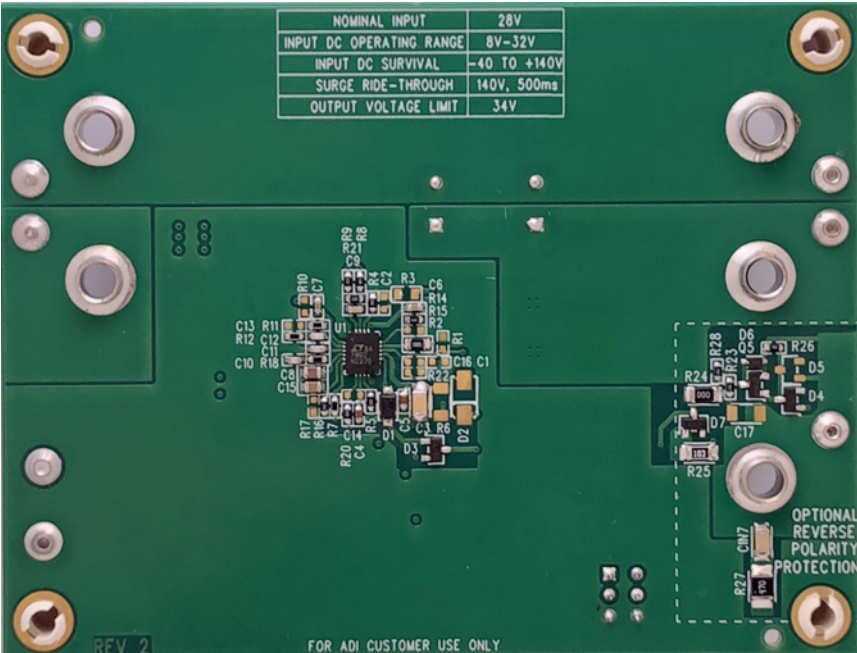

(b) Bottom View

Figure 3. Board Photos

## QUICK START PROCEDURE

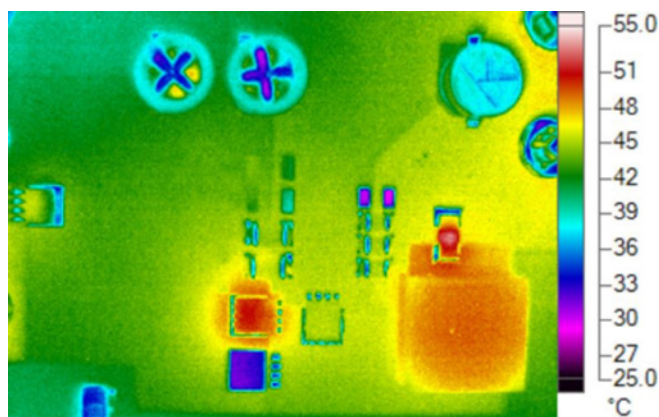

Top View

Figure 4. Thermal Plot, Test Conditions:  $V_{IN\_RPP} = 28.0V$ ,  $V_{OUT} = 27.7V$ , Load = 10.0A,  $T_{AMBIENT} = 27.4^{\circ}C$

## PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
<b>Required Circuit Components</b>				
1	3	COUT1, COUT2, COUT3	CAP., X7S, 10 $\mu$ F, 50V, 20%, 1210	TDK, C3225X7S1H106K250AB
2	1	COUT5	CAP., 150 $\mu$ F, ALUM, 50V, 20%, 10mm $\times$ 10.5mm	SUN ELEC, 50CE150AX
3	1	C3	CAP., X7R, 0.1 $\mu$ F, 200V, 10%, 1206	AVX, 12062C104KAT2A
4	1	C4	CAP., X7R, 0.33 $\mu$ F, 50V, 10%, 0603	TDK, C3225X7S1H106K250AB
5	1	C5	CAP., 10 $\mu$ F, X5R, 10V, 20%, 0603	AVX, 12062C104KAT2A
6	2	C6, C7	CAP., 0.1 $\mu$ F, X7R, 50V, 10%, 0603	AVX, 06035C104KAT2A
7	1	C8	CAP., 10 $\mu$ F, X7S, 16V, 10%, 0805	MURATA, GCM21BC71C106KE36
8	1	C9	CAP., X7R, 1000pF, 50V, 10%, 0603	AVX, 06035C102KAT2A
9	1	C10	CAP., COG, 2200pF, 50V, 5%, 0603	MURATA, GCM1885C1H222JA16D
10	1	C11	CAP., COG, 470pF, 50V, 5%, 0603	AVX, 06035A471JAT2A
11	1	C12	CAP., COG, 10pF, 50V, 5%, 0603	AVX, 06035A100JAT2A
12	1	C15	CAP., 2.2 $\mu$ F, X7R, 16V, 10%, 0805	MURATA, GCM21BR71C225KA64
13	1	C17	CAP., 0.01 $\mu$ F, U2J, 250V, 5%, 1206	MURATA, GCM31B7U2E103JX01L
14	2	CIN1, CIN2	CAP., 22 $\mu$ F, ALUM, 160V, 20%, 10mm $\times$ 12mm	NICHICON, UVY2C220MPD1TD
15	2	CIN3, CIN4	CAP., X7T, 1 $\mu$ F, 250V, 10%, 1812	TDK, CGA8P3X7T2E105M250KA
16	1	Q1	XSTR., MOSFET, N-CH, 150V, 87A, PG-TDSON-8	INFINEON, BSC093N15NS5ATMA1
17	1	Q2	XSTR., MOSFET, N-CH, 150V, 56A, PG-TDSON-8	INFINEON, BSC160N15NS5GATMA1
18	1	D1	DIODE, 200V, 1A	NEXPERIA, ES1DRX
19	1	R2	RES., 10MEG, 1/8W, 1%, 0805	VISHAY, CRCW080510M0FKEA
20	10	R4, R5, R9, R14, R16, R20, R22, R28, R29, R30	RES., 0 $\Omega$ , 1/16W, 0603	VISHAY, CRCW06030000Z0EA
21	1	R6	RES., 2.2 $\Omega$ , 5%, 3/4W, 1206	VISHAY, CRCW12062R20JNEAHP



# DEMO MANUAL DC2674A

## PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
22	1	R7	RES., 100k $\Omega$ , 1/16W, 1%, 0603	VISHAY, CRCW0603100KFKEA
23	1	R8	RES., 5.11 $\Omega$ , 1/10W, 1%, 0603	VISHAY, CRCW06035R11FKEA
24	1	R10	RES, 10 $\Omega$ 1/10W 1%, 0603	VISHAY, CRCW060310R0FKEA
25	1	R11	RES., 162k $\Omega$ , 1/10W, 1%, 0603	VISHAY, CRCW0603162KFKEA
26	1	R12	RES., 3.92k $\Omega$ , 1/16W, 1%, 0603	VISHAY, CRCW06033K92FKEA
27	1	R18	RES., 21.5k $\Omega$ , 1/16W, 1%, 0603	VISHAY, CRCW060321K5FKEA
28	1	R19	RES., 0.004 $\Omega$ , 3W, 1%, 2512	PANASONIC, ERJ-MS4SF4M0U
29	1	R21	RES., 20 $\Omega$ , 1/10W, 1%, 0603	VISHAY, CRCW060320R0FKEA
30	1	L1	INDUCTOR, 10 $\mu$ H	WURTH, 74439370100
31	1	U1	IC, LTC7862EUFD	ANALOG DEVICES, LTC7862EUFD#PBF


### Additional Demo Board Circuit Components

1	0	COUT4	CAP, OPTION, 1210	OPTION
2	0	C1, C2, C13, C14, C16	CAP, OPTION, 0603	OPTION
3	0	C17	CAP, OPTION, 1206	OPTION
4	0	CIN5, CIN6	CAP, OPTION, 1812	OPTION
5	1	CIN7	CAP, 0.01 $\mu$ F, X7R, 200V, 10%, 1206	AVX, 12062C103KAT2A
6	0	Q3	MOSFET N-CHAN, OPTION, S08-POWERPAK	OPTION
7	1	Q4	XSTR., MOSFET, N-CH, 60V, 100A, PG-TDSON-8	NEXPERIA, BUK7Y4R8-60E
8	1	Q5	XSTR., MOSFET NPN, 40V, SOT23	ON SEMI, MMBT3904
9	0	D2	DIODE., OPTION, SMA	OPTION
10	2	D3, D4	DIODE, 180V, 200mA, SOT23	CENTRAL, CMPD3003
11	1	D6	DIODE, ZENER 15V, SOD323	DIODES INC, DDZ9702S
12	0	D7	DIODE, 180V, 200mA, SOT23	OPTION
13	0	D5	DIODE, OPTION, SOT23	OPTION
14	0	R3	RES., OPTION, 0805	OPTION
15	0	R1, R15, R17, R22	RES., OPTION, 0603	OPTION
16	1	R23	RES., 270k $\Omega$ , 1%, 1/10W, 0603	VISHAY, CRCW0603270KFKEA
17	1	R24	RES., 1k $\Omega$ , 1/4W, 1206	VISHAY, CRCW12061K00JNEAC
18	1	R25	RES., 10k $\Omega$ , 5%, 1/4W, 1206	VISHAY, CRCW120610K0JNEA
19	1	R26	RES., 240k $\Omega$ , 1%, 1/10W, 0603	VISHAY, CRCW0603240KFKEA
20	1	R27	RES., 47 $\Omega$ , 1%, 3/4W, 1210, AEC-Q200	VISHAY, CRCW121047R0JNEAHP
21	2	R28, R30	RES., 0 $\Omega$ , 1/16W, 0603	VISHAY, CRCW06030000Z0EA
22	1	SW1	SWITCH, SUB-MINIATURE SLIDE, DPDT, 0.3A, 6V <sub>DC</sub> , THT	C&K COMPONENTS, JS202011CQN

### Hardware: For Demo Board Only

1	7	E1, E2, E3, E4, E5, E6, E7	TESTPOINT, TURRET, 0.094"	MILL MAX, 2501-2-00-80-00-00-07-0
2	5	J1, J2, J3, J4, J5	CONN, BANANA JACK	KEYSTONE, 575-4
3	4	MH1, MH2, MH3, MH4	STAND-OFF, SNAP ON NYLON 0.50"	KEYSTONE, 8833
4	1		FAB, PRINTED CIRCUIT BOARD	DEMO BOARD, 2674A

SCHEMATIC DIAGRAM

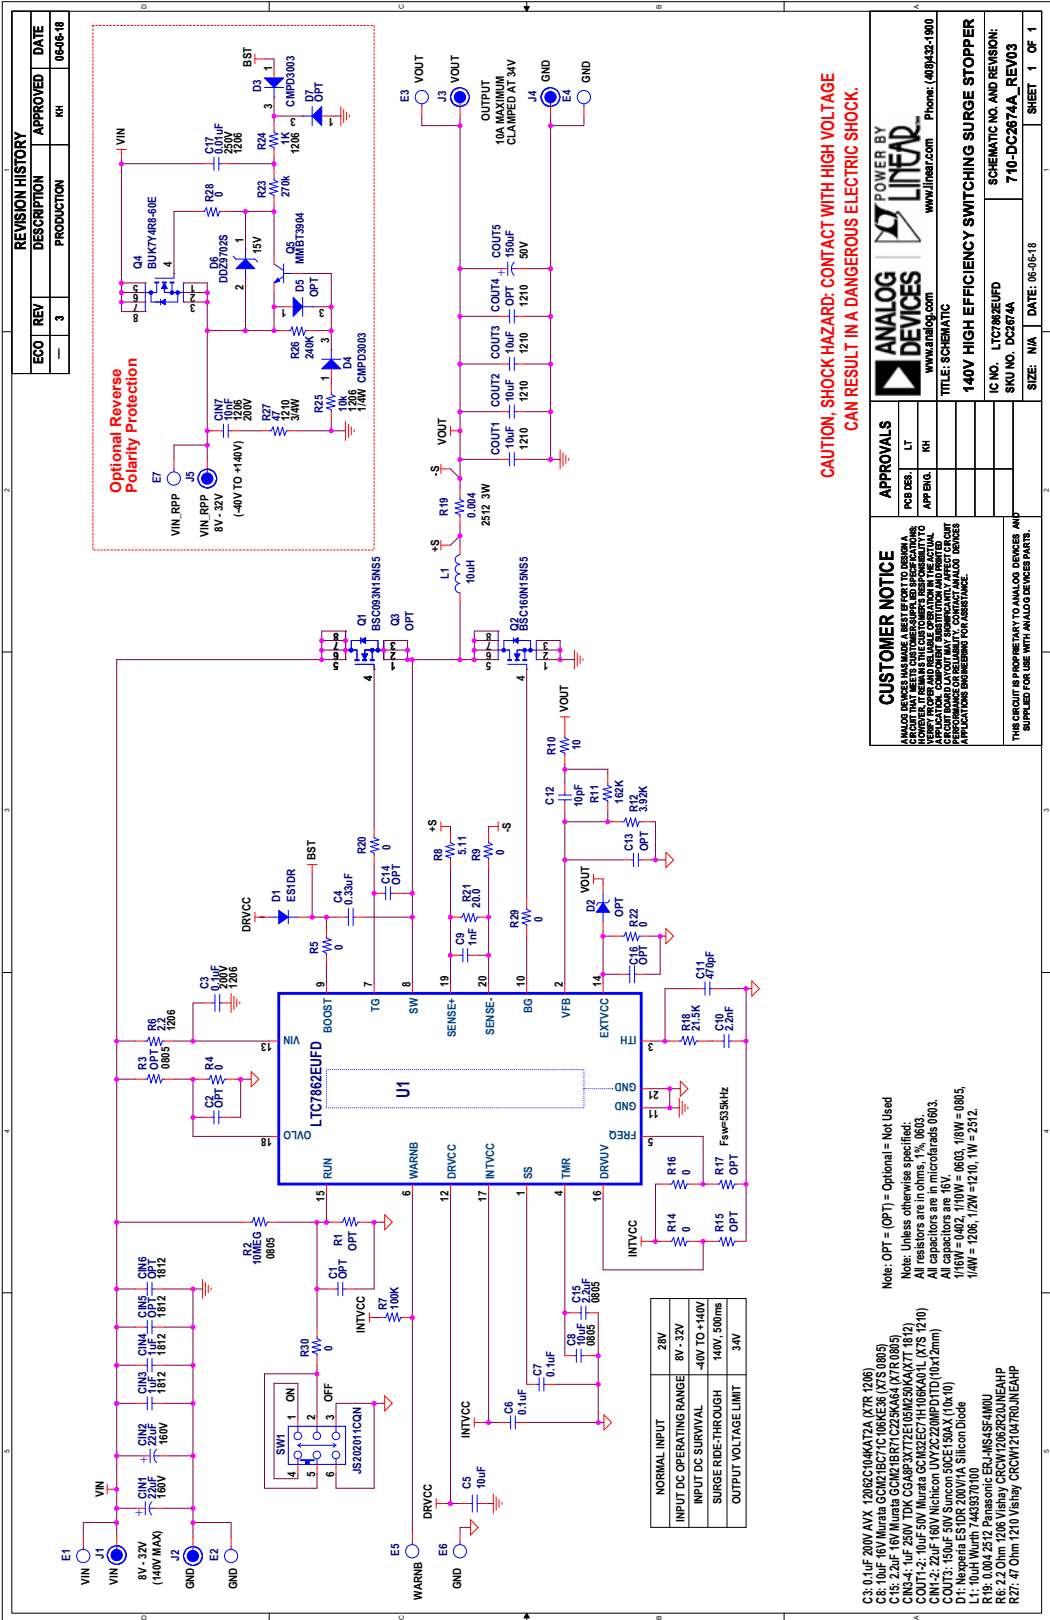

**ESD Caution**

**ESD (electrostatic discharge) sensitive device.** Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

**Legal Terms and Conditions**

By using the evaluation board discussed herein (together with any tools, components documentation or support materials, the "Evaluation Board"), you are agreeing to be bound by the terms and conditions set forth below ("Agreement") unless you have purchased the Evaluation Board, in which case the Analog Devices Standard Terms and Conditions of Sale shall govern. Do not use the Evaluation Board until you have read and agreed to the Agreement. Your use of the Evaluation Board shall signify your acceptance of the Agreement. This Agreement is made by and between you ("Customer") and Analog Devices, Inc. ("ADI"), with its principal place of business at One Technology Way, Norwood, MA 02062, USA. Subject to the terms and conditions of the Agreement, ADI hereby grants to Customer a free, limited, personal, temporary, non-exclusive, non-sublicensable, non-transferable license to use the Evaluation Board FOR EVALUATION PURPOSES ONLY. Customer understands and agrees that the Evaluation Board is provided for the sole and exclusive purpose referenced above, and agrees not to use the Evaluation Board for any other purpose. Furthermore, the license granted is expressly made subject to the following additional limitations: Customer shall not (i) rent, lease, display, sell, transfer, assign, sublicense, or distribute the Evaluation Board; and (ii) permit any Third Party to access the Evaluation Board. As used herein, the term "Third Party" includes any entity other than ADI, Customer, their employees, affiliates and in-house consultants. The Evaluation Board is NOT sold to Customer; all rights not expressly granted herein, including ownership of the Evaluation Board, are reserved by ADI. **CONFIDENTIALITY.** This Agreement and the Evaluation Board shall all be considered the confidential and proprietary information of ADI. Customer may not disclose or transfer any portion of the Evaluation Board to any other party for any reason. Upon discontinuation of use of the Evaluation Board or termination of this Agreement, Customer agrees to promptly return the Evaluation Board to ADI. **ADDITIONAL RESTRICTIONS.** Customer may not disassemble, decompile or reverse engineer chips on the Evaluation Board. Customer shall inform ADI of any occurred damages or any modifications or alterations it makes to the Evaluation Board, including but not limited to soldering or any other activity that affects the material content of the Evaluation Board. Modifications to the Evaluation Board must comply with applicable law, including but not limited to the RoHS Directive. **TERMINATION.** ADI may terminate this Agreement at any time upon giving written notice to Customer. Customer agrees to return to ADI the Evaluation Board at that time. **LIMITATION OF LIABILITY.** THE EVALUATION BOARD PROVIDED HEREUNDER IS PROVIDED "AS IS" AND ADI MAKES NO WARRANTIES OR REPRESENTATIONS OF ANY KIND WITH RESPECT TO IT. ADI SPECIFICALLY DISCLAIMS ANY REPRESENTATIONS, ENDORSEMENTS, GUARANTEES, OR WARRANTIES, EXPRESS OR IMPLIED, RELATED TO THE EVALUATION BOARD INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, TITLE, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS. IN NO EVENT WILL ADI AND ITS LICENSORS BE LIABLE FOR ANY INCIDENTAL, SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES RESULTING FROM CUSTOMER'S POSSESSION OR USE OF THE EVALUATION BOARD, INCLUDING BUT NOT LIMITED TO LOST PROFITS, DELAY COSTS, LABOR COSTS OR LOSS OF GOODWILL. ADI'S TOTAL LIABILITY FROM ANY AND ALL CAUSES SHALL BE LIMITED TO THE AMOUNT OF ONE HUNDRED US DOLLARS (\$100.00). **EXPORT.** Customer agrees that it will not directly or indirectly export the Evaluation Board to another country, and that it will comply with all applicable United States federal laws and regulations relating to exports. **GOVERNING LAW.** This Agreement shall be governed by and construed in accordance with the substantive laws of the Commonwealth of Massachusetts (excluding conflict of law rules). Any legal action regarding this Agreement will be heard in the state or federal courts having jurisdiction in Suffolk County, Massachusetts, and Customer hereby submits to the personal jurisdiction and venue of such courts. The United Nations Convention on Contracts for the International Sale of Goods shall not apply to this Agreement and is expressly disclaimed.