

## **TAS5162DKD6EVM**

This user's guide describes the operation of the evaluation module for the TAS5162 Digital Amplifier Power Output Stage using the TAS5518 Digital Audio PWM Processor from Texas Instruments. The user's guide also provides measurement data and design information such as the schematic, BOM, and PCB layout

### **Contents**

|            |                                                    |    |
|------------|----------------------------------------------------|----|
|            | Trademarks .....                                   | 2  |
| 1          | Overview .....                                     | 2  |
| 2          | Quick Setup Guide.....                             | 5  |
| 3          | Protection .....                                   | 7  |
| 4          | TAS5162DKD6EVM Performance.....                    | 8  |
| 5          | Related Documentation from Texas Instruments ..... | 20 |
| Appendix A | .....                                              | 21 |

### **List of Figures**

|    |                                                                     |    |
|----|---------------------------------------------------------------------|----|
| 1  | Integrated PurePath Digital™ Amplifier System .....                 | 4  |
| 2  | Physical structure for the TAS5162DKD6EVM (Approximate Layout)..... | 4  |
| 3  | TAS5518 GUI Window .....                                            | 6  |
| 4  | THD+N vs Power (BTL - 6Ω) .....                                     | 10 |
| 5  | THD+N vs Power (BTL - 8Ω) .....                                     | 10 |
| 6  | THD+N vs Power (PBTL - 4Ω) .....                                    | 11 |
| 7  | THD+N vs Frequency (BTL - 6Ω) .....                                 | 11 |
| 8  | THD+N vs Frequency (BTL - 8Ω) .....                                 | 12 |
| 9  | THD+N vs Frequency (PBTL - 4Ω) .....                                | 12 |
| 10 | FFT Spectrum With -60 dBFS Tone (BTL) .....                         | 13 |
| 11 | FFT Spectrum With -60 dBFS Tone (PBTL).....                         | 13 |
| 12 | Idle Noise FFT Spectrum (BTL) .....                                 | 14 |
| 13 | Idle Noise FFT Spectrum (PBTL) .....                                | 14 |
| 14 | Channel Separation .....                                            | 15 |
| 15 | Frequency Response (BTL).....                                       | 15 |
| 16 | Frequency Response (PBTL).....                                      | 16 |
| 17 | High Current Protection (BTL) .....                                 | 16 |
| 18 | High Current Protection (PBTL) .....                                | 17 |
| 19 | Pop/Click (BTL) .....                                               | 17 |
| 20 | Pop/Click (PBTL) .....                                              | 18 |
| 21 | Output Stage Efficiency .....                                       | 18 |
| 22 | Subwoofer Line Out THD Vs. Output Voltage .....                     | 19 |
| 23 | Subwoofer Line Out THD+N vs. Frequency .....                        | 19 |
| 24 | Subwoofer Line Out Frequency Response .....                         | 20 |

### **List of Tables**

|   |                                             |   |
|---|---------------------------------------------|---|
| 1 | TAS5162DKD6EVM Specification .....          | 2 |
| 2 | Recommended Supply Voltages.....            | 5 |
| 3 | TAS5162 Warning/Error Signal Decoding ..... | 7 |
| 4 | General Test Conditions .....               | 8 |
| 5 | TAS5518 Register Settings.....              | 8 |

## Overview

|     |                                                    |    |
|-----|----------------------------------------------------|----|
| 6   | Electrical Data .....                              | 8  |
| 7   | Audio Performance .....                            | 9  |
| 8   | Audio Performance Subwoofer Line Output.....       | 9  |
| 9   | Thermal Specifications .....                       | 9  |
| 10  | Physical Specifications.....                       | 9  |
| 11  | Related Documentation from Texas Instruments ..... | 20 |
| A-1 | Design Documents .....                             | 21 |

| Topic | Page |
|-------|------|
|       |      |

## Trademarks

PurePath Digital, Equibit are trademarks of Texas Instruments.

I<sup>2</sup>C is a trademark of Philips Electronics.

## 1 Overview

The TAS5162DKD6EVM PurePath Digital™ customer evaluation module demonstrates the integrated circuits TAS5162DKD and TAS5518PAG from Texas Instruments.

The TAS5162DKD is a high-performance, integrated stereo Digital Amplifier Power Stage designed to drive 6-Ω speakers at up to 210 W per channel. The device incorporates PurePath Digital™ technology and is designed to be used with PurePath Digital™ modulators. This system requires only a simple passive demodulation filter to deliver high-quality, high-efficiency audio amplification.

TAS5518PAG is a high performance 32 bit (24 bit input) multi channel PurePath Digital™ Pulse Width Modulator (PWM) based on Equibit™ technology with fully symmetrical AD modulation scheme. The device also has Digital Audio Processing (DAP) that provides 48 bit signal processing, advanced performance and a high level of system integration. The device has interfaces for headphone output and Power Supply Volume Control (PSVC).

This EVM is configured with 4 BTL channels and 1 PBTL (parallel BTL) channel for the subwoofer channel.

This EVM, together with a TI input-USB board, is a complete 5 channels + subwoofer line output digital audio amplifier system which includes digital input (S/PDIF), analog inputs, interface to PC and DAP features like digital volume control, input and output mixers, automute, tone controls, loudness, EQ filters and dynamic range compression (DRC). There are configuration options for power stage failure protection, and a phono connector for subwoofer line output.

**Table 1. TAS5162DKD6EVM Specification**


| Key Parameters               |                                              |
|------------------------------|----------------------------------------------|
| Output Stage Supply Voltage: | 0 V - 50 V                                   |
| System Supply Voltage:       | 15 V - 20 V                                  |
| Number of Channels           | 4 x BTL, 1x PBTL                             |
| Load Impedance BTL:          | 6-8 Ω                                        |
| Load Impedance PBTL:         | 4-8 Ω                                        |
| Output power BTL             | 160 W / 8 Ω 10% THD or 210 W / 6 Ω / 10% THD |
| Output power PBTL            | 310 W / 4 Ω / 10% THD                        |
| DNR                          | >110 dB                                      |
| PWM Processor                | TAS5518PAG                                   |
| Output Stage                 | TAS5162DKD                                   |

**Table 1. TAS5162DKD6EVM Specification (continued)**

|                |                       |
|----------------|-----------------------|
| Other Features | Subwoofer line output |
|----------------|-----------------------|

This 5 channel system + subwoofer line output is designed for home theater applications such as A/V receivers, DVD receivers, DVD mini-component systems or home theater in a box (HTIB).

This document covers EVM specifications, audio performance and power efficiency measurements graphs, and design documentation that includes schematics, parts list, layout and mechanical design.

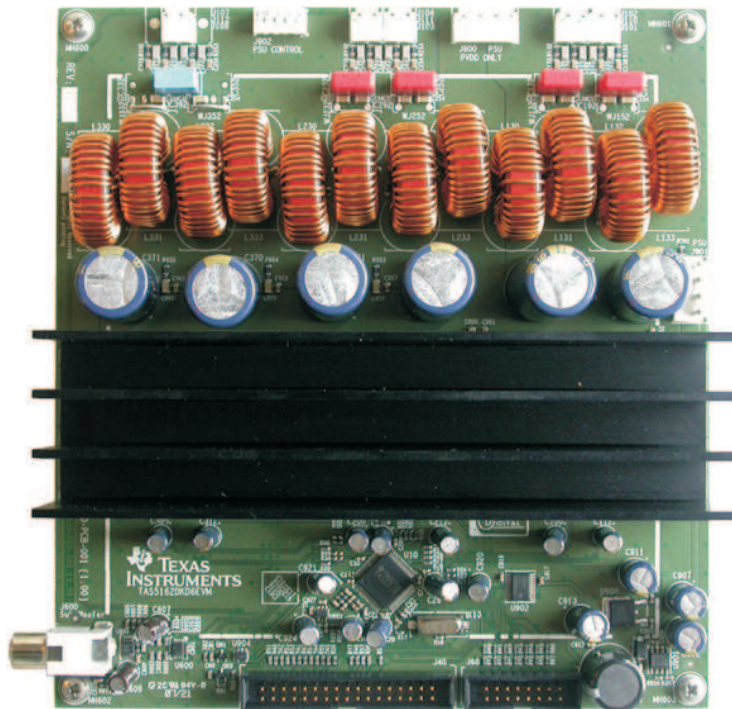

Gerber (layout) files are available at [www.ti.com](http://www.ti.com).

The EVM is delivered with cables and Input-USB board to connect to an input source and be controlled from a PC.

### 1.1 1.1 TAS5162DKD6EVM Features

- 5/6 channel PurePath Digital™ evaluation module (double-sided plated-through PCB layout).
- Subwoofer Line Output (LFE Output).
- Self-contained protection system (short-circuit and thermal).
- Standard I<sup>2</sup>S and I<sup>2</sup>C™ / Control connector for TI input board
- Double-sided plated-through PCB layout.

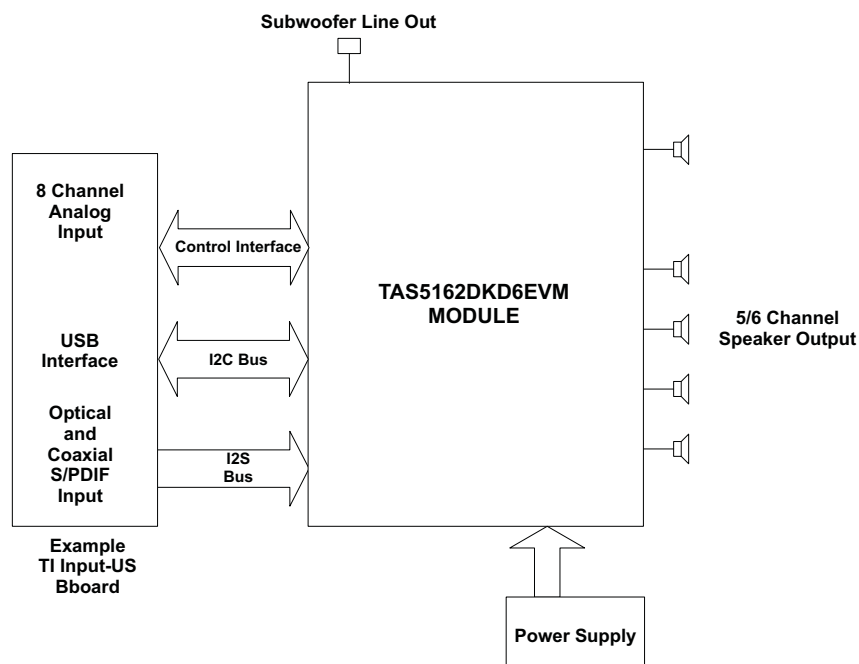


Figure 1. Integrated PurePath Digital™ Amplifier System

## 1.2 PCB Key Map

Physical structure for the TAS5162DKD6EVM is illustrated in Figure 2.

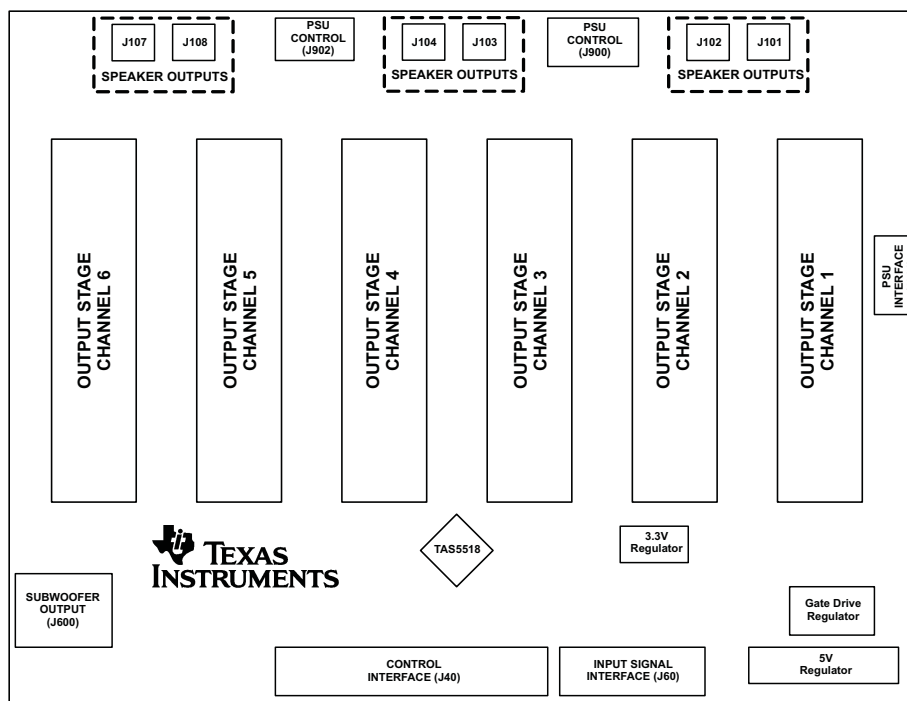


Figure 2. Physical structure for the TAS5162DKD6EVM (Approximate Layout)

## 2 Quick Setup Guide

This section describes the TAS5162DKD6EVM board in regards to power supplies and system interfaces. The section provides information regarding handling and unpacking, absolute operating conditions, and a description of the factory default switch and jumper configuration.

This chapter provides a step-by-step guide to configuring the TAS5162DKD6EVM for device evaluation.

### 2.1 Electrostatic Discharge Warning

Many of the components on the TAS5162DKD6EVM are susceptible to damage by electrostatic discharge (ESD). Customers are advised to observe proper ESD handling precautions when unpacking and handling the EVM, including the use of a grounded wrist strap at an approved ESD workstation.

#### CAUTION

Failure to observe ESD handling procedures may result in damage to EVM components.

### 2.2 Unpacking the EVM

Upon opening the TAS5162DKD6EVM package, check to make sure that the following items are included:

- 1 pc. TAS5162DKD6EVM board using one TAS5518PAG and four TAS5162DKD.
- 1 pc. TI Input-USB board for interfacing TAS5162DKD6EVM with SPDIF/analog sources and PC for control.
- 1 pc. Signal Interface IDC cable for connection to an I<sup>2</sup>S front-end like the attached TI Input-USB board.
- 1 pc. Control Interface IDC cable for connection to an I<sup>2</sup>C™ front-end like the attached TI Input-USB board.
- 1 pc Cable for connecting Input-USB board to a USB port on a PC for TAS5518 control by software.
- 1 pc. Power supply cable for one regulated power supply (H-bridge).
- 1 pc. Power supply cable for two regulated power supplies (H-bridge and System supply).
- 1 pc. PurePath™ CD-ROM

If any of these items are missing, contact the Texas Instruments Product Information Center nearest you to inquire about a replacement.

Connect the Input-USB board to TAS5162DKD6EVM using the 2 delivered IDC cables.

### 2.3 Power Supply Setup

To power up the EVM, two power supplies are needed. One for system power, logic and gate-drive, and one for output stage supply. Power supplies are connected to the EVM using delivered power cable Red/Black, White/Black.

**Table 2. Recommended Supply Voltages**

| Description               | Voltage Limitations | Current Requirement | Cable       |
|---------------------------|---------------------|---------------------|-------------|
| System power supply       | 15 - 20 V           | 0.3 A               | Red/Black   |
| Output stage power supply | 0 - 50 V            | 10 A                | White/Black |

#### CAUTION

Applying voltages above the limitations given in [Table 2](#) may cause permanent damage to the hardware.

**Note:** The length of power supply cable must be minimized. Increasing length of PSU cable is equal to increasing the distortion for the amplifier at high output levels and low frequencies.

## 2.4 Speaker Connection

### CAUTION

Both positive and negative speaker outputs are floating and may not be connected to ground (e.g. through an oscilloscope).

## 2.5 GUI Software Installation

The TAS5518 GUI provides easy control of all registers in the TAS5518. To install the GUI, run setup file from the PurePath™ CD-ROM.

After installation, turn on the power supplies and connect the USB cable to the Input-USB board.

Start GUI program from windows menu. Start up of GUI will take few seconds.



Figure 3. TAS5518 GUI Window

From the files menu load the configuration file:

TAS5162DKD6EVM Configuration (1.00).cfg

The file is located on the PurePath™ CD-rom. This file contains all settings for a default setup of the EVM.

For easy access of the file it is recommended to copy the files into directory where the GUI is installed.

Default is C:\Program Files\Texas Instruments Inc\TAS5518\

For more advanced use of the GUI, refer to the GUI User's Guide and data manual for the TAS5518.

### 3 Protection

This chapter describes the short-circuit protection and fault reporting circuitry of the TAS5162 ([SLES194](#)) device.

#### 3.1 Short-Circuit Protection and Fault Reporting Circuitry

The TAS5162 is a self-protecting device that provides fault reporting (including high-temperature protection and short-circuit protection). TAS5162 is configured in back-end auto-recovery mode, and therefore, resets automatically after all errors (M1, M2 and M3 are set low), see the data sheet for further explanation. This mean that the device will restart itself after an error occasion and reports through the  $\overline{SD}$  error signal.

#### 3.2 Fault Reporting

The  $\overline{OTW}$  and  $\overline{SD}$  outputs from TAS5162 indicate fault conditions. See the TAS5162 data manual for a description of these pins.

**Table 3. TAS5162 Warning/Error Signal Decoding**

| $\overline{OTW}$ | $\overline{SD}$ | Device Condition                                 |
|------------------|-----------------|--------------------------------------------------|
| 0                | 0               | High temperature error and/or high current error |
| 0                | 1               | High temperature warning                         |
| 1                | 0               | Undervoltage lockout or high current error       |
| 1                | 1               | Normal operation, no errors/warnings             |

The temperature warning signals at the TAS5162DKD6EVM board are wired — or to one temperature warning signal ( $\overline{OTW}$  - pin 22 in control interface connector). Shutdown signals are wired-or into one shutdown signal ( $\overline{SD}$  - pin 20 in control interface connector).

The shutdown signals together with the temperature warning signal give chip state information as described in [Table 3](#). Device fault reporting outputs are open-drain outputs.



## 4 TAS5162DKD6EVM Performance

All electrical and audio specifications are typical values.

**Table 4. General Test Conditions**

| General Test Conditions <sup>(1)</sup> |                   | Notes                                    |
|----------------------------------------|-------------------|------------------------------------------|
| Output Stage Supply Voltage:           | 50 V              | Laboratory Power Supply (EA-PS 7065-10A) |
| System Supply Voltage:                 | 15 V              |                                          |
| Load Impedance BTL:                    | 6-8 $\Omega$      |                                          |
| Load Impedance PBTL:                   | 3-4 $\Omega$      |                                          |
| Input Signal                           | 1 kHz Sine        |                                          |
| Sampling Frequency                     | 48 kHz            |                                          |
| Gain setting in TAS5518                | 0 dB              |                                          |
| Measurement Filter                     | AES17 and AUX0025 |                                          |
| TI Input-USB Board                     | Input-USB         | Rev 10                                   |
| EVM configuration file                 | Ver 1.00          | TAS5162DKD6EVM Configuration (1.00).cfg  |

<sup>(1)</sup> These test conditions are used for all tests, unless otherwise specified.

**Table 5. TAS5518 Register Settings**

| Register <sup>(1)</sup>         |      | Value       | Notes                         |
|---------------------------------|------|-------------|-------------------------------|
| Modulation Index Limit Register | 0x16 | 0x04        | Set Modulation Index to 96.1% |
| Master Volume Register          | 0xD9 | 00 00 00 48 | Master Volume set to 0 dB     |

<sup>(1)</sup> These register settings are used for all test, unless otherwise specified.

**Table 6. Electrical Data**

| Electrical Data                     |         | Notes/Conditions                                    |
|-------------------------------------|---------|-----------------------------------------------------|
| Output Power, BTL, 6 $\Omega$ :     | 155 W   | 1 kHz, unclipped (0 dBFS), $T_A = 25^\circ\text{C}$ |
| Output Power, BTL, 6 $\Omega$ :     | 210 W   | 1 kHz, 10% THD+N, $T_A = 25^\circ\text{C}$          |
| Output Power, BTL, 8 $\Omega$ :     | 125 W   | 1 kHz, unclipped (0 dBFS), $T_A = 25^\circ\text{C}$ |
| Output Power, BTL, 8 $\Omega$ :     | 160 W   | 1 kHz, 10% THD+N, $T_A = 25^\circ\text{C}$          |
| Output Power, PBTL, 4 $\Omega$ :    | 240 W   | 1 kHz, unclipped (0 dBFS), $T_A = 25^\circ\text{C}$ |
| Output Power, PBTL, 4 $\Omega$ :    | 315 W   | 1 kHz, 10% THD+N, $T_A = 25^\circ\text{C}$          |
| Maximum Peak Current, BTL:          | >10 A   | 1 kHz burst, 1 $\Omega$ , $R_{OC} = 22\text{ k}$    |
| Maximum Peak Current, PBTL:         | >20 A   | 1 kHz burst, 1 $\Omega$ , $R_{OC} = 22\text{ k}$    |
| Output Stage Efficiency:            | 90%     | 2 x channels, 8 $\Omega$                            |
| Damping Factor BTL:                 | 15      | 1 kHz, relative to 8 $\Omega$ load                  |
| Damping Factor PBTL:                | 15      | 1 kHz, relative to 4 $\Omega$ load                  |
| System Supply Current:              | <270 mA | 1 kHz, -60 dBFS signal, with TI input board         |
| H-Bridge Supply Current:            | <187 mA | 1 kHz, -60 dBFS signal                              |
| Total Board Idle Power Consumption: | 13.4 W  | H-Bridge supply + System supply, -60 dBFS signal    |



**Table 7. Audio Performance**

| Audio Performance         |       |                 | Notes/Conditions                                     |
|---------------------------|-------|-----------------|------------------------------------------------------|
| THD+N, BTL, 6 $\Omega$ :  | 1 W   | <0.02%          | 1 kHz                                                |
| THD+N, BTL, 6 $\Omega$ :  | 10 W  | <0.05%          | 1 kHz                                                |
| THD+N, BTL, 6 $\Omega$ :  | 50 W  | <0.08%          | 1 kHz                                                |
| THD+N, BTL, 6 $\Omega$ :  | 100 W | <0.10%          | 1 kHz                                                |
| THD+N, BTL, 6 $\Omega$ :  | 150 W | <0.13%          | 1 kHz                                                |
| THD+N, BTL, 8 $\Omega$ :  | 1 W   | <0.02%          | 1 kHz                                                |
| THD+N, BTL, 8 $\Omega$ :  | 10 W  | <0.07%          | 1 kHz                                                |
| THD+N, BTL, 8 $\Omega$ :  | 50 W  | <0.06%          | 1 kHz                                                |
| THD+N, BTL, 8 $\Omega$ :  | 100 W | <0.07%          | 1 kHz                                                |
| THD+N, PBTL, 4 $\Omega$ : | 1 W   | <0.009%         | 1 kHz                                                |
| THD+N, PBTL, 4 $\Omega$ : | 10 W  | <0.05%          | 1 kHz                                                |
| THD+N, PBTL, 4 $\Omega$ : | 50 W  | <0.04%          | 1 kHz                                                |
| THD+N, PBTL, 4 $\Omega$ : | 100 W | <0.04%          | 1 kHz                                                |
| THD+N, PBTL, 4 $\Omega$ : | 200 W | <0.12%          | 1 kHz                                                |
| Dynamic Range:            |       | >109 dB         | Ref: rated power, A-weighted, AES17 filter, 4 ch avg |
| Noise Voltage:            |       | <110 $\mu$ Vrms | A-weighted, AES17 filter                             |
| Click/Pop, DC step BTL:   |       | 10 mV           | Mute/Unmute, No signal, 6 $\Omega$                   |
| Click/Pop, DC step PBTL:  |       | 23 mV           | Mute/Unmute, No signal, 4 $\Omega$                   |
| Channel Separation:       |       | >65 dB          | 1 kHz                                                |
| Frequency Response:       |       | +0.8 / 0.0 dB   | 125 W / 8 $\Omega$ , unclipped (0 dBFS)              |

**Table 8. Audio Performance Subwoofer Line Output**

| Audio Performance                            |        |             | Notes/Conditions          |
|----------------------------------------------|--------|-------------|---------------------------|
| Full Scale Output Voltage Swing, 0 dBFS:     |        | 1.275 Vrms  | 1 kHz, 10 k $\Omega$ load |
| Full Scale Output Voltage Swing, 10 % THD+N: |        | 1.5 Vrms    | 1 kHz, 10 k $\Omega$ load |
| THD+N, 10 k $\Omega$ :                       | 1 V    | <0.014%     | 1 kHz                     |
| THD+N, 10 k $\Omega$ :                       | 100 mV | <0.02%      | 1 kHz                     |
| Frequency Response:                          |        | +1, -6 dB   | 20 Hz - 20 kHz            |
| Dynamic Range:                               |        | >96 dB      | 20 Hz - 20 kHz            |
| Noise Voltage:                               |        | <20 $\mu$ V | 20 Hz - 20 kHz            |

**Table 9. Thermal Specifications**

| Thermal Specifications                                  | T <sub>HEATSINK</sub> <sup>(1)</sup> | Notes/Conditions                                            |
|---------------------------------------------------------|--------------------------------------|-------------------------------------------------------------|
| Idle, All Channels Switching                            | 41°C                                 | 1 kHz, 15 min, -60 dBFS signal, T <sub>A</sub> = 25°C 1 kHz |
| 6 x 16 W, 8 $\Omega$ + 1 x 32 W, 4 $\Omega$ (1/8 power) | 63°C                                 | 1 kHz, 1 hour, T <sub>A</sub> = 25°C                        |
| 2 x 125 W, 8 $\Omega$                                   | 73°C                                 | 1 kHz, 5 min, T <sub>A</sub> = 25°C                         |

<sup>(1)</sup> Measured on surface of heatsink.

**Table 10. Physical Specifications**

| Physical Specification |                | Notes/Conditions                         |
|------------------------|----------------|------------------------------------------|
| PCB Dimensions:        | 160 x 172 x 55 | Width x Length x Height (mm)             |
| Total Weight:          | 640 gr.        | Components + PCB + Heat-sink + Mechanics |

#### 4.1 THD+N vs Power (BTL - 6Ω)

Gain: 2.5 dB set in TAS5518

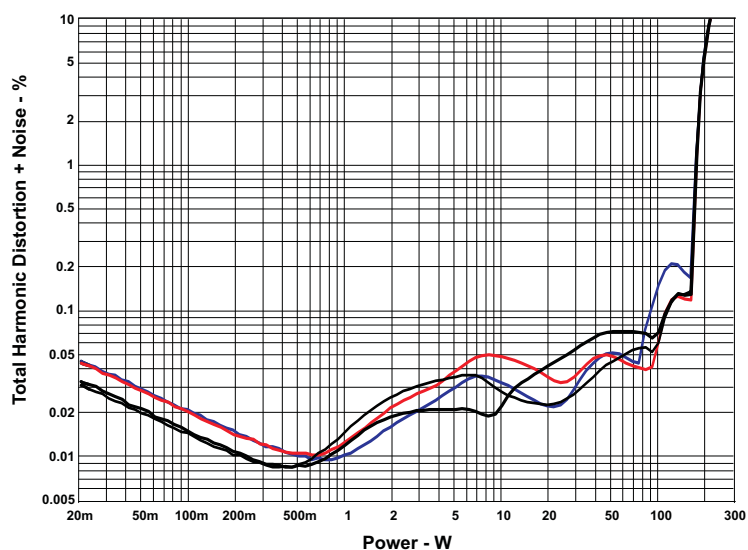


Figure 4. THD+N vs Power (BTL - 6Ω)

#### 4.2 THD+N vs Power (BTL - 8Ω)

Gain: 2.5 dB set in TAS5518

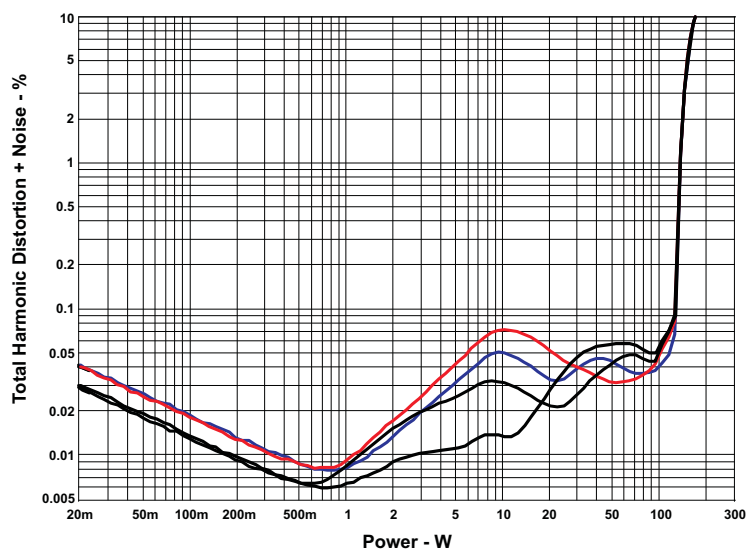


Figure 5. THD+N vs Power (BTL - 8Ω)

### 4.3 THD+N vs Power (PBTL - 4Ω)

Gain: 2.5 dB set in TAS5518

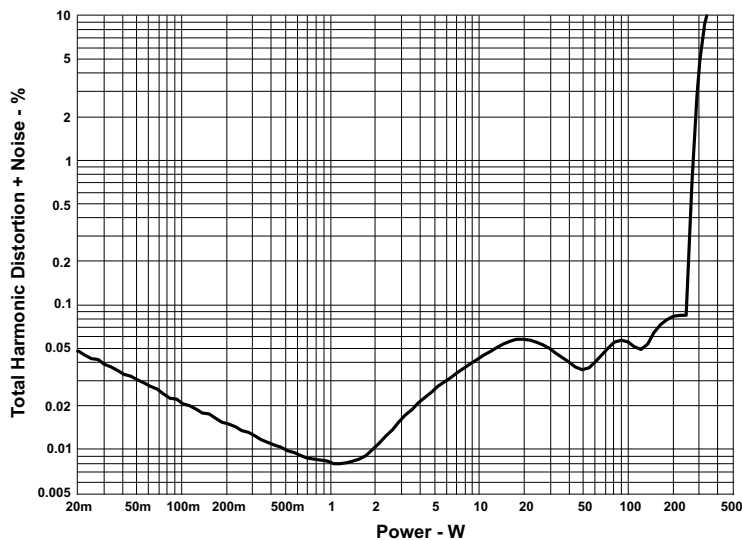


Figure 6. THD+N vs Power (PBTL - 4Ω)

### 4.4 THD+N vs Frequency (BTL - 6Ω)

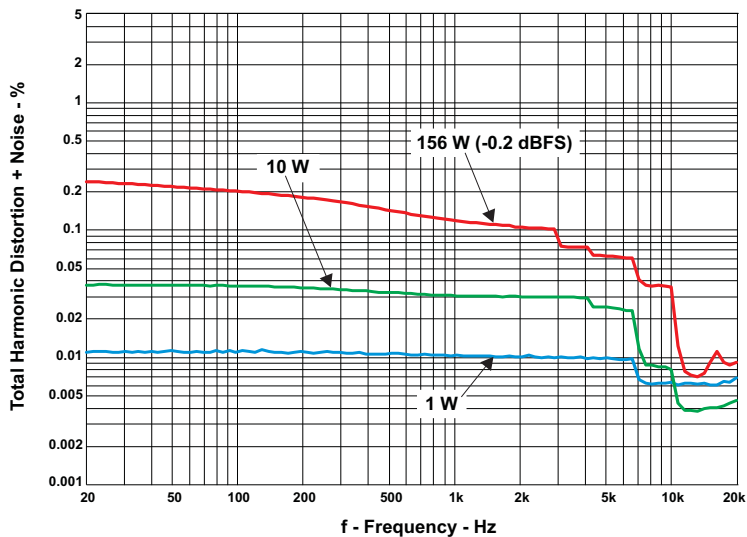


Figure 7. THD+N vs Frequency (BTL - 6Ω)

#### 4.5 THD+N vs Frequency (BTL - 8Ω)

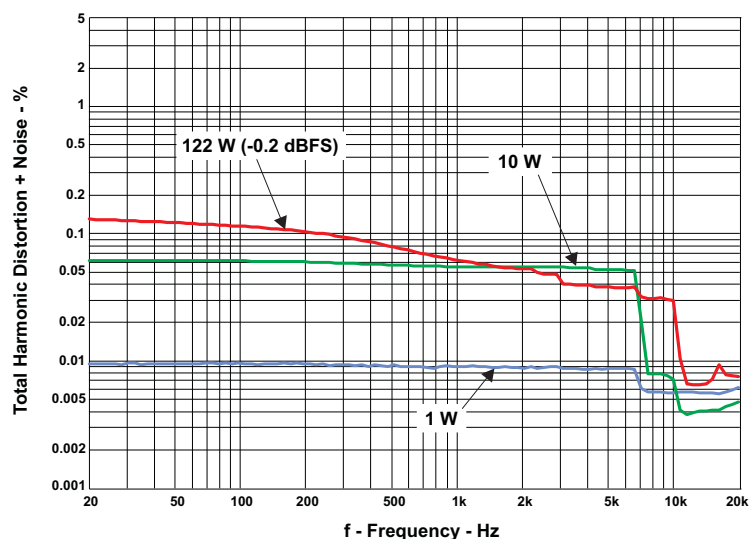


Figure 8. THD+N vs Frequency (BTL - 8Ω)

#### 4.6 THD+N vs Frequency (PBTL - 4Ω)

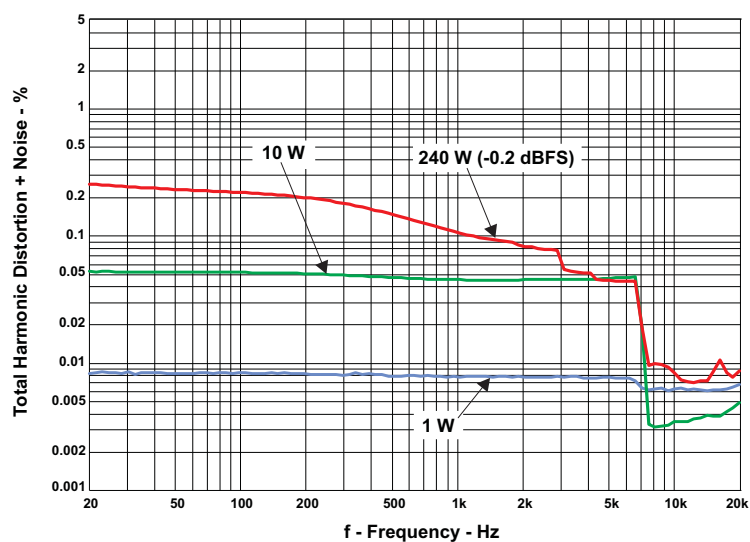


Figure 9. THD+N vs Frequency (PBTL - 4Ω)

#### 4.7 FFT Spectrum With -60 dBFS Tone (BTL)

Reference voltage is 31.3 V. FFT size 16 k.

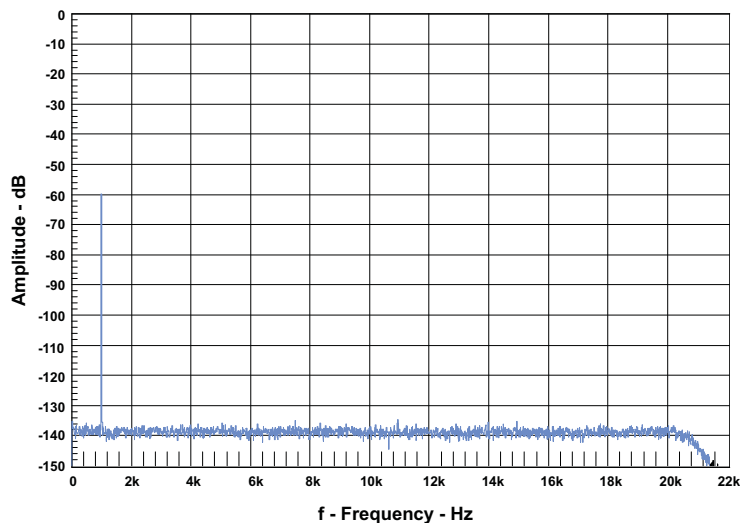


Figure 10. FFT Spectrum With -60 dBFS Tone (BTL)

#### 4.8 FFT Spectrum With -60 dBFS Tone (PBTL)

Reference voltage is 31.7 V. FFT size 16 k.

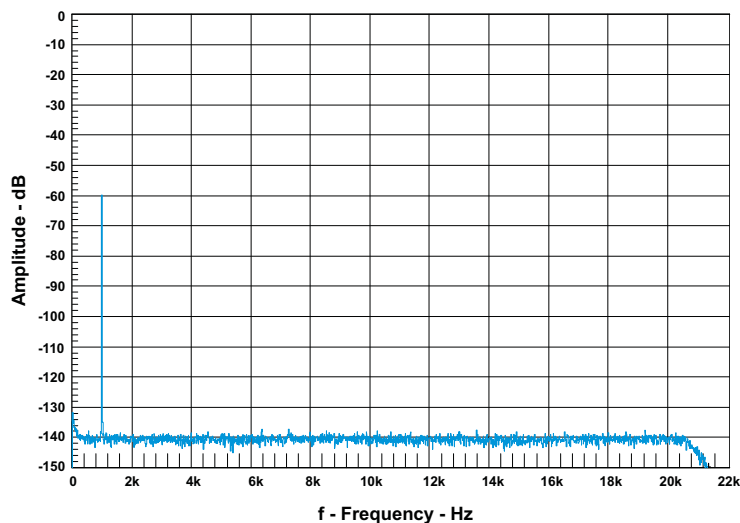


Figure 11. FFT Spectrum With -60 dBFS Tone (PBTL)

#### 4.9 Idle Noise FFT Spectrum (BTL)

Automute disabled — Register x04h set to x60h. Reference voltage is 31.3 V. FFT size 16 k.

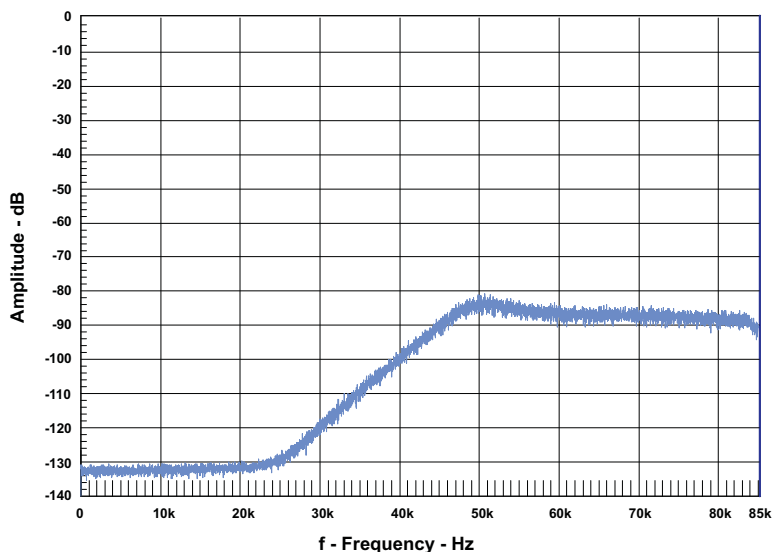


Figure 12. Idle Noise FFT Spectrum (BTL)

#### 4.10 Idle Noise FFT Spectrum (PBTL)

Automute disabled — Register x04h set to x60h. Reference voltage is 31.7 V. FFT size 16 k.

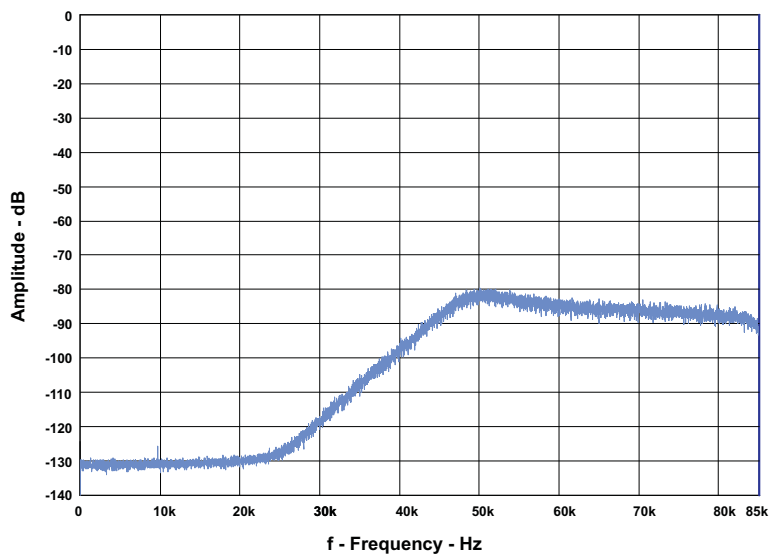


Figure 13. Idle Noise FFT Spectrum (PBTL)

### 4.11 Channel Separation

Channel separation is tested for two channels in different package, channel 1 and channel 2. 8  $\Omega$  loads are used for both channels. Channel 1 input signal is 0 dBFS, channel 2 muted. Reference voltage is 31.9 Vrms

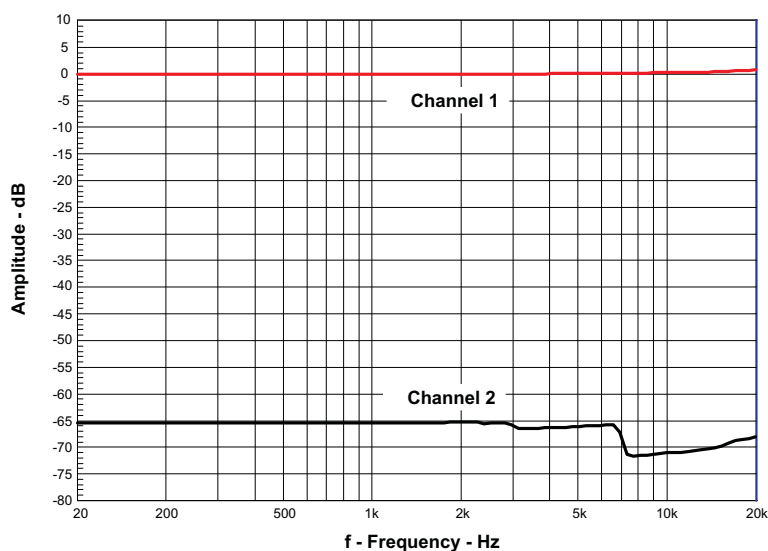


Figure 14. Channel Separation

### 4.12 Frequency Response (BTL)

Measurement bandwidth filter 80 kHz.

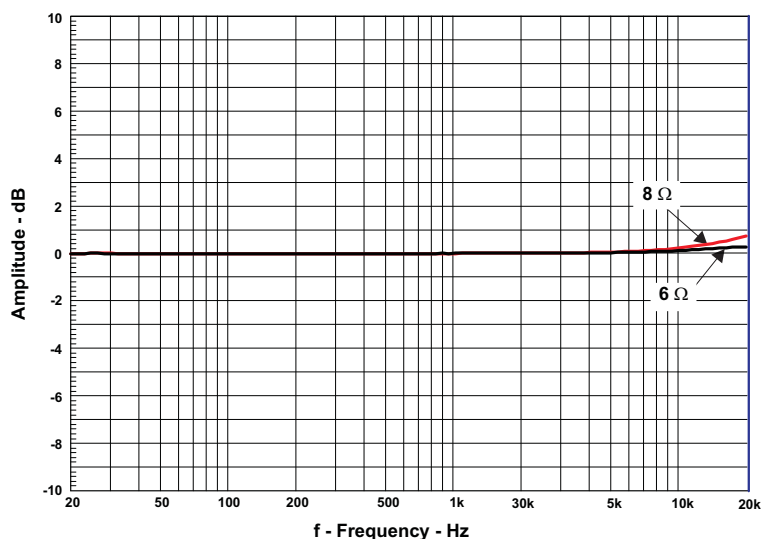


Figure 15. Frequency Response (BTL)



### 4.13 Frequency Response (PBTl)

Measurement bandwidth filter 80 kHz.

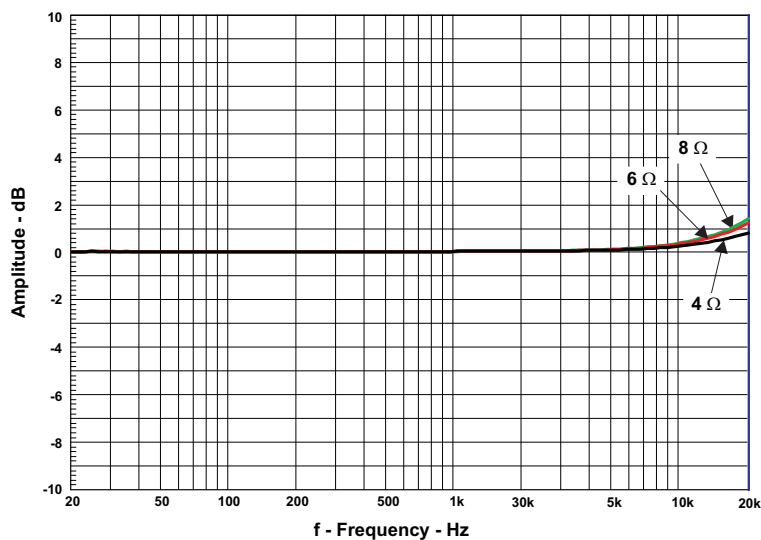


Figure 16. Frequency Response (PBTl)

### 4.14 High Current Protection (BTL)

Input 1 kHz bursted signal, Load 1 Ω.

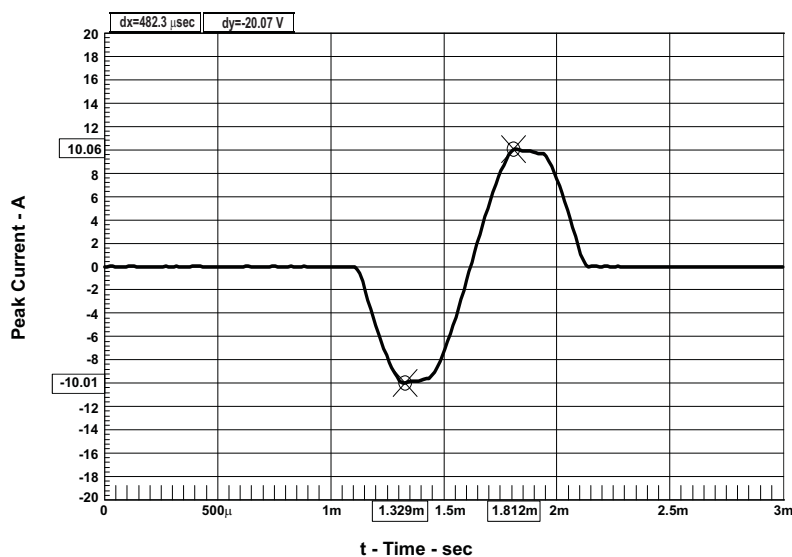


Figure 17. High Current Protection (BTL)

#### 4.15 High Current Protection (PBTL)

Input 1 kHz bursted signal, Load 1  $\Omega$ .

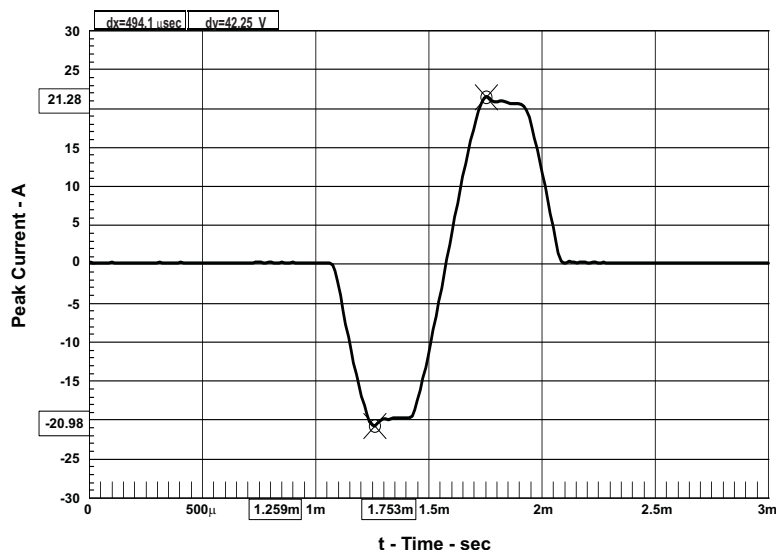


Figure 18. High Current Protection (PBTL)

#### 4.16 Pop/Click (BTL)

No input signal applied. The measurement results are presented both in time domain and in frequency domain.

Test with automute disabled — Register x04h set to x60h. No input signal applied. Load 6  $\Omega$ .

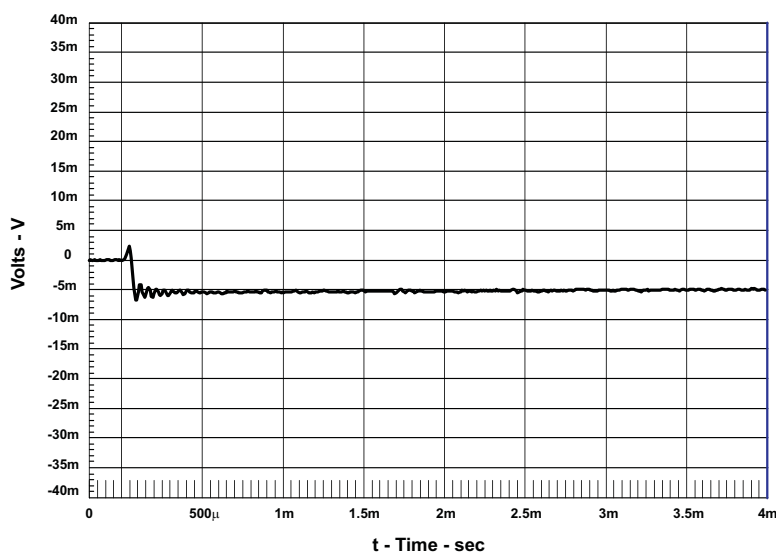


Figure 19. Pop/Click (BTL)

#### 4.17 Pop/Click (PBTL)

No input signal applied. The measurement results are presented both in time domain and in frequency domain.

Test with automute disabled — Register x04h set to x60h. No input signal applied. Load 4  $\Omega$ .

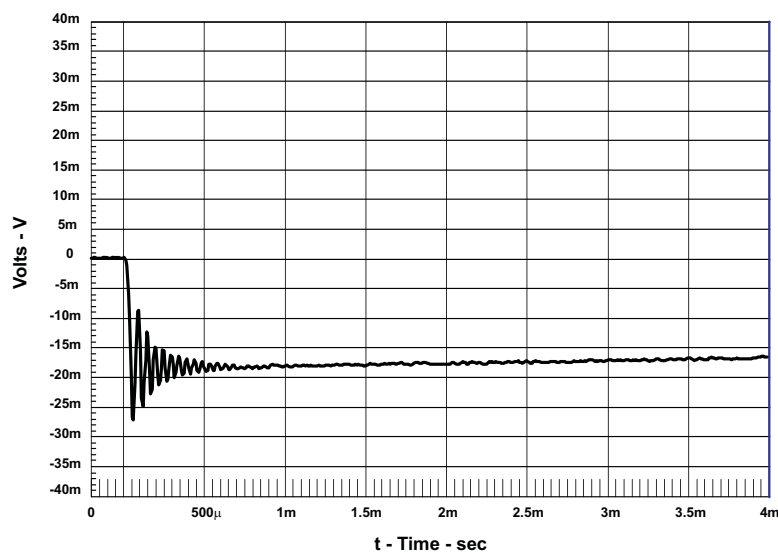


Figure 20. Pop/Click (PBTL)

#### 4.18 Output Stage Efficiency

Efficiency is tested with 2 channels loaded 8  $\Omega$ . The board has been preheated for 1 hour at 1/8 output power.

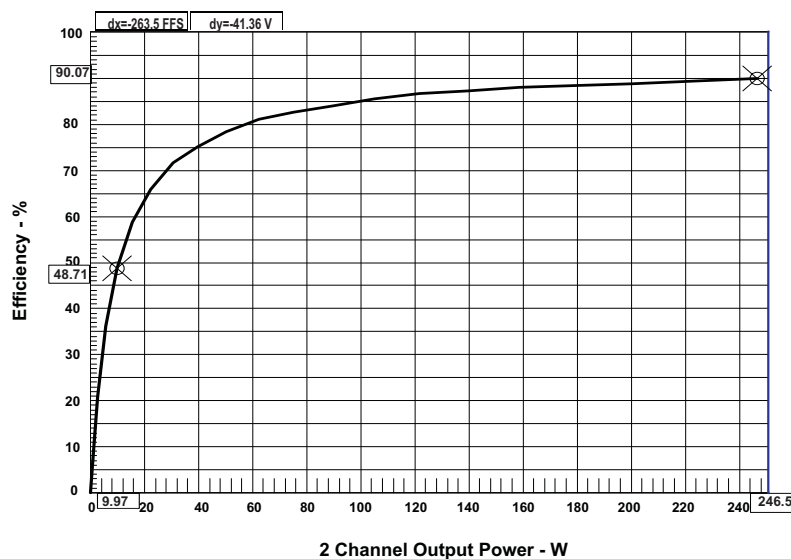


Figure 21. Output Stage Efficiency

#### 4.19 Subwoofer Line Out THD Vs. Output Voltage

Gain: 2.5 dB set in TAS5518

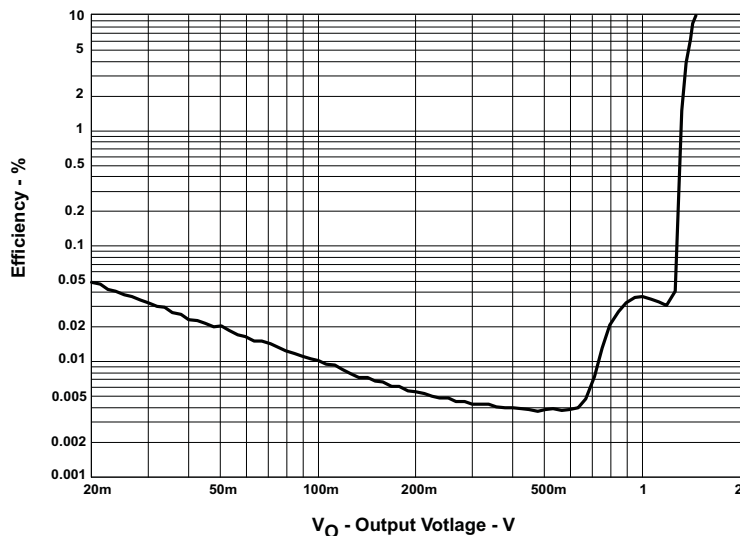


Figure 22. Subwoofer Line Out THD Vs. Output Voltage

#### 4.20 Subwoofer Line Out THD+N vs. Frequency

Load 10 k $\Omega$ .

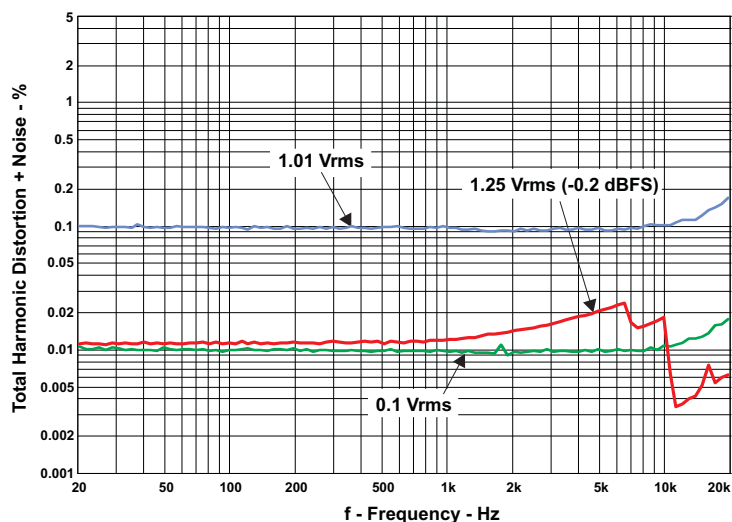
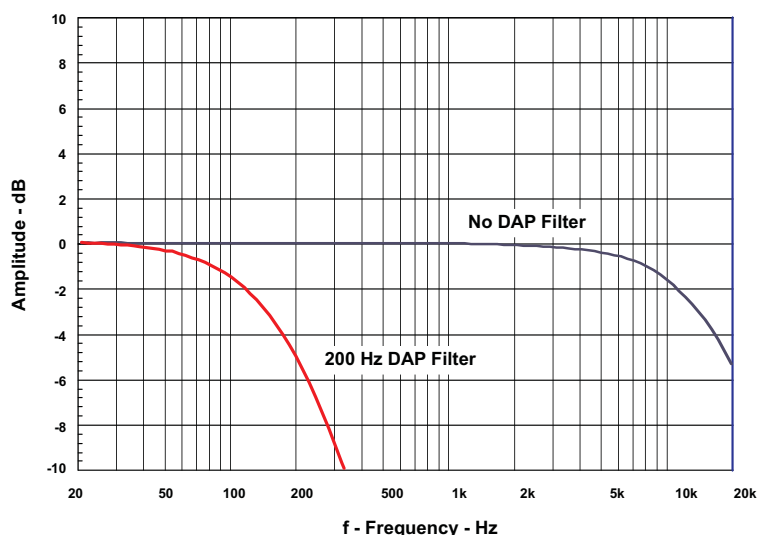


Figure 23. Subwoofer Line Out THD+N vs. Frequency

## 4.21 Subwoofer Line Out Frequency Response

Measurement bandwidth filter 80 kHz. Load 10 kΩ.



**Figure 24. Subwoofer Line Out Frequency Response**

## 5 Related Documentation from Texas Instruments

Table 11 contains a list of data manuals that have detailed descriptions of the integrated circuits used in the design of the TAS5162DKD6EVM. The data manuals can be obtained at the <http://www.ti.com>.

**Table 11. Related Documentation from Texas Instruments**

| Part Number | Literature Number       |
|-------------|-------------------------|
| TAS5518     | <a href="#">SLES115</a> |
| TAS5162     | <a href="#">SLES194</a> |
| TLV272      | <a href="#">SLOS351</a> |
| TPS3825-33  | <a href="#">SLVS165</a> |
| TPS5430     | <a href="#">SLVS632</a> |
| TPS76733    | <a href="#">SLVS208</a> |
| TPS79133    | <a href="#">SLVS325</a> |

### 5.1 Additional Documentation

1. PC Configuration Tool for TAS5518 (TAS5518 GUI ver. 4.0 or later)
2. System Design Considerations for True Digital Audio Power Amplifiers ([SLAA117](#))
3. Digital Audio Measurements ([SLAA114](#))
4. PSRR for PurePath Digital Audio Amplifiers ([SLEA049](#))
5. Power Rating in Audio Amplifier ([SLEA047](#))
6. PurePath Digital AM Interference Avoidance ([SLEA040](#))
7. Click & Pop Measurements Technique ([SLEA044](#))
8. Power Supply Recommendations for DVD-Receivers ([SLEA027](#))
9. Implementation of Power Supply Volume Control ([SLEA038](#))

## Appendix A

### A.1 Design Documents

**Table A-1. Design Documents**

| Appendix | Document                         | Version      | Pages   |
|----------|----------------------------------|--------------|---------|
| A.1      | TAS5162DKD6EVM Schematic         | Version 2.00 | 8 pages |
| A.2      | TAS5162DKD6EVM Parts List        | Version 2.00 | 2 pages |
| A.3      | TAS5162DKD6EVM PCB Specification | Version 1.00 | 1 pages |
| A.4      | TAS5162DKD6EVM PCB Layers        | Version 1.00 | 4 pages |
| A.5      | Heat Sink Drawing                | Version 1.00 | 1 pages |



Board Name: **TAS5162DKD6EVM**  
Type: Mass Market Evaluation Module  
File Name: A830-SCH-001.DSN  
Version: 2.00  
Date: 15.June 2007  
Engineer: Jonas L. Holm

Audio Configuration: 3-6 Channel PurePath Digital Amplifier Design with Subwoofer line out  
1 x TAS5518PAG, 3 x TAS5162DKD  
1 x Subwoofer Line Out (TLV272)

Interfaces: J30: 34 pin IDC Header for Control, I2C and +5V  
J60: 16 pin IDC Header for I2S Audio  
J101-J108: 2 pin 3.96mm Headers for Speakers  
J600: RCA Connector for Subwoofer Line Out  
J900: 4 pin 3.96mm Header for H-Bridge Power Supply (Optional)  
J901: 4 pin 3.96mm Header for H-Bridge and System Power Supply  
J902: 5 pin 2.54mm Header for PSU Control

Setup: 8 Ohm (BTL) and 4 Ohm (PBTl) Speaker Loads  
+50V H-Bridge and +15V System Power Supplies

Performance: 125 W / 8 Ohm (BTL) unclipped, or 210 W / 6 Ohm (BTL) 10% THD+N  
110 dB Dynamic Range

#### Page

- 1/8: Front Page and Schematic Disclaimer
- 2/8: Overview - Modulator, Input/Output and Headphone Connectors
- 3/8: Power Stage 1
- 4/8: Power Stage 2
- 5/8: Power Stage 3
- 6/8: Subwoofer Line Out
- 7/8: Power Supplies
- 8/8: Mechanics

Copyright 2007 Texas Instruments, Inc - All rights reserved - The TI and PurePath Digital logos are trademarks of Texas Instruments.

#### NOTE1

#### SCHEMATIC DISCLAIMER

The schematic information and materials ("Materials") provided here are provided by Texas Instruments Incorporated ("TI") as a service to its customers and/or suppliers, and may be used for informational purposes only, and only subject to the following terms. By downloading or viewing these Materials, you are signifying your assent to these terms.


- 1.) These evaluation schematics are intended for use for ENGINEERING DEVELOPMENT AND EVALUATION PURPOSES ONLY and are not considered by Texas Instruments to be fit as a basis for establishing production products or systems. This information may be incomplete in several respects, including but not limited to information relating to required design, marketing, and/or manufacturing-related protective considerations and product safety measures typically found in the end-product incorporating the goods.
- 2.) Accordingly, neither TI nor its suppliers warrant the accuracy or completeness of the information, text, graphics, links or other items contained within the Materials. TI may make changes to the Materials, or to the products described therein, at any time without notice. TI makes no commitment to update the Materials.
- 3.) TI assumes no liability for applications assistance, customer product design, software performance, or services that may be described or referenced in the Materials. The user assumes all responsibility and liability for proper and safe design and handling of goods. Accordingly, the user indemnifies TI from all claims arising from its use of the Materials.
- 4.) TI currently deals with various customers for products, and therefore our arrangement with the user will not be exclusive. TI makes no representations regarding the commercial availability of non-TI components that may be referenced in the Materials.
- 5.) No license is granted under any patent right or other intellectual property right of TI covering or relating to any combination, machine, or process in which such TI products or services might be or are used. Except as expressly provided herein, TI and its suppliers do not grant any express or implied right to you under any patents, copyrights, trademarks, or trade secret information.
- 6.) Performance tests and ratings, to the extent referenced in the Materials, are measured using specific computer systems and/or components and reflect the approximate performance of TI products as measured by those tests. Any difference in system hardware or software design or configuration may affect actual performance. Buyers should consult other sources of information to evaluate the performance of systems or components they are considering purchasing.
- 7.) Resale of TI's products or services with statements different from or beyond the parameters stated by TI for that product or service in official TI data books or data sheets voids all express and any implied warranties for the associated TI product or service, and is an unfair and deceptive business practice, and TI is not responsible for any such use.
- 8.) The Materials are copyrighted and any unauthorized use may violate copyright, trademark, and other laws. You may only download one copy for your internal use only, unless you are specifically licensed to do otherwise by TI in writing. This is a license, not a transfer of title, and is subject to the following restrictions: You may not: (a) modify the Materials (including any associated warranties, conditions, limitations or notices) or use them for any commercial purpose, or any public display, performance, sale or rental; (b) decompile, reverse engineer, or disassemble software Materials except and only to the extent permitted by applicable law; (c) remove any copyright or other proprietary notices from the Materials; (d) transfer the Materials to another person. You agree to prevent any unauthorized copying of the Materials. TI may terminate this license at any time if you are in breach of the terms of this Agreement. Upon termination, you will immediately destroy the Materials.
- 9.) THE MATERIALS ARE PROVIDED "AS IS" WITHOUT ANY EXPRESS OR IMPLIED WARRANTY OF ANY KIND INCLUDING WARRANTIES OF MERCHANTABILITY, NONINFRINGEMENT OF INTELLECTUAL PROPERTY, OR FITNESS FOR ANY PARTICULAR PURPOSE. IN NO EVENT SHALL TI OR ITS SUPPLIERS BE LIABLE FOR ANY DAMAGES WHATSOEVER (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, BUSINESS INTERRUPTION, LOSS OF INFORMATION) ARISING OUT OF THE USE OF OR INABILITY TO USE THE MATERIALS, EVEN IF TI HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Not Used







## POWER OUTPUT STAGE BTL

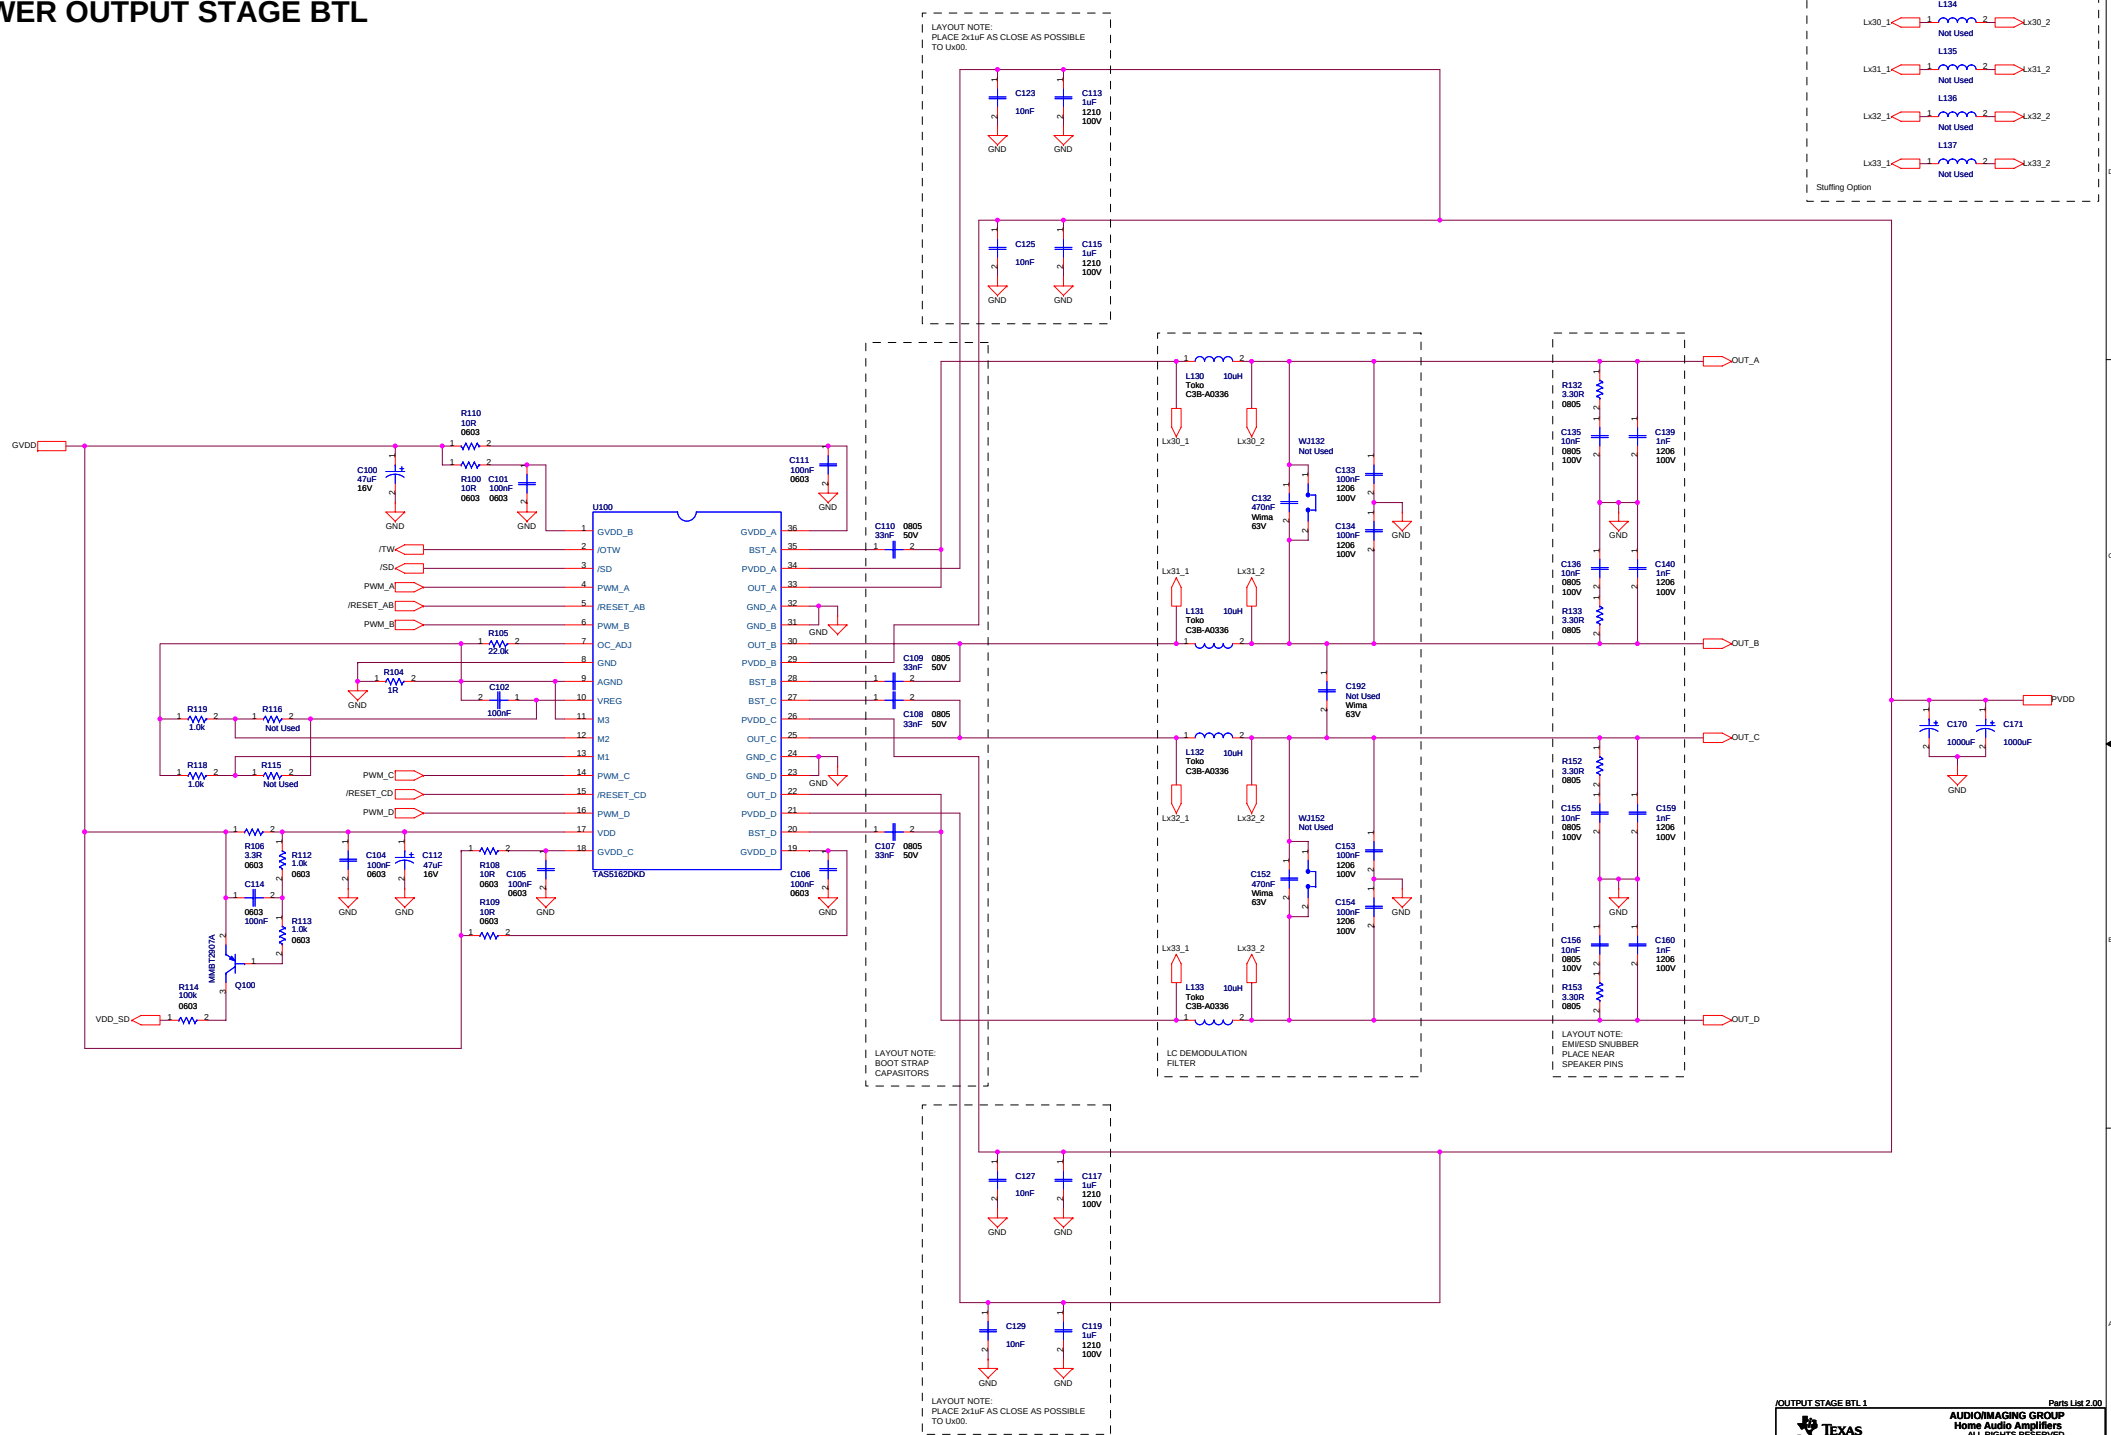

## POWER OUTPUT STAGE BTL

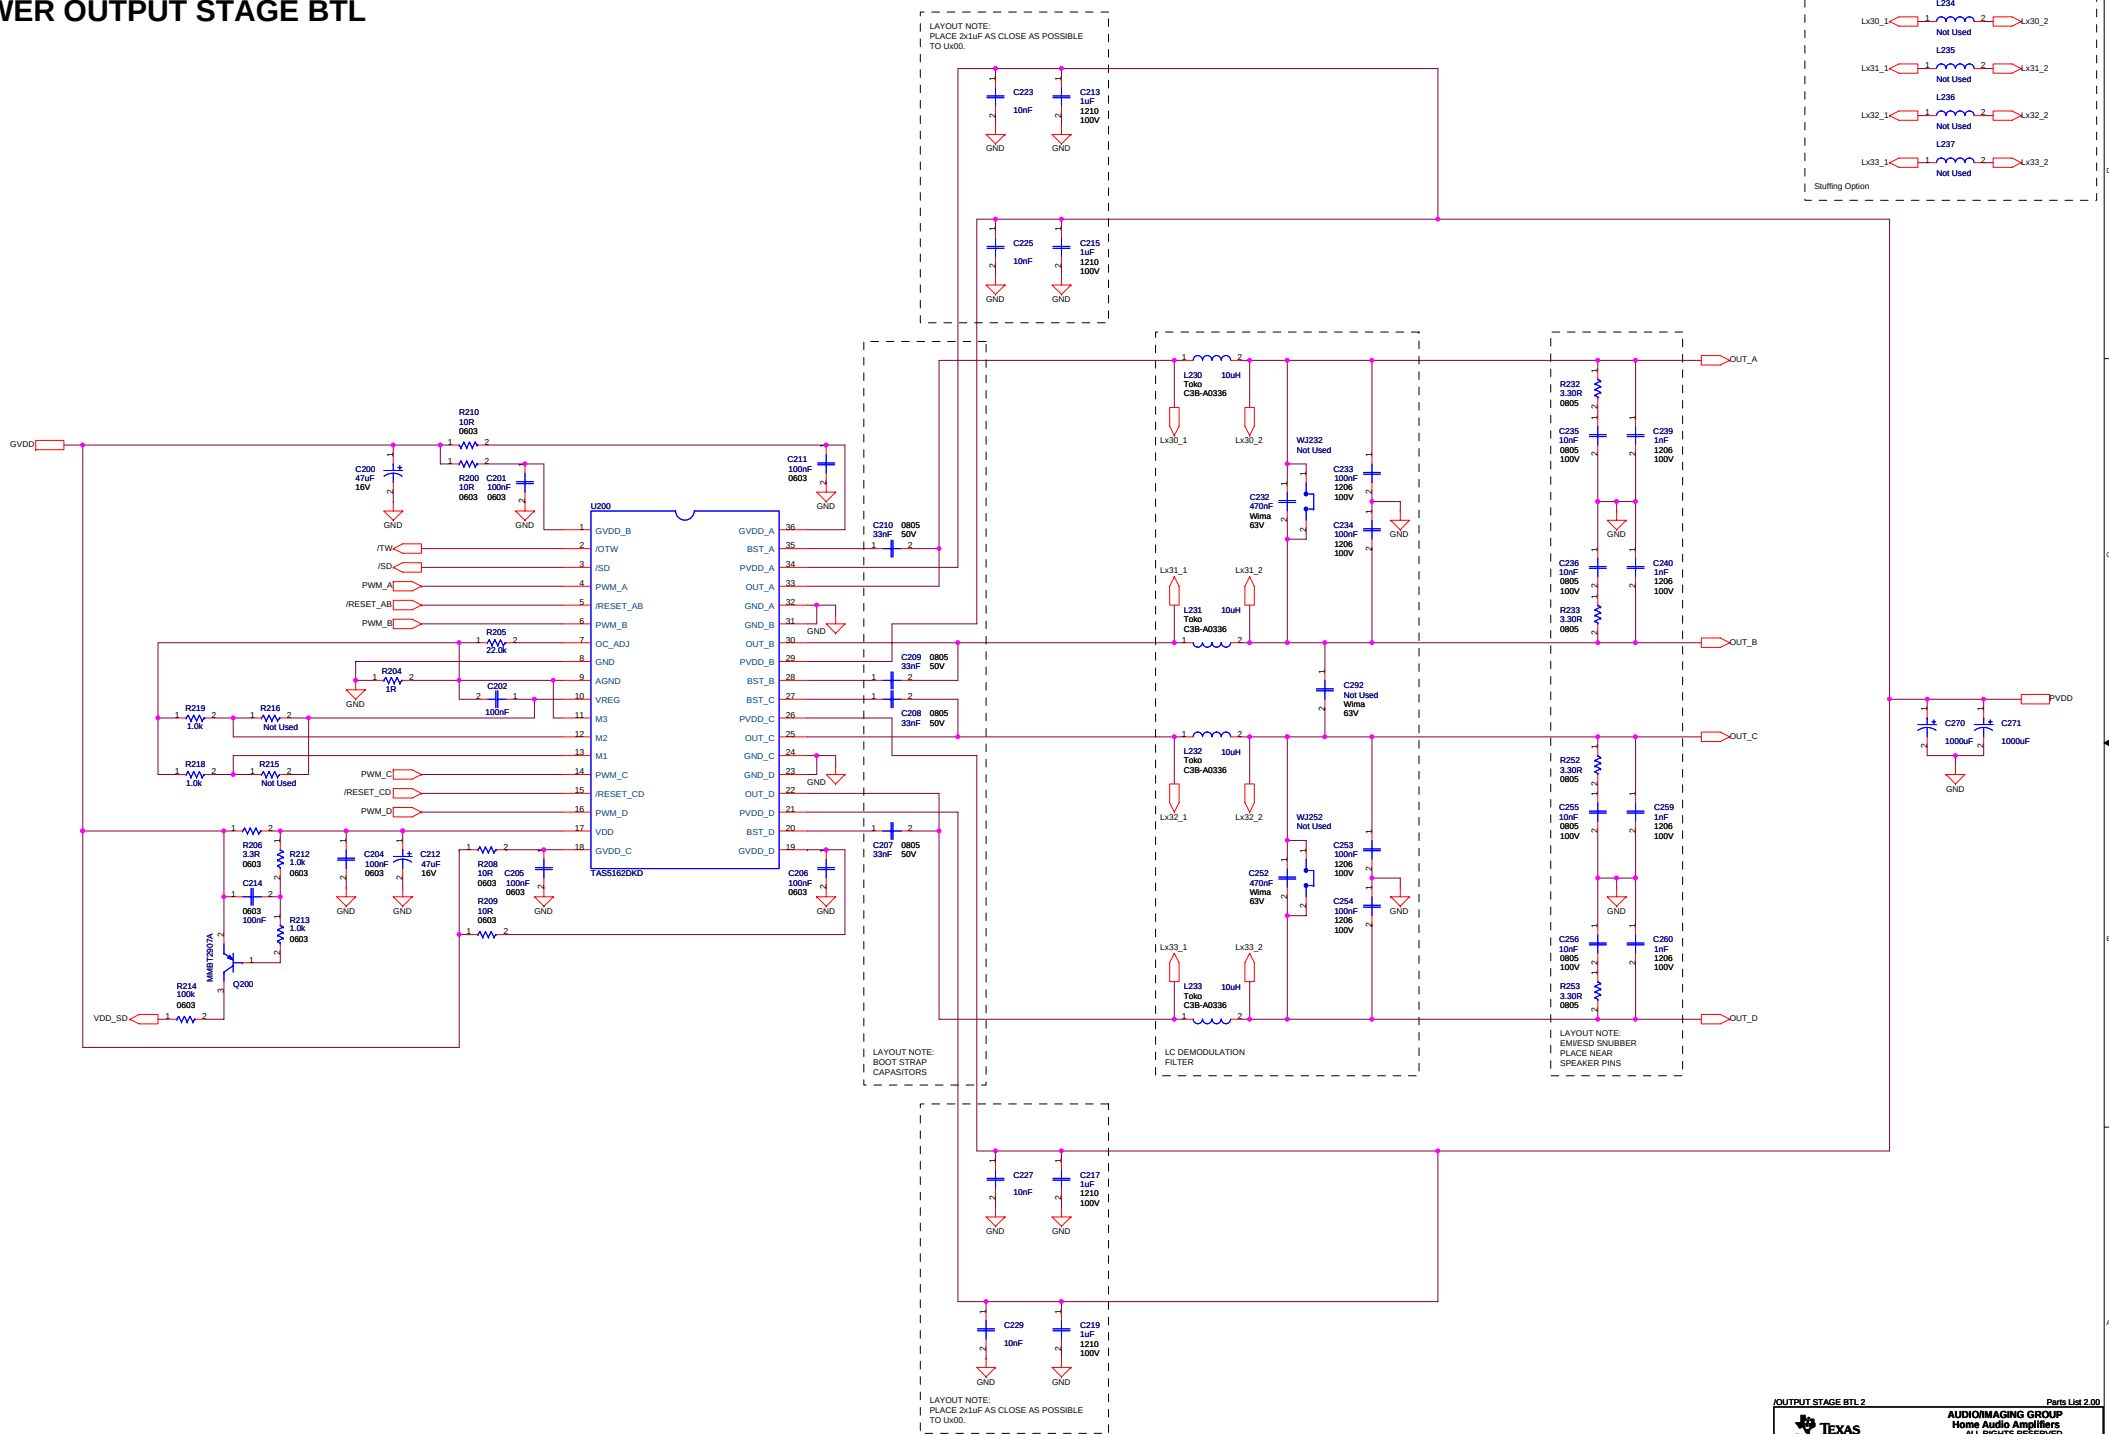


POWER OUTPUT STAGE PBTL

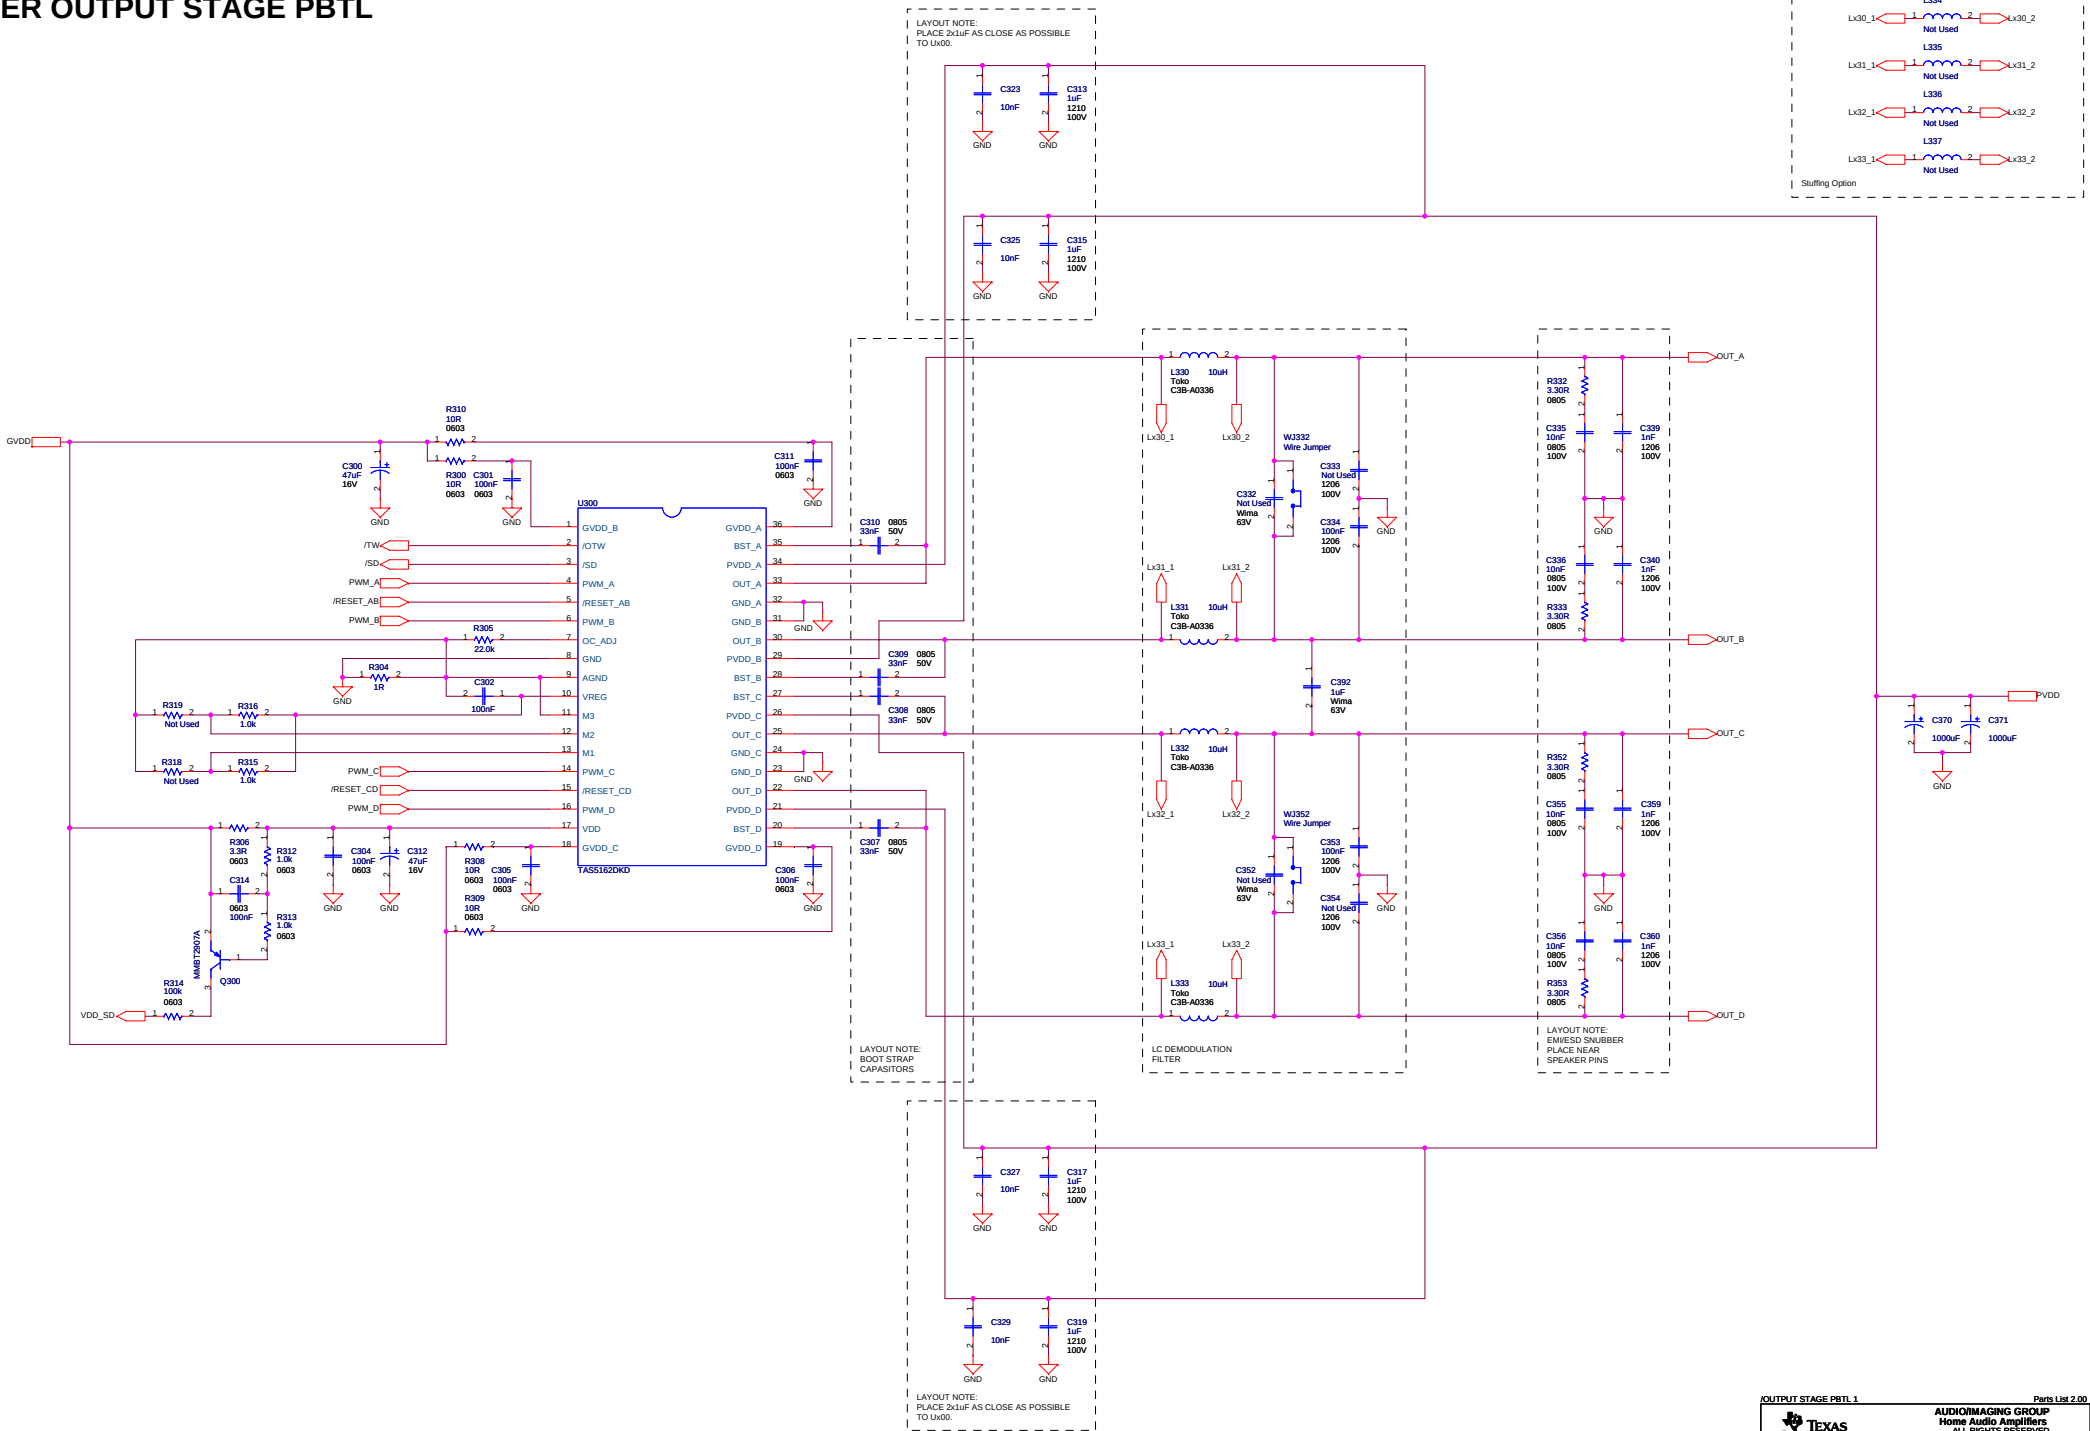


|                     |                      |                                                                                                      |               |
|---------------------|----------------------|------------------------------------------------------------------------------------------------------|---------------|
| OUTPUT STAGE PBTL 1 |                      | Parts List 2.00                                                                                      |               |
|                     |                      | AUDIOIMAGING GROUP<br>Home Audio Amplifiers<br>ALL RIGHTS RESERVED<br>TEXAS INSTRUMENTS INCORPORATED |               |
| Project:            | TASS162DDVD          | Rev:                                                                                                 | 2.00          |
| Page Title:         | PAGE TITLE           | Size:                                                                                                | A2            |
| File Name:          | A830-SC4-003.DSN     | Engineer:                                                                                            | Jonas L. Helm |
| Date:               | Friday, May 25, 2007 | Page:                                                                                                | 5 of 8        |






SUBWOOFER LINE OUT

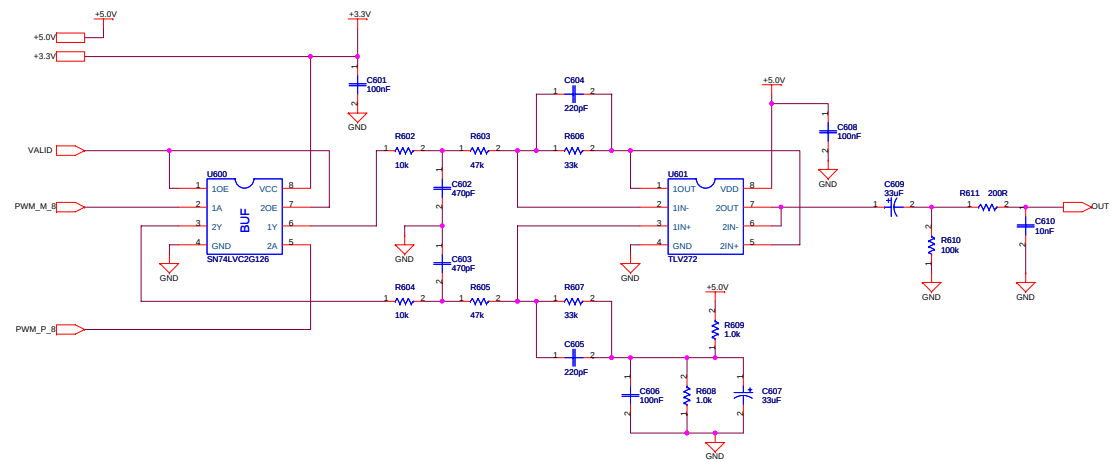

## POWER SUPPLIES

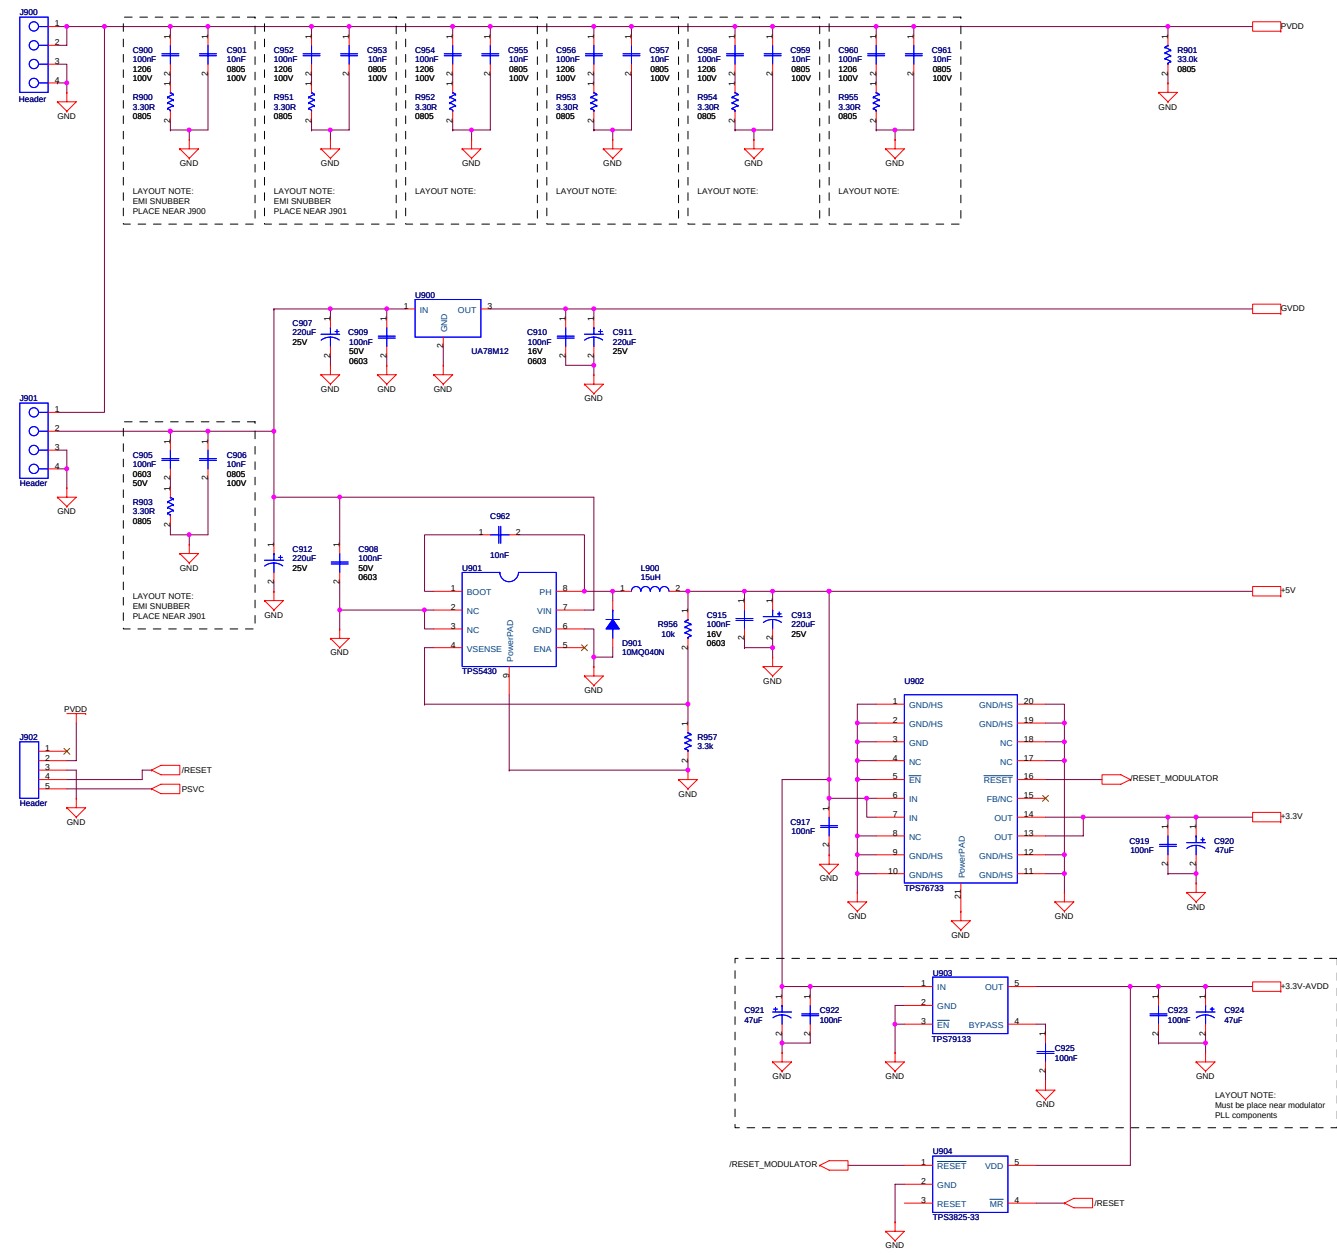

MECHANICS



# TAS5162DKD6EVM Partslist (2.00)



| Qty | Part Reference                                                                                                                                                                                                 | Description                                                                               | Manufacture       | First Mfr P/N                 |
|-----|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------|-------------------|-------------------------------|
| 1   | R901                                                                                                                                                                                                           | 33.0k / 125mW / 1% / 0805 Thick Film Resistor                                             | Yageo             | RC0805FR-0733KL               |
| 19  | R132 R133 R152 R153 R232 R233 R252 R253 R332 R333 R352 R353 R900 R903 R951 R952 R953 R954 R955                                                                                                                 | 3.30R / 125mW / 1% / 0805 Thick Film Resistor                                             | Yageo             | RC0805FR-0733R3L              |
| 21  | R50 R51 R52 R53 R54 R57 R58 R112 R113 R118 R119 R212 R213 R218 R219 R312 R313 R315 R316 R608 R609                                                                                                              | 1.0k / 100mW / 5% / 0603 Thick Film Resistor                                              | Yageo             | RC0603JR-071KL                |
| 20  | R40 R41 R42 R43 R44 R45 R46 R47 R67 R68 R69 R70 R71 R72 R73 R81 R82 R602 R604 R956                                                                                                                             | 10k / 100mW / 5% / 0603 Thick Film Resistor                                               | Yageo             | RC0603JR-0710KL               |
| 4   | R114 R214 R314 R610                                                                                                                                                                                            | 100k / 100mW / 5% / 0603 Thick Film Resistor                                              | Yageo             | RC0603JR-07100KL              |
| 1   | R18                                                                                                                                                                                                            | 1M / 100mW / 5% / 0603 Thick Film Resistor                                                | Yageo             | RC0603JR-071ML                |
| 5   | R17 R21 R104 R204 R304                                                                                                                                                                                         | 1R / 100mW / 5% / 0603 Thick Film Resistor                                                | Yageo             | RC0603JR-071RL                |
| 12  | R100 R108 R109 R110 R200 R208 R209 R210 R300 R308 R309 R310                                                                                                                                                    | 10R / 100mW / 5% / 0603 Thick Film Resistor                                               | Yageo             | RC0603JR-0710RL               |
| 5   | R10 R11 R55 R56 R611                                                                                                                                                                                           | 200R / 100mW / 5% / 0603 Thick Film Resistor                                              | Yageo             | RC0603JR-07200RL              |
| 3   | R105 R205 R305                                                                                                                                                                                                 | 22.0k / 100mW / 1% / 0603 Thick Film Resistor                                             | Yageo             | RC0603FR-0722KL               |
| 1   | R957                                                                                                                                                                                                           | 3.3k / 100mW / 5% / 0603 Thick Film Resistor                                              | Yageo             | RC0603JR-073K3L               |
| 2   | R606 R607                                                                                                                                                                                                      | 33k / 100mW / 5% / 0603 Thick Film Resistor                                               | Yageo             | RC0603JR-0733KL               |
| 3   | R106 R206 R306                                                                                                                                                                                                 | 3.3R / 100mW / 5% / 0603 Thick Film Resistor                                              | Yageo             | RC0603JR-073R3L               |
| 2   | R603 R605                                                                                                                                                                                                      | 47k / 100mW / 5% / 0603 Thick Film Resistor                                               | Yageo             | RC0603JR-0747KL               |
| 3   | R15 R16 R22                                                                                                                                                                                                    | 4.7R / 100mW / 5% / 0603 Thick Film Resistor                                              | Yageo             | RC0603JR-074R7L               |
| 20  | R24 R26 R27 R28 R29 R30 R31 R32 R33 R36 R39 R48 R60 R61 R62 R63 R64 R65 R66 R80                                                                                                                                | 47R / 100mW / 5% / 0603 Thick Film Resistor                                               | Yageo             | RC0603JR-0747RL               |
| 31  | C123 C125 C127 C129 C135 C136 C155 C156 C223 C225 C227 C229 C235 C236 C255 C256 C323 C325 C327 C329 C335 C336 C355 C356 C901 C906 C953 C955 C957 C959 C961                                                     | Ceramic 10nF / 100V / 20% X7R 0805 Capacitor                                              | BC Components     | 0805B103M101NT                |
| 12  | C107 C108 C109 C110 C207 C208 C209 C210 C307 C308 C309 C310                                                                                                                                                    | Ceramic 33nF / 50V / 20% X7R 0805 Capacitor                                               | BC Components     | 0805B333M500NT                |
| 12  | C139 C140 C159 C160 C239 C240 C259 C260 C339 C340 C359 C360                                                                                                                                                    | Ceramic 1nF / 100V / 10% NP0 1206 Capacitor                                               | BC Components     | 1206N102K101NT                |
| 16  | C133 C134 C153 C154 C233 C234 C253 C254 C334 C353 C900 C952 C954 C956 C958 C960                                                                                                                                | Ceramic 100nF / 100V / 20% X7R 1206 Capacitor                                             | BC Components     | 1206B104M101NT                |
| 12  | C113 C115 C117 C119 C213 C215 C217 C219 C313 C315 C317 C319                                                                                                                                                    | Ceramic 1uF / 100V / 10% X7R 1210 Capacitor                                               | Murata            | GRM32ER72A105KA01L            |
| 4   | C10 C13 C610 C962                                                                                                                                                                                              | Ceramic 10nF / 50V / 20% X7R 0603 Capacitor                                               | Vishay            | VJ0603Y103MXA                 |
| 44  | C11 C12 C14 C15 C17 C21 C22 C25 C27 C28 C30 C80 C81 C101 C102 C104 C105 C106 C111 C114 C201 C202 C204 C205 C206 C211 C214 C301 C302 C304 C305 C306 C311 C314 C601 C606 C608 C910 C915 C917 C919 C922 C923 C925 | Ceramic 100nF / 16V / 20% X7R 0603 Capacitor                                              | Vishay            | VJ0603Y104MXJ                 |
| 3   | C905 C908 C909                                                                                                                                                                                                 | Ceramic 100nF / 50V / 20% X7R 0603 Capacitor                                              | Vishay            | VJ0603Y104MXA                 |
| 1   | C19                                                                                                                                                                                                            | Ceramic 1nF / 50V / 10% NP0 0603 Capacitor                                                | BC Components     | 0603N102K500NT                |
| 2   | C23 C24                                                                                                                                                                                                        | Ceramic 15pF / 50V / 10% NP0 0603 Capacitor                                               | BC Components     | 0603N150K500NT                |
| 2   | C604 C605                                                                                                                                                                                                      | Ceramic 220pF / 50V / 10% NP0 0603 Capacitor                                              | BC Components     | 0603N221K500NT                |
| 2   | C602 C603                                                                                                                                                                                                      | Ceramic 470pF / 50V / 10% NP0 0603 Capacitor                                              | BC Components     | 0603N471K500NT                |
| 6   | C170 C171 C270 C271 C370 C371                                                                                                                                                                                  | Electrolytic 1000uF / 63V / 20% Aluminium 7.5mm ø16mm FC Series - Low Impedance Capacitor | Panasonic         | EEUFC1J102                    |
| 4   | C907 C911 C912 C913                                                                                                                                                                                            | Electrolytic 220uF / 25V / 20% Aluminium 3.5mm ø8mm FC Series - Low Impedance Capacitor   | Panasonic         | EEUFC1E221                    |
| 2   | C607 C609                                                                                                                                                                                                      | Electrolytic 33uF / 16V / 20% Aluminium 2mm ø5mm Low ESR (0.26R) Capacitor                | Rubycon           | 16ZA33M5X7                    |
| 13  | C16 C20 C26 C29 C100 C112 C200 C212 C300 C312 C920 C921 C924                                                                                                                                                   | Electrolytic 47uF / 16V / 20% Aluminium 2mm ø5mm FC Series - Low Impedance Capacitor      | Panasonic         | EEUFC1C470                    |
| 1   | C392                                                                                                                                                                                                           | Metal Film 1uF / 63V / 10% Polyester 7.5mm (W:6mm L:10mm) Capacitor                       | Wima              | MKS 4 1uF/10%/63Vdc PCM7.5    |
| 4   | C132 C152 C232 C252                                                                                                                                                                                            | Metal Film 470nF / 63V / 10% Polyester 7.5mm (W:4.5mm L:10mm) Capacitor                   | Wima              | MKS 4 0.47uF/10%/63Vdc PCM7.5 |
| 12  | L130 L131 L132 L133 L230 L231 L232 L233 L330 L331 L332 L333                                                                                                                                                    | 10uH / Ferrite Inductor                                                                   | Toko              | C3B-A0336                     |
| 1   | L900                                                                                                                                                                                                           | 15uH / Ferrite Inductor                                                                   | Kwang Sung        | 8020P-06-150L                 |
| 2   | WJ332 WJ352                                                                                                                                                                                                    | Wire Jumper / Wire ø0.9mm (SWG20), Pitch 7.5mm, Copper Tinned Wire Jumper Inductor        | n/a               | n/a                           |
| 1   | D901                                                                                                                                                                                                           | 1A / 40V Schottky 10MQ040N Diode (SMA)                                                    | Int. Rectifier    | 10MQ040N                      |
| 1   | Q81                                                                                                                                                                                                            | 600mA / 40V NPN Small signal PMBT2222 Transistor (SOT-23)                                 | Philips           | PMBT2222                      |
| 4   | Q80 Q100 Q200 Q300                                                                                                                                                                                             | 800mA / 40V PNP Small signal MMBT2907A Transistor (SOT-23)                                | Fairchild         | MMBT2907A                     |
| 3   | U100 U200 U300                                                                                                                                                                                                 | TAS5162DKD / Stereo Digital Audio PWM Power Output Stage (PSOP3-36)                       | Texas Instruments | TAS5162DKD                    |
| 1   | U10                                                                                                                                                                                                            | TAS5518 / 8 ch PWM processor (AD, DAP, 192kHz, PWM-VOL) (TQFP64)                          | Texas Instruments | TAS5518PAG                    |
| 1   | U601                                                                                                                                                                                                           | TLV272 / Dual RIR Output Opamp (VSSOP8)                                                   | Texas Instruments | TLV272CDGK                    |

# TAS5162DKD6EVM Partslist (2.00)



|   |                                                 |                                                                             |                   |                     |
|---|-------------------------------------------------|-----------------------------------------------------------------------------|-------------------|---------------------|
| 1 | U600                                            | SN74LVC2G126 / Dual Buffer, LVC (SSOP8)                                     | Texas Instruments | SN74LVC2G126DCT     |
| 1 | U904                                            | TPS3825-33 / 3.3V Supply Voltage Supervisor (SOP5-DBV)                      | Texas Instruments | TPS3825-33DBVT      |
| 1 | U900                                            | UA78M12 / 12V/500mA Positive Voltage Regulator (PFM2-KTP)                   | Texas Instruments | UA78M12CKTPR        |
| 1 | U901                                            | TPS5430 / 5V/3A Buck Converter (HSOP8-DDA)                                  | Texas Instruments | TPS5430DDA          |
| 1 | U902                                            | TPS76733 / 3.3V/1A Low Drop Voltage Regulator (HTSSOP20-PWP)                | Texas Instruments | TPS76733QPWP        |
| 1 | U903                                            | TPS79133 / 3.3V/100mA Low Dropout Regulator (Ultra Low Noise) (SOP5-DBV)    | Texas Instruments | TPS79133DBVR        |
| 4 | SCREW620 SCREW621 SCREW622 SCREW623             | M3x6 Pan Head, Pozidriv, A2 Screw                                           | Bossard           | BN 81882 M3x6       |
| 4 | SCREW630 SCREW631 SCREW632 SCREW633             | M3x10 Pan Head, Pozidriv, A2 Screw                                          | Bossard           | BN 81882 M3x10      |
| 4 | WASHER620 WASHER621 WASHER622 WASHER623         | M3 Stainless Steel Washer                                                   | Bossard           | BN 670 M3           |
| 4 | WASHER630 WASHER631 WASHER632 WASHER633         | M3 Stainless Steel Spring Washer                                            | Bossard           | BN 760 M3           |
| 4 | STANDOFF620 STANDOFF621 STANDOFF622 STANDOFF623 | M3x10 Aluminium Stand-off                                                   | Ettinger          | 05.03.108           |
| 1 | J902                                            | 5 pins / 1 row / 2.54mm Pitch Vertical Male Friction lock Pin header Header | Molex             | 22-27-2051          |
| 5 | J101 J102 J103 J104 J112                        | 2 pins / 1 row / 3.96mm Pitch Vertical Male Pin header Header               | JST               | B2P-VH              |
| 2 | J900 J901                                       | 4 pins / 1 row / 3.96mm Pitch Vertical Male Pin header Header               | JST               | B4P-VH              |
| 1 | J600                                            | Horizontal Female w. Switch Coax Phono socket                               | Chunfeng          | RJ843-4W            |
| 1 | J60                                             | 16 pins / 2 rows / 2.54mm Pitch Vertical Male IDC 16 pins IDC Box header    | Molex             | 87256-1611          |
| 1 | J40                                             | 34 pins / 2 rows / 2.54mm Pitch Vertical Male IDC 34 pins IDC Box header    | Molex             | 87256-3411          |
| 1 | X10                                             | 13.5MHz 13.5MHz SMD Crystal (HCM49)                                         | Citizen           | HCM49-13.500MABJT   |
| 1 | PCB610                                          | A830-PCB-001_1.00 / TAS5162DKD6EVM Printed Circuit Board (ver. 1.00)        | Printline         | A830-PCB-001(1.00)  |
| 1 | HEATSINK630                                     | TIC-HSINK-051_1.00 / Heatsink for 3 DKD packages length 154mm               | THF-Teknik        | TIC-HSINK-051(1.00) |



# TAS5162DKD6EVM

## PCB SPECIFICATION


Version 1.00

---

|                             |                                                                         |
|-----------------------------|-------------------------------------------------------------------------|
| BOARD IDENTIFICATION:       | A830-PCB-001(1.00)                                                      |
| BOARD TYPE:                 | DOUBLE-SIDED PLATED-THROUGH BOARD                                       |
| LAMINATE TYPE:              | FR4                                                                     |
| LAMINATE THICKNESS:         | 1.6mm                                                                   |
| COPPER THICKNESS:           | 70µm (INCL. PLATING EXTERIOR LAYER)                                     |
| COPPER PLATING OF HOLES:    | >25µm                                                                   |
| MINIMUM HOLE DIAMETER       | 0.3 mm                                                                  |
| SILKSCREEN COMPONENT SIDE:  | WHITE - REMOVE SILKSCREEN FROM SOLDER AREA & PRE-TINNED AREAS           |
| SILKSCREEN SOLDER SIDE:     | None                                                                    |
| SOLDER MASK COMPONENT SIDE: | GREEN                                                                   |
| SOLDER MASK SOLDER SIDE:    | GREEN                                                                   |
| PROTECTIVE COATING:         | SOLDER COATING AND CHEMICAL SILVER ON FREE COPPER                       |
| ELECTRICAL TEST:            | PCB MUST BE ELECTRICAL TESTED                                           |
| MANUFACTURED TO:            | PERFAG 2E ( <a href="http://www.perfag.dk">www.perfag.dk</a> )          |
| APERTURE TABLE:             | PERFAG 10A ( <a href="http://www.perfag.dk">www.perfag.dk</a> )         |
| BOARD SIZE:                 | 160 x 171.5 mm                                                          |
| Aprox. Number of holes      | 1200                                                                    |
| COMMENTS:                   | SEE DRILL INFORMATION FILE ( <a href="#">pdfdoc\FAB1_DRAWING.pdf</a> ). |

---


|     |                                    |                        |             |
|-----|------------------------------------|------------------------|-------------|
| POS | Texas Instruments                  |                        |             |
|     | Lyngby Hovedgade 4, DK-2800 Lyngby |                        |             |
|     | Title TAS5162DKD6EVM               | Date 2007/MAJ/02       |             |
|     | P/N A830-PCB-001-1-0               | REV 0                  | Designer KR |
|     | LAYER 01 - SHEET 01 OF 07          | Engineer Jonas L. Holm |             |

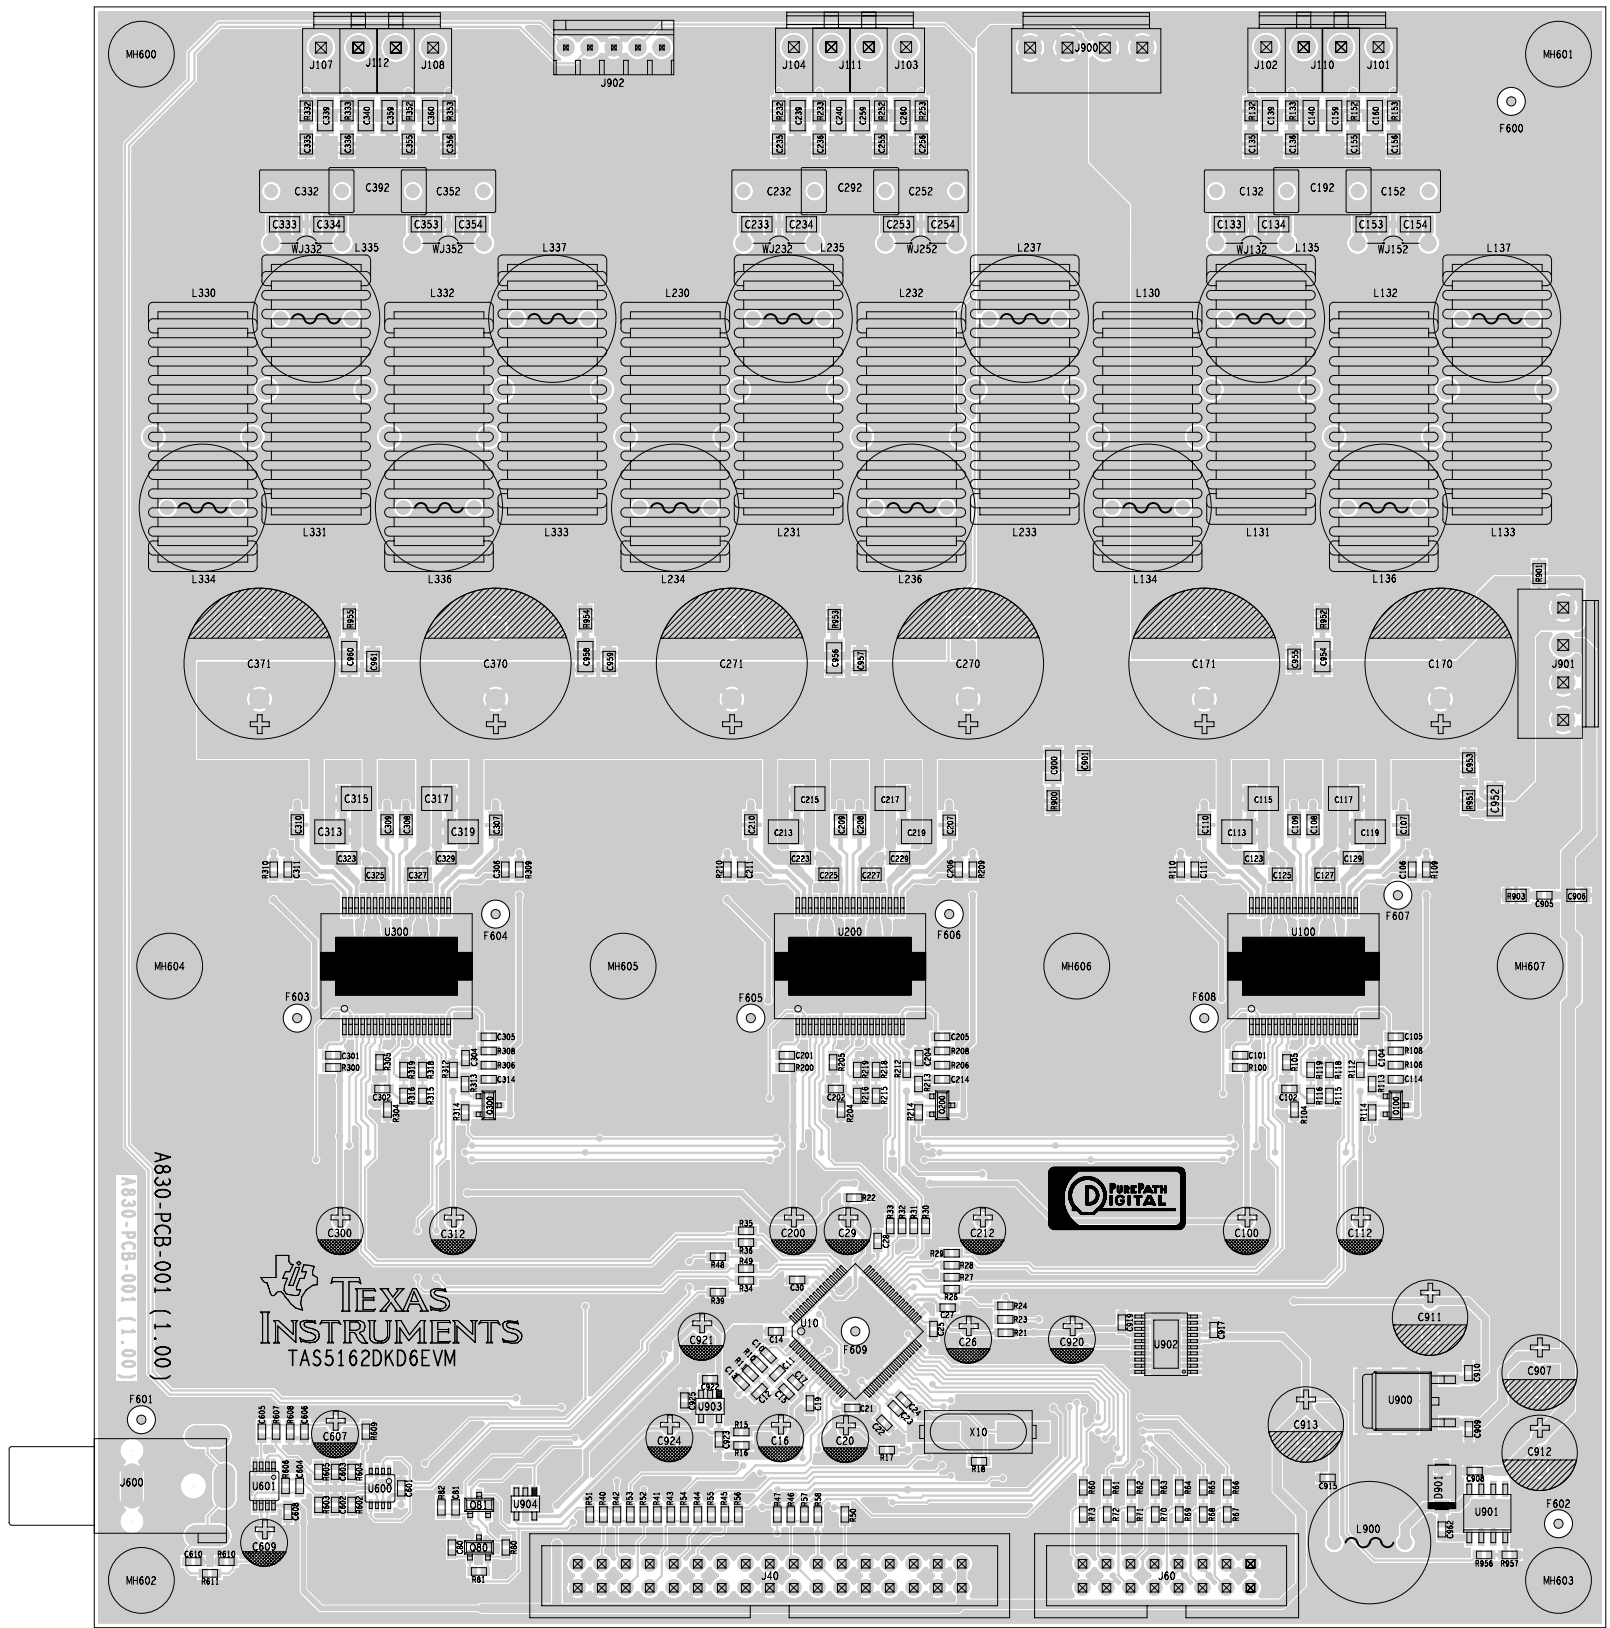

| RevNo | Revision note   | Date        | Signature | Checked |
|-------|-----------------|-------------|-----------|---------|
| 0     | INITIAL RELEASE | 2007/MAJ/02 | KR        | CMS     |


NOTES: UNLESS OTHERWISE SPECIFIED.

1. COMPONENT MOUNTING TYPES TOP/BOTTOM : SMD-Leaded / None
2. X,Y COORDINATES AND ROTATION PROVIDED IN DATA FILES.
3. SOLDERING METHODS TYPE TOPSIDE : RES
4. SOLDERING METHODS TYPE BOTSIDE : RES / WAS
- WAS - Wave soldering
- RES - Reflow soldering
- IRS - Infrared soldering
- MHS - Manual hand-soldering
5. PCBLAYOUT BY GHDSIGN DENMARK. (+45)44441482
6. PCB CONTAINS SMD LEADLESS PACKAGES.

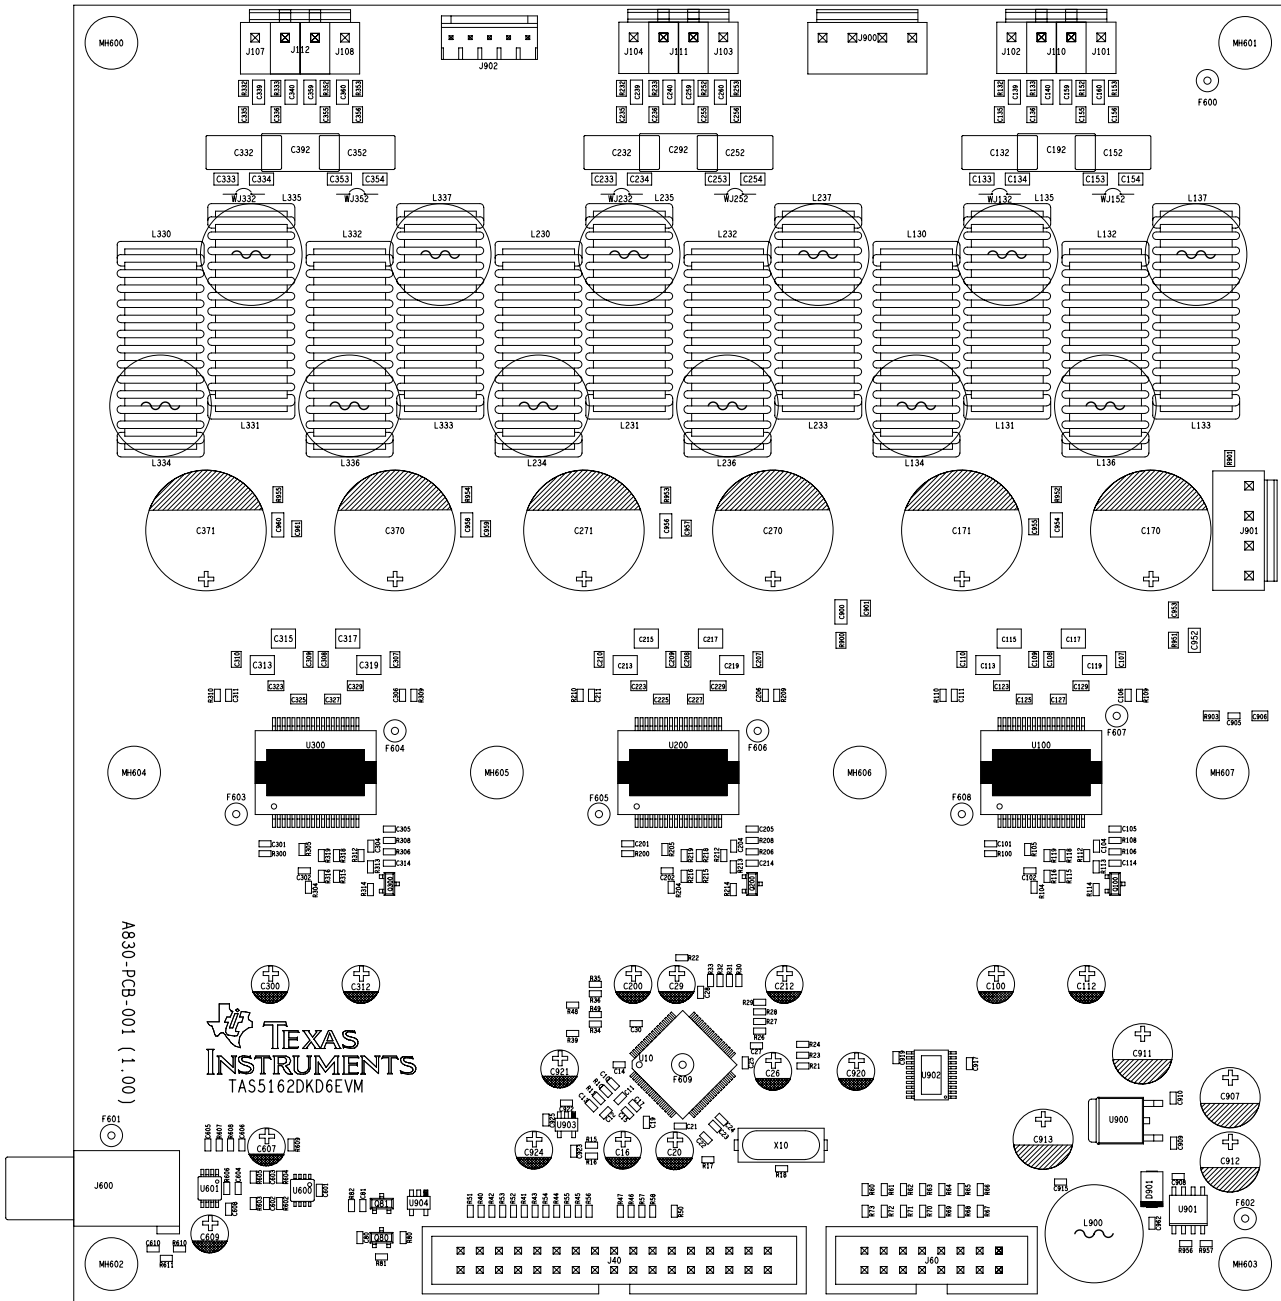


|                   |                                                         |                   |                              |                     |
|-------------------|---------------------------------------------------------|-------------------|------------------------------|---------------------|
| A3                | Texas Instruments<br>Lyngby Hovedgade 4, DK-2800 Lyngby |                   | PCB No. A830-PCB-001-1       |                     |
|                   |                                                         |                   | Engineer Jonas L. Holm       |                     |
| Designed by<br>KR |                                                         | Checked by<br>CMS | Approved by<br>Jonas L. Holm | Date<br>2007/MAJ/02 |
| ASSY DRAWING      |                                                         | TAS5162DKD6EVM    |                              |                     |
|                   |                                                         | A830-PCB-001      |                              | Rev<br>0            |
|                   |                                                         | Sheet<br>1 OF 1   |                              |                     |

|                           |                                    |                        |             |
|---------------------------|------------------------------------|------------------------|-------------|
| POS                       | Texas Instruments                  |                        |             |
|                           | Lyngby Hovedgade 4, DK-2800 Lyngby |                        |             |
|                           | Title TA55162DKD6EVM               | Date 2007/MAJ/03       |             |
|                           | P/N A830-PCB-001-1-0               | REV 0                  | Designer KR |
| LAYER 01 - SHEET 01 OF 07 |                                    | Engineer Jonas L. Holm |             |

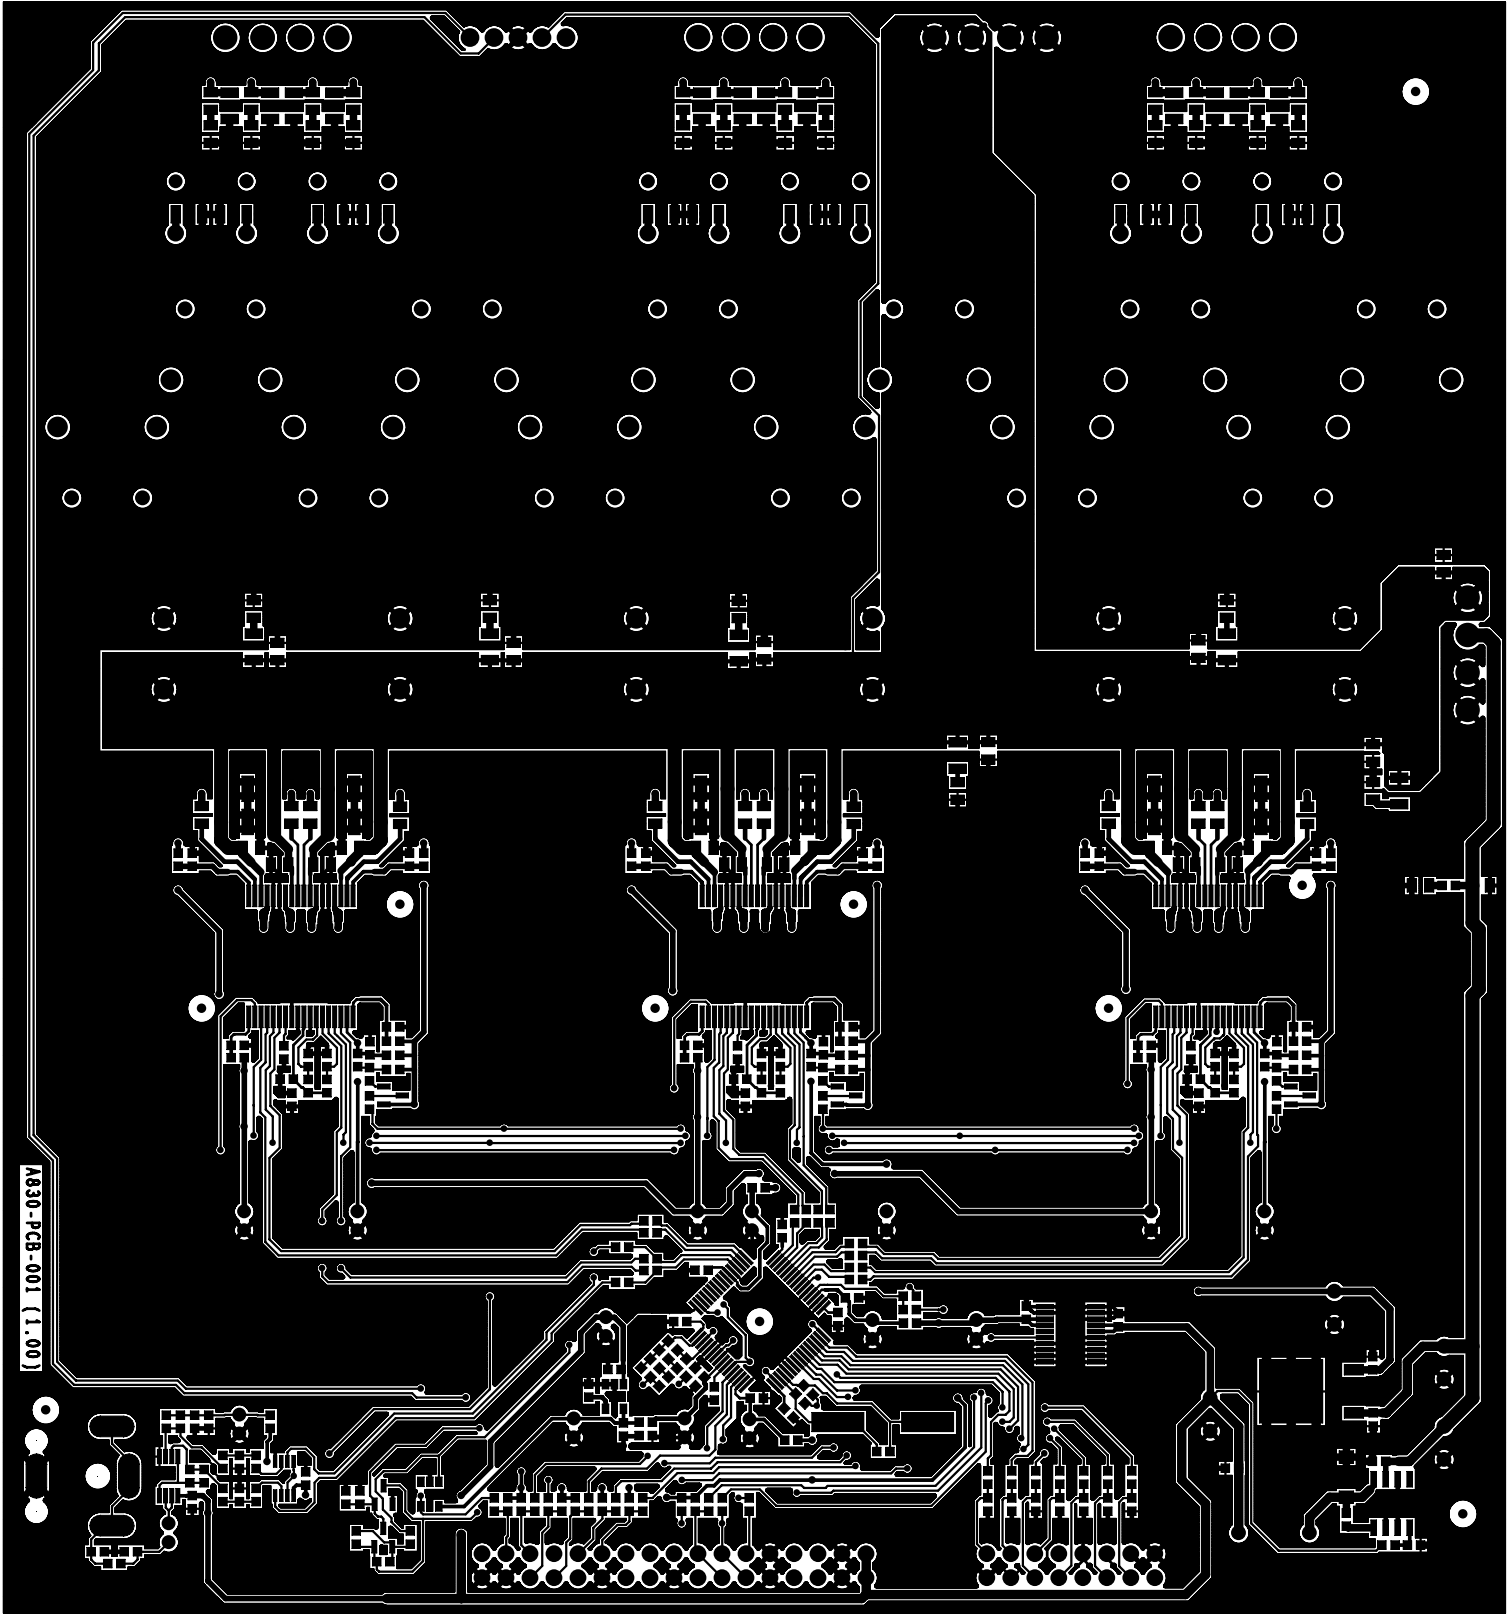

|                           |                                    |                        |             |
|---------------------------|------------------------------------|------------------------|-------------|
| POS                       | Texas Instruments                  |                        |             |
|                           | Lyngby Hovedgade 4, DK-2800 Lyngby |                        |             |
|                           | Title TA55162DKD6EVM               | Date 2007/MAJ/03       |             |
|                           | P/N A830-PCB-001-1-0               | REV 0                  | Designer KR |
| LAYER 02 - SHEET 02 OF 07 |                                    | Engineer Jonas L. Holm |             |



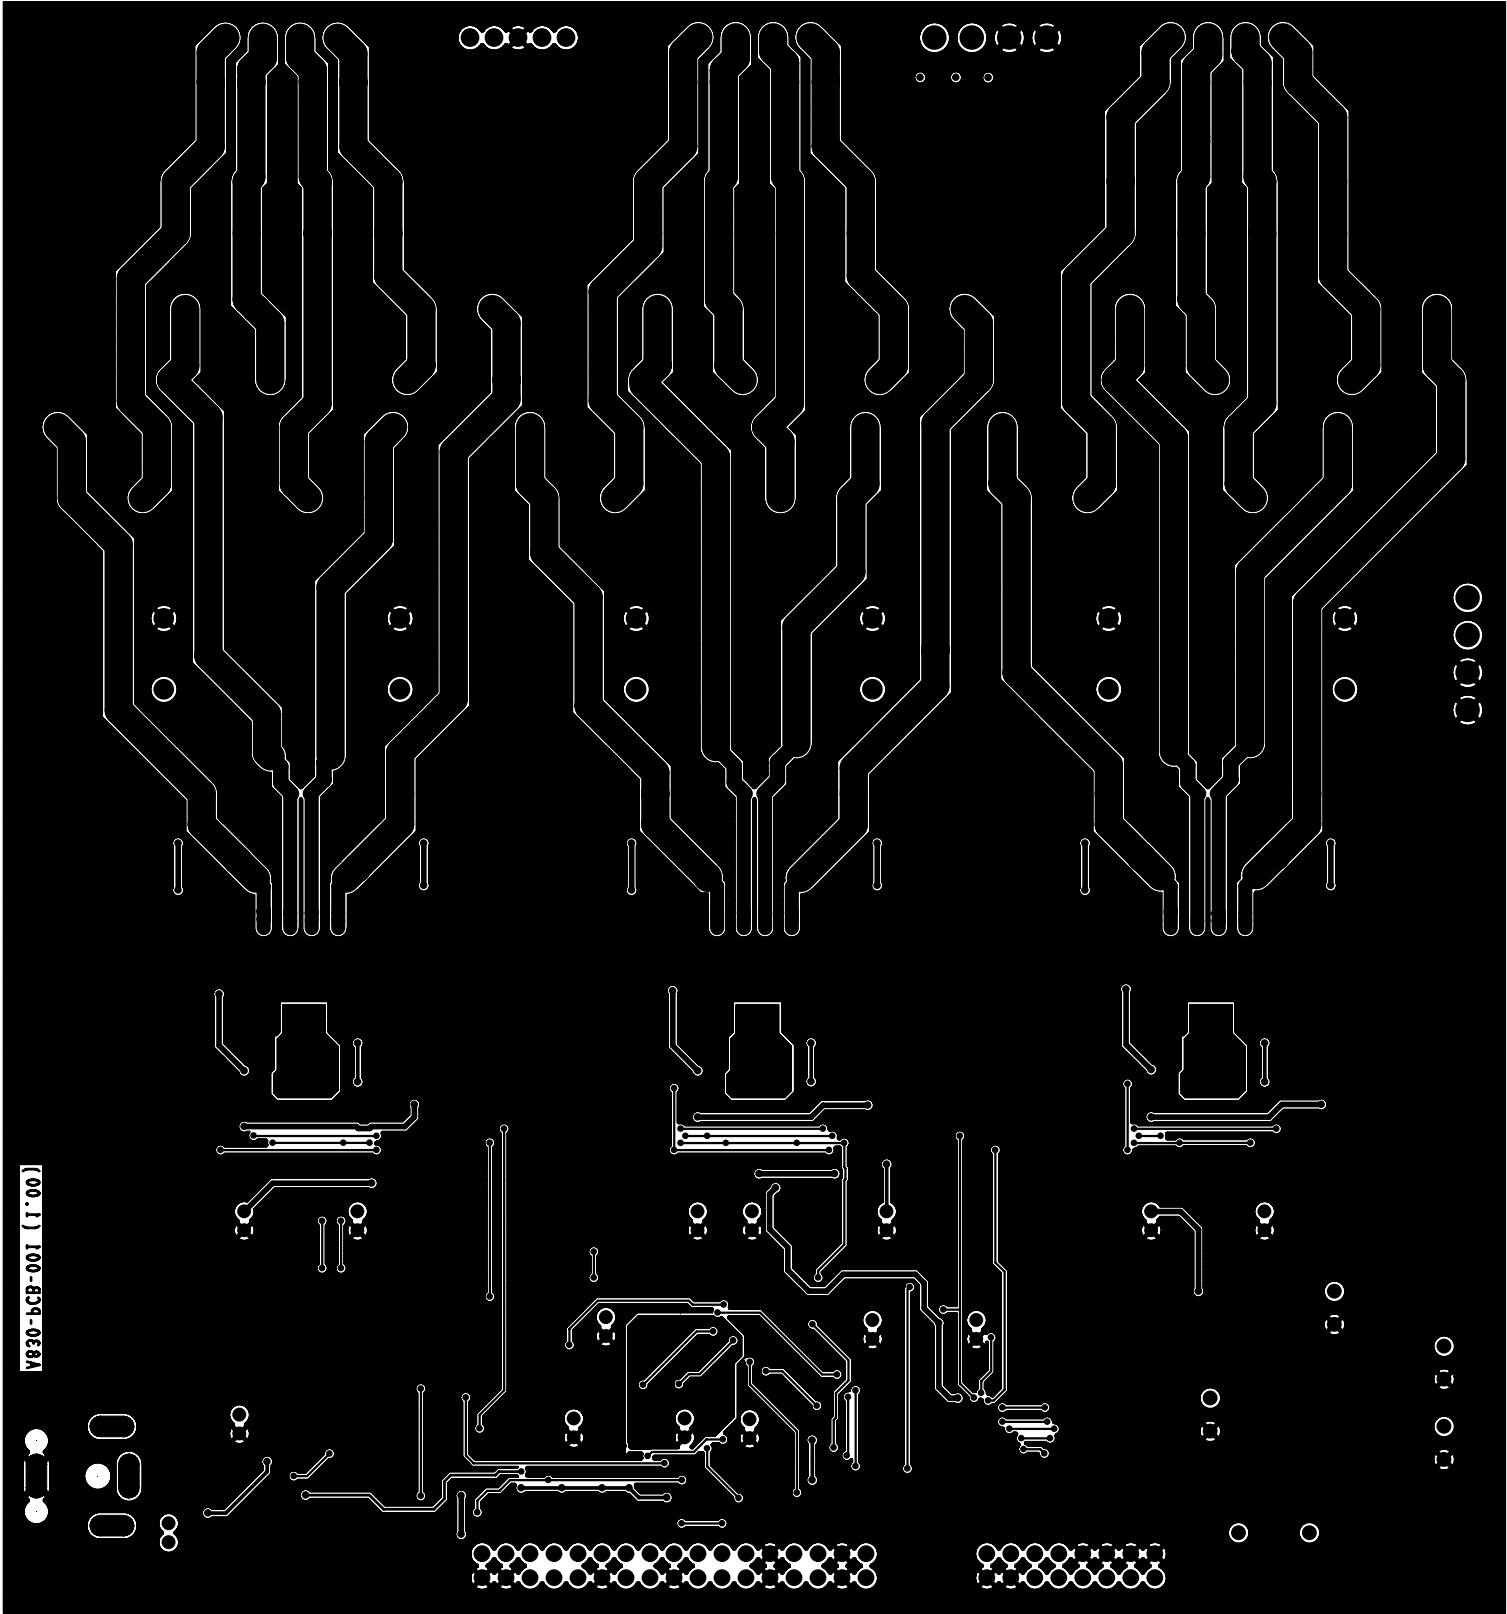


# TIC-HSINK-051(1.00)

Heatsink for 3 DKD packages length 154 mm

2. May 2007  
TIC-HSINK-051(1.00).dwg

Jonas L. Holm

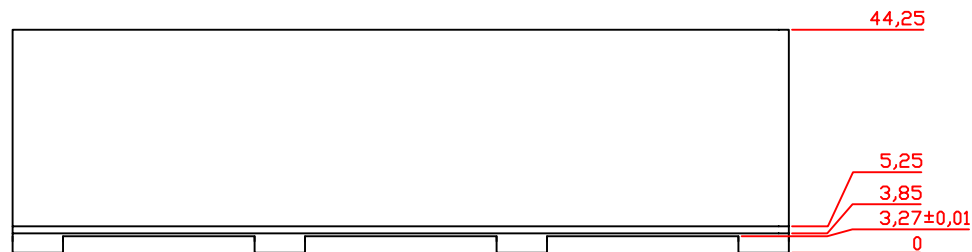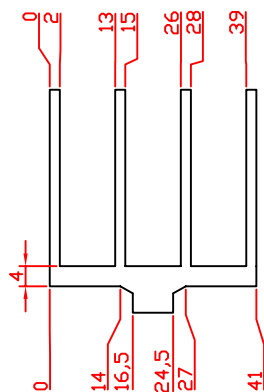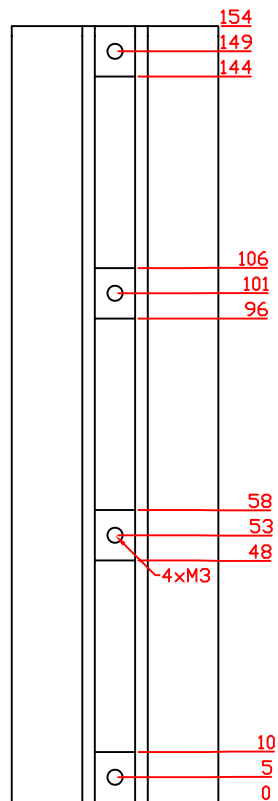

**SCALE:** 1:1.5  
**PROFILE:** TIC-HSINK-050 profile  
**DIMENSIONS:** mm  
**MATERIAL:** ALUMINUM  
**INTERNAL SCREW THREADS:** M3  
**SURFACE:** FREE OF SHARP EDGES  
**SURFACE TREATMENT:** BLACK ANODIZED  
**TOLERANCES:** +/- 0.1 mm

## EVALUATION BOARD/KIT IMPORTANT NOTICE

Texas Instruments (TI) provides the enclosed product(s) under the following conditions:

This evaluation board/kit is intended for use for **ENGINEERING DEVELOPMENT, DEMONSTRATION, OR EVALUATION PURPOSES ONLY** and is not considered by TI to be a finished end-product fit for general consumer use. Persons handling the product(s) must have electronics training and observe good engineering practice standards. As such, the goods being provided are not intended to be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including product safety and environmental measures typically found in end products that incorporate such semiconductor components or circuit boards. This evaluation board/kit does not fall within the scope of the European Union directives regarding electromagnetic compatibility, restricted substances (RoHS), recycling (WEEE), FCC, CE or UL, and therefore may not meet the technical requirements of these directives or other related directives.

Should this evaluation board/kit not meet the specifications indicated in the User's Guide, the board/kit may be returned within 30 days from the date of delivery for a full refund. **THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE.**

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user indemnifies TI from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge.

**EXCEPT TO THE EXTENT OF THE INDEMNITY SET FORTH ABOVE, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.**

TI currently deals with a variety of customers for products, and therefore our arrangement with the user **is not exclusive**.

TI assumes **no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein.**

Please read the User's Guide and, specifically, the Warnings and Restrictions notice in the User's Guide prior to handling the product. This notice contains important safety information about temperatures and voltages. For additional information on TI's environmental and/or safety programs, please contact the TI application engineer or visit [www.ti.com/esh](http://www.ti.com/esh).

No license is granted under any patent right or other intellectual property right of TI covering or relating to any machine, process, or combination in which such TI products or services might be or are used.

## FCC Warning

This evaluation board/kit is intended for use for **ENGINEERING DEVELOPMENT, DEMONSTRATION, OR EVALUATION PURPOSES ONLY** and is not considered by TI to be a finished end-product fit for general consumer use. It generates, uses, and can radiate radio frequency energy and has not been tested for compliance with the limits of computing devices pursuant to part 15 of FCC rules, which are designed to provide reasonable protection against radio frequency interference. Operation of this equipment in other environments may cause interference with radio communications, in which case the user at his own expense will be required to take whatever measures may be required to correct this interference.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright 2007, Texas Instruments Incorporated

## EVM WARNINGS AND RESTRICTIONS

It is important to operate this EVM within the input voltage range of 3.3 V to 5 V and the output voltage range of 0 V to 5 V.

Exceeding the specified input range may cause unexpected operation and/or irreversible damage to the EVM. If there are questions concerning the input range, please contact a TI field representative prior to connecting the input power.

Applying loads outside of the specified output range may result in unintended operation and/or possible permanent damage to the EVM. Please consult the EVM User's Guide prior to connecting any load to the EVM output. If there is uncertainty as to the load specification, please contact a TI field representative.

During normal operation, some circuit components may have case temperatures greater than 30°C. The EVM is designed to operate properly with certain components above 85°C as long as the input and output ranges are maintained. These components include but are not limited to linear regulators, switching transistors, pass transistors, and current sense resistors. These types of devices can be identified using the EVM schematic located in the EVM User's Guide. When placing measurement probes near these devices during operation, please be aware that these devices may be very warm to the touch.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright 2007, Texas Instruments Incorporated

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

### Products

|                    |                                                                    |
|--------------------|--------------------------------------------------------------------|
| Amplifiers         | <a href="http://amplifier.ti.com">amplifier.ti.com</a>             |
| Data Converters    | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>     |
| DSP                | <a href="http://dsp.ti.com">dsp.ti.com</a>                         |
| Interface          | <a href="http://interface.ti.com">interface.ti.com</a>             |
| Logic              | <a href="http://logic.ti.com">logic.ti.com</a>                     |
| Power Mgmt         | <a href="http://power.ti.com">power.ti.com</a>                     |
| Microcontrollers   | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a> |
| RFID               | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>               |
| Low Power Wireless | <a href="http://www.ti.com/lpw">www.ti.com/lpw</a>                 |

### Applications

|                    |                                                                          |
|--------------------|--------------------------------------------------------------------------|
| Audio              | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                   |
| Automotive         | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>         |
| Broadband          | <a href="http://www.ti.com/broadband">www.ti.com/broadband</a>           |
| Digital Control    | <a href="http://www.ti.com/digitalcontrol">www.ti.com/digitalcontrol</a> |
| Military           | <a href="http://www.ti.com/military">www.ti.com/military</a>             |
| Optical Networking | <a href="http://www.ti.com/opticalnetwork">www.ti.com/opticalnetwork</a> |
| Security           | <a href="http://www.ti.com/security">www.ti.com/security</a>             |
| Telephony          | <a href="http://www.ti.com/telephony">www.ti.com/telephony</a>           |
| Video & Imaging    | <a href="http://www.ti.com/video">www.ti.com/video</a>                   |
| Wireless           | <a href="http://www.ti.com/wireless">www.ti.com/wireless</a>             |

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2007, Texas Instruments Incorporated