



MCP2200
USB to UART with Isolation
Demo Board
User's Guide

Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights.

Trademarks

The Microchip name and logo, the Microchip logo, dsPIC, FlashFlex, flexPWR, JukeBlox, KEELOQ, KEELOQ logo, Klear, LANCheck, MediaLB, MOST, MOST logo, MPLAB, OptoLyzer, PIC, PICSTART, PIC³² logo, RightTouch, SpyNIC, SST, SST Logo, SuperFlash and UNI/O are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

The Embedded Control Solutions Company and mTouch are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Analog-for-the-Digital Age, BodyCom, chipKIT, chipKIT logo, CodeGuard, dsPICDEM, dsPICDEM.net, ECAN, In-Circuit Serial Programming, ICSP, Inter-Chip Connectivity, KlearNet, KlearNet logo, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, MultiTRAK, NetDetach, Omniscient Code Generation, PICDEM, PICDEM.net, PICKit, PICtail, RightTouch logo, REAL ICE, SQI, Serial Quad I/O, Total Endurance, TSHARC, USBCheck, VariSense, ViewSpan, WiperLock, Wireless DNA, and ZENA are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

Silicon Storage Technology is a registered trademark of Microchip Technology Inc. in other countries.

GestIC is a registered trademarks of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

All other trademarks mentioned herein are property of their respective companies.

© 2015, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

ISBN: 978-1-63277-264-0

QUALITY MANAGEMENT SYSTEM
CERTIFIED BY DNV
= ISO/TS 16949 =

Microchip received ISO/TS-16949:2009 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELOQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.

Object of Declaration: MCP2200 USB to UART with Isolation Demo Board

EU Declaration of Conformity

Manufacturer: Microchip Technology Inc.
2355 W. Chandler Blvd.
Chandler, Arizona, 85224-6199
USA

This declaration of conformity is issued by the manufacturer.

The development/evaluation tool is designed to be used for research and development in a laboratory environment. This development/evaluation tool is not intended to be a finished appliance, nor is it intended for incorporation into finished appliances that are made commercially available as single functional units to end users. This development/evaluation tool complies with EU EMC Directive 2004/108/EC and as supported by the European Commission's Guide for the EMC Directive 2004/108/EC (8th February 2010).

This development/evaluation tool complies with EU RoHS2 Directive 2011/65/EU.

This development/evaluation tool, when incorporating wireless and radio-telecom functionality, is in compliance with the essential requirement and other relevant provisions of the R&TTE Directive 1999/5/EC and the FCC rules as stated in the declaration of conformity provided in the module datasheet and the module product page available at www.microchip.com.

For information regarding the exclusive, limited warranties applicable to Microchip products, please see Microchip's standard terms and conditions of sale, which are printed on our sales documentation and available at www.microchip.com.

Signed for and on behalf of Microchip Technology Inc. at Chandler, Arizona, USA


Derek Carlson
VP Development Tools

12-Sep-14
Date

NOTES:



MCP2200 USB TO UART WITH ISOLATION DEMO BOARD USER'S GUIDE

Table of Contents

Preface	7
Introduction	7
Document Layout	7
Conventions Used in this Guide	8
Recommended Reading	9
The Microchip Web Site	9
Customer Support	9
Revision History	9
Chapter 1. Product Overview	
1.1 Introduction	11
1.2 What is the MCP2200 USB to UART with Isolation Demo Board?	11
1.3 What the MCP2200 USB to UART with Isolation Demo Board Kit Contains	11
Chapter 2. Installation and Operation	
2.1 Introduction	13
2.2 Software Setup	13
2.3 Software Operation	14
Appendix A. Schematics and Layouts	
A.1 Introduction	17
A.2 Board – Schematic	18
A.3 Board – Top Copper and Silk	19
A.4 Board – Top Copper	19
A.5 Board – Bottom Copper	19
Appendix B. Bill of Materials (BOM)	
Worldwide Sales and Service	22

NOTES:



MCP2200 USB TO UART WITH ISOLATION DEMO BOARD USER'S GUIDE

Preface

NOTICE TO CUSTOMERS

All documentation becomes dated, and this manual is no exception. Microchip tools and documentation are constantly evolving to meet customer needs, so some actual dialogs and/or tool descriptions may differ from those in this document. Please refer to our web site (www.microchip.com) to obtain the latest documentation available.

Documents are identified with a "DS" number. This number is located on the bottom of each page, in front of the page number. The numbering convention for the DS number is "DSXXXXXXXXA", where "XXXXXXXX" is the document number and "A" is the revision level of the document.

For the most up-to-date information on development tools, see the MPLAB® IDE online help. Select the Help menu, and then Topics to open a list of available online help files.

INTRODUCTION

This chapter contains general information that will be useful to know before using the MCP2200 USB to UART with Isolation Demo Board. Items discussed in this chapter include:

- Document Layout
- Conventions Used in this Guide
- Recommended Reading
- The Microchip Web Site
- Customer Support
- Revision History

DOCUMENT LAYOUT

This document describes how to use the MCP2200 USB to UART with Isolation Demo Board as a development tool to emulate and debug firmware on a target board. The document is organized as follows:

- **Chapter 1. "Product Overview"**– Important information about the MCP2200 USB to UART with Isolation Demo Board.
- **Chapter 2. "Installation and Operation"** – This chapter includes a detailed description of each function of the demo board and instructions for how to begin using the board.
- **Appendix A. "Schematics and Layouts"** – Shows the schematic and layout diagrams for the MCP2200 USB to UART with Isolation Demo Board.
- **Appendix B. "Bill of Materials (BOM)"** – Lists the parts used to build the MCP2200 USB to UART with Isolation Demo Board.

CONVENTIONS USED IN THIS GUIDE

This manual uses the following documentation conventions:

DOCUMENTATION CONVENTIONS

Description	Represents	Examples
Arial font:		
Italic characters	Referenced books	<i>MPLAB® IDE User's Guide</i>
	Emphasized text	...is the <i>only</i> compiler...
Initial caps	A window	the Output window
	A dialog	the Settings dialog
	A menu selection	select Enable Programmer
Quotes	A field name in a window or dialog	"Save project before build"
Underlined, Italic text with right angle bracket	A menu path	<u><i>File>Save</i></u>
Bold characters	A dialog button	Click OK
	A tab	Click the Power tab
N'Rnnnn	A number in verilog format, where N is the total number of digits, R is the radix and n is a digit.	4'b0010, 2'hF1
Text in angle brackets < >	A key on the keyboard	Press <Enter>, <F1>
Courier New font:		
Plain Courier New	Sample source code	#define START
	Filenames	autoexec.bat
	File paths	c:\mcc18\h
	Keywords	_asm, _endasm, static
	Command-line options	-Opa+, -Opa-
	Bit values	0, 1
	Constants	0xFF, 'A'
Italic Courier New	A variable argument	<i>file.o</i> , where <i>file</i> can be any valid filename
Square brackets []	Optional arguments	mcc18 [options] <i>file</i> [options]
Curly brackets and pipe character: { }	Choice of mutually exclusive arguments; an OR selection	errorlevel {0 1}
Ellipses...	Replaces repeated text	var_name [, var_name...]
	Represents code supplied by user	void main (void) { ... }

RECOMMENDED READING

This user's guide describes how to use MCP2200 USB to UART with Isolation Demo Board. Another useful document is listed below. The following Microchip document is available and recommended as a supplemental reference resource:

- **MCP2200 Data Sheet - “USB 2.0 to UART Protocol Converter with GPIO” (DS22228)**

This data sheet provides detailed information regarding the MCP2200 product.

THE MICROCHIP WEB SITE

Microchip provides online support via our web site at www.microchip.com. This web site is used as a means to make files and information easily available to customers. Accessible by using your favorite Internet browser, the web site contains the following information:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQs), technical support requests, online discussion groups, Microchip consultant program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

CUSTOMER SUPPORT

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Field Application Engineer (FAE)
- Technical Support

Customers should contact their distributor, representative or field application engineer (FAE) for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in the back of this document.

Technical support is available through the web site at:

<http://www.microchip.com/support>.

REVISION HISTORY

Revision A (May 2015)

Original release of this document.

NOTES:

Chapter 1. Product Overview

1.1 INTRODUCTION

This chapter provides an overview of the MCP2200 USB to UART with Isolation Demo Board and covers the following topics:

- What is the MCP2200 USB to UART with Isolation Demo Board?
- What the MCP2200 USB to UART with Isolation Demo Board kit contains

1.2 WHAT IS THE MCP2200 USB TO UART WITH ISOLATION DEMO BOARD?

The MCP2200 USB to UART with Isolation Demo Board is a USB to UART development and evaluation board for the MCP2200 device. This board is powered from the host's USB port. Two of the MCP2200 GPIO pins (GP6 and GP7) are connected to LEDs used to indicate the USB to UART traffic when the associated pins are configured as TxLED and RxLED pins, respectively. The isolated side is powered externally with 3V to 5.5V. The board offers 3.75 kV AC of electrical isolation for power and UART signals.

Microchip Technology Inc. provides a software package to be used with this board that can be downloaded from Microchip's web site. This PC software is used to evaluate/demonstrate the MCP2200 as a Virtual Com Port (VCP) device. This software also allows custom device configurations.

A DLL is included to allow the development of the custom configurations and software applications to control the GPIOs, that can be downloaded from the product/board web page.

1.3 WHAT THE MCP2200 USB TO UART WITH ISOLATION DEMO BOARD KIT CONTAINS

The MCP2200 USB to UART with Isolation Demo Board kit includes:

- MCP2200 USB to UART with Isolation Demo Board (ADM00276)
- Mini USB Cable
- ABS Protective Case
- Important Information Sheet

NOTES:

Chapter 2. Installation and Operation

2.1 INTRODUCTION

The MCP2200 USB to UART with Isolation Demo Board is designed to demonstrate the device in a VCP environment, where an electrical isolation is needed between the USB host and the targeted UART system.

The MCP2200 USB to UART with Isolation Demo Board has the following features:

- Dedicated Tx LED (green) and Rx LED (red) to indicate the USB to UART traffic
- Isolated power LED (green) that indicates the presence of power on the isolated side
- Mini USB connector
- 6-pin PICKit™ Serial header with the UART (Tx and Rx) signals and power signals (V_{DD} and GND)
- Isolated transceiver powered externally from the isolated side with 3V to 5.5V that can be used as a voltage level translator

2.2 SOFTWARE SETUP

To set up the board software, first download the support material (software and drivers) from the board's page on the Microchip web site.

1. Connect the board to a USB port on a Windows or Linux system. Wait for the operating system to detect and install the device.
2. For Linux machines, the driver installation is not required unless the support for USB CDC ACM class is not present. Please read the `Linux Driver Readme` file on the board's web page for more details.
3. For MAC OS read the MCP2200/MCP2221 Mac Driver Information from the product web page.
4. If required, the MCP2200 Configuration Utility software can be installed.

- Note 1:** If the software fails to start and the message box indicates a "Code 10 error" message, a Microsoft update may be required. The update (KB943198) can be downloaded from <http://support.microsoft.com/kb/943198>.
- 2:** The default VID is 0x04D8, licensed to Microchip. The default PID for the MCP2200 is 0x00DF. Changing the VID assumes you own a license from the USB consortium, while changing the PID assumes you have licensed one from Microchip.
- 3:** Please consult the `MCP2200 Windows Driver Readme` document on the MCP2200 webpage for a complete list of known windows installation issues.



FIGURE 2-1: MCP2200 USB to UART with Isolation Demo Board

2.3 SOFTWARE OPERATION

The board operates as a USB to UART converter. In addition, the software can be used to control the I/O lines and set custom configurations.

2.3.1 USB to UART Operation

The board can be connected to a USB host and to a UART signal (or signals) of the targeted system. If the host application sends a "Set Line Coding" command (sets the UART baud rate), the MCP2200 will automatically switch to the correct baud rate.

MCP2200 supports the following UART data format: eight data bits, one stop bit, no parity. Setting other parameters than the supported ones will not return an error, but the board will still operate using eight data bits, one stop bit and no parity. The "no error return" behavior was chosen in order to prevent crashes from certain terminal software that cannot handle properly the rejection of the selected parameters.

2.3.2 Configuration Software

The PC software allows the user to evaluate functionality and set custom configurations. [Figure 2-2](#) shows the main screen.

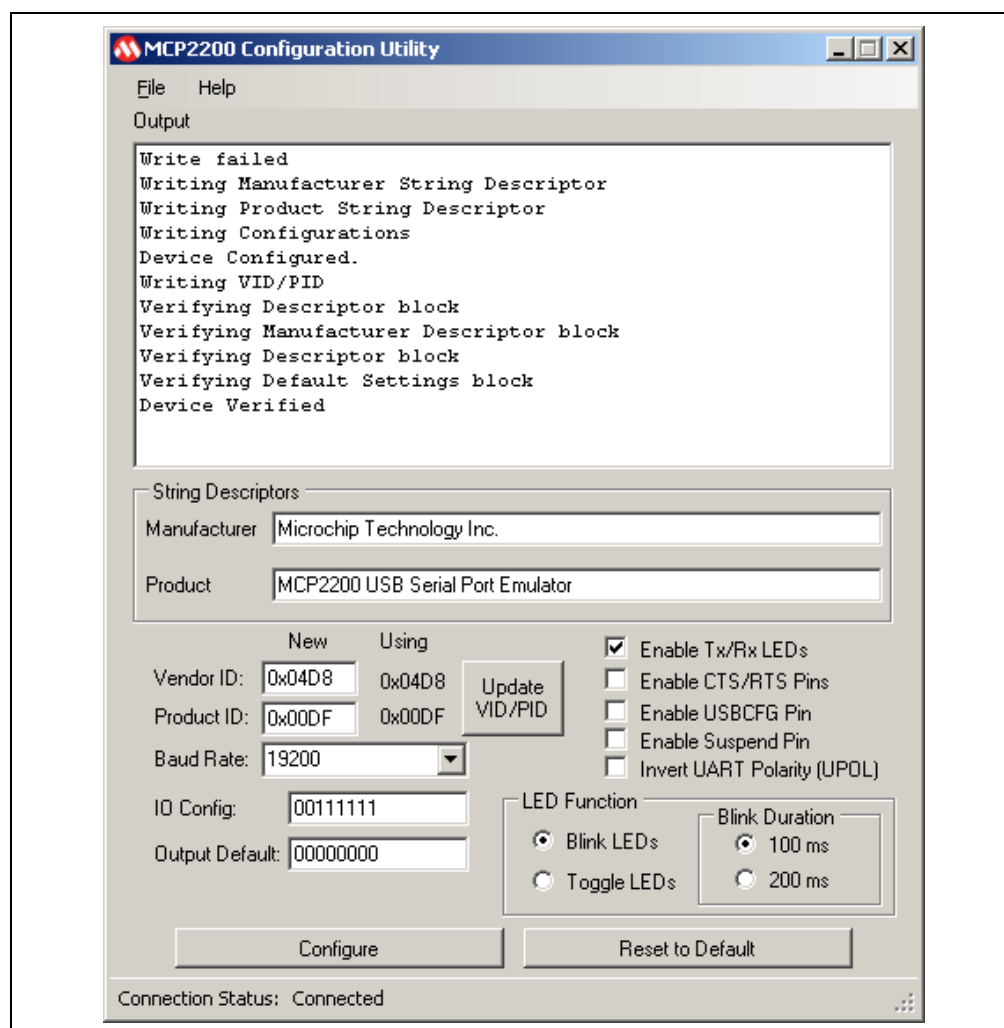


FIGURE 2-2: Main Software Screen

The software is designed to help in the development of custom configurations. The following functionalities can be modified to meet the custom/user's requirements:

- **Vendor ID (VID) and Product ID (PID):** The default VID is 0x04D8, which is assigned to Microchip by the USB IF. The VID can be changed to another VID if authorized by the owner of the assignment. Contact the USB IF for more information. The default PID for the MCP2200 device is 0x00DF and can be used "as-is". Microchip's Vendor ID can be sublicensed by obtaining a new Product ID from Microchip Technology Inc. See the product or board page for link and instructions to the sublicensing agreement. This is required only if the Microchip's Vendor ID is used. Changing the Vendor ID to another assigned and authorized VID does not require any sublicensing from Microchip.
- **Baud rate:** A pull-down box allows a selection of the most commonly used baud rates.
- **I/O Config:** This function is a binary 8-bit value that configures the I/O port to input (logic '1') or output (logic '0').
- **Output Default:** It is the default value for the port pins configured as output. This is also an 8-bit binary value.
- **Tx/Rx LEDs:** By checking this box, the LED functions are enabled on GP6 and GP7. The "LED Function" and "Blink Duration" must be configured.
- **Hardware Flow Control:** This function enables the RTS and CTS pins for UART handshaking. Not used on this board since the pins are not connected.
- **USBCFG Pin:** Enables the USBCFG pin on GP1. Not used on this board since the pin is not connected.
- **Suspend Pin:** Enables the SSPND pin functionality on GP0. Not used on this board since the pin is not connected.
- **UART Polarity:** Enables the inverse polarity for the UART pins.
- **String Descriptors:** Enter custom Manufacturer and Product string descriptors.
- **Update VID/PID Button:** This button updates the software to use the VID and PID in the "New" boxes. For example, if the PID is changed to 0xFFFF, the software will keep using the original 0x00DF until the **Update VID/PID** button is pressed. After this, the software will switch to the 0xFFFF PID.

CAUTION
Care must be taken when changing the VID or PID because the software will be unable to communicate to the board if a mismatch occurs.

NOTES:



MCP2200 USB TO UART WITH ISOLATION DEMO BOARD USER'S GUIDE


Appendix A. Schematics and Layouts

A.1 INTRODUCTION


This appendix contains the following schematics and layouts for the MCP2200 USB to UART with Isolation Demo Board:

- Board – Schematic
- Board – Top Copper and Silk
- Board – Top Copper
- Board – Bottom Copper


A.2 BOARD – SCHEMATIC

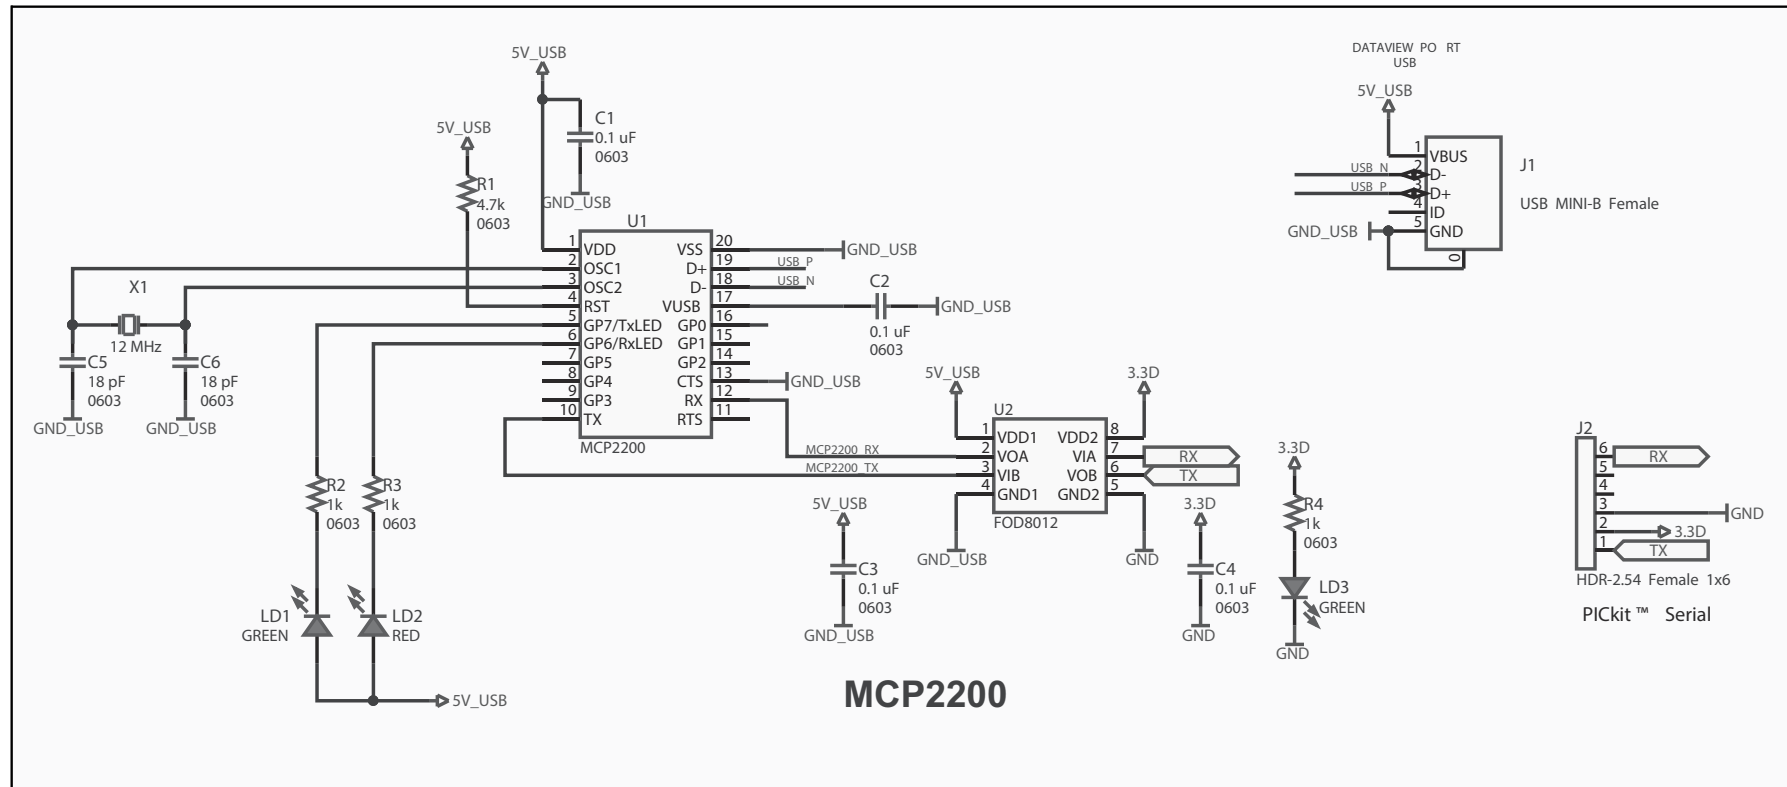


A.3 BOARD – TOP COPPER AND SILK

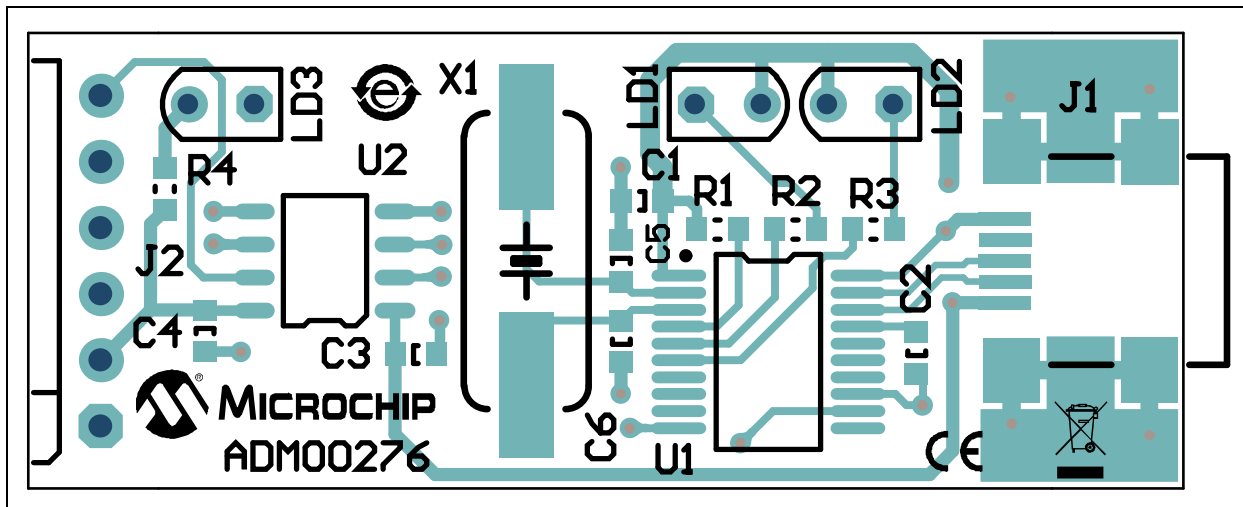

A.4 BOARD – TOP COPPER

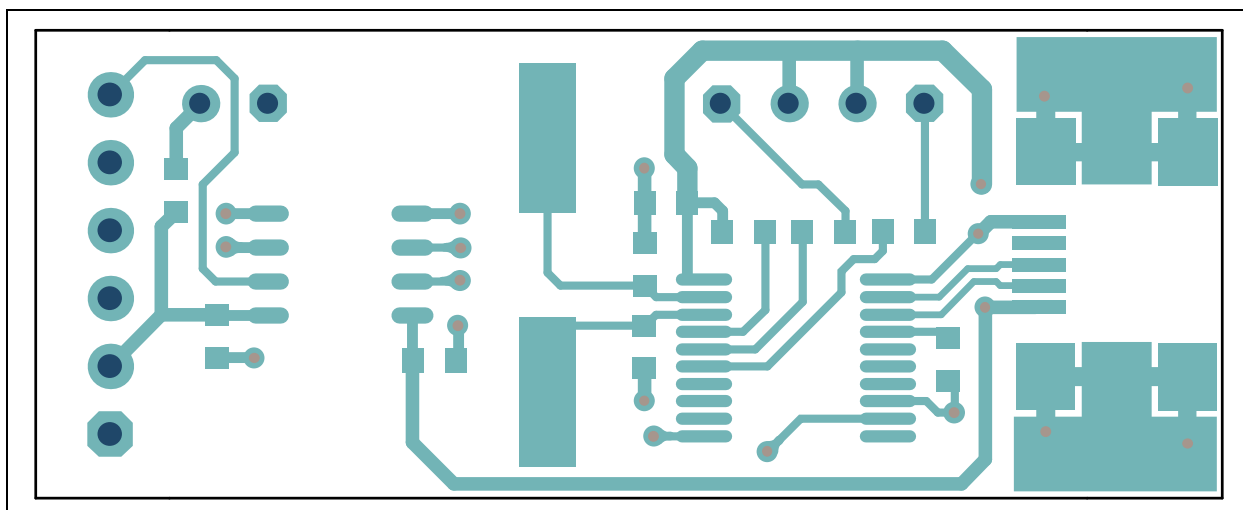

A.5 BOARD – BOTTOM COPPER

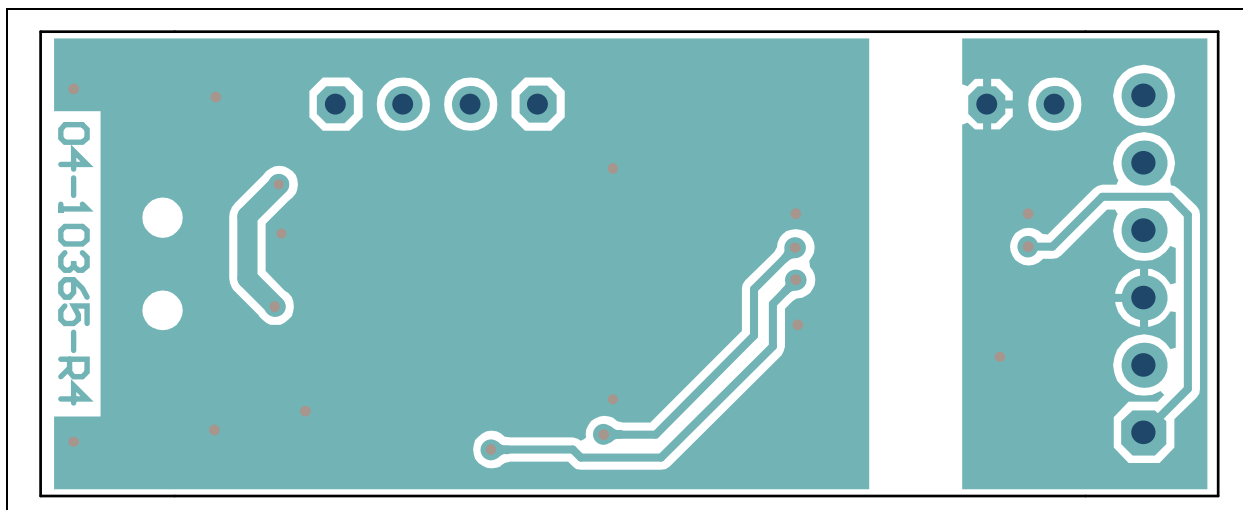

NOTES:

Appendix B. Bill of Materials (BOM)

TABLE B-1: BILL OF MATERIALS (BOM)

Qty	Reference	Description	Manufacturer	Part Number
4	C1, C2, C3, C4	Cap. ceramic 0.1 μ F 16V 10% X7R SMD 0603	Samsung Electro-Mechanics America, Inc.	CL10B104KO8NNNC
2	C5, C6	Cap. ceramic 18 pF 50V 5% NP0 SMD 0603	Kemet®	C0603C180J5GACTU
1	CBL1	Mech. HW cable USB-A Male to Mini USB-B Male 3 ft Black	Katerno	10UM-02103BK
1	J1	Conn. USB Mini-B Female SMD R/A	Hirose Electric Co., Ltd.	UX60-MB-5ST
1	J2	Conn. HDR-2.54 Female 1x6 Gold TH R/A	Sullins Connector Solutions	PPPC061LGBN-RC
2	LD1, LD3	Diode LED Green 2.2V 25 mA 10 mcd Diffuse RAD 1.8 mm	Kingbright Corp.	WP4060GD
1	LD2	Diode LED Red 1.85V 30 mA 200 mcd Diffuse RAD 1.8 mm	Kingbright Corp.	WP4060SRD
3	M1, M2, M3	Mech. HW stand-off LED T1-3/4 0.120" Black	Bivar, Inc.	LTM-120
1	R1	Res. TKF 4.7k 5% 1/10W SMD 0603	Yageo Corporation	RC0603JR-074K7L
3	R2, R3, R4	Res. TKF 1k 5% 1/10W SMD 0603	Panasonic® - ECG	ERJ-3GEYJ102V
1	U1	MCHP Interface USB UART MCP2200-I/SS SSOP-20	Microchip Technology Inc.	MCP2200-I/SS
1	U2	IC Photo FOD8012 Bi-Dir 3.3V and 5V SOIC-8	Fairchild Semiconductor®	FOD8012
1	X1	Crystal 12 MHz 18 pF SMD HC49/US	Abracon® Corporation	ABLS-12.000MHZ-B4-T
1	Enclosure	Custom Enclosure	—	N/A

Note 1: The components listed in this Bill of Materials are representative of the PCB assembly. The released BOM used in manufacturing uses all RoHS-compliant components.

Worldwide Sales and Service

AMERICAS

Corporate Office
2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277
Technical Support:
<http://www.microchip.com/support>
Web Address:
www.microchip.com

Atlanta
Duluth, GA
Tel: 678-957-9614
Fax: 678-957-1455

Austin, TX
Tel: 512-257-3370

Boston
Westborough, MA
Tel: 774-760-0087
Fax: 774-760-0088

Chicago
Itasca, IL
Tel: 630-285-0071
Fax: 630-285-0075

Cleveland
Independence, OH
Tel: 216-447-0464
Fax: 216-447-0643

Dallas
Addison, TX
Tel: 972-818-7423
Fax: 972-818-2924

Detroit
Novi, MI
Tel: 248-848-4000

Houston, TX
Tel: 281-894-5983

Indianapolis
Noblesville, IN
Tel: 317-773-8323
Fax: 317-773-5453

Los Angeles
Mission Viejo, CA
Tel: 949-462-9523
Fax: 949-462-9608

New York, NY
Tel: 631-435-6000

San Jose, CA
Tel: 408-735-9110

Canada - Toronto
Tel: 905-673-0699
Fax: 905-673-6509

ASIA/PACIFIC

Asia Pacific Office
Suites 3707-14, 37th Floor
Tower 6, The Gateway
Harbour City, Kowloon
Hong Kong
Tel: 852-2943-5100
Fax: 852-2401-3431

Australia - Sydney
Tel: 61-2-9868-6733
Fax: 61-2-9868-6755

China - Beijing
Tel: 86-10-8569-7000
Fax: 86-10-8528-2104

China - Chengdu
Tel: 86-28-8665-5511
Fax: 86-28-8665-7889

China - Chongqing
Tel: 86-23-8980-9588
Fax: 86-23-8980-9500

China - Dongguan
Tel: 86-769-8702-9880

China - Hangzhou
Tel: 86-571-8792-8115
Fax: 86-571-8792-8116

China - Hong Kong SAR
Tel: 852-2943-5100
Fax: 852-2401-3431

China - Nanjing
Tel: 86-25-8473-2460
Fax: 86-25-8473-2470

China - Qingdao
Tel: 86-532-8502-7355
Fax: 86-532-8502-7205

China - Shanghai
Tel: 86-21-5407-5533
Fax: 86-21-5407-5066

China - Shenyang
Tel: 86-24-2334-2829
Fax: 86-24-2334-2393

China - Shenzhen
Tel: 86-755-8864-2200
Fax: 86-755-8203-1760

China - Wuhan
Tel: 86-27-5980-5300
Fax: 86-27-5980-5118

China - Xian
Tel: 86-29-8833-7252
Fax: 86-29-8833-7256

ASIA/PACIFIC

China - Xiamen
Tel: 86-592-2388138
Fax: 86-592-2388130

China - Zhuhai
Tel: 86-756-3210040
Fax: 86-756-3210049

India - Bangalore
Tel: 91-80-3090-4444
Fax: 91-80-3090-4123

India - New Delhi
Tel: 91-11-4160-8631
Fax: 91-11-4160-8632

India - Pune
Tel: 91-20-3019-1500

Japan - Osaka
Tel: 81-6-6152-7160
Fax: 81-6-6152-9310

Japan - Tokyo
Tel: 81-3-6880-3770
Fax: 81-3-6880-3771

Korea - Daegu
Tel: 82-53-744-4301
Fax: 82-53-744-4302

Korea - Seoul
Tel: 82-2-554-7200
Fax: 82-2-558-5932 or
82-2-558-5934

Malaysia - Kuala Lumpur
Tel: 60-3-6201-9857
Fax: 60-3-6201-9859

Malaysia - Penang
Tel: 60-4-227-8870
Fax: 60-4-227-4068

Philippines - Manila
Tel: 63-2-634-9065
Fax: 63-2-634-9069

Singapore
Tel: 65-6334-8870
Fax: 65-6334-8850

Taiwan - Hsin Chu
Tel: 886-3-5778-366
Fax: 886-3-5770-955

Taiwan - Kaohsiung
Tel: 886-7-213-7828

Taiwan - Taipei
Tel: 886-2-2508-8600
Fax: 886-2-2508-0102

Thailand - Bangkok
Tel: 66-2-694-1351
Fax: 66-2-694-1350

EUROPE

Austria - Wels
Tel: 43-7242-2244-39
Fax: 43-7242-2244-393

Denmark - Copenhagen
Tel: 45-4450-2828
Fax: 45-4485-2829

France - Paris
Tel: 33-1-69-53-63-20
Fax: 33-1-69-30-90-79

Germany - Dusseldorf
Tel: 49-2129-3766400

Germany - Munich
Tel: 49-89-627-144-0
Fax: 49-89-627-144-44

Germany - Pforzheim
Tel: 49-7231-424750

Italy - Milan
Tel: 39-0331-742611
Fax: 39-0331-466781

Italy - Venice
Tel: 39-049-7625286

Netherlands - Drunen
Tel: 31-416-690399
Fax: 31-416-690340

Poland - Warsaw
Tel: 48-22-3325737

Spain - Madrid
Tel: 34-91-708-08-90
Fax: 34-91-708-08-91

Sweden - Stockholm
Tel: 46-8-5090-4654

UK - Wokingham
Tel: 44-118-921-5800
Fax: 44-118-921-5820