


TPD1S414EVM

This user's guide describes the characteristics, operation, and use of the TPD1S414EVM evaluation module (EVM). This EVM includes 4 TPD1S414's in various configurations for testing. Three TPD1S414's are configured for IEC61000-4-5 compliance testing; one TPD1S414 is configured for throughput on USB 2.0 Type A connectors for throughput analysis. This user's guide includes setup instructions, schematic diagrams, a bill of materials, and printed-circuit board layout drawings for the EVM.

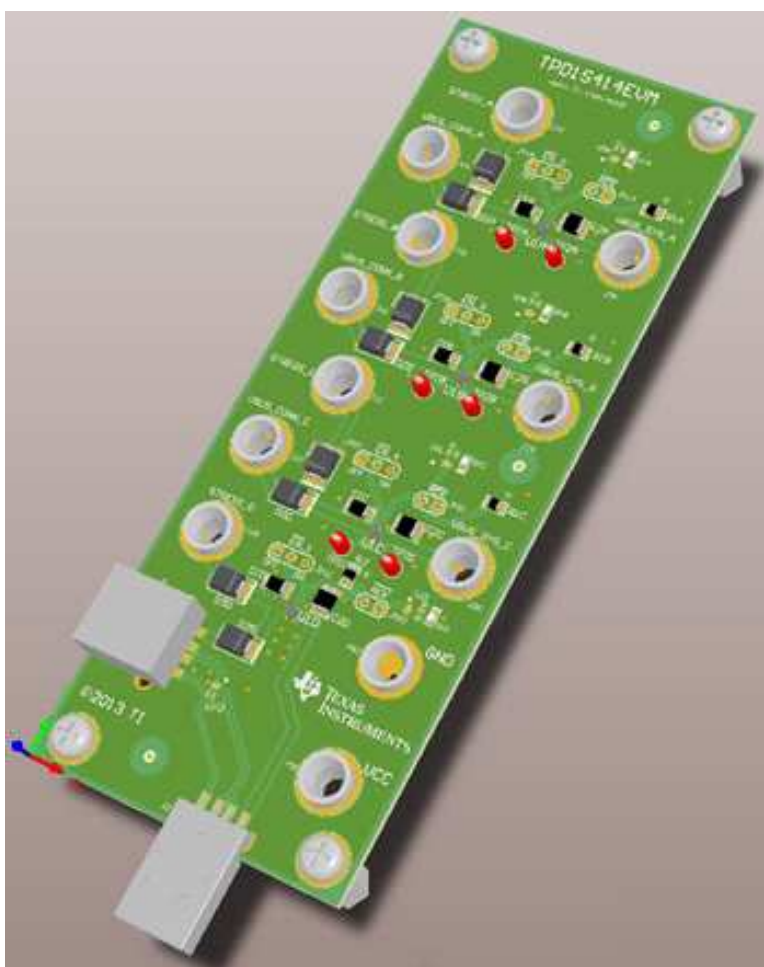

1 Introduction

Texas Instrument's TPD1S414 evaluation module helps designers evaluate the operation and performance of the TPD1S414 device. The TPD1S414 is a single-chip solution for USB connector's VBUS line protection. The bi-directional nFET switch ensures safe current flow in both charging and host mode while protecting the internal system circuits from any over-voltage conditions at the V_{BUS_CON} pin. On the V_{BUS_CON} pin, this device can handle over-voltage protection up to 30 V. After the $\overline{EN}$ pin toggles low, the TPD1S414 waits 15 ms before turning ON the nFET through a soft start delay. $\overline{ACK}$ pin indicates the FET is completely turned ON.

Table 1. EVM Configuration


Reference Designator	TI Part Number	Configuration
U1A-U1C	TPD1S414	Surge
U1D and U3	TPD1S414 and TPD3E001	Surge and ESD

2 Board Setup

This section describes the intended use of the TPD1S414EVM. A generalized outline of the procedure given in IEC-61000-4-5 is described here. IEC-61000-4-5 should be referred to for a more specific testing outline.

2.1 U1A – U1C

Three separate and identical test setups for TPD1S414 (U1A – U1C) are pinned out to allow evaluating device performance during normal operating conditions as well as during surge events. V_{BUS_CON} is J1A – J1C and V_{BUS_SYS} is J3A – J3C. Surge can be injected onto V_{BUS_CON} using J2A – J2C. A Schottky Barrier Diode (D2A – D2C) protects equipment attached to J1x from any surge (up to 90 V DC) injected on J2x. Another Schottky Barrier Diode (D3A – D3C) prevents V_{BUS_CON} from back driving voltage into the surge tester, which can cause the surge tester problems with outputting an IEC61000-4-5 compliant signal.

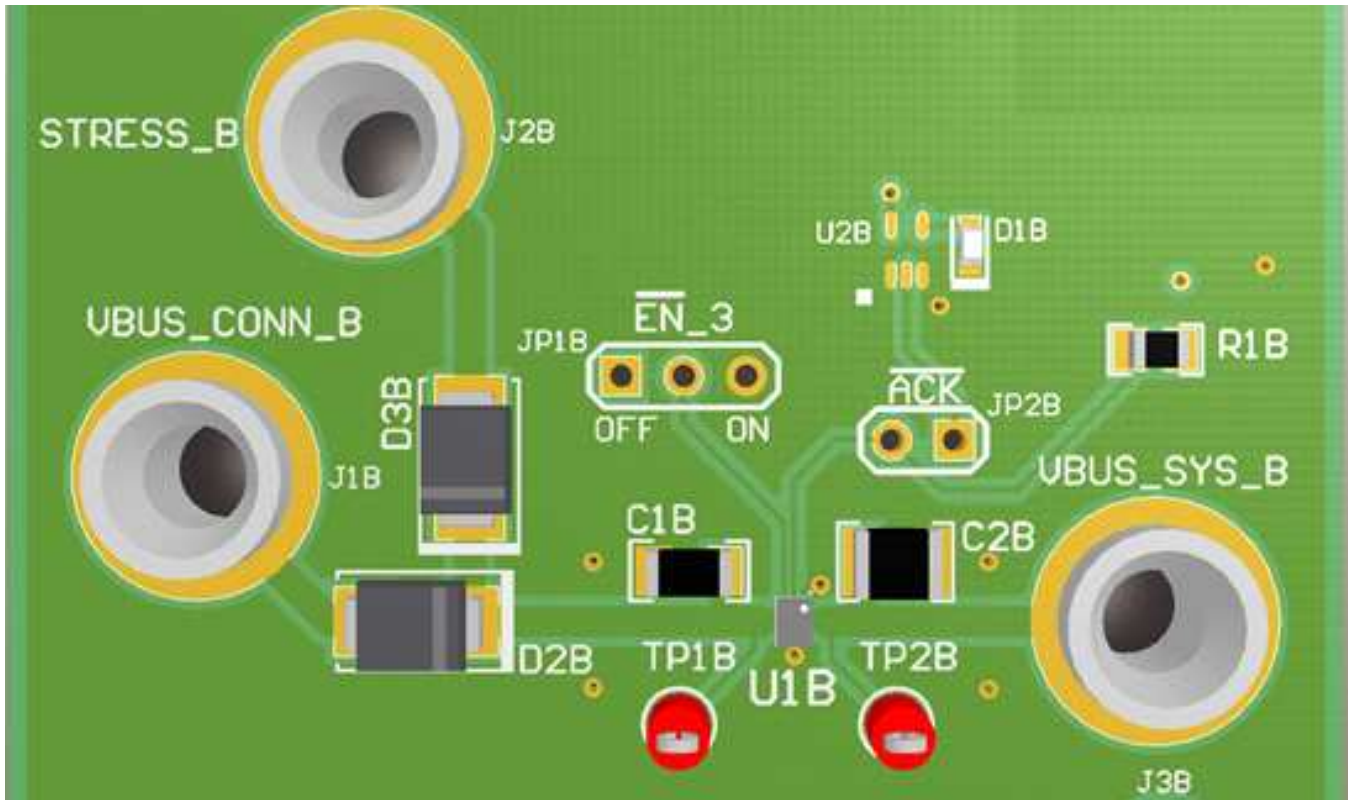
Figure 1. TPD1S414 Board Configuration for U1A – U1C

Test points (TP1A – TP1C and TP2A – TP2C) provide Kelvin connections for monitoring the voltage drop across U1A – U1C during surge events as well as for measuring R_{DYN} while current is flowing through TPD1S414. A 3-pin header (JP1A – JP1C) allows shunting the $\overline{EN}$ pin (JP1A – JP1C) on or off. A 2-pin header (JP2A – JP2C) allows monitoring $\overline{ACK}$ by observing an LED (D1A – D1C) with a shunt installed, or by measuring the voltage by clipping to the TPD1S414 side of JP2x. All testing requires +5V applied to VCC (PS1) and ground to GND (PS2).

2.2 U1D

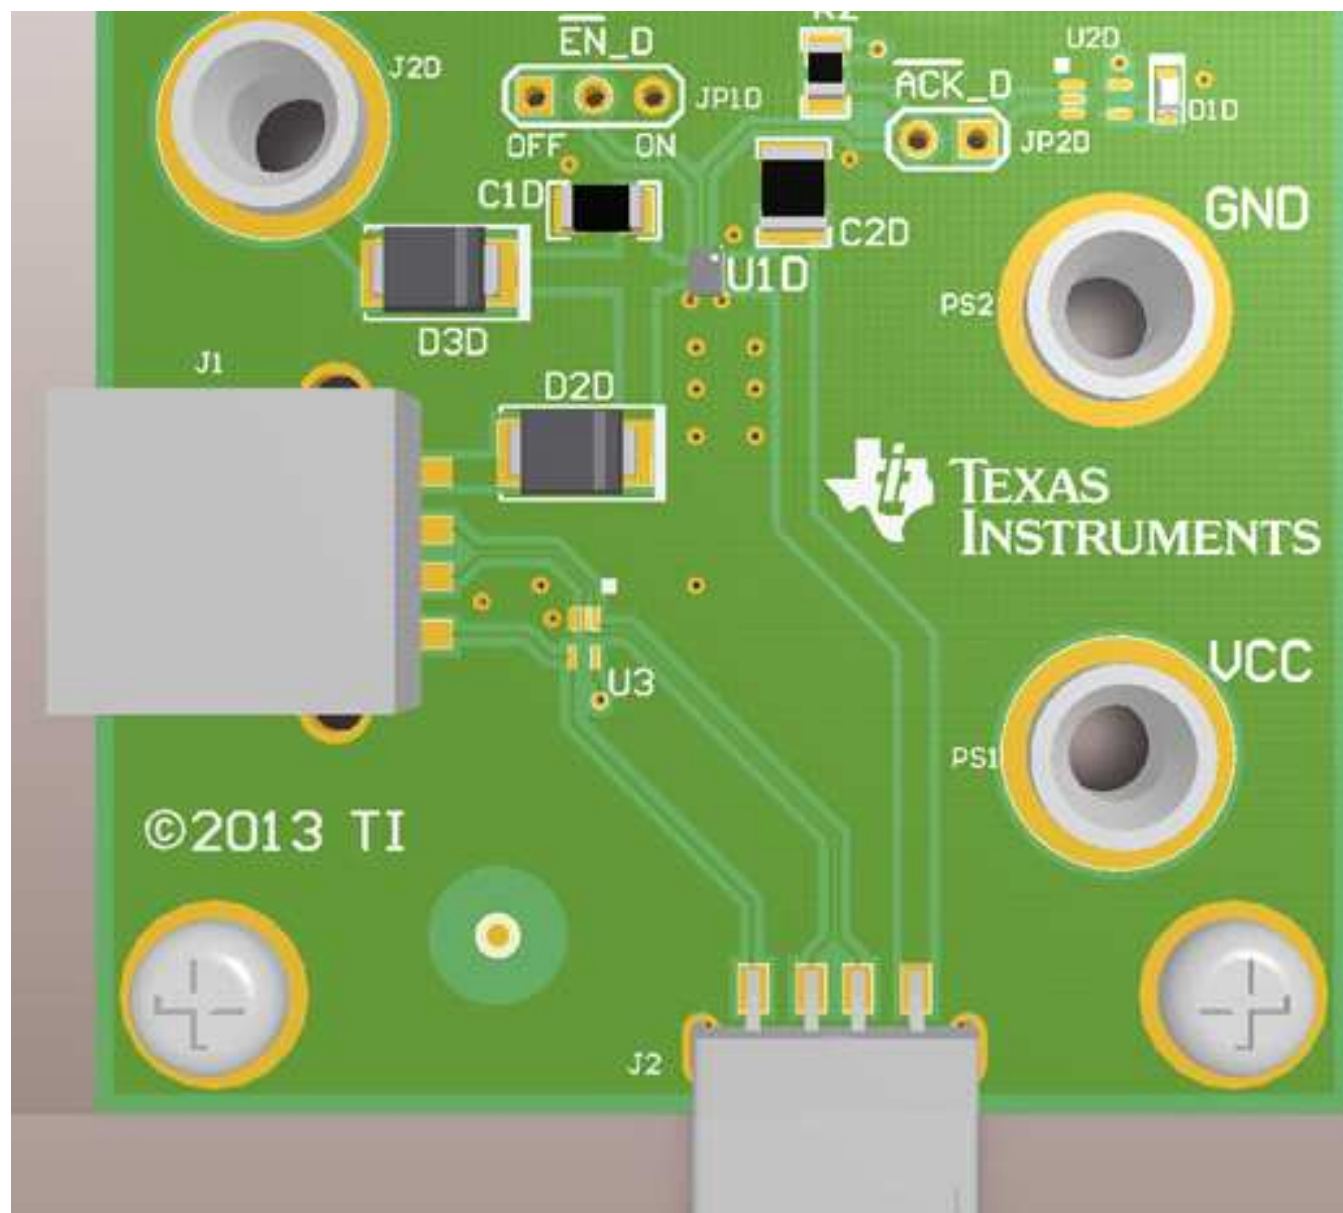


Figure 2. TPD1S414 Board Configuration for U1D

A pass through USB2.0 port is included for system level testing. The female USB connector (J1) is the “Connector” side of TPD1S414 and a male USB connector (J2) is the “System” side. ESD protection has been added to the Hi-Speed data lines and ID pin in the form of TPD3E001DRL to complete the port protection example scheme.

Surge can be injected onto V_{BUS_CON} using J2D. A Schottky Barrier Diode (D2D) protects equipment attached to J1 from any surge (up to 90 V DC) injected on J2D. Another Schottky Barrier Diode (D3D) prevents V_{BUS_CON} from back driving voltage into the surge tester, which can cause the surge tester problems with outputting an IEC61000-4-5 compliant signal.

A 3-pin header (JP1D) allows shunting the $\overline{EN}$ pin (JP1D) on or off. A 2-pin header (JP2D) allows monitoring $\overline{ACK}$ by observing an LED (D1D) with a shunt installed, or by measuring the voltage by clipping to the TPD1S414 side of JP2D. All testing requires +5V applied to VCC (PS1) and ground to GND (PS2).

3 Bill of Materials

Table 2. Bill of Materials

Designator	Quantity	Value	Description	Package Reference	Part Number	Manufacturer
C1A, C1B, C1C, C1D	4	1uF	CAP, CERM, 1uF, 25V, +/-10%, X7R, 1206	1206	12063C105KA T2A	AVX
C2A, C2B, C2C, C2D	4	2.2uF	CAP, CERM, 2.2uF, 100V, +/-10%, X7R, 1210	1210	GRM32ER72A 225KA35L	MuRata
D1A, D1B, D1C, D1D	4	Red	LED, Green, SMD	1.6 x 0.8 x 0.8 mm	LTST- C190GKT	Lite-On
D2A, D2B, D2C, D2D, D3A, D3B, D3C, D3D	8	90V	Diode, Schottky, 90 V, 2 A, SMB	SMB	B290-13-F	Diodes Inc.
H1, H2, H3, H4	4		Machine Screw, Round, #4-40 x 1/4, Nylon, Philips pan head	Screw	NY PMS 440 0025 PH	B & F Fastener Supply
H5, H6, H7, H8	4		Standoff, Hex, 0.5"L #4-40 Nylon	Standoff	1902C	Keystone
J1	1		Connector, Receptacle, USB TYPE A, 4POS SMD	USB TYPE A CONNECTOR RECEPTACLE 4 POS SMD	896-43-004-00- 000000	Mill-Max
J1A, J1B, J1C, J2A, J2B, J2C, J2D, J3A, J3B, J3C, PS1, PS2	12		Standard Banana Jack, Un-insulated, 5.5 mm	Keystone_575-4	575-4	Keystone
J2	1		Connector, USB Type A, 4POS R/A, SMD	USB Type A right angle	48037-1000	Molex
JP1A, JP1B, JP1C, JP1D	4	PEC03SAAN	Header, Male 3-pin, 100 mil spacing,	0.100 inch x 3	PEC03SAAN	Sullins
JP2A, JP2B, JP2C, JP2D	4	PEC02SAAN	Header, Male 2-pin, 100 mil spacing,	0.100 inch x 2	PEC02SAAN	Sullins
R1A, R1B, R1C, R2	4	4.3k	RES, 4.3 kΩ, 5%, 0.125W, 0805	0805	CRCW08054K 30JNEA	Vishay-Dale
TP1A, TP1B, TP1C, TP2A, TP2B, TP2C	6	Red	Test Point, Miniature, Red, TH	Red Miniature Test point	5000	Keystone
U1A, U1B, U1C, U1D	4		USB CHARGER OVP SWITCH WITH ESD FOR VBUS_CON PIN, YFF0012ALAR	YFF0012ALAR	TPD1S414YFF	Texas Instruments
U2A, U2B, U2C, U2D	4	SN74LVC1G12 5DCK	IC, Single Bus Buffer Gate With 3-States Outputs, OE Active Low	DCK	SN74LVC1G12 5DCK	Texas Instruments
U3	1	TPD3E001DRL R	IC, LOW-CAPACITANCE 3-CHANNEL ±15-kV ESD-PROTECTION ARRAY FOR HIGH-SPEED DATA INTERFACES	SOP-5 (DRL)	TPD3E001DRL R	Texas Instruments

4 Schematics

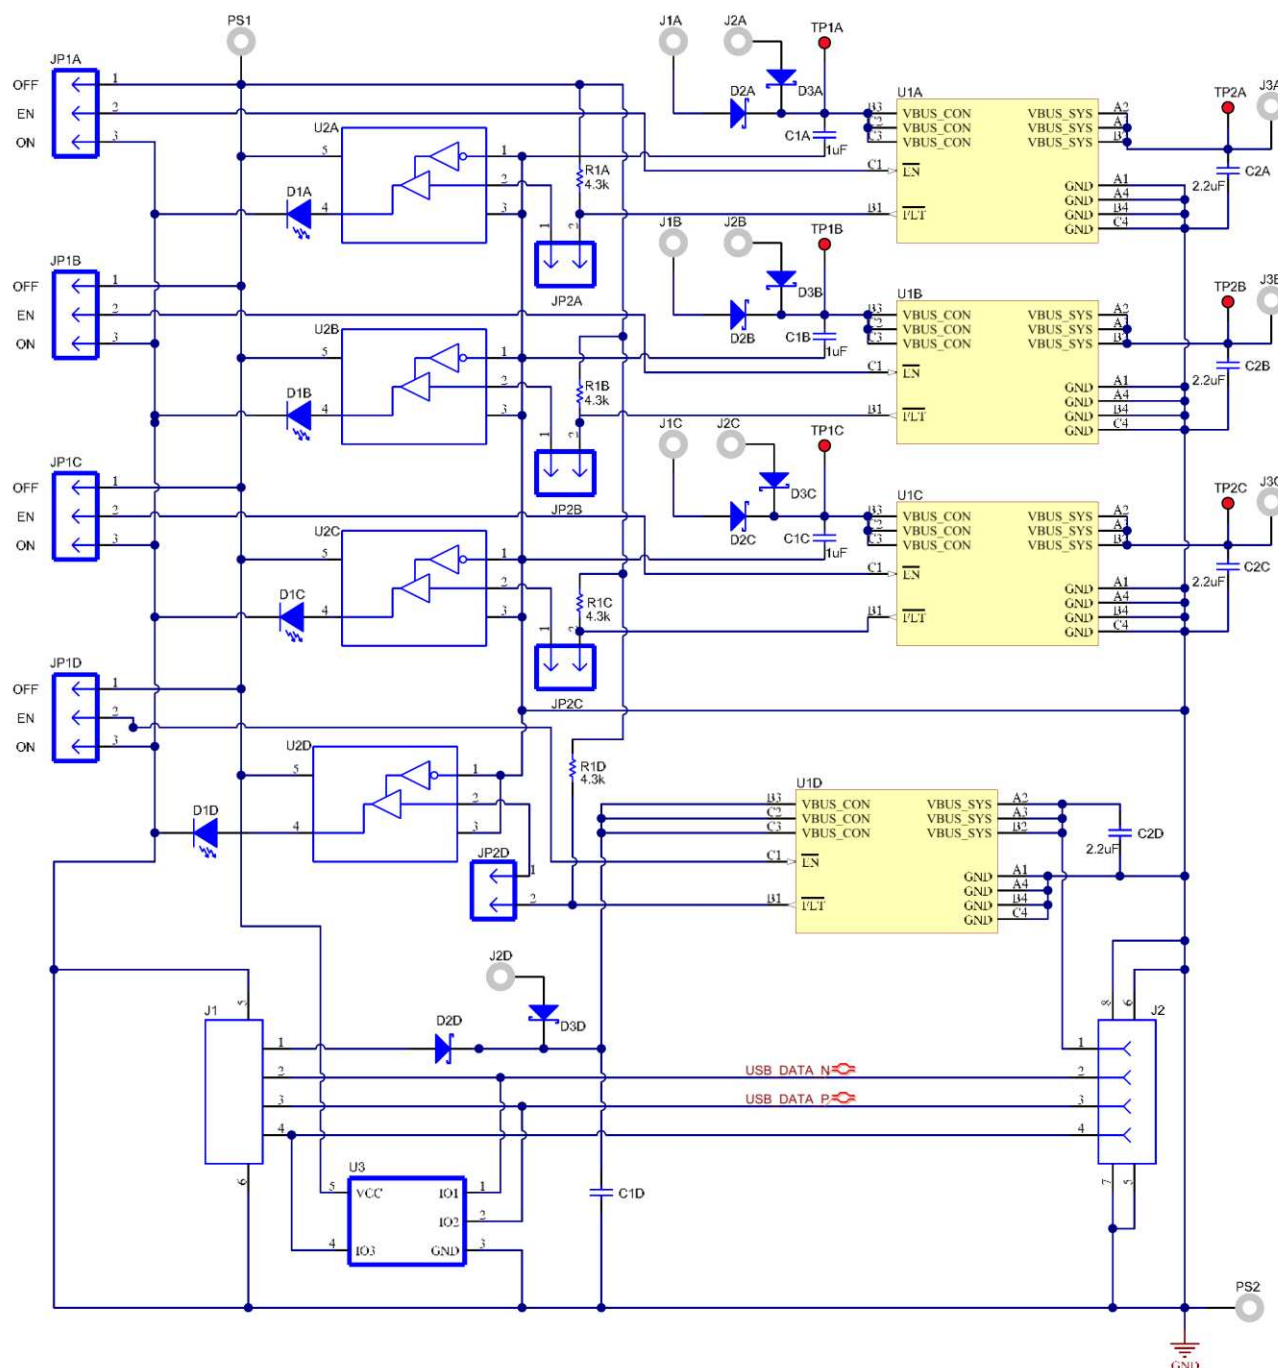


Figure 3. TPD1S414EVM Schematic

5 Board Layout

This section provides the TPD1S414EVM board layout. TPD1S414EVM is a 4-layer board of FR-4 at 0.062" thickness.

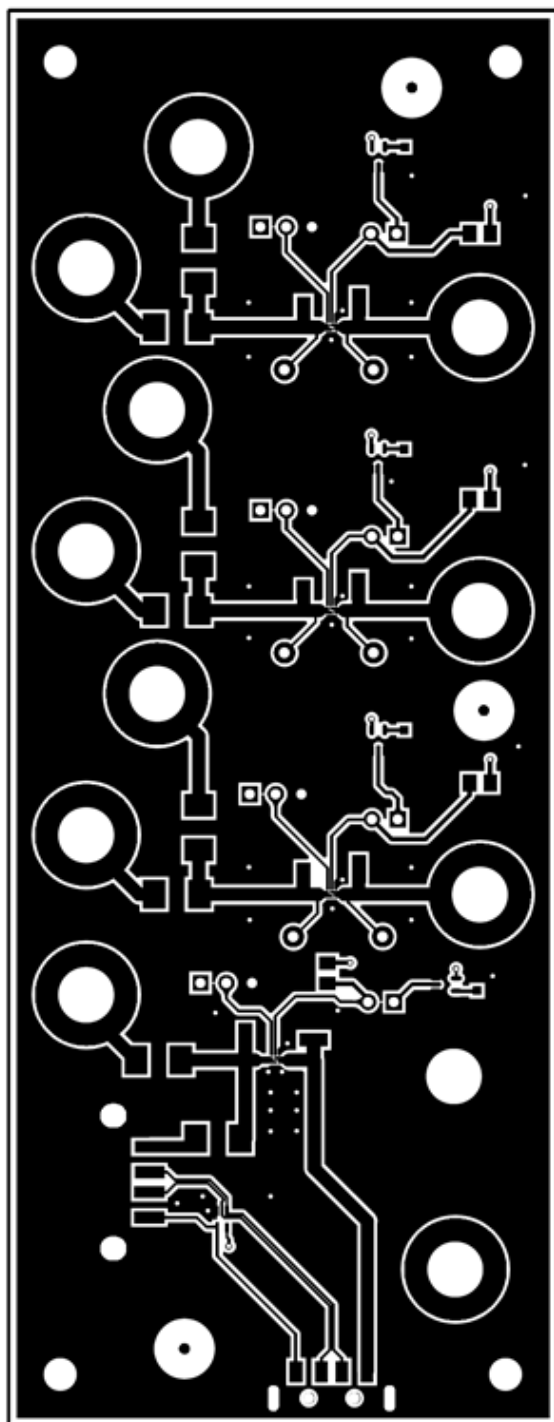


Figure 4. Top Layer Copper

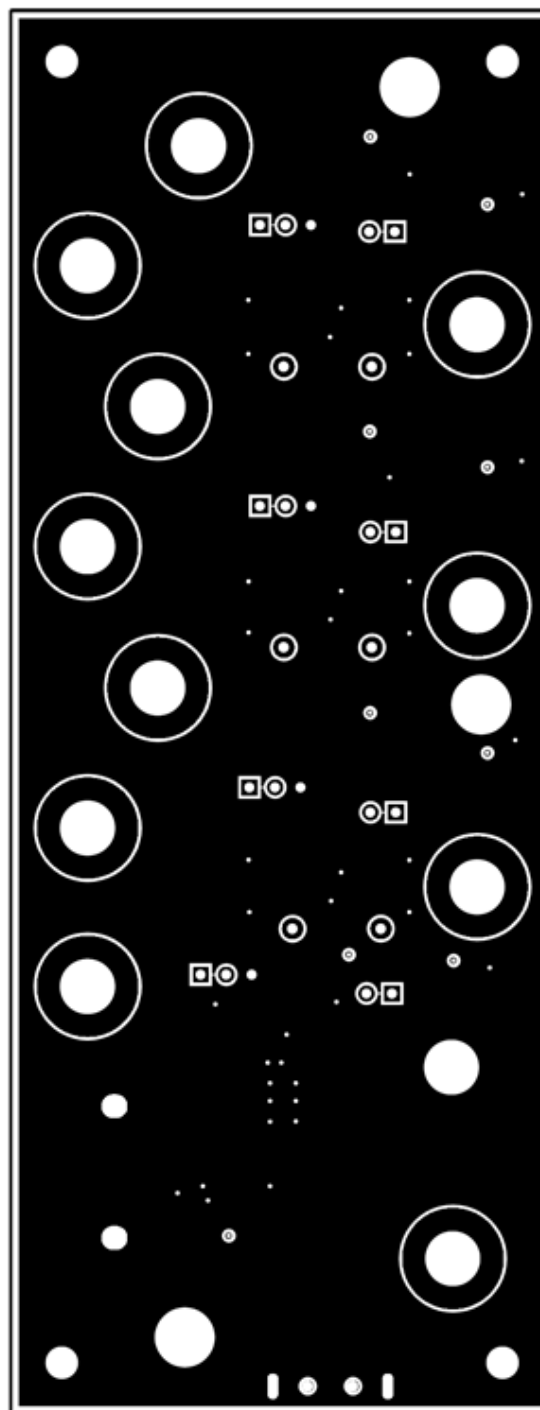


Figure 5. Bottom Layer Copper

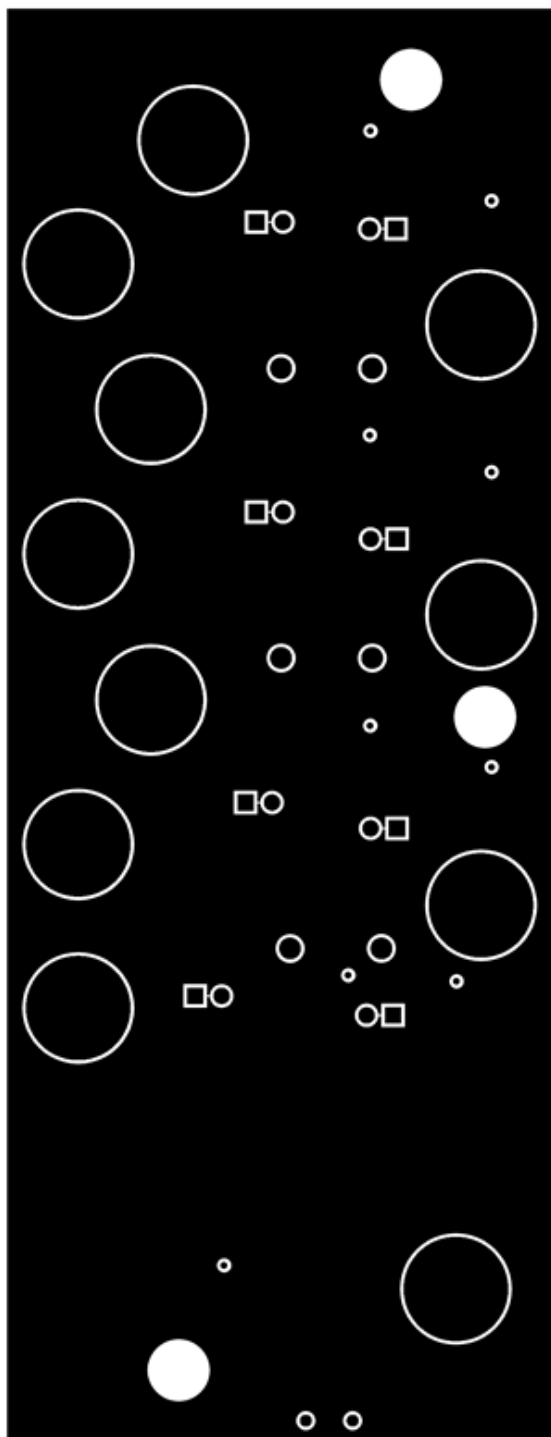


Figure 6. Layer 2 Copper

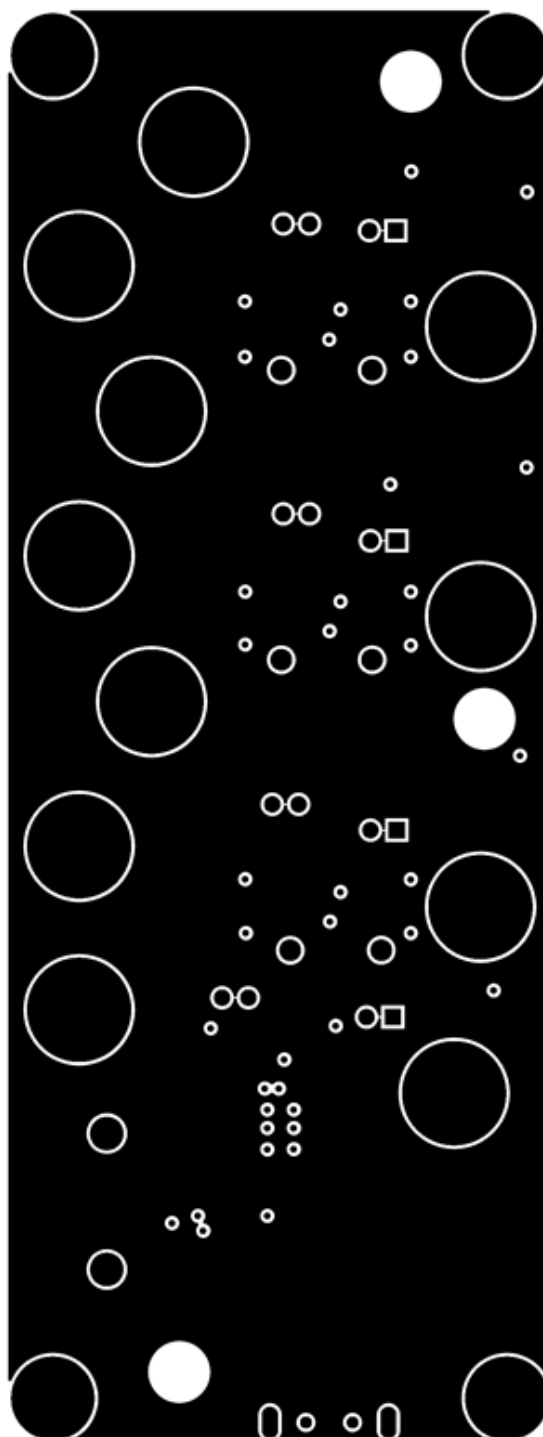


Figure 7. Layer 3 Copper

Revision History

Changes from Original (May 2015) to A Revision	Page
• Updated section order.	1
• Added Schematics section.	5

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Applications Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community

e2e.ti.com