


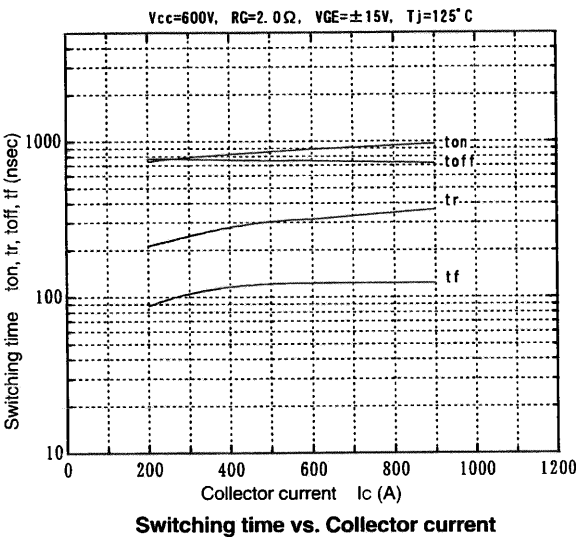
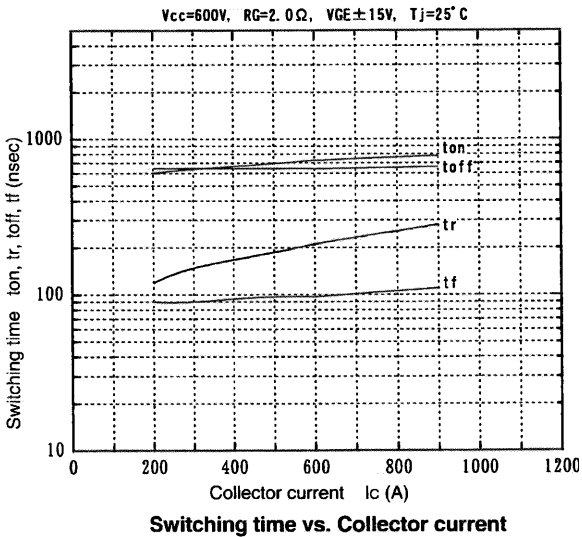
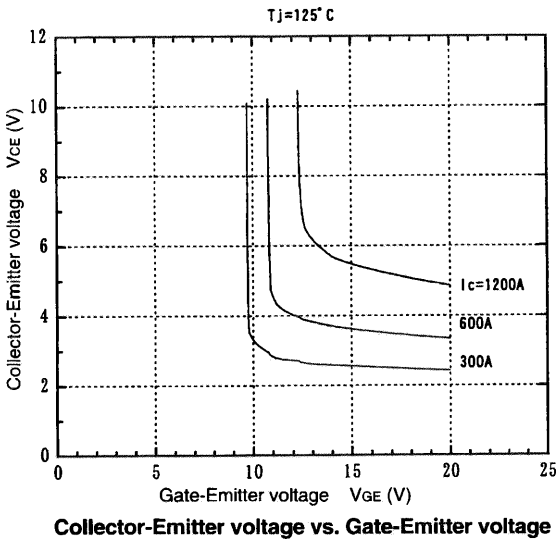
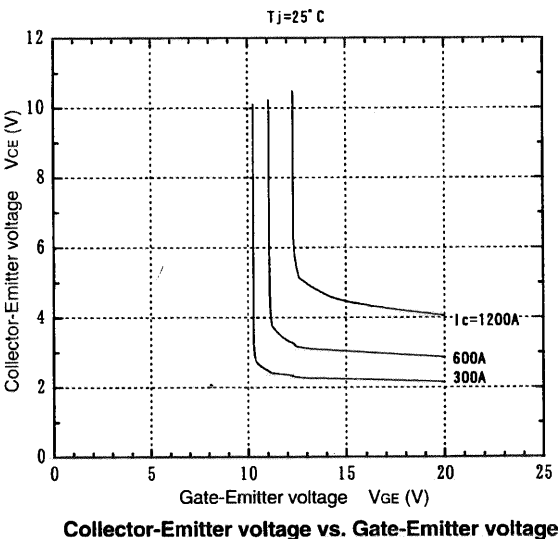
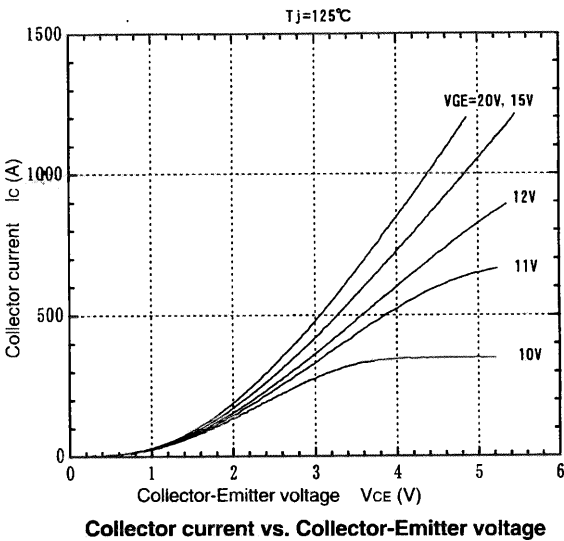


■ Characteristics (Representative)

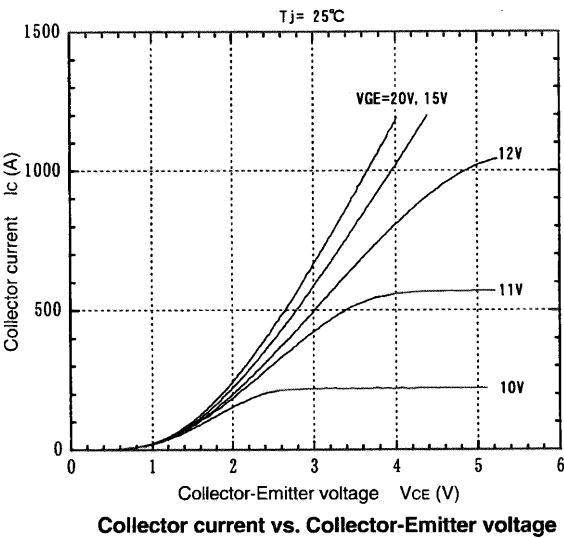


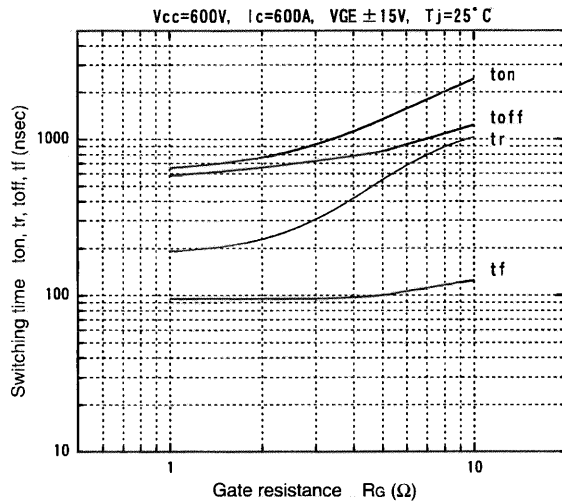



Switching time vs. Gate resistance

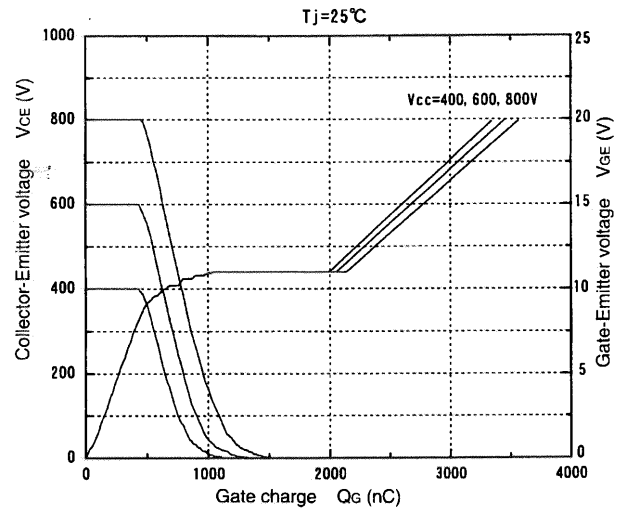


Dynamic input characteristics

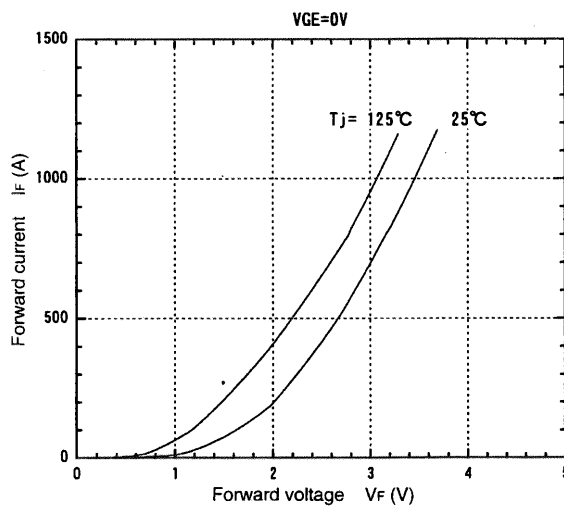



Forward current vs. Forward voltage

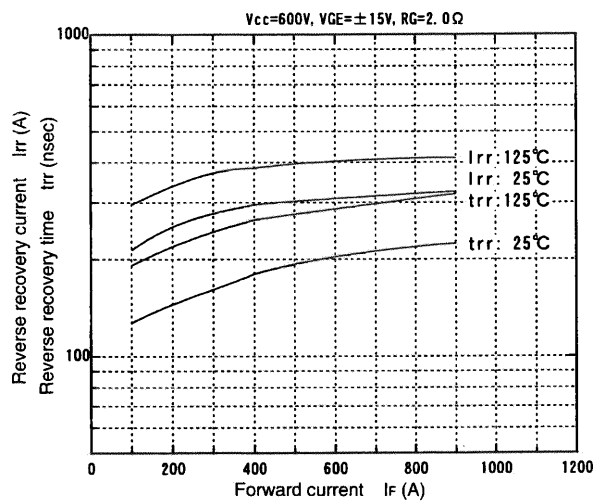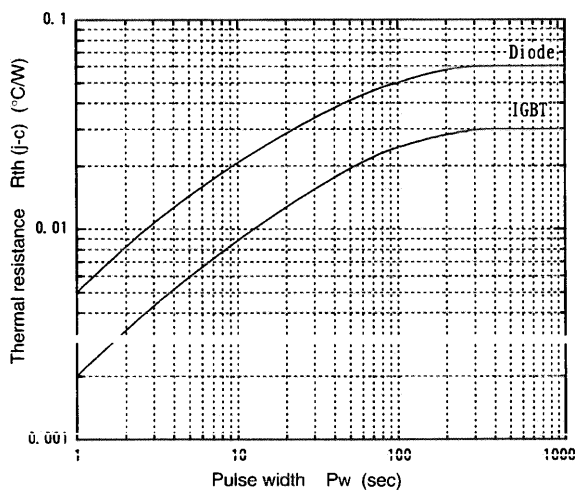 T_{rr}, I_{rr} vs. I_F 

Transient thermal resistance

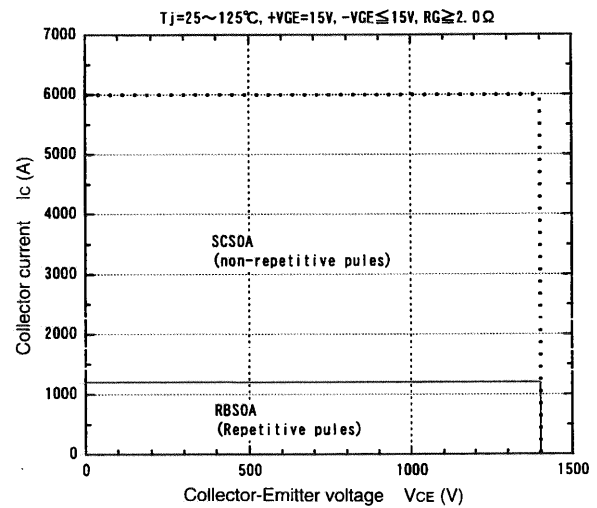


Reverse biased safe operating area

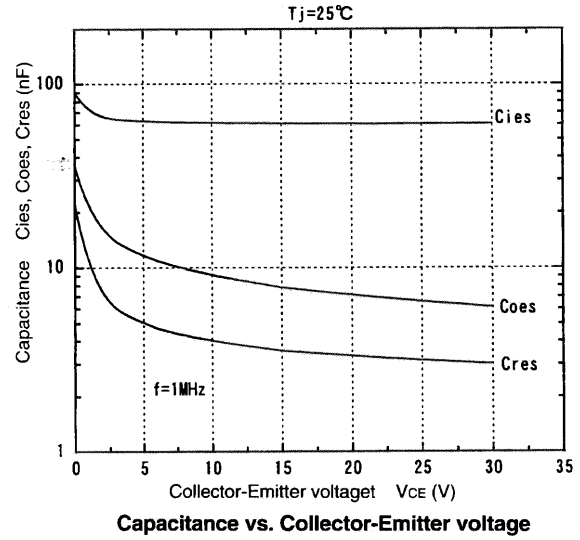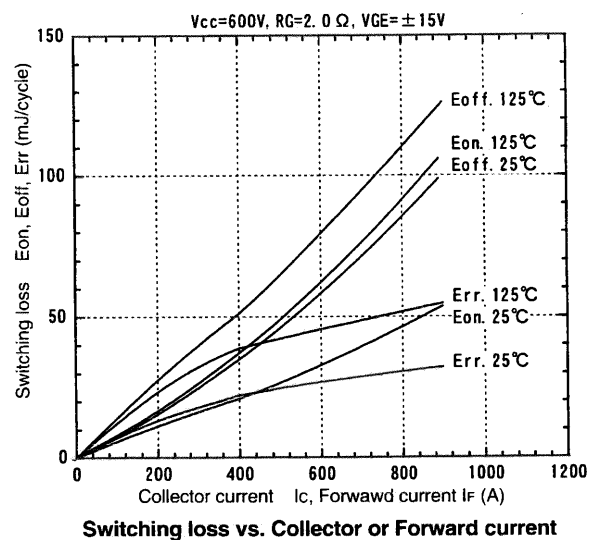

■ Outline Drawings, mm

M138

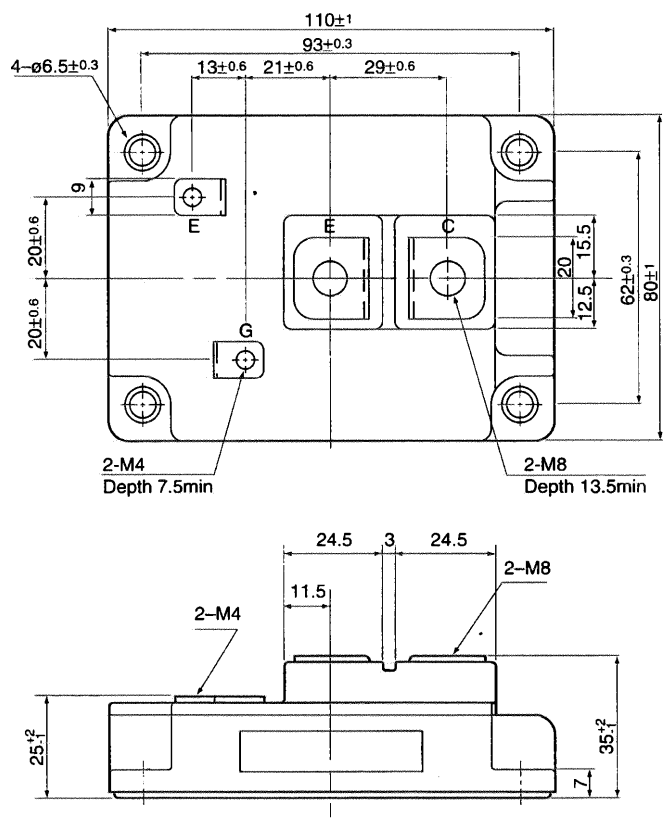

Mass : 530g