

Silicon Switching Diode

1N4150
or
1N4150-1


DO-35 Glass Package

Applications

Used in general purpose applications, where a controlled forward characteristic and fast switching speed are important.

Features

- Six sigma quality
- Metallurgically bonded
- BKC's Sigma Bond™ plating for problem free solderability
- LL-34/35 MELF SMD available
- Full approval to Mil-S-19500/231
- Available up to JANTXV-1 levels
- "S" level screening available to Source Control Drawings

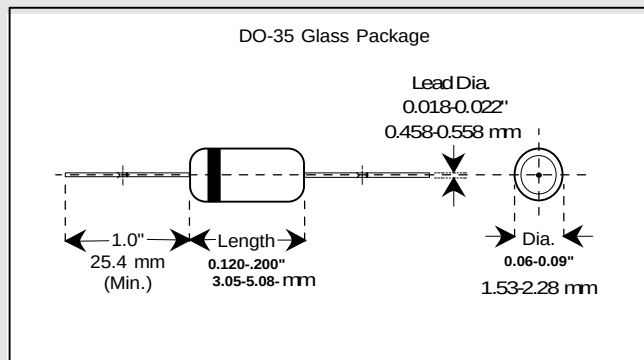

Maximum Ratings		Symbol	Value	Unit	
Peak Inverse Voltage		PIV	75 (Min.)	Volts	
Average Rectified Current		I_{Avg}	200	mAmps	
Continuous Forward Current		I_{Fdc}	400	mAmps	
Peak Surge Current ($t_{peak} = 1 \text{ sec.}$)		I_{peak}	0.5	Amp	
BKC Power Dissipation $T_L=50^\circ\text{C}$, $L = 3/8"$ from body		P_{tot}	500	mWatts	
Operating Temperature Range		T_{Op}	-65 to +200	$^\circ\text{C}$	
Storage Temperature Range		T_{St}	-65 to +200	$^\circ\text{C}$	
Electrical Characteristics @ 25°C		Symbol	Minimum	Maximum	Unit
Forward Voltage Drop @ $I_F = 1.0 \text{ mA}$		V_F	0.54	0.62	Volts
Forward Voltage Drop @ $I_F = 10 \text{ mA}$		V_F	0.66	0.74	Volts
Forward Voltage Drop @ $I_F = 50 \text{ mA}$		V_F	0.76	0.86	Volts
Forward Voltage Drop @ $I_F = 100 \text{ mA}$		V_F	0.80	0.92	Volts
Forward Voltage Drop @ $I_F = 200 \text{ mA}$		V_F	0.87	1.0	Volts
Reverse Leakage Current @ $V_R = 50 \text{ V}$		I_r		0.1 (100 @ 150°C)	μA
Breakdown Voltage @ $I_r = 0.1 \text{ mA}$		PIV	75		Volts
Capacitance @ $V_R = 0 \text{ V}$, $f = 1 \text{ MHz}$		C_T		2.5	pF
Reverse Recovery time (note 1)		t_{rr}		4.0	nSecs
Reverse Recovery time (note 2,3)		t_{rr}		6.0	nSecs
Forward Recovery time (note 4)		V_{fr}		10	nSecs

Note 1: Per Method 4031-A with $I_F = I_R = 10$ to 200 mA, $R_L = 100 \text{ Ohms}$, recover to 0.1 If.

Note 2: Per Method 4031-A with $I_F = I_R = 200$ to 400 mA, $R_L = 100 \text{ Ohms}$, recover to 0.1 If.

Note 3: Per Method 4031-A with $I_F = 10 \text{ microA}$, $I_R = 1.0 \text{ mA}$, recover to 0.1 mA.

Note 4: Per Method 4026 with $I_F = 200 \text{ mA}$, $I_R = 1.0 \text{ mA}$, recover to 0.1 mA.



6 Lake Street - Lawrence, MA 01841

Tel: 978-681-0392 - Fax: 978-681-9135