

DS21Q55DK Quad T1/E1/J1 Transceiver Design Kit Daughter Card

www.maxim-ic.com

GENERAL DESCRIPTION

The DS21Q55DK is an easy-to-use evaluation board for the DS21Q55 quad T1/E1/J1 transceiver. The DS21Q55DK is intended to be used as a daughter card with the DK101 motherboard or the DK2000 motherboard. The DS21Q55DK comes complete with a DS21Q55 quad SCT, transformers, termination resistors, configuration switches, line-protection circuitry, network connectors, and motherboard connectors. The DK101/DK2000 motherboard and Dallas' ChipView software give point-and-click access to configuration and status registers from a Windows®-based PC. On-board LEDs indicate receive loss-of-signal and interrupt status. An on-board FPGA contains mux logic to connect framer ports to one another or to the DK2000 in a variety of configurations.

Each DS21Q55DK is shipped with a free DK101 motherboard. For complex applications, the DK2000 high-performance demo kit motherboard can be purchased separately.

Windows is a registered trademark of Microsoft Corp.

ORDERING INFORMATION

PART	DESCRIPTION
DS21Q55DK	DS21Q55 Demo Kit Daughter Card (with included DK101 Motherboard)

FEATURES

- Demonstrates Key Functions of DS21Q55 Quad T1/E1/J1 Transceiver
- Includes DS21Q55 Quad LIU, Transformers, BNC, and RJ45 Network Connectors and Termination Passives
- Compatible with DK101 and DK2000 Demo Kit Motherboards
- DK101/DK2000 and ChipView Software Provide Point-and-Click Access to the DS21Q55 Register Set
- All Equipment-Side Framer Pins are Easily Accessible for External Data Source/Sink
- Memory-Mapped FPGA Provides Flexible Clock/Data/Sync Connections Among Framer Ports and DK2000 Motherboard
- LEDs for Loss-of-Signal and Interrupt Status
- Easy-to-Read Silk-Screen Labels Identify the Signals Associated with All Connectors, Jumpers and LEDs
- Network Interface Protection for Overvoltage and Overcurrent Events

DESIGN KIT CONTENTS

DS21Q55DK Design Kit Daughter Card
DK101 Low-Cost Motherboard
CD-ROM
ChipView Software
DS21Q55DK Data Sheet
DK101 Data Sheet
DS21Q55 Data Sheet
DS21Q55 Errata Sheet

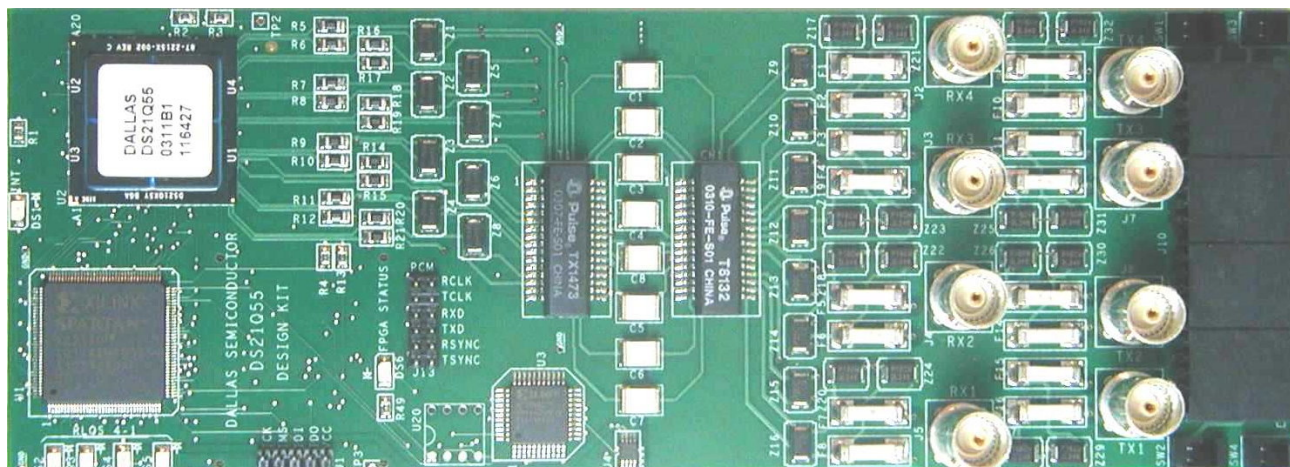


TABLE OF CONTENTS

COMPONENT LIST	3
BOARD FLOORPLAN.....	4
ERRATA	4
BASIC OPERATION.....	4
HARDWARE CONFIGURATION.....	4
<i>Using the DK101 Processor Board:</i>	<i>4</i>
<i>Using the DK2000 Processor Board:</i>	<i>4</i>
General.....	5
Miscellaneous.....	5
QUICK SETUP (DEMO MODE).....	5
QUICK SETUP (REGISTER VIEW).....	5
ADDRESS MAP	6
FPGA REGISTER MAP	7
ID REGISTERS.....	7
CONTROL REGISTERS.....	8
FPGA CONTROL EXAMPLES.....	15
DS21Q55 INFORMATION	17
DS21Q55DK INFORMATION.....	17
TECHNICAL SUPPORT	17
SCHEMATICS	17
DOCUMENT REVISION HISTORY	17


LIST OF TABLES

Table 1. Daughter Card Address Map	6
Table 2. FPGA Register Map	7
Table 3. TCLKx Source Definition	8
Table 4. TSYCLKx Source Definition	9
Table 5. RSYCLKx Source Definition.....	9
Table 6. RSYNCx Function Definition	11
Table 7. TSERx Source Definition.....	12
Table 8. FPGA Configuration for Scenario #1 (Port 1, T1 Mode).....	15
Table 9. FPGA Configuration for Scenario #2 (Port 1, T1 Mode).....	16
Table 10. DS21Q55 Partial Configuration for Scenario #2 (Port 1, T1 Mode).....	16

COMPONENT LIST

DESIGNATION	QTY	DESCRIPTION	SUPPLIER	PART
C1–C8	8	0.22μF, 50V capacitors	Phycomp	PCF1150CT-ND
C9, C10, C12, C18, C22–C33, C35, C38–C43	23	0.1μF 10%, 16V ceramic capacitors (0603)	Phycomp	06032R104K7B20D
C11, C13–C15	4	0.1μF 10%, 25V ceramic capacitors (1206)	Panasonic	ECJ-3VB1E104K
C16, C17, C19–C21, C34, C36, C45	8	1μF 10%, 16V ceramic capacitors (1206)	Panasonic	ECJ-3YB1C105K
C37, C44	2	10μF 20%, 10V ceramic capacitors (1206)	Panasonic	ECJ-3YB1A106M
CH1	1	Quad port choke	Pulse	T8132
DS1	1	LED, red, SMD	Panasonic	LN1251C
DS2–DS6	5	LED, green, SMD	Panasonic	LN1351C
F1–F16	16	1.25A, 250V fuse, SMT	Teccor	F1250T
J1	1	10-pin, dual row, vertical jumper	Digi-Key	S2012-05-ND
J2–J9	8	5-pin connectors, BNC right-angle vertical	Cambridge	CP-BNCP-004
J10	1	8-pin 4-port jack, right-angle RJ45	Molex	43223-8140
J11, J12	2	50-pin socket, SMD, dual row, vertical	Samtec	TFM-125-02-S-D-LC
J13	1	12-pin connector, dual row, vertical	Digi-Key	S2012-06-ND
R1, R2, R4	3	10kΩ 1%, 1/10W resistors (0805)	Panasonic	ERJ-6ENF1002V
R3, R26, R39, R41, R45	5	10kΩ 5%, 1/10W resistors (0805)	Panasonic	ERJ-6GEYJ103V
R5–R12, R14–R21, R48	17	0Ω 5%, 1/8W resistors (1206)	Panasonic	ERJ-8GEYJ0R00V
R13	1	470Ω 5%, 1/10W resistor (0805)	Panasonic	ERJ-6GEYJ471V
R22–R25	4	51.1Ω 1%, 1/10W resistors (0805)	Panasonic	ERJ-6ENF51R1V
R27, R28, R38	3	1.0kΩ 1%, 1/10W resistors (0805)	Panasonic	ERJ-6ENF1001V
R29–R36	8	61.9Ω 1%, 1/8W resistors (1206)	Panasonic	ERJ-8ENF61R9V
R37, R47	2	Not populated	Panasonic	Not populated
R40, R42–R44, R46, R49	6	330Ω 0.1%, 1/10W MF resistors (0805)	Panasonic	ERA-6YEB331V
SW1–SW4	4	6-PIN TH Switch DPDT	Tyco	SSA22
T1	1	XFMR, XMIT/RCV, 1 to 2, SMT 32-pin	Pulse	TX1473
U1	1	XILINX spartan 2.5V FPGA 144-pin, 20 x 20 TQFP	Xilinx	XC2S50-5TQ144C
U2	1	Quad T1/E1/J1 transceiver 256-pin BGA, 0°C to +70°C multichip module	Dallas Semiconductor	DS21Q55
U3	1	1M PROM for FPGA 44-pin TQFP	Xilinx	XC18V01VQ44C_U
U4	1	8-pin μMAX, SO 2.5V or ADJ	Maxim	MAX1792EUA25
U20	1	Serial configuration EEPROM for XILINX 65kb, 8-DIP	Atmel	AT17LV65EUA-NOPOP
Z1–Z8	8	50A, 6V Sidactor, DO214 SMD	Teccor	P0080SAMC
Z9–Z16	8	500A, 25V Sidactor, DO214 SMD	Teccor	P0300SCMC
Z17–Z32	16	500A, 170V Sidactor, DO214 SMD	Teccor	P1800SCMC

BOARD FLOORPLAN

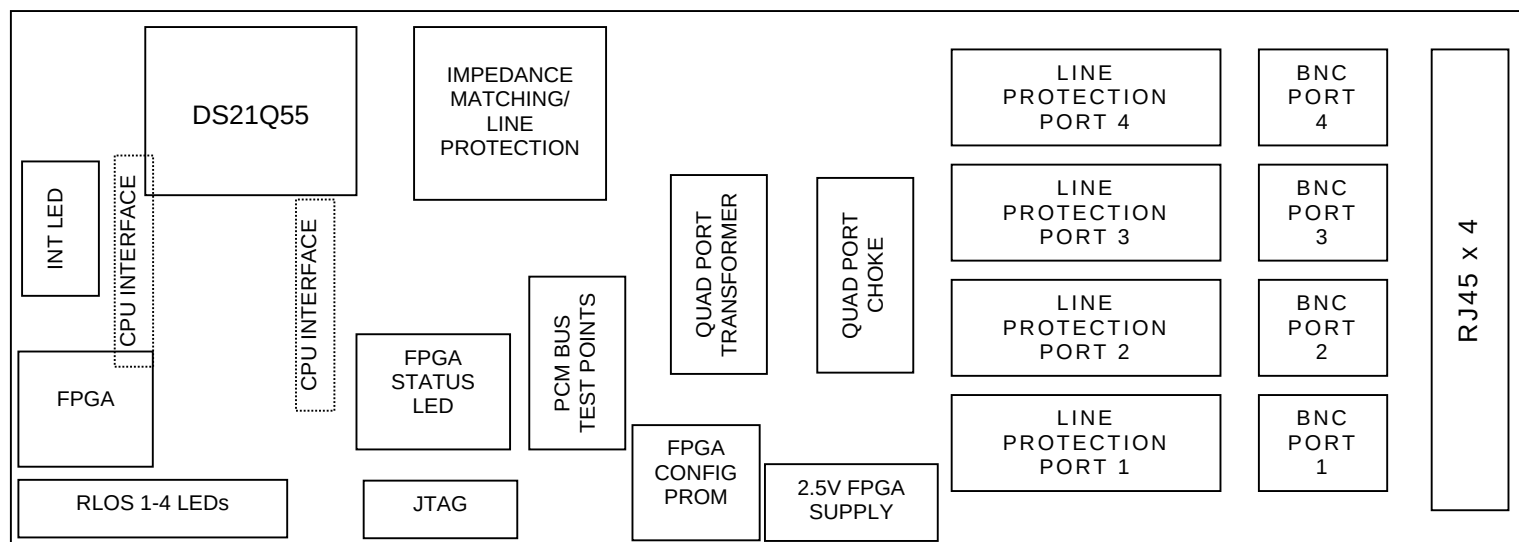

ERRATA

- Connector J1 has silk-screen mislabeled such that the text TMS and TCK should be swapped. Worded differently, TCK belongs to pin 7 and TMS belongs to pin 9.
- Switches SW1 to SW4 are missing silk screen to indicate which side is grounded. Sliding the switch toward the BNC grounds the BNC shell (E1 mode). For T1 mode the switch should be slid away from the BNC.

BASIC OPERATION

This design kit relies upon several supporting files, which are available for downloading on our website at www.maxim-ic.com/telecom. See the DS21Q55DK QuickView data sheet for these files.

Hardware Configuration

Using the DK101 Processor Board:

- Connect the daughter card to the DK101 processor board.
- Supply 3.3V to the banana-plug receptacles marked GND and VCC_3.3V. (The external 5V connector is unused. Additionally, the 'TIM 5V supply' headers are unused.)
- All processor board DIP-switch settings should be in the ON position with exception of the flash-programming switch, which should be OFF.
- From the Programs menu, launch the host application named ChipView.EXE. Run the ChipView application. If the default installation options were used, click the Start button on the Windows toolbar and select Programs → ChipView → ChipView.

Using the DK2000 Processor Board:

- Connect the daughter card to the DK2000 processor board.
- Connect J1 to the power supply that is delivered with the kit. Alternately, a PC power supply may be connected to connector J2.
- From the Programs menu, launch the host application named ChipView.EXE. Run the ChipView application. If the default installation options were used, click the Start button on the Windows toolbar and select Programs → ChipView → ChipView.

General

- Upon power-up, the RLOS LEDs (green) will not be lit, the INT LED (red) will not be lit, but the FPGA status LED (green) will be lit.
- When operating in E1 mode, slide SW1–SW4 such that the BNC shell is grounded (to the left, as shown in the board floorplan). When operating in T1 mode, ensure that SW1–SW4 are slid to the right as shown in the board floorplan.

Miscellaneous

- Clock frequencies and certain pin bias levels are provided by a register-mapped FPGA, which is on the DS21Q55 daughter card.
- The definition file for this FPGA is named DS21Q55DC_FPGA.def. The definitions are located on page 7. A drop-down menu on the top of the screen allows for switching between definition files.
- All files referenced above are available for download as described in the section marked “BASIC OPERATION”

Quick Setup (Demo Mode)

- The PC will load ChipView offering a choice between DEMO MODE, REGISTER VIEW, and TERMINAL MODE. Select Demo Mode.
- The program will request a configuration file, select among the displayed files (DS2155_E1_DSNCOM_DRV.R.cfg or DS2155_T1_DSNCOM_DRV.R.cfg).
- The Demo Mode screen will appear. Upon external loopback, the LOS and OOF indicators will extinguish.
- Note: Demo Mode interacts with the device driver, which is resident in the DK101/DK2000 firmware. The current implementation of this driver is for one device. As such, the demo mode will only interact with **Port 1**. With minor changes, the device driver is extendible to *N* devices.

Quick Setup (Register View)

- The PC will load ChipView offering a choice between DEMO MODE, REGISTER VIEW, and TERMINAL MODE. Select Register View.
- The program will request a definition file. Select DS21Q55DC_FPGA.def; through the 'links' section this will also load DS21Q55DC.def.
- The Register View Screen will appear, showing the register names, acronyms, and values for the DS21Q55
- Predefined register settings for several functions are available as initialization files.
 - INI files are loaded by selecting the menu File→Reg Ini File→Load Ini File
 - Load the INI file DS21Q55_T1_BERT_ESF.ini
 - After loading the INI file, the following may be observed:
 - The RLOS LEDs (green) light upon external loopback.
 - All four ports of the DS2Q155 begin transmitting a Daly pattern. When external loopback is applied, the BERT bit count registers BBC1–3 and BEC1–3 may be updated by clearing and setting BC1.LC and clicking the 'Read All' button.

ADDRESS MAP

DK101 Daughter Card address space begins at 0x81000000.

DK2000 Daughter Card address space begins at:

0x30000000 for slot 0

0x40000000 for slot 1

0x50000000 for slot 2

0x60000000 for slot 3

All offsets given below are relative to the beginning of the daughter card address space (shown above).

Table 1. Daughter Card Address Map

OFFSET	DEVICE	DESCRIPTION
0X0000 to 0X0015	FPGA	Board identification and clock/signal routing
0X1000 to 0X10ff	T1/E1/J1 Transceiver #1	DS21Q55 T1/E1/J1 transceiver, port 1
0X2000 to 0X20ff	T1/E1/J1 Transceiver #2	DS21Q55 T1/E1/J1 transceiver, port 2
0X3000 to 0X30ff	T1/E1/J1 Transceiver #3	DS21Q55 T1/E1/J1 transceiver, port 3
0X4000 to 0X40ff	T1/E1/J1 Transceiver #4	DS21Q55 T1/E1/J1 transceiver, port 4

Registers in the FPGA may be easily modified using the ChipView host-based user-interface software along with the definition file named "DS21Q55DC_FPGA.def."

FPGA Register Map

Table 2. FPGA Register Map

OFFSET	REGISTER NAME	TYPE	DESCRIPTION
0X0000	BID	Read-Only	Board ID
0X0002	XBIDH	Read-Only	High-Nibble Extended Board ID
0X0003	XBIDM	Read-Only	Middle-Nibble Extended Board ID
0X0004	XBIDL	Read-Only	Low-Nibble Extended Board ID
0X0005	BREV	Read-Only	Board FAB Revision
0X0006	AREV	Read-Only	Board Assembly Revision
0X0007	PREV	Read-Only	PLD Revision
0X0011	MCSR	Control	DS21Q55 MCLK Pin Source
0X0012	TCSR	Control	DS21Q55 TCLK Pin Source
0X0013	SYSCCLKT	Control	DS21Q55 TSYSCLK Pin Setting
0X0014	SYSCCLKR	Control	DS21Q55 RSYSCLK Pin Setting
0X0015	SYNC1	Control	DS21Q55 TSYNC Source
0X0016	SYNC2	Control	DS21Q55 TSSYNC Source
0X0017	SYNC3	Control	DS21Q55 RSYNC Source
0X0018	TSERS	Control	TSER Source
0X0019	PRSER	Control	PCM RSER Source
0X001A	PSYNC	Control	PCM RSYNC/TSYNC Source
0X001B	PCLK	Control	PCM RCLK/TCLK Source

ID REGISTERS

BID: BOARD ID (Offset=0X0000)

BID is read only with a value of 0xD

XBIDH: HIGH NIBBLE EXTENDED BOARD ID (Offset=0X0002)

XBIDH is read only with a value of 0x0

XBIDM: MIDDLE NIBBLE EXTENDED BOARD ID (Offset=0X0003)

XBIDM is read only with a value of 0x1

XBIDL: LOW NIBBLE EXTENDED BOARD ID (Offset=0X0004)

XBIDL is read only with a value of 0x6

BREV: BOARD FAB REVISION (Offset=0X0005)

BREV is read only and displays the current fab revision

AREV: BOARD ASSEMBLY REVISION (Offset=0X0006)

AREV is read only and displays the current assembly revision

PREV: PLD REVISION (Offset=0X0007)

PREV is read only and displays the current PLD firmware revision

CONTROL REGISTERS

Register Name: **MCSR**

Register Description: **DS21Q55 MCLK Pin Source**

Register Offset: **0x0011**

Bit #	7	6	5	4	3	2	1	0
Name	—	—	—	—	—	—	MSRCB	MSRCA
Default	—	—	—	—	—	—	1	1

Bit 0: DS21Q55 Port 1 and 3 MCLK Source (MSRCA)

0 = Connect MCLK 1 (controls port 1 and 3) to the 1.544MHz clock

1 = Connect MCLK 1 (controls port 1 and 3) to the 2.048MHz clock

Bit 1: DS21Q55 Port 2 and 4 MCLK Source (MSRCA)

0 = Connect MCLK 2 (controls port 2 and 4) to the 1.544MHz clock

1 = Connect MCLK 2 (controls port 2 and 4) to the 2.048MHz clock

Register Name: **TCSR**

Register Description: **DS21Q55 TCLK Pin Source**

Register Offset: **0x0012**

Bit #	7	6	5	4	3	2	1	0
Name	T4S1	T4S0	T3S1	T3S0	T2S1	T2S0	T1S1	T1S0
Default	0	0	0	0	0	0	0	0

Bit 0 to 1: DS21Q55 Port 1 TCLK Source (T1S0, T1S1)

The source for TCLK 1 is Defined as shown in Table 3.

Bit 2 to 3: DS21Q55 Port 2 TCLK Source (T2S0, T2S1)

The source for TCLK 2 is Defined as shown in Table 3.

Bit 4 to 5: DS21Q55 Port 3 TCLK Source (T3S0, T3S1)

The source for TCLK 3 is Defined as shown in Table 3.

Bit 6 to 7: DS21Q55 Port 4 TCLK Source (T4S0, T4S1)

The source for TCLK 3 is Defined as shown in Table 3.

Table 3. TCLKx Source Definition

TxS1, TxS0	TCLK CONNECTION
00	Drive TCLK _x with the 1.544MHz clock
01	Drive TCLK _x with the 2.048MHz clock
10	Drive TCLK _x with RCLK _x
11	N/A

Register Name: **SYCLKT**Register Description: **DS21Q55 TSYCLK Pin Setting**Register Offset: **0x0013**

Bit #	7	6	5	4	3	2	1	0
Name	R4S1	R4S0	R3S1	R3S0	R2S1	R2S0	R1S1	R1S0
Default	0	0	0	0	0	0	0	0

Bit 0 to 1: DS21Q55 Port 1 TSYCLK Source (R1S0, R1S1)

The source for TSYCLK 1 is Defined as shown in Table 4.

Bit 2 to 3: DS21Q55 Port 2 TSYCLK Source (R2S0, R2S1)

The source for TSYCLK 2 is Defined as shown in Table 4.

Bit 4 to 5: DS21Q55 Port 3 TSYCLK Source (R3S0, R3S1)

The source for TSYCLK 3 is Defined as shown in Table 4.

Bit 6 to 7: DS21Q55 Port 4 TSYCLK Source (R4S0, R4S1)

The source for TSYCLK 4 is Defined as shown in Table 4.

Table 4. TSYCLKx Source Definition

RxS1, RxS0	TSYCLK _x CONNECTION
00	Drive TSYCLK _x with the 1.544MHz clock
01	Drive TSYCLK _x with the 2.048MHz clock
10	Drive TSYCLK _x with 8.192MHz clock
11	Drive TSYCLK _x with DS21Q55 Port _x BPCLK

Register Name: **SYCLKR**Register Description: **DS21Q55 RSYCLK Pin Setting**Register Offset: **0x0014**

Bit #	7	6	5	4	3	2	1	0
Name	T4S1	T4S0	T3S1	T3S0	T2S1	T2S0	T1S1	T1S0
Default	0	0	0	0	0	0	0	0

Bit 0 to 1: DS21Q55 Port 1 RSYCLK Source (T1S0, T1S1)

The source for RSYCLK 1 is Defined as shown in Table 5.

Bit 2 to 3: DS21Q55 Port 2 RSYCLK Source (T2S0, T2S1)

The source for RSYCLK 2 is Defined as shown in Table 5.

Bit 4 to 5: DS21Q55 Port 3 RSYCLK Source (T3S0, T3S1)

The source for RSYCLK 3 is Defined as shown in Table 5.

Bit 6 to 7: DS21Q55 Port 4 RSYCLK Source (T4S0, T4S1)

The source for RSYCLK 4 is Defined as shown in Table 5.

Table 5. RSYCLKx Source Definition

TxS1, TxS0	RSYCLK _x CONNECTION
00	Drive RSYCLK _x with the 1.544MHz clock
01	Drive RSYCLK _x with the 2.048MHz clock
10	Drive RSYCLK _x with 8.192MHz clock
11	Drive RSYCLK _x with DS21Q55 Port _x BPCLK

Register Name: **SYNC1**Register Description: **DS21Q55 TSYNC Pin Source**Register Offset: **0x0015**

Bit #	7	6	5	4	3	2	1	0
Name	—	—	—	—	T4SRC	T3SRC	T2SRC	T1SRC
Default	—	—	—	—	0	0	0	0

Bit 0: DS21Q55 Port 1 TSYNC Source (T1SRC)

0 = TSYNC 1 is an output, tri-state corresponding FPGA driver pin (weak pulldown)

1 = Drive TSYNC 1 with RSYNC 1

Bit 1: DS21Q55 Port 2 TSYNC Source (T2SRC)

0 = TSYNC 2 is an output, tri-state corresponding FPGA driver pin (weak pulldown)

1 = Drive TSYNC 2 with RSYNC 2

Bit 2: DS21Q55 Port 3 TSYNC Source (T3SRC)

0 = TSYNC 3 is an output, tri-state corresponding FPGA driver pin (weak pulldown)

1 = Drive TSYNC 3 with RSYNC 3

Bit 3: DS21Q55 Port 4 TSYNC Source (T4SRC)

0 = TSYNC 4 is an output, tri-state corresponding FPGA driver pin (weak pulldown)

1 = Drive TSYNC 4 with RSYNC 4

Note: When driving TSYNCx with RSYNCx the corresponding DS21Q55 port should be configured such that TSYNCx is an input (IOCR1.1 = 0) and RSYNCx is an output (IOCR1.4 = 0).

Register Name: **SYNC2**Register Description: **DS21Q55 TSSYNC Pin Source**Register Offset: **0x0016**

Bit #	7	6	5	4	3	2	1	0
Name	—	—	—	—	T4SRC	T3SRC	T2SRC	T1SRC
Default	—	—	—	—	0	0	0	0

Bit 0: DS21Q55 Port 1 TSSYNC Source (T1SRC)

0 = Not using transmit-side elastic store, tri-state corresponding FPGA driver pin (weak pulldown)

1 = Drive TSSYNC 1 with RSYNC 1

Bit 1: DS21Q55 Port 2 TSSYNC Source (T2SRC)

0 = Not using transmit-side elastic store, tri-state corresponding FPGA driver pin (weak pulldown)

1 = Drive TSSYNC 2 with RSYNC 2

Bit 2: DS21Q55 Port 3 TSSYNC Source (T3SRC)

0 = Not using transmit-side elastic store, tri-state corresponding FPGA driver pin (weak pulldown)

1 = Drive TSSYNC 3 with RSYNC 3

Bit 3: DS21Q55 Port 4 TSSYNC Source (T4Source)

0 = Not using transmit-side elastic store, tri-state corresponding FPGA driver pin (weak pulldown)

1 = Drive TSSYNC 4 with RSYNC 4

Note: When driving TSSYNCx with RSYNCx the corresponding DS21Q55 port should be configured such that RSYNCx is an output (IOCR1.4 = 0).

Register Name: **SYNC3**

Register Description: **DS21Q55 RSYNC Pin Setting**

Register Offset: **0x0017**

Bit #	7	6	5	4	3	2	1	0
Name	RSOR1	RSOR0	—	—	R4IO	R3IO	R2IO	R1IO
Default	0	0	—	—	0	0	0	0

Bit 0: DS21Q55 Port 1 RSYNC Setting (R1IO)

0 = RSYNC 1 is an output, tri-state corresponding FPGA driver pin (weak pulldown)

1 = Drive RSYNC 1 with RSYNC_x as shown in Table 6

Bit 1: DS21Q55 Port 2 RSYNC Setting (R2IO)

0 = RSYNC 2 is an output, tri-state corresponding FPGA driver pin (weak pulldown)

1 = Drive RSYNC 2 with RSYNC_x as shown in Table 6

Bit 2: DS21Q55 Port 3 RSYNC Setting (R3IO)

0 = RSYNC 3 is an output, tri-state corresponding FPGA driver pin (weak pulldown)

1 = Drive RSYNC 4 with RSYNC_x as shown in Table 6

Bit 3: DS21Q55 Port 4 RSYNC Setting (R4IO)

0 = RSYNC 4 is an output, tri-state corresponding FPGA driver pin (weak pulldown)

1 = Drive RSYNC 4 with RSYNC_x as shown in Table 6

Note: When driving RSYNC_y with RSYNC_x the corresponding DS21Q55 port should be configured such that RSYNC_x is an output (IOCR1.4 = 0) and RSYNC_y is an input (IOCR1.4 = 1).

Table 6. RSYNC_x Function Definition

RSOR1, RSOR0	MASTER RSYNC DESIGNATION
00	RSYNC 1 is used to drive other RSYNC pins (providing R _x IO = 1)
01	RSYNC 2 is used to drive other RSYNC pins (providing R _x IO = 1)
10	RSYNC 3 is used to drive other RSYNC pins (providing R _x IO = 1)
11	RSYNC 4 is used to drive other RSYNC pins (providing R _x IO = 1)

Register Name: **TSERS**Register Description: **DS21Q55 TSER Pin Source**Register Offset: **0x0018**

Bit #	7	6	5	4	3	2	1	0
Name	T4S1	T4S0	T3S1	T3S0	T2S1	T2S0	T1S1	T1S0
Default	0	0	0	0	0	0	0	0

Bit 0 to 1: DS21Q55 Port 1 TSER Source (T1S0, T1S1)

The source for TSER 1 is Defined as shown in Table 7.

Bit 2 to 3: DS21Q55 Port 2 TSER Source (T2S0, T2S1)

The source for TSER 2 is Defined as shown in Table 7.

Bit 4 to 5: DS21Q55 Port 3 TSER Source (T3S0, T3S1)

The source for TSER 3 is Defined as shown in Table 7.

Bit 6 to 7: DS21Q55 Port 4 TSER Source (T4S0, T4S1)

The source for TSER 4 is Defined as shown in Table 7.

Table 7. TSERx Source Definition

TxS1, TxS0	TSER _x CONNECTION
00	Tri-state TSER _x (weak pulldown)
01	Drive TSER _x with RSER _x
10	Drive TSER _x with PCM_TXD bus (DK2000 only)
11	N/A

Register Name: **PRSER**Register Description: **PCM RSER Source**Register Offset: **0x0019**

Bit #	7	6	5	4	3	2	1	0
Name	—	—	—	—	R1EN	R1EN	R1EN	R1EN
Default	—	—	—	—	0	0	0	0

Bit 0 to 1: PCM RSER Source (R1EN)

0 = Do not drive DS21Q55 Port 1 RSER onto PCM_RSER

1 = Logically OR DS21Q55 Port 1 RSER with selected other RSER pins and drive onto PCM_RSER

Bit 2 to 3: DS21Q55 Port 2 TSER Source (T2S0, T2S1)

0 = Do not drive DS21Q55 Port 2 RSER onto PCM_RSER

1 = Logically OR DS21Q55 Port 2 RSER with selected other RSER pins and drive onto PCM_RSER

Bit 4 to 5: DS21Q55 Port 3 TSER Source (T3S0, T3S1)

0 = Do not drive DS21Q55 Port 3 RSER onto PCM_RSER

1 = Logically OR DS21Q55 Port 3 RSER with selected other RSER pins and drive onto PCM_RSER

Bit 6 to 7: DS21Q55 Port 4 TSER Source (T4S0, T4S1)

0 = Do not drive DS21Q55 Port 4 RSER onto PCM_RSER

1 = Logically OR DS21Q55 Port 4 RSER with selected other RSER pins and drive onto PCM_RSER

Note: PRSER register is for use with the DK2000 only.

Register Name: **PSYNC**Register Description: **PCM RSYNC/TSYNC Source**Register Offset: **0x001A**

Bit #	7	6	5	4	3	2	1	0
Name	—	—	T2SR	T1SR	—	—	R2SR	R1SR
Default	—	—	0	0	—	—	0	0

Bit 0 to 1: PCM_RSYNC Source

R2SR, R1SR	PCM_RSYNC Source
00	PCM_RSYNC is driven by DS21Q55 port 1 RSYNC.
01	PCM_RSYNC is driven by DS21Q55 port 2 RSYNC.
10	PCM_RSYNC is driven by DS21Q55 port 3 RSYNC.
11	PCM_RSYNC is driven by DS21Q55 port 4 RSYNC.

Bit 4 to 5: PCM_TSYNC Source

T2SR, T1SR	PCM_TSYNC Source
00	PCM_TSYNC is driven by DS21Q55 port 1 TSYNC.
01	PCM_TSYNC is driven by DS21Q55 port 2 TSYNC.
10	PCM_TSYNC is driven by DS21Q55 port 3 TSYNC.
11	PCM_TSYNC is driven by DS21Q55 port 4 TSYNC.

Note: PSYNC register is for use with the DK2000 only.

Register Name: **PCLK**Register Description: **PCM RCLK/TCLK Source**Register Offset: **0x001B**

Bit #	7	6	5	4	3	2	1	0
Name	—	TCM	T2SR	T1SR	—	RCM	R2SR	R1SR
Default	—	0	0	0	—	0	0	0

Bit 0 to 2: PCM_RCLK Source

RCM, R2SR, R1SR	PCM_RCLK Source
000	PCM_RCLK is driven by DS21Q55 port 1 RCLK.
001	PCM_RCLK is driven by DS21Q55 port 2 RCLK.
010	PCM_RCLK is driven by DS21Q55 port 3 RCLK.
011	PCM_RCLK is driven by DS21Q55 port 4 RCLK.
100	PCM_RCLK is driven by DS21Q55 port 1 BPCLK.
101	PCM_RCLK is driven by DS21Q55 port 2 BPCLK.
110	PCM_RCLK is driven by DS21Q55 port 3 BPCLK.
111	PCM_RCLK is driven by DS21Q55 port 4 BPCLK.

Bit 4 to 5: PCM_TCLK Source

TCM, T2SR, T1SR	PCM_TCLK Source
000	PCM_TCLK is driven by source used for DS21Q55 port 1 TCLK.
001	PCM_TCLK is driven by source used for DS21Q55 port 2 TCLK.
010	PCM_TCLK is driven by source used for DS21Q55 port 3 TCLK.
011	PCM_TCLK is driven by source used for DS21Q55 port 4 TCLK.
100	PCM_TCLK is driven by DS21Q55 port 1 BPCLK.
101	PCM_TCLK is driven by DS21Q55 port 2 BPCLK.
110	PCM_TCLK is driven by DS21Q55 port 3 BPCLK.
111	PCM_TCLK is driven by DS21Q55 port 4 BPCLK.

Note: PCLK register is for use with the DK2000 only.

FPGA CONTROL EXAMPLES

SCENARIO #1: DS21Q55 TO/FROM DK2000

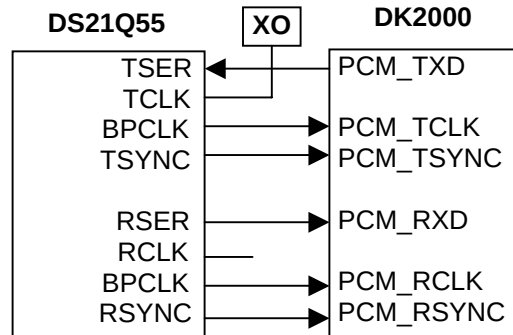


Table 8. FPGA Configuration for Scenario #1 (Port 1, T1 Mode)

REGISTER	SETTING	FUNCTION
MCSR	0X01	Drive DS21Q55 ports 1 and 3 MCLK with 2.048MHz
TCSR	0X00	Drive TCLK with 1.544MHz
SYSCCLKT	0X00	Drive TSYSCCLK with 1.544MHz
SYSCCLKR	0X00	Drive RSYSCCLK with 1.544MHz
SYNC1	0X00	Tri-state FPGA driver pin for DS21Q55 TSYNC1
SYNC2	0X01	Drive TSSYNC1 with RSYNC1
SYNC3	0X00	Tri-state FPGA driver pin for DS21Q55 RSYNC
TSERS	0X02	Drive DS21Q55 TSER1 with data from PCM bus
PRSER	0X01	Drive DS21Q55 RSER1 onto PCM bus
PSYNC	0X00	PCM RSYNC and PCM TSYNC are provided by DS21Q55 port 1 RSYNC and TSYNC (respectively)
PCLK	0X44	PCM RCLK and TCLK are driven by port 1 BPCLK

**SCENARIO #2: EXTERNAL REMOTE LOOPBACK
(FULL BANDWIDTH, NOT JUST PAYLOAD)**

DS21Q55




Table 9. FPGA Configuration for Scenario #2 (Port 1, T1 Mode)

REGISTER	SETTING	FUNCTION
MCSR	0X01	Drive DS21Q55 ports 1 and 3 MCLK with 2.048MHz
TCSR	0X02	Drive TCLK1 with RCLK1
SYSCLKT	0X00	Drive TSYCLK with 1.544MHz
SYSCLKR	0X00	Drive RSYCLK with 1.544MHz
SYNC1	0X01	Drive TSYNC1 with RSYNC1
SYNC2	0X01	Drive TSSYNC1 with RSYNC1
SYNC3	0X00	Tri-state FPGA driver pin for DS21Q55 RSYNC
TSERS	0X01	Drive DS21Q55 TSER1 with data from RSER1
PRSER	N/A	Unused
PSYNC	N/A	Unused
PCLK	N/A	Unused

Table 10. DS21Q55 Partial Configuration for Scenario #2 (Port 1, T1 Mode)

REGISTER	SETTING	FUNCTION
IOCR1	TSIO = 0; RSIO = 0	TSYNc is an input, RSYNC is an output
ESCR	TESE = 0; RESE = 0	Bypass Rx and Tx elastic stores
CCR1	TCSS1 = 0; TCSS2 = 0	TCLK is driven by TCLK pin

DS21Q55 INFORMATION

For more information about the DS21Q55, please consult the DS21Q55 data sheet available on our website at www.maxm-ic.com/DS21Q55. Software downloads are also available for this demo kit.

DS21Q55DK INFORMATION

For more information about the DS21Q55DK, including software downloads, please consult the DS21Q55DK data sheet available on our website at www.maxim-ic.com/telecom.

TECHNICAL SUPPORT


For additional technical support, please e-mail your questions to telecom.support@dalsemi.com.



SCHEMATICS


The DS21Q55DK schematics are featured in the following pages.

DOCUMENT REVISION HISTORY


REVISION DATE	DESCRIPTION
121903	Initial DS21Q55DK data sheet release.
012506	Changed part number for CH1 in <i>Component List</i> from "TX1473" to "T8132."
110106	Updated schematics.

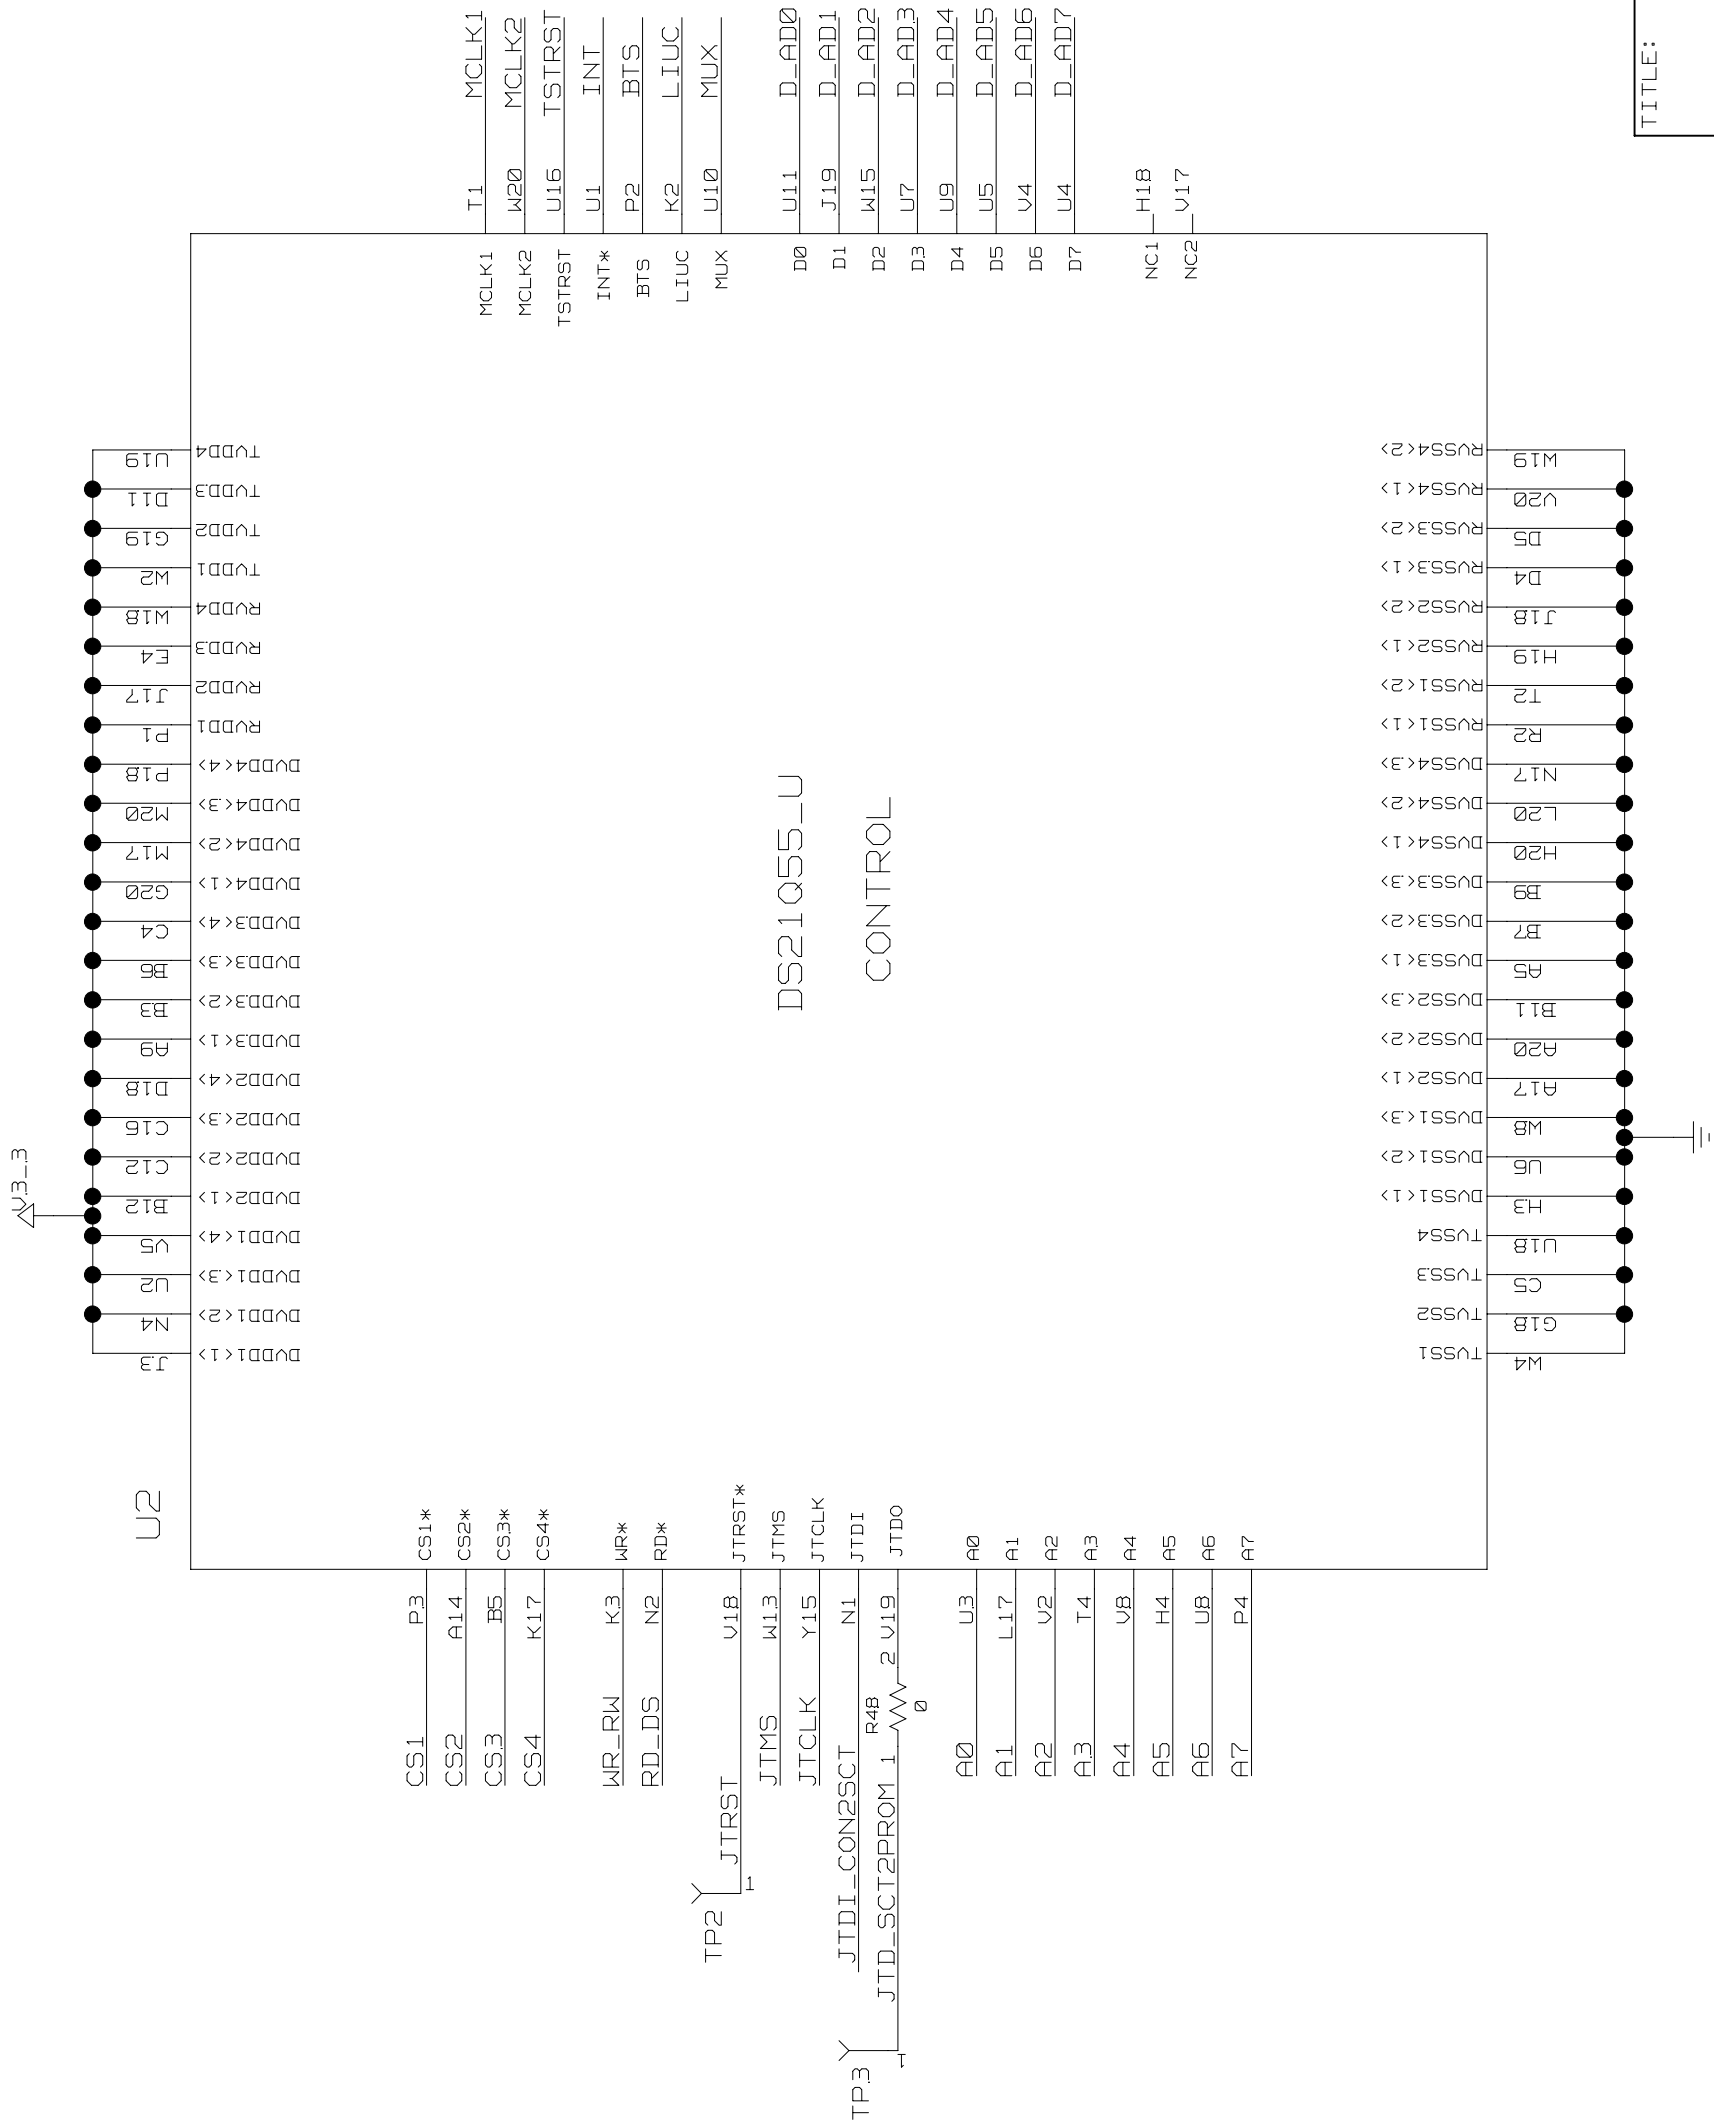

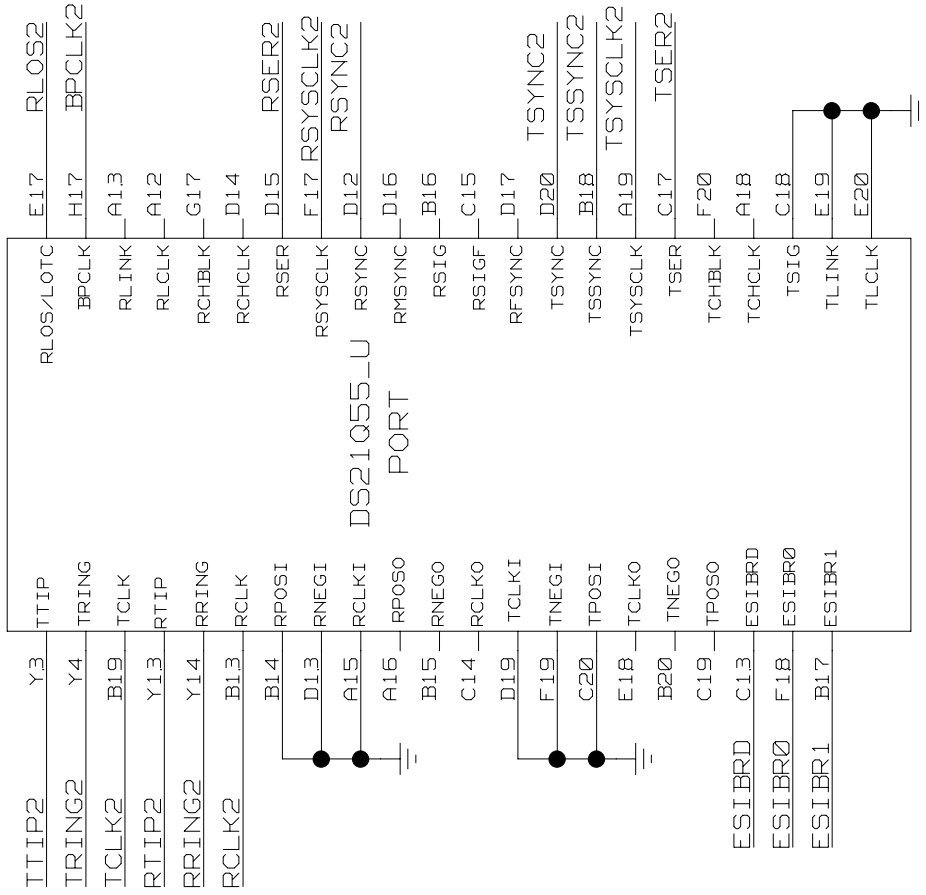
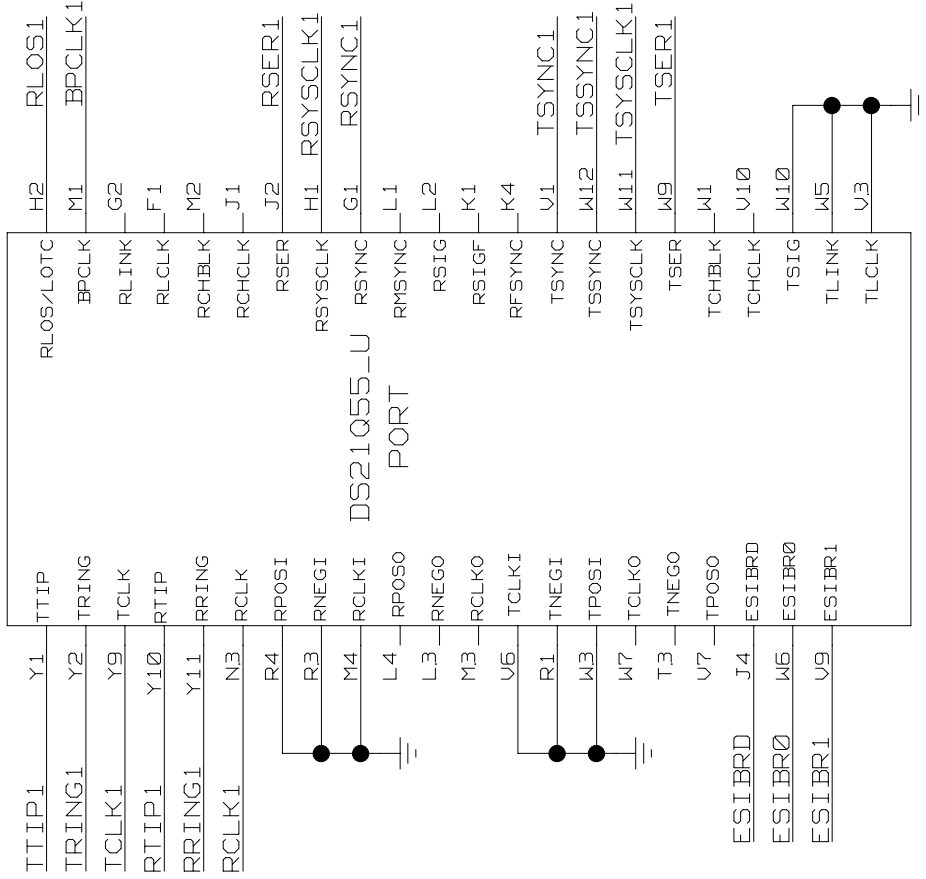


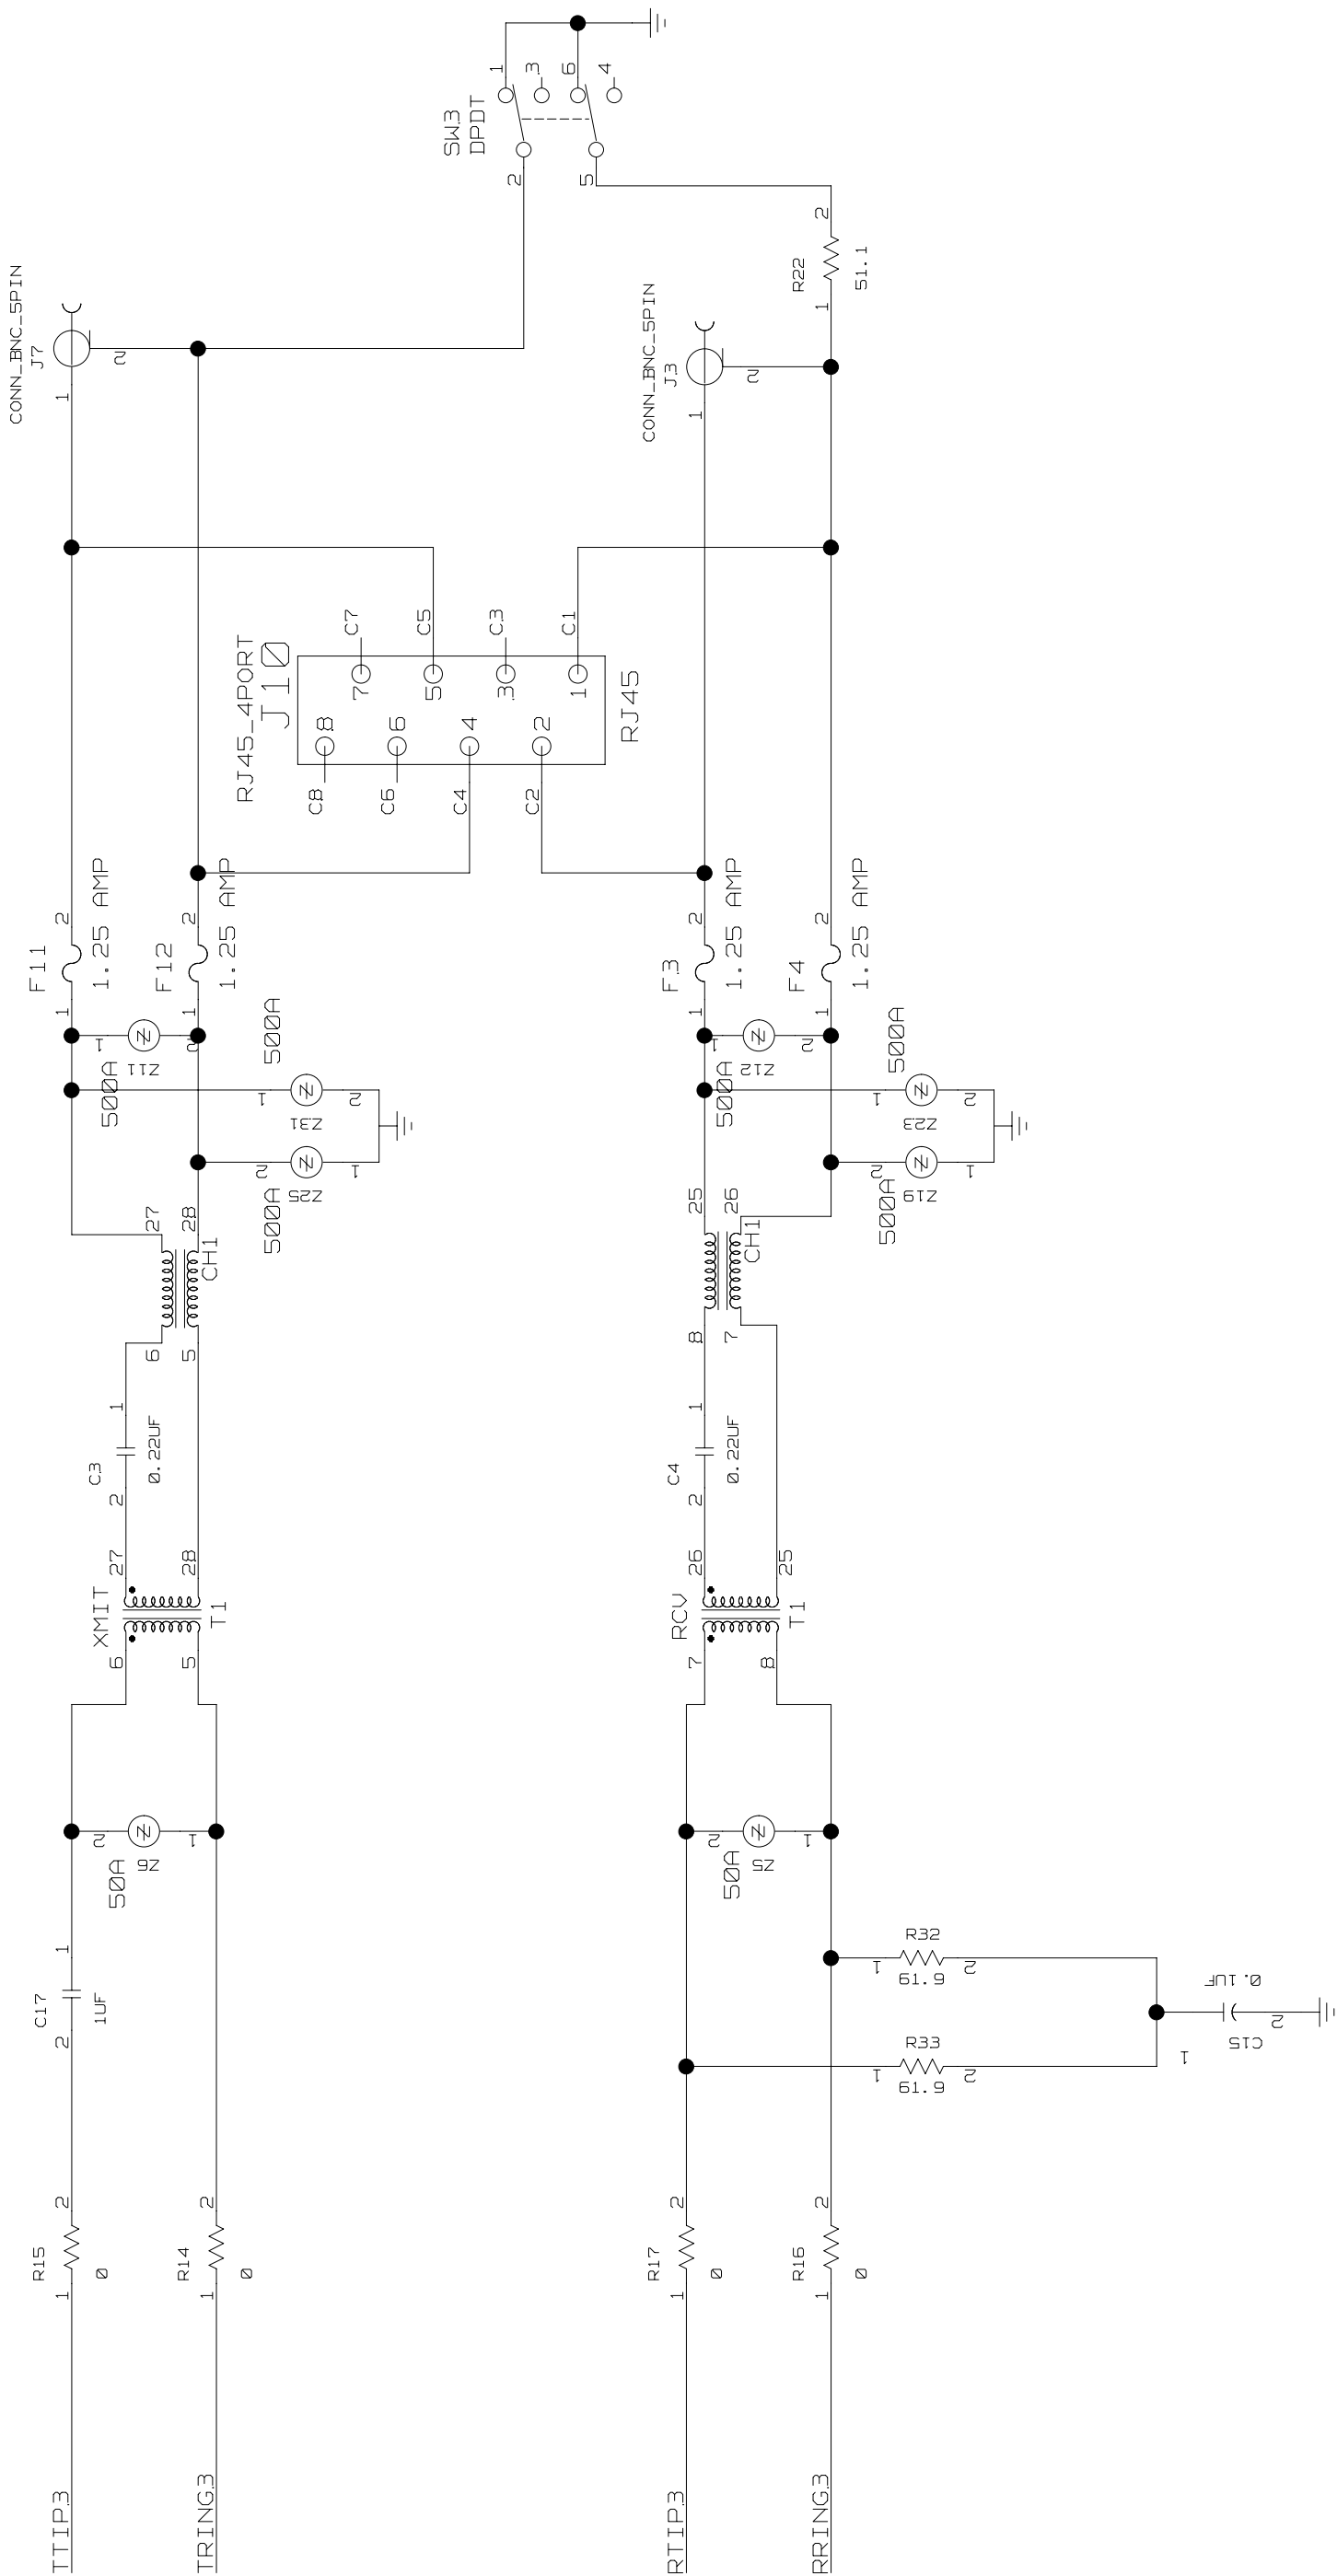






TITLE:	DS21Q55DK02A1	DATE:	2/24/03
ENGINEER:	STEVE SCULLY	PAGE:	7 15

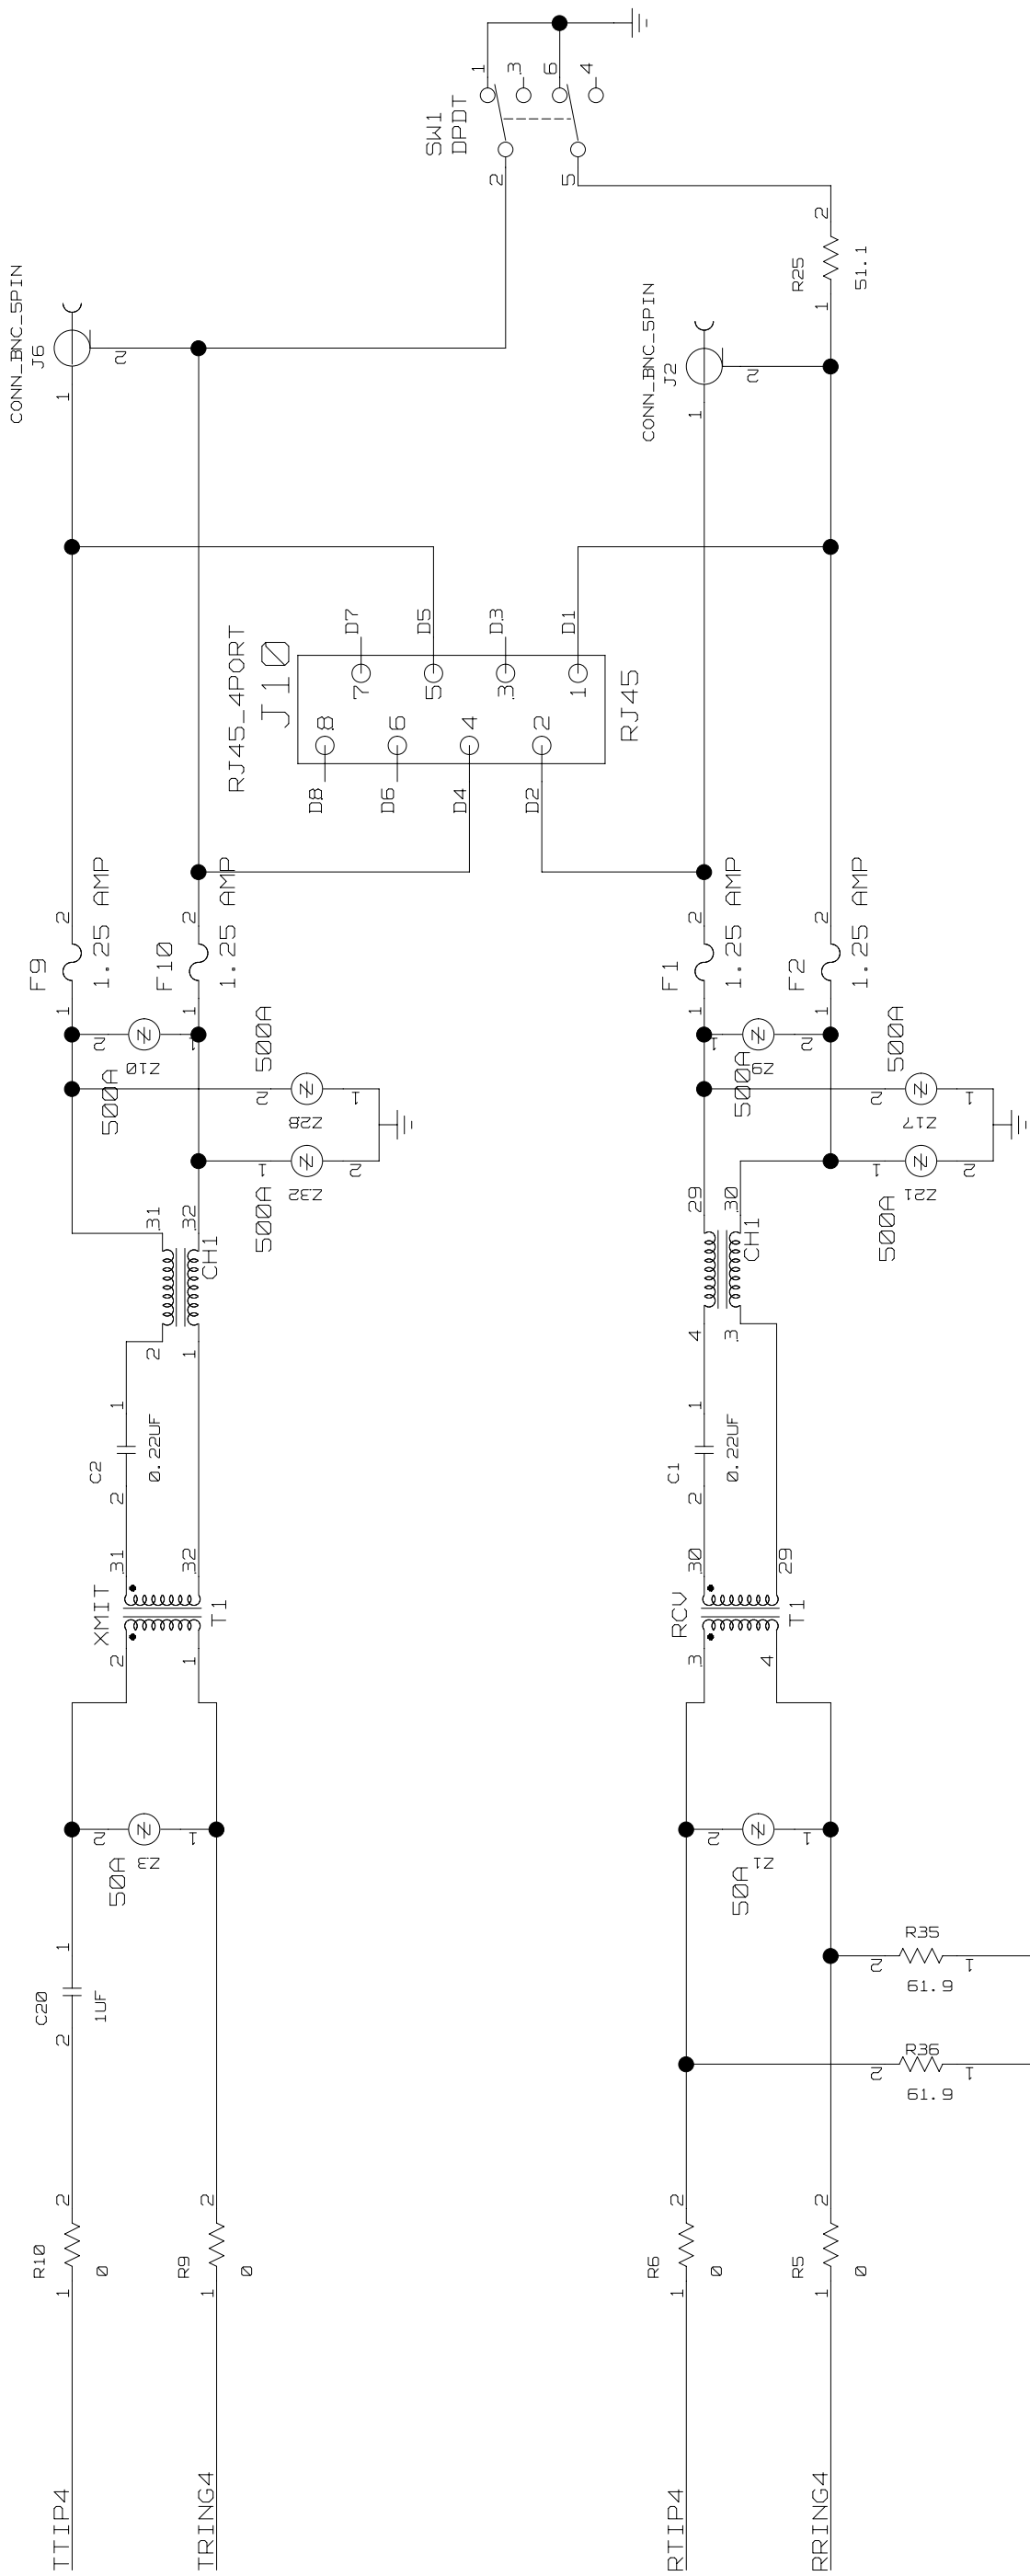

TITLE:		DATE:	
DS21Q55DK02A1		2/24/03	
ENGINEER:		PAGE:	
STEVE SCULLY		8 / 15	
3	2	1	

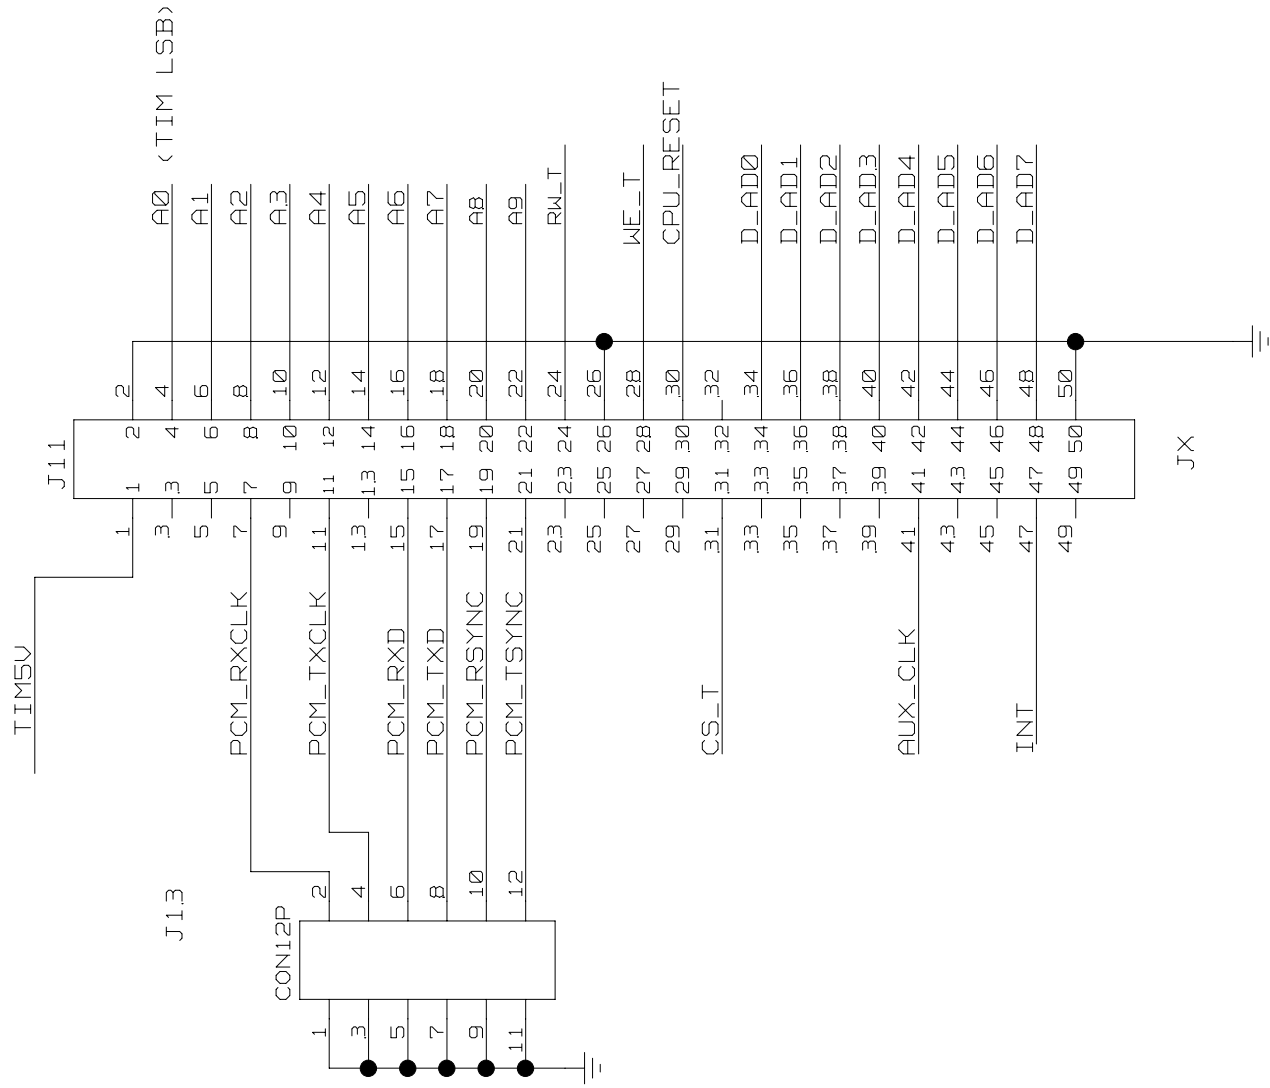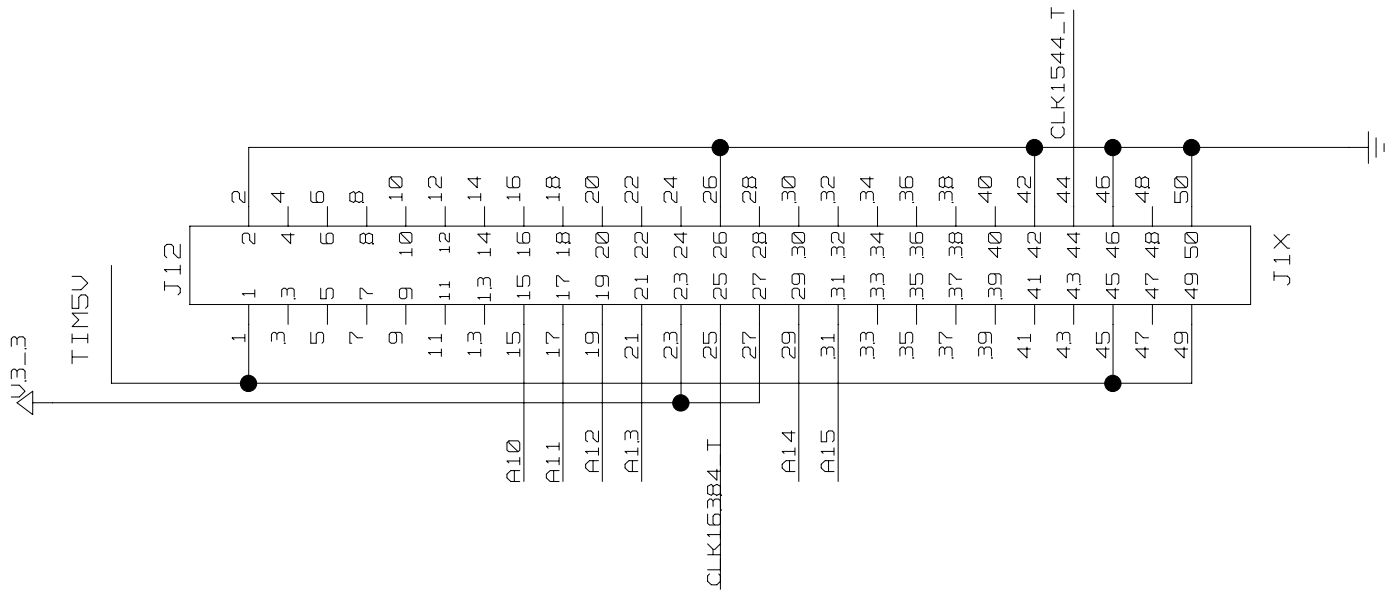

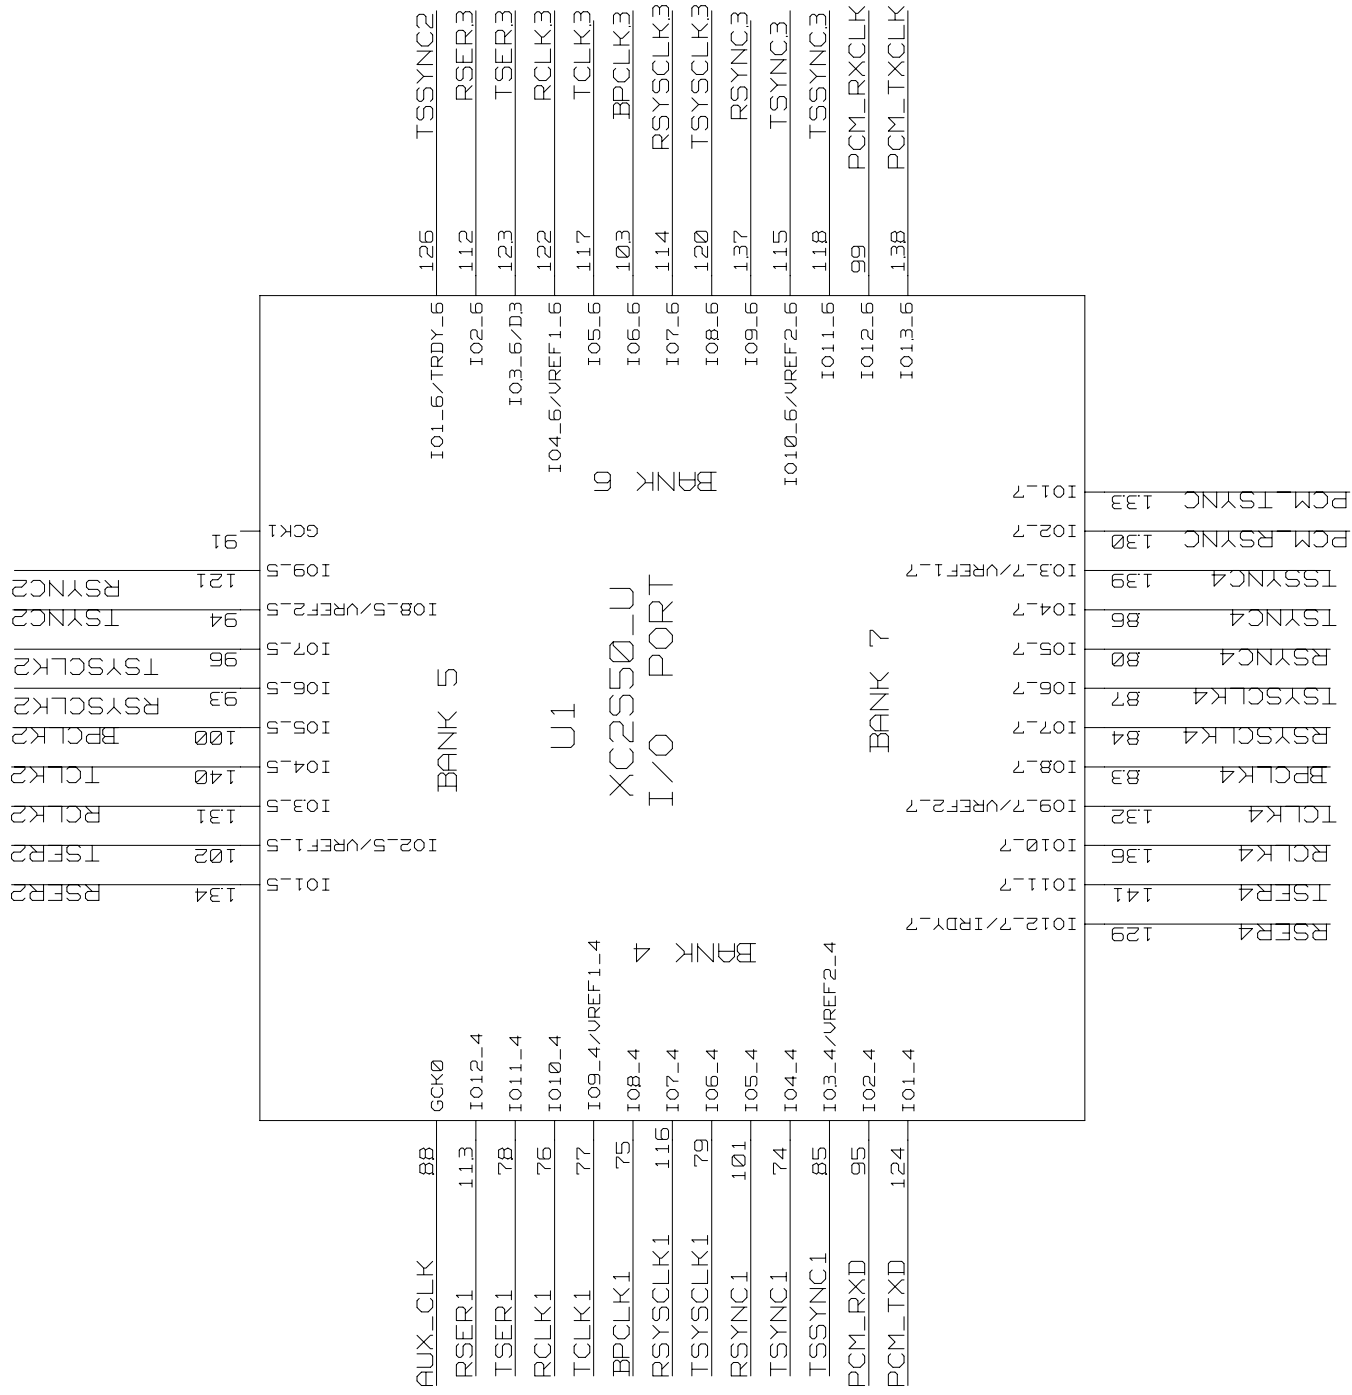

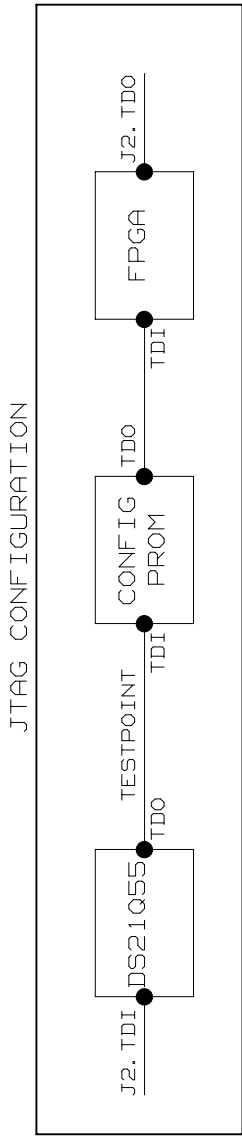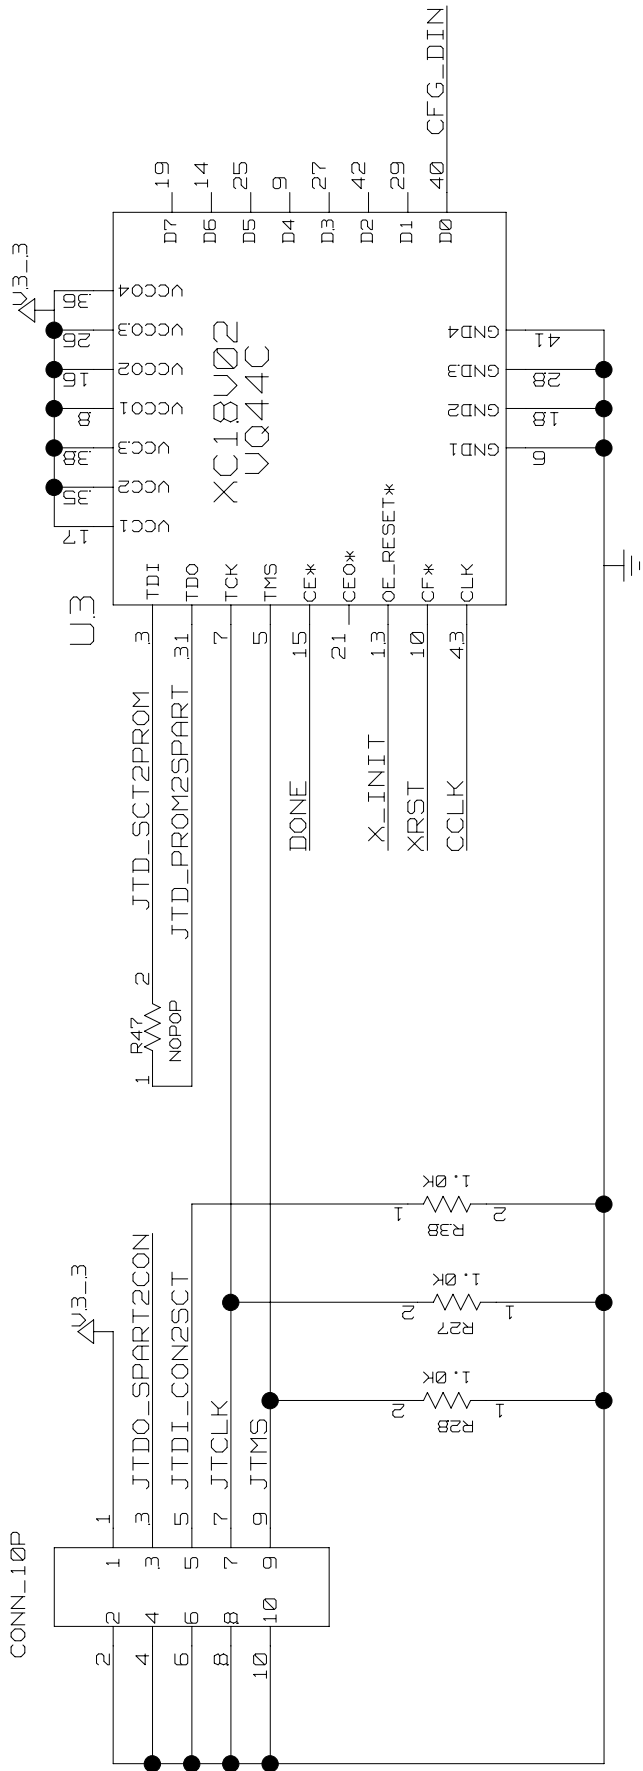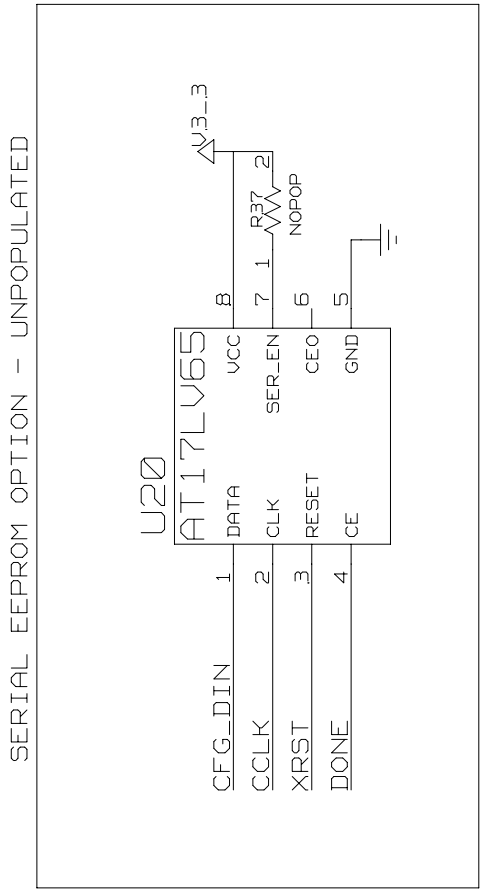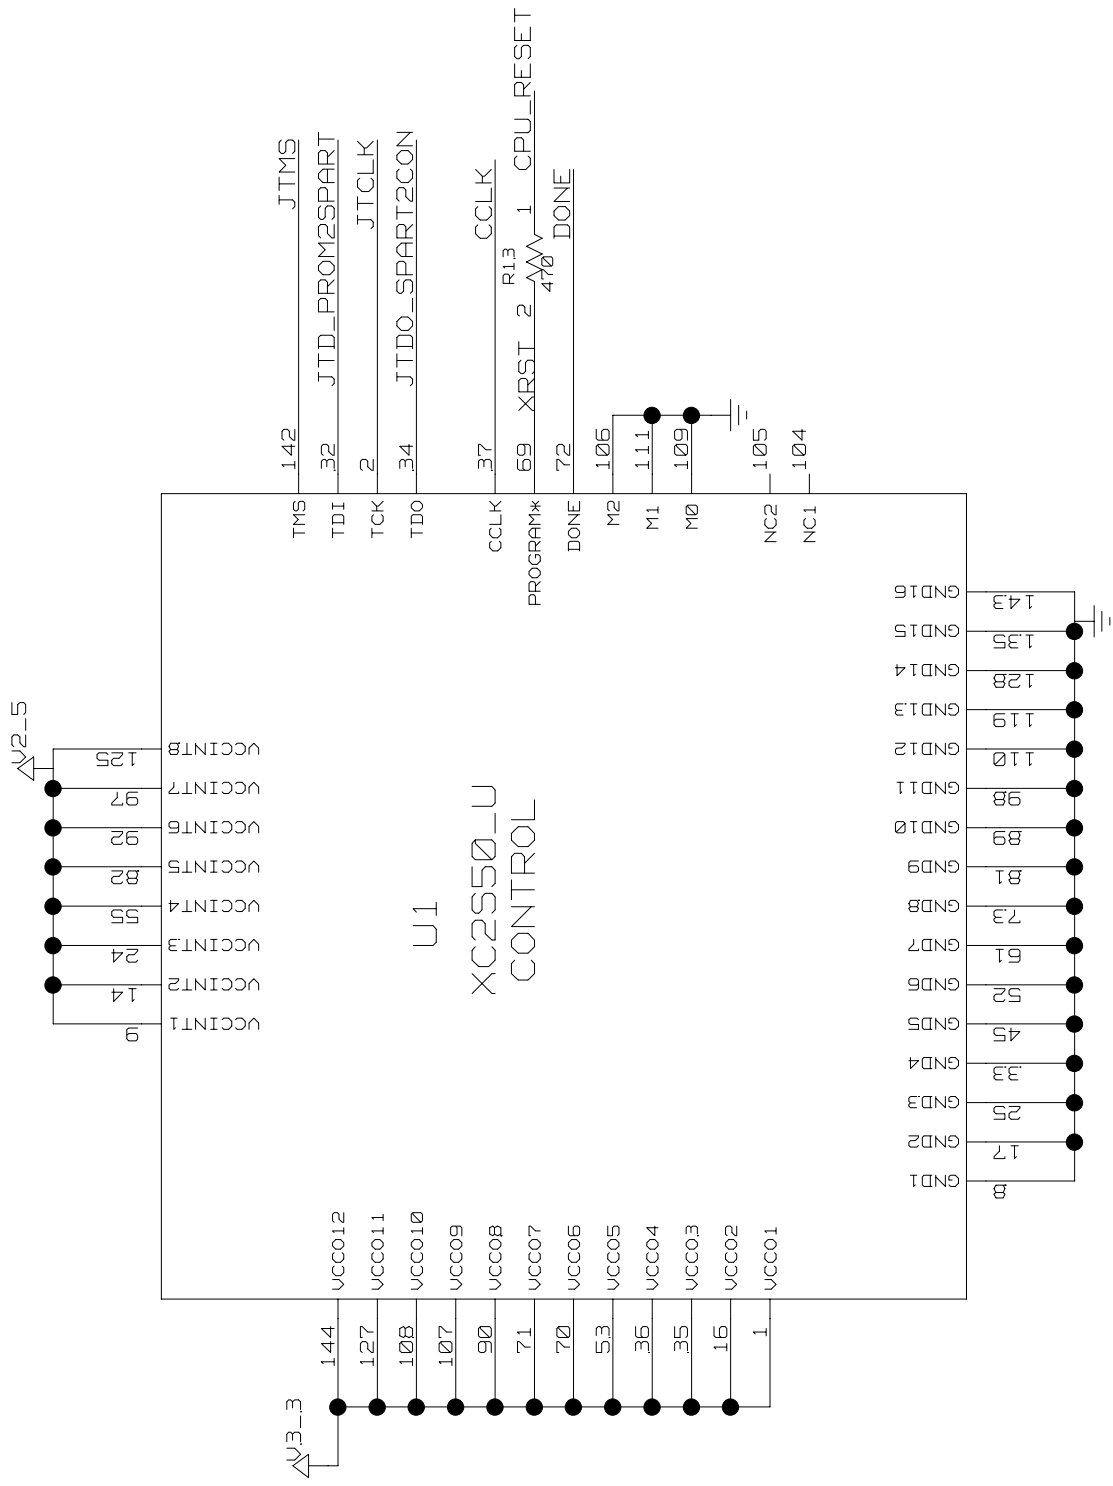

TITLE:	DS21Q55DK02A1	DATE:	2/24/03
ENGINEER:	STEVE SCULLY	PAGE:	11/15

B		7	6		5	4	3	2	1
*** Signal Cross-Reference for the entire design ***									
A0	9D6<> 12C5<> 2B7<								
A1	9C6<> 12C5<> 2B7<								
A2	9C6<> 12C5<> 2B7<								
A3	9C6<> 12C5<> 2B7<								
A4	9C6<> 12C5<> 2B7<								
A5	9C6<> 12B5<> 2A7<								
A6	9C6<> 12B5<> 2A7<								
A7	9C6<> 12B5<> 2A7<								
AB									
A9	9C5<>								
A10	9C3<>								
A11	9C3<>								
A12	9C3<> 12A4<>								
A13	9C3<> 12A4<>								
A14	9B3<> 12A4<>								
A15	9B3<> 12A3<>								
AUX_CLK	9BB<> 10C7<								
BPCLK1	3C6> 10C6<>								
BPCLK2	3C1> 10D5<>								
BPCLK3	4C6> 10C3<>								
BPCLK4	4C1> 10A5<>								
BTS	12C1<> 2C3<								
CCLK	11A6< 11BB< 11C1<								
CFG_DIN	11A4> 11BB<> 12B1<>								
CLK1544_T	9B2<> 12C5<								
CLK163B4_T	9C4<> 12D3<								
CPU_RESET	9BB<> 12B1<> 11C1<								
CS1	12B1<> 2C7<								
CS2	12B1<> 2C7<								
CS3	12B1<> 2C7<								
CS4	12B1<> 2C7<								
CS_T	9BB<> 12C1<>								
DONE	11BB<> 11A6< 11C1<								
D_AD0	2B3<> 9BB<> 12D3<>								
D_AD1	2B3<> 9BB<> 12D3<>								
D_AD2	2B3<> 9BB<> 12D3<>								
D_AD3	2B3<> 9BB<> 12D3<>								
D_AD4	2B3<> 9BB<> 12D3<>								
D_AD5	2B3<> 9BB<> 12D3<>								
D_AD6	2B3<> 9BB<> 12D4<>								
D_AD7	2B3<> 9BB<> 12D4<>								
ESI1R0	3A4<> 3AB<> 4A4<> 4AB<> 12C6<								
ESI1B1	3A4<> 3AB<> 4A4<> 4AB<> 12C6<								
ESI1RD	3B4<> 3BB<> 4A4<> 4AB<> 12D6<								
INT	2C3> 9BB<> 12B5<> 12D6<								
INT_IND	12B5<> 12D3<>								
JTCLK	11AB<> 2B7< 11C1<								
JTDI_CON2SCT	11AB<> 2BB<								
JTD0_SPART2CON	11A7<> 11C1>								
JTD_PROM2SPART	11A6<> 11D1<								
JTD_SCT2PROM	2BB<> 11A6<								
JTMS	11AB<> 2B7< 11D1<								
JTRST	2B7<> 12DB<								
LIUC	2C3< 12D6<								
MCLK1	12D3<> 2C3<								
MCLK2	12D3<> 2C3<								
MUX	12C1<> 2B3<								
PCM_RSYNC	9CB<> 10A4<>								
PCM_RXCLK	9CB<> 10B3<>								
PCM_LRXD	9CB<> 10B7<>								
PCM_TSYNC	9CB<> 10A4<>								
PCM_TXCLK	9CB<> 10B3<>								
PCM_TXD	9CB<> 10B7<>								
RCLK1	3CB> 10C6<>								
RCLK2	3C4> 10D5<>								
RCLK3	4CB> 10C3<>								
RCLK4	4C4> 10A5<>								
RD_DS	12C1<> 2C7<								
RLOS1	3C6> 12A3<>								
RLOS1_IND	12A3<> 12A5<>								
RLOS2	3C1> 12A3<>								
RLOS2_IND	12A3<> 12A5<>								
RLOS3	4C6> 12A3<>								
RLOS3_IND	12A3<> 12A5<>								
RLOS4	4C1> 12A3<>								
D		C		B		A			
RLOS4_IND		RRING1		12A3<> 12A5<>		3CB< 5BB<			
RRING2		RRING3		3C4< 6BB<		4CB< 7BB<			
RRING4		RSER1		3C6> 10C6<>		3C1> 10D5<>			
RSER2		RSER3		4BB> 10C3<>		4B1> 10A5<>			
RSER4		RSYNC1		3BB<> 10B6<>		3B1<> 10D4<>			
RSYNC2		RSYNC3		4BB<> 10B3<>		4B1<> 10A5<>			
RSYNC4		RSYSCLK1		10BB<> 3BB<		10D5<> 3B1<			
RSYSCLK2		RSYSCLK3		10B3<> 4BB<		10A5<> 4B1<			
RSYSCLK4		RTIP1		3CB< 5BB<		3C4< 6BB<			
RTIP2		RTIP3		4CB< 7BB<		4C4< 8BB<			
RTIP4		RWL_T		9C6<> 12C1<>		10C6<> 3CB<			
TCLK1		TCLK2		10D5<> 3C4<		10C3<> 4CB<			
TCLK3		TCLK4		10A5<> 4C4<		9D3<> 9DB<>			
TIM5V		TRING1		3CB> 5CB<		3C4> 6CB<			
TRING2		TRING3		4CB> 7CB<		4C4> 8CB<			
TRING4		TSER1		10C6<> 3BB<		10D5<> 3B1<			
TSER2		TSER3		10C3<> 4BB<		10A5<> 4B1<			
TSER4		TSSYNC1		10BB<> 3BB<		10C3<> 3B1<			
TSSYNC2		TSSYNC3		10B3<> 4BB<		10A4<> 4B1<			
TSSYNC4		TSTRST		2C3< 12DB<		3BB<> 10BB<>			
TSYNC1		TSYNC2		3B1<> 10D5<>		4BB<> 10B3<>			
TSYNC3		TSYNC4		4B1<> 10A5<>		10BB<> 3BB<			
TSYSCLK1		TSYSCLK2		10D5<> 3B1<		10B3<> 4BB<			
TSYSCLK3		TSYSCLK4		10A5<> 4B1<		3CB> 5CB<			
TTIP1		TTIP2		3C4> 6CB<		4CB> 7CB<			
TTIP3		TTIP4		4C4> 8CB<		9BB<> 12C1<>			
WE_T		WR_RW		12C1<> 2C7<		11A6> 11BB> 11C2<			
XRST		X_INIT		11A6<> 12A3<> 13D4<>					
TITLE:				DATE:					
ENGINEER:				PAGE:					
B		7		6		5		4	

B		7	6		5	4		3	2	1
*** Part Cross-Reference for the entire design *** C1CAP8B5 C2CAP8C5 C3CAP7C5 C4CAP7B5 C5CAP6B5 C6CAP5B5 C7CAP5C5 C8CAP6C5 C9CAP13B7 C10CAP13B5 C11CAP8A6 C12CAP13B4 C13CAP6A6 C14CAP5A6 C15CAP7A6 C16CAP5D6 C17CAP7D6 C18CAP13B7 C19CAP6C6 C20CAP8C6 C21CAP13C4 C22CAP13B5 C23CAP13B2 C24CAP13B2 C25CAP13B6 C26CAP13B1 C27CAP13B4 C28CAP13B2 C29CAP13B3 C30CAP13B5 C31CAP13B7 C32CAP13B3 C33CAP13B2 C34CAP13D3 C35CAP13B1 C36CAP13D2 C37CAP13D3 C38CAP13B3 C39CAP13B4 C40CAP13B6 C41CAP13B2 C42CAP13B2 C43CAP13B8 C44CAP13B8 C45CAP13B8 CH1CHOKE_QUADPORT_T15B45C46B46C47B47C48B4 DS1LED12B5 DS2LED12A5 DS3LED12A5 DS4LED12A5 DS5LED12B5 DS6LED12B2 F1FUSE8B4 F2FUSE8B4 F3FUSE7B4 F4FUSE7B4 F5FUSE6B3 F6FUSE6B3 F7FUSE5B4 F8FUSE5B4 F9FUSE8D4 F10FUSE8C4 F11FUSE7D4 F12FUSE7C4 F13FUSE6D3 F14FUSE6C3 F15FUSE5D4 F16FUSE5C4 J1CONN_10P11B8 J2CONN_BNC_SPIN8B2 J3CONN_BNC_SPIN7B2 J4CONN_BNC_SPIN6B2 J5CONN_BNC_SPIN5B2 J6CONN_BNC_SPIN8D2 Z5SIDACTOR_27B6 Z6SIDACTOR_27C6 Z7SIDACTOR_25B6 Z8SIDACTOR_25C6 Z9SIDACTOR_28B4 Z10SIDACTOR_28C4 Z11SIDACTOR_27C4 Z12SIDACTOR_27B4 Z13SIDACTOR_26C4 Z14SIDACTOR_26B4 Z15SIDACTOR_25C4 Z16SIDACTOR_25B4 Z17SIDACTOR_28A4 Z18SIDACTOR_26A4 Z19SIDACTOR_27A4 Z20SIDACTOR_25A4 Z21SIDACTOR_28A4 Z22SIDACTOR_26A4 Z23SIDACTOR_27A4 Z24SIDACTOR_25A4 Z25SIDACTOR_27C4 Z26SIDACTOR_26C4 Z27SIDACTOR_25C4 Z28SIDACTOR_28C4 Z29SIDACTOR_25C4 Z30SIDACTOR_26C4 Z31SIDACTOR_27C4 Z32SIDACTOR_28C4										