

TPS65270 High Current, Synchronous Step Down Dual Buck DC/DC Converter Evaluation Module

User's Guide



Literature Number: SLVU474B
August 2011–Revised December 2011

1	Introduction	5
2	Background	5
3	Schematic	6
4	Board Layout	7
5	Bench Test Setup Conditions	9
	5.1 Headers Description and Jumper Placement	9
	5.2 Jumpers	10
6	Power-Up Procedure	10
7	Bill of Materials	11

List of Figures

1	TPS65270 Schematic	6
2	Placement (Top Layer)	7
3	Board Layout (Top Layer).....	7
4	Board Layout (Bottom Layer).....	8
5	Headers Description and Jumper Placement	9

List of Tables

1	Input Voltage and Output Current Summary	5
2	Jumpers.....	10
3	Bill of Materials	11

1 Introduction

This document presents the information required to power the TPS65270 PMIC as well as the support documentation including schematic and bill of materials.

2 Background

The TPS65270 PMIC is designed to provide 2-A and 3-A continuous currents with an operational range of 4.5 V to 16 V and an externally set switching frequency ranging from 300 kHz to 1.4 MHz. When the PMIC is not fully loaded, Buck1 can be loaded to 2.5 A and Buck2 to 3.5 A.


As there are many possible options to set the converters, [Table 1](#) presents the performance specification summary for the EVM.

Table 1. Input Voltage and Output Current Summary

EVM	TEST CONDITIONS	OUTPUT CURRENT RANGE
TPS65270EVM	$V_{IN} = 4.5 \text{ V to } 16 \text{ V}$ $f_{SW} = 620 \text{ kHz}$	Buck1, 1.8 V, up to 2 A Buck2, 1.2 V, up to 3 A (25°C ambient)

This evaluation module is designed to provide access to the features of the TPS65270. Some modifications can be made to this module to test performance at different input and output voltages, current and frequency operation. Please contact TI Field Applications Group for advice on these matters.

4 Board Layout

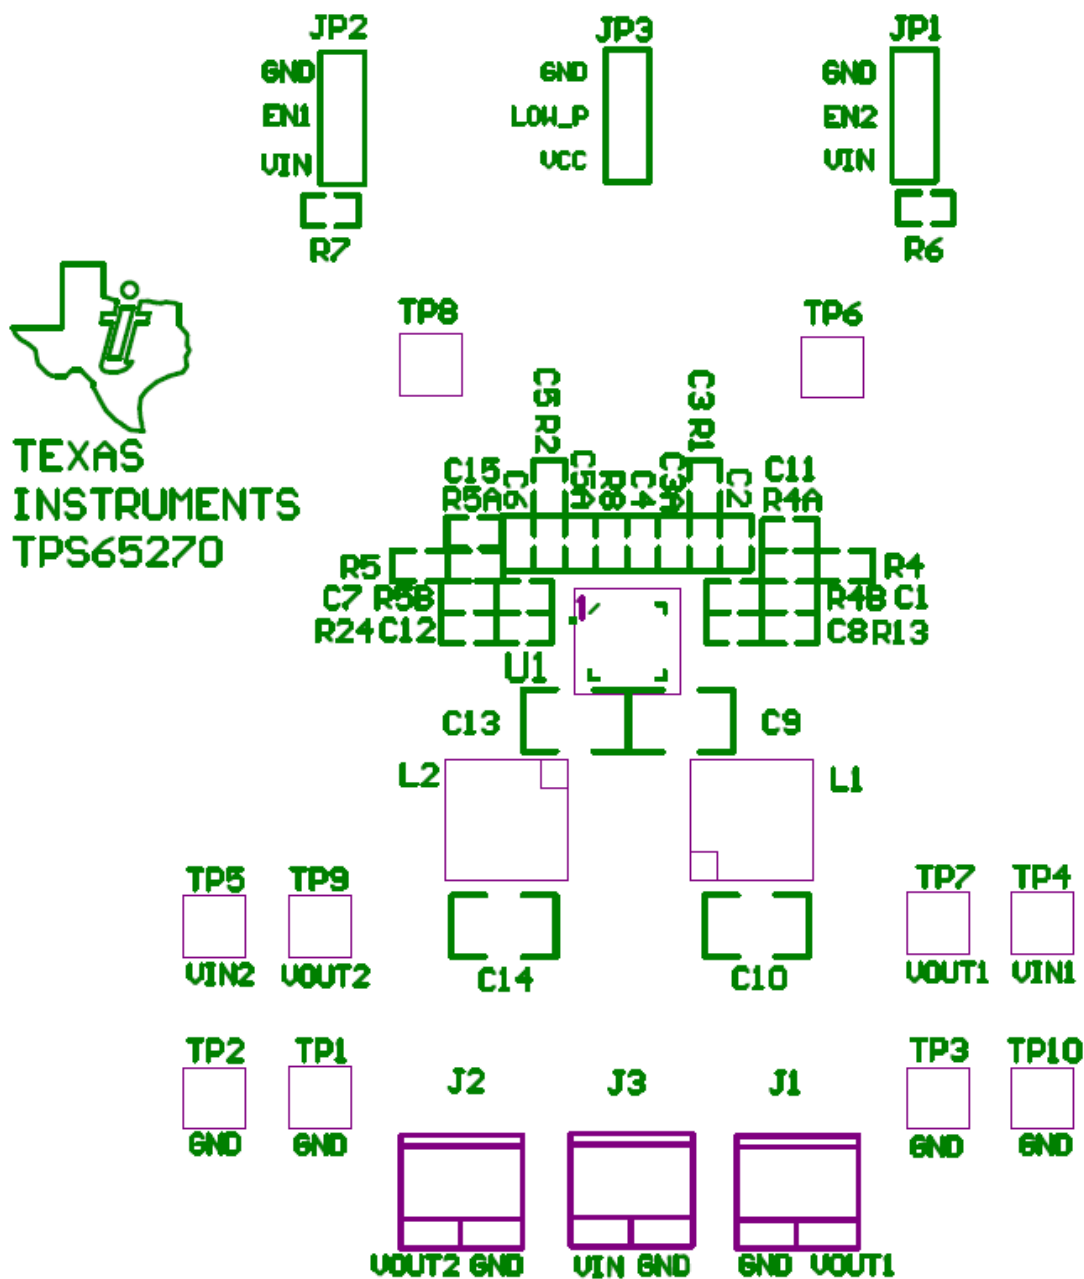

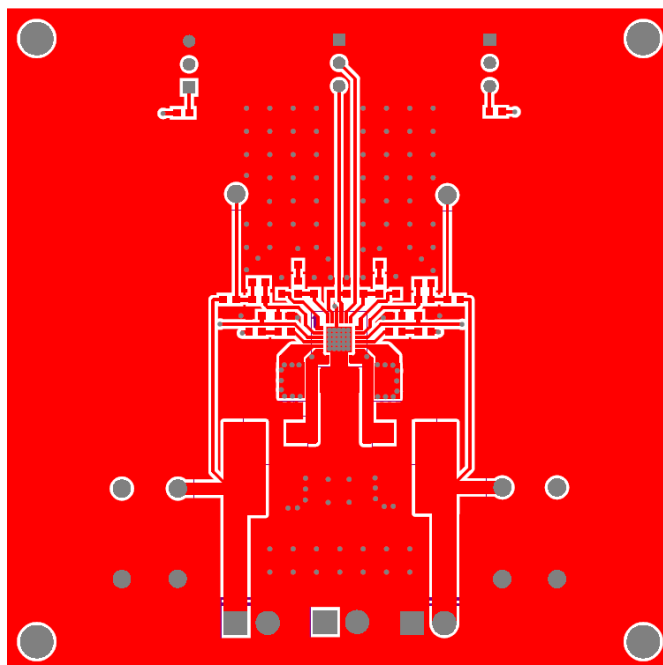


Figure 3. Board Layout (Top Layer)

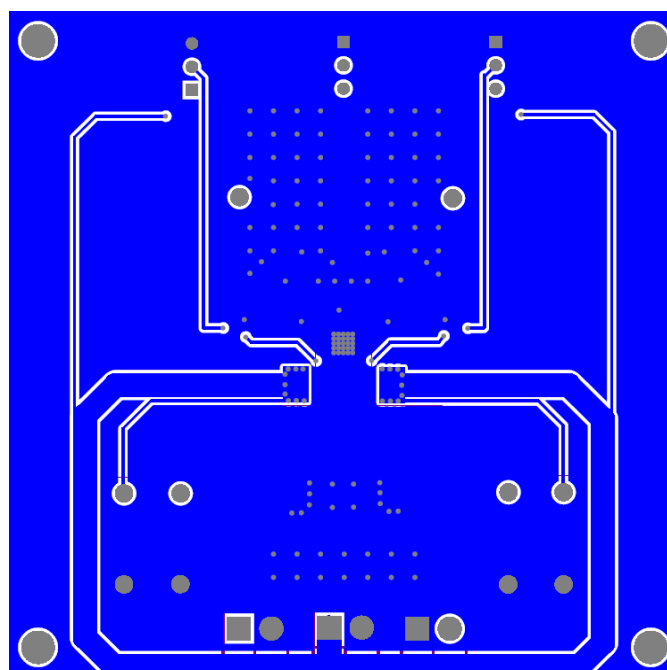


Figure 4. Board Layout (Bottom Layer)

5 Bench Test Setup Conditions

5.1 Headers Description and Jumper Placement

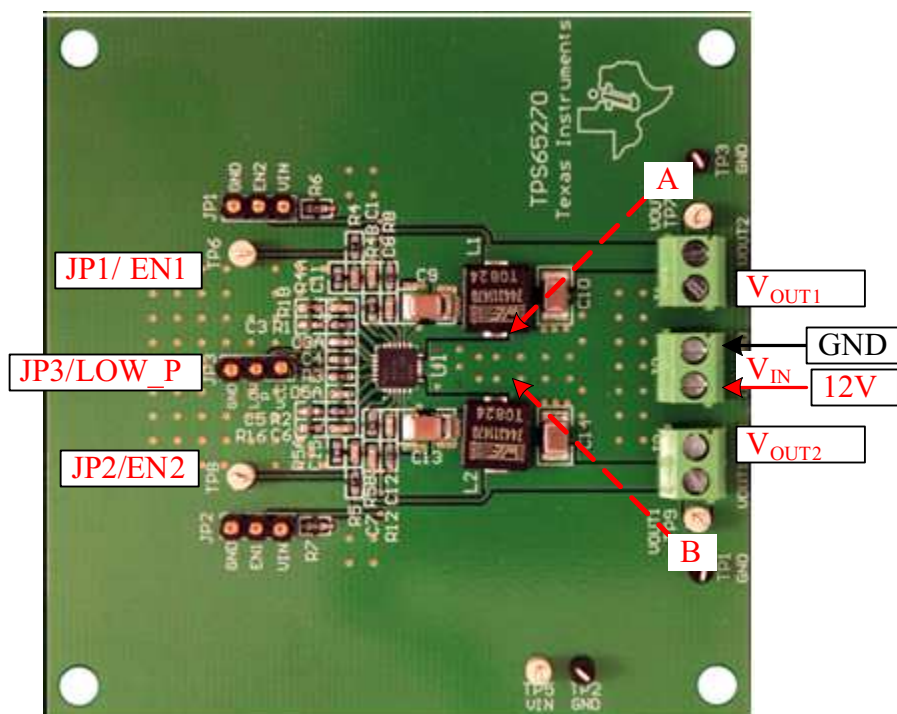


Figure 5. Headers Description and Jumper Placement

Test points:

A: LX of V_{OUT1}

B: LX of V_{OUT2}

V_{OUT1} , V_{OUT2} , V_{CC} , EN1, EN2, LOW_P

5.2 Jumpers

Table 2. Jumpers

JUMPER NO.	FUNCTION	PLACEMENT	COMMENT
JP1	BUCK1 enable (EN1)	Connect EN1 to GND to disable V_{OUT1} , connect EN1 to V_{IN} to enable V_{OUT1} ; Leave open to enable V_{OUT1}	
JP2	BUCK2 enable (EN2)	Connect EN2 to GND to disable V_{OUT2} , connect EN2 to V_{IN} to enable V_{OUT2} ; Leave open to enable V_{OUT2}	
JP3	Low Power Mode (LOW_P)	Connect LOW_P to GND to enter forced PWM mode; Connect LOW_P to V_{CC} to enter automatic PSM/PWM mode	Cannot leave open

6 Power-Up Procedure

1. Apply 4.5 V - 16 V to J3.
2. Toggle JP1 or JP2 to enable V_{OUT1} and V_{OUT2} respectively.
3. Apply loads to the output connectors.

7 Bill of Materials

Table 3. Bill of Materials

ITEM	QUANTITY	DESIGNATOR	VALUE	FOOTPRINT	MANUFACTURER	DESCRIPTION
1	2	C1, C7	4.7nF	603	Generic	CAP 4700PF 50V CERAMIC X7R 0603
2	2	C2, C6	10nF	603	Generic	CAP 10000PF 50V CERM X7R 0603
3	2	C3, C5	2.2nF	603	Generic	CAP 2200PF 50V CERAMIC X7R 0603
4 ⁽¹⁾	2	C3A, C5A	100pF	603	Generic	CAP100PF 50V CERAMIC X7R 0603
5	2	C9, C13	10uF	1210	Generic	CAP 10UF 35V CERAMIC X5R 1210
6	1	C4	10uF	603	Generic	CAP CER 10UF 10V X5R 20% 0603
7	2	C8, C12	47nF	603	Generic	CAP 47000PF 50V CERAMIC X7R 0603
8	2	C10, C14	22uF	1210	Generic	CAP 22UF 16V CERAMIC X5R 1210
9 ⁽¹⁾	2	C11, C15	82pF	603	Generic	CAP 82PF 50V CERAMIC X7R 0603
10	3	J1, J2, J3	ED555/2DS	TB_2X3.5MM	Onshore technology Inc	Terminal Block, 2-pin, 6-A, 3.5mm
11 ⁽²⁾	3	JP1, JP2, JP3	NA	JMP0.3	Mil Max/Generic	SIP HEADER 64 POS STRAIGHT PCB (800-10-064-10-001000)
12	2	L1, L2	4.7uH	IND_744311470	Wurth Electronics Inc	Magnetic-Core Inductor
13	2	R1, R2	10K	603	Generic	RES 10.0K OHM 1/10W 1% 0603 SMD
14	2	R4, R5	0	603	Generic	RES 0 OHM 1/10W 1% 0603 SMD
15	2	R4A, R5A	40.2K	603	Generic	RES 40.2K OHM 1/10W 1% 0603 SMD
16	1	R4B	32.4K	603	Generic	RES 32.4K OHM 1/10W 1% 0603 SMD
17	1	R5B	80.6K	603	Generic	RES 80.6K OHM 1/10W 1% 0603 SMD
18	2	R6, R7	200K	603	Generic	RES 200K OHM 1/10W 1% 0603 SMD
19	1	R8	383K	603	Generic	RES 3830K OHM 1/10W 1% 0603 SMD
20	2	R13, R24	47	603	Generic	RES 47 OHM 1/10W 1% 0603 SMD
21	3	TP1, TP2, TP3	5001	TH-40	Keystone Electronics	Test Point, Black, Thru Hole Color Keyed
22	5	TP5, TP6, TP7, TP8, TP9	5002	TH-40	Keystone Electronics	Test Point, White, Thru Hole Color Keyed
23	1	U1	NA	RGE24	Texas Instruments	'TPS65270RGE24
24 ⁽³⁾	4	NA	NA	NA	3M	SJ-5303 (CLEAR), BUMPON HEMISPHERE .44X.20 CLEAR
25 ⁽⁴⁾	3	NA	NA	NA	Sullins Connector Solutions	SPC02SYAN, CONN JUMPER SHORTING GOLD FLASH

⁽¹⁾ Optional

⁽²⁾ Split into three pins

⁽³⁾ Install item 24 on bottom at corners.

⁽⁴⁾ Install item 25 on item 11 no order - be consistent

Evaluation Board/Kit Important Notice

Texas Instruments (TI) provides the enclosed product(s) under the following conditions:

This evaluation board/kit is intended for use for **ENGINEERING DEVELOPMENT, DEMONSTRATION, OR EVALUATION PURPOSES ONLY** and is not considered by TI to be a finished end-product fit for general consumer use. Persons handling the product(s) must have electronics training and observe good engineering practice standards. As such, the goods being provided are not intended to be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including product safety and environmental measures typically found in end products that incorporate such semiconductor components or circuit boards. This evaluation board/kit does not fall within the scope of the European Union directives regarding electromagnetic compatibility, restricted substances (RoHS), recycling (WEEE), FCC, CE or UL, and therefore may not meet the technical requirements of these directives or other related directives.

Should this evaluation board/kit not meet the specifications indicated in the User's Guide, the board/kit may be returned within 30 days from the date of delivery for a full refund. THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE.

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user indemnifies TI from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge.

EXCEPT TO THE EXTENT OF THE INDEMNITY SET FORTH ABOVE, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

TI currently deals with a variety of customers for products, and therefore our arrangement with the user **is not exclusive**.

TI assumes **no liability for applications assistance, customer product design, software performance, or infringement of patents or services described herein**.

Please read the User's Guide and, specifically, the Warnings and Restrictions notice in the User's Guide prior to handling the product. This notice contains important safety information about temperatures and voltages. For additional information on TI's environmental and/or safety programs, please contact the TI application engineer or visit www.ti.com/esh.

No license is granted under any patent right or other intellectual property right of TI covering or relating to any machine, process, or combination in which such TI products or services might be or are used.

FCC Warning

This evaluation board/kit is intended for use for **ENGINEERING DEVELOPMENT, DEMONSTRATION, OR EVALUATION PURPOSES ONLY** and is not considered by TI to be a finished end-product fit for general consumer use. It generates, uses, and can radiate radio frequency energy and has not been tested for compliance with the limits of computing devices pursuant to part 15 of FCC rules, which are designed to provide reasonable protection against radio frequency interference. Operation of this equipment in other environments may cause interference with radio communications, in which case the user at his own expense will be required to take whatever measures may be required to correct this interference.

EVM Warnings and Restrictions

It is important to operate this EVM within the input voltage range of and the output voltage range of that listed in Table 1.

Exceeding the specified input range may cause unexpected operation and/or irreversible damage to the EVM. If there are questions concerning the input range, please contact a TI field representative prior to connecting the input power.

Applying loads outside of the specified output range may result in unintended operation and/or possible permanent damage to the EVM. Please consult the EVM User's Guide prior to connecting any load to the EVM output. If there is uncertainty as to the load specification, please contact a TI field representative.

During normal operation, some circuit components may have case temperatures greater than 85°C. The EVM is designed to operate properly with certain components above 85°C as long as the input and output ranges are maintained. These components include but are not limited to linear regulators, switching transistors, pass transistors, and current sense resistors. These types of devices can be identified using the EVM schematic located in the EVM User's Guide. When placing measurement probes near these devices during operation, please be aware that these devices may be very warm to the touch.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2011, Texas Instruments Incorporated

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Mobile Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Transportation and Automotive	www.ti.com/automotive
Video and Imaging	www.ti.com/video

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2011, Texas Instruments Incorporated