



稳压（齐纳）二极管 Zener Diodes


■特征 Features

- P_{tot} 5.0W
- V_z 3.3V-200V

■用途 Applications

- 稳定电压用 Stabilizing Voltage

■外形尺寸和印记 Outline Dimensions and Mark

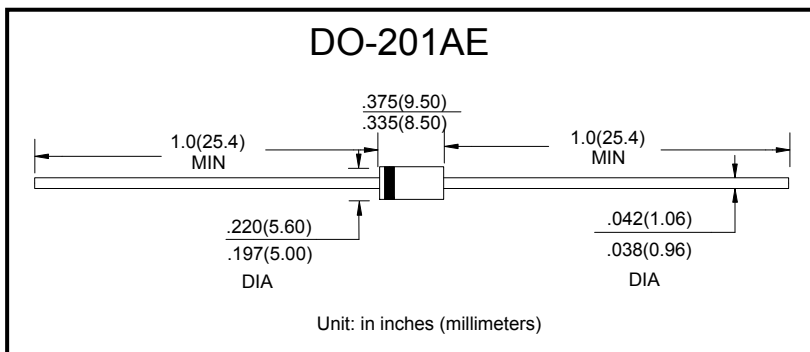

■极限值（绝对最大额定值）

Limiting Values (Absolute Maximum Rating)

参数名称 Item	符号 Symbol	单位 Unit	条件 Conditions	最大值 Max
损耗功率 Power dissipation	P_{tot}	W	$L=9.5\text{mm}, T_L=75^\circ\text{C}$	5.0
齐纳电流 Zener current	I_z	mA		P_V / V_z
存储温度范围 Storage temperature range	T_{stg}	$^\circ\text{C}$		-55 to +150

■电特性（ $T_a=25^\circ\text{C}$ 除非另有规定）Electrical Characteristics ($T_a=25^\circ\text{C}$ Unless otherwise specified)

参数名称 Item	符号 Symbol	单位 Unit	条件 Conditions	最大值 Max
典型热阻 Thermal resistance	$R_{\theta JA}$	$^\circ\text{C}/\text{W}$	结到环境, $T_L=75^\circ\text{C}$ junction to ambient air, $T_L=75^\circ\text{C}$	20
正向电压 Forward voltage	V_F	V	$I_F=1.0\text{A}$	1.2

■ 电性参数 ($T_A=25^{\circ}\text{C}$ 除非另有规定)Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

产品型号 Part Number	额定齐纳电压 Nominal Zener voltage	测试电流 Test current	最大动态电阻 Maximum dynamic impedance			最大反向漏电流 Maximum reverse leakage current		最大工作电流 Maximum Zener current
	V_Z at I_{ZT}	I_{ZT}	Z_{ZT} at I_{ZT}	Z_{ZK} at I_{ZK}	I_{ZK}	IR	Test voltage V_R	I_{ZM}
	V	mA	Ω	Ω	mA	μA	V	mA
1N5333B	3.3	380	3.0	400	1	300	1.0	1440
1N5334B	3.6	350	2.5	500	1	150	1.0	1320
1N5335B	3.9	320	2.0	500	1	50	1.0	1220
1N5336B	4.3	290	2.0	500	1	10	1.0	1100
1N5337B	4.7	260	2.0	450	1	5.0	1.0	1010
1N5338B	5.1	240	1.5	400	1	1.0	1.0	930
1N5339B	5.6	220	1.0	400	1	1.0	2.0	865
1N5340B	6.0	200	1.0	300	1	1.0	3.0	790
1N5341B	6.2	200	1.0	200	1	1.0	3.0	765
1N5342B	6.8	175	1.0	200	1	10	5.2	700
1N5343B	7.5	175	1.5	200	1	10	5.7	630
1N5344B	8.2	150	1.5	200	1	10	6.2	580
1N5345B	8.7	150	2.0	200	1	10	6.6	545
1N5346B	9.1	150	2.0	150	1	10	6.9	520
1N5347B	10	125	2.0	125	1	7.5	7.6	475
1N5348B	11	125	2.5	125	1	5	8.4	430
1N5349B	12	100	2.5	125	1	2	9.1	395
1N5350B	13	100	2.5	100	1	1	9.9	365
1N5351B	14	100	2.5	75	1	1	10.6	340
1N5352B	15	75	2.5	75	1	1	11.5	310
1N5353B	16	75	2.5	75	1	1	12.2	295
1N5354B	17	70	2.5	75	1	0.5	12.9	280
1N5355B	18	65	2.5	75	1	0.5	13.7	265
1N5356B	19	65	3	75	1	0.5	14.4	250
1N5357B	20	65	3	75	1	0.5	15.2	237
1N5358B	22	50	3.5	75	1	0.5	16.7	216
1N5359B	24	50	3.5	100	1	0.5	18.2	198
1N5360B	25	50	4	110	1	0.5	19	190
1N5361B	27	50	5	120	1	0.5	20.6	176
1N5362B	28	50	6	130	1	0.5	21.2	170
1N5363B	30	40	8	140	1	0.5	22.8	158
1N5364B	33	40	10	150	1	0.5	25.1	144
1N5365B	36	30	11	160	1	0.5	27.4	132
1N5366B	39	30	14	170	1	0.5	29.7	122
1N5367B	43	30	20	190	1	0.5	32.7	110
1N5368B	47	25	25	210	1	0.5	35.8	100



1N53 SERIES

产品型号 Part Number	额定齐纳电压 Nominal Zener voltage	测试电流 Test current	最大动态电阻 Maximum dynamic impedance			最大反向漏电流 Maximum reverse leakage current		最大工作电流 Maximum Zener current
	V _Z at I _{ZT}	I _{ZT}	Z _{ZT} at I _{ZT}	Z _{ZK} at I _{ZK}	I _{ZK}	IR	Test voltage V _R	I _{ZM}
	V	mA	Ω	Ω	mA	μA	V	mA
1N5369B	51	25	27	230	1	0.5	38.8	93
1N5370B	56	20	35	280	1	0.5	42.6	86
1N5371B	60	20	40	350	1	0.5	45.5	79
1N5372B	62	20	42	400	1	0.5	47.1	76
1N5373B	68	20	44	500	1	0.5	51.7	70
1N5374B	75	20	45	620	1	0.5	56	63
1N5375B	82	15	65	720	1	0.5	62.2	58
1N5376B	87	15	75	760	1	0.5	66	54.5
1N5377B	91	15	75	760	1	0.5	69.2	52.5
1N5378B	100	12	90	800	1	0.5	76	47.5
1N5379B	110	12	125	1000	1	0.5	83.6	43
1N5380B	120	10	170	1150	1	0.5	91.2	39.5
1N5381B	130	10	190	1250	1	0.5	98.8	36.6
1N5382B	140	8	230	1500	1	0.5	106	34
1N5383B	150	8	330	1500	1	0.5	114	31.6
1N5384B	160	8	350	1650	1	0.5	122	29.4
1N5385B	170	8	380	1750	1	0.5	129	28
1N5386B	180	5	430	1750	1	0.5	137	26.4
1N5387B	190	5	450	1850	1	0.5	144	25
1N5388B	200	5	480	1850	1	0.5	152	23.6

备注: Notes:

后缀'B'表示5%的标准公差范围。

Suffix 'B' denotes 5% tolerance which is standard .

■特性曲线（典型） Characteristics(Typical)

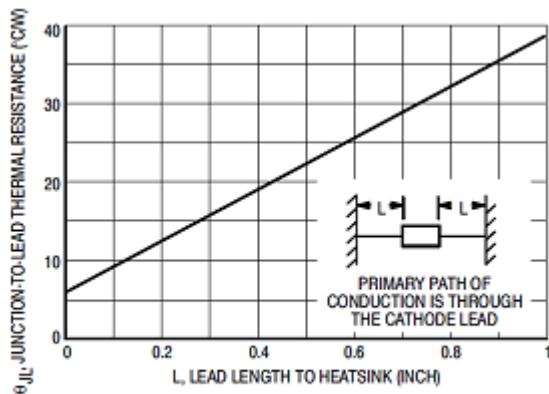


Figure 1. Typical Thermal Resistance

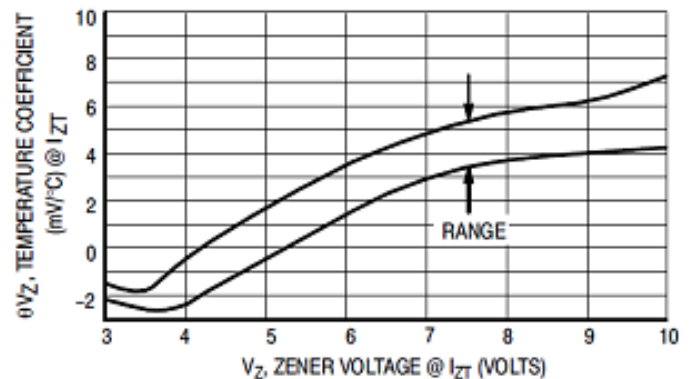


Figure 2. Temperature Coefficient-Range for Units 3 to 10 Volts


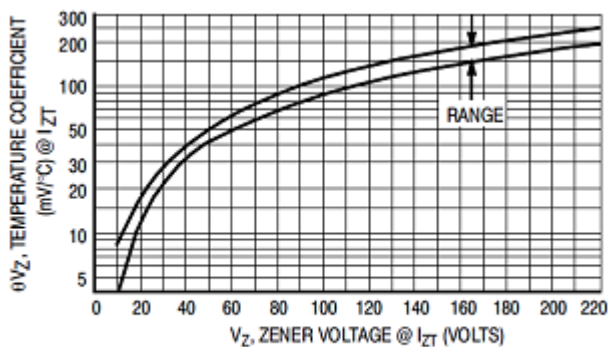


Figure 3. Temperature Coefficient-Range for Units 10 to 220 Volts

Figure 4. Typical Thermal Response
L, Lead Length = 3/8 Inch

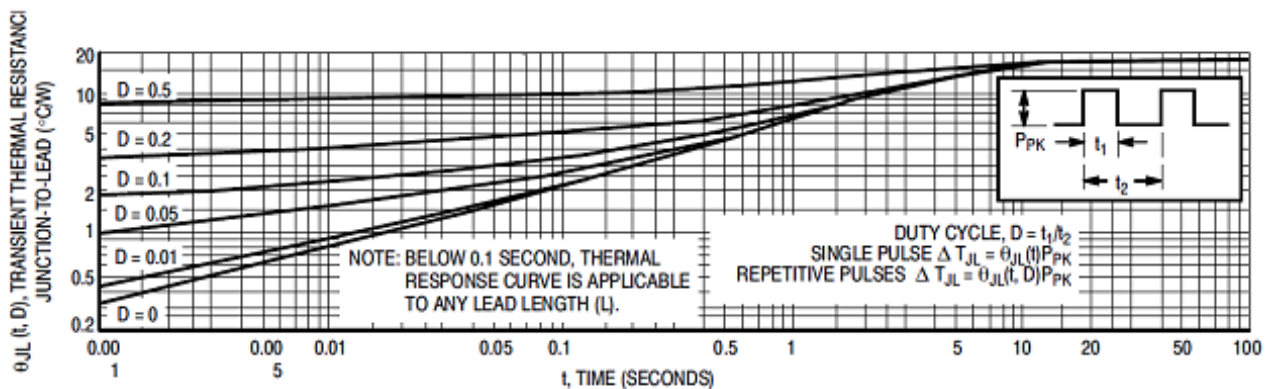

■特性曲线（典型） Characteristics(Typical)

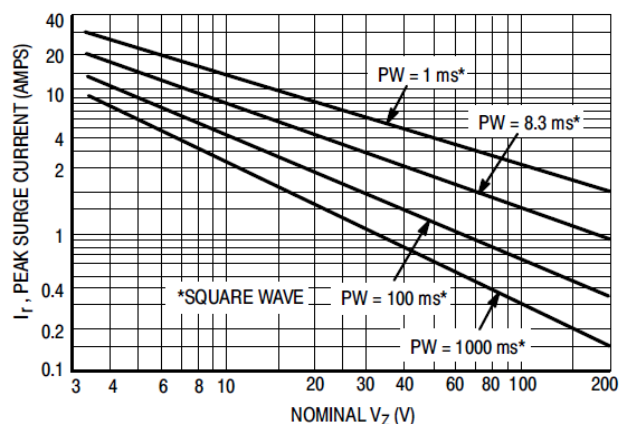


Figure 5. Maximum Non-Repetitive Surge Current versus Nominal Zener Voltage

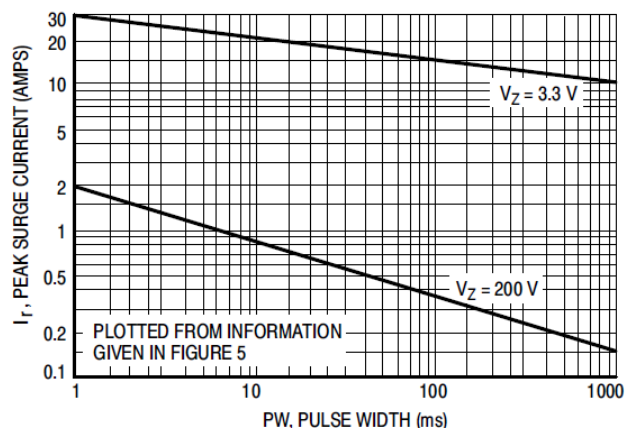


Figure 6. Peak Surge Current versus Pulse Width

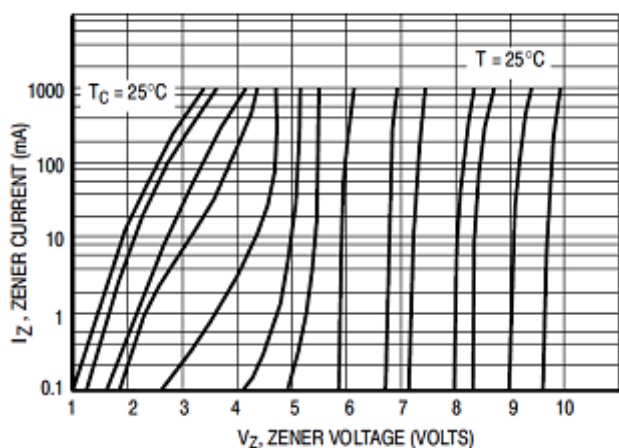


Figure 7. Zener Voltage versus Zener Current
 $V_Z = 3.3$ thru 10 Volts

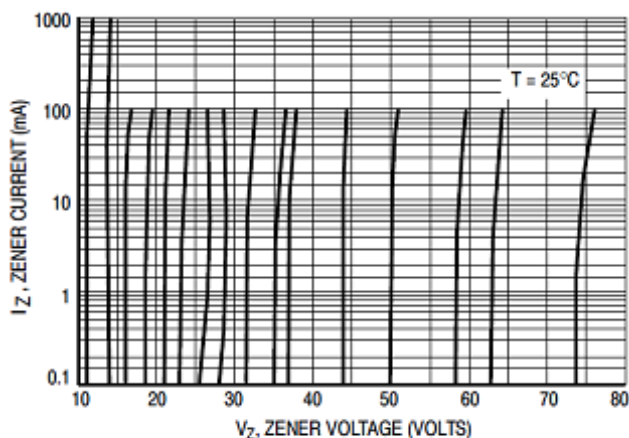


Figure 8. Zener Voltage versus Zener Current
 $V_Z = 11$ thru 75 Volts

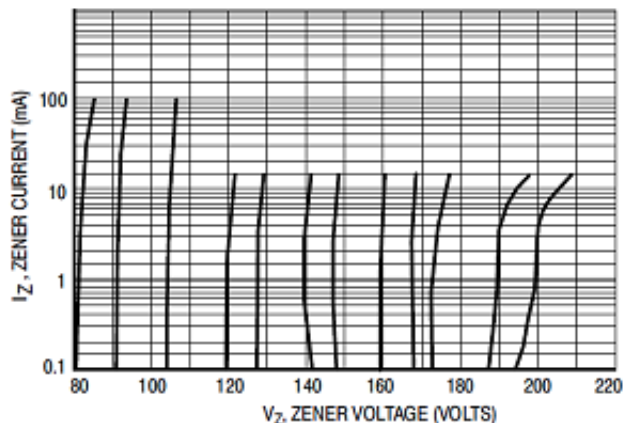


Figure 9. Zener Voltage versus Zener Current
 $V_Z = 82$ thru 200 Volts