Freescale Semiconductor
Technical Data

Document Number: MRF9180
Rev. 10, 5/2006

RoHS

RF Power Field Effect Transistor

N-Channel Enhancement-Mode Lateral MOSFET

MRF9180R6


880 MHz, 170 W, 26 V
LATERAL N-CHANNEL
RF POWER MOSFET

Designed for broadband commercial and industrial applications with frequencies from 865 to 895 MHz. The high gain and broadband performance of this device make it ideal for large- signal, common- source amplifier applications in 26 volt base station equipment.

- Typical CDMA Performance @ 880 MHz, 26 Volts, I_{DQ} = 1400 mA
  IS-95 CDMA Pilot, Sync, Paging, Traffic Codes 8 Through 13
  Output Power — 40 Watts
  Power Gain — 17 dB
  Efficiency — 26%
  Adjacent Channel Power -
  750 kHz: -45.0 dBc in 30 kHz BW
  1.98 MHz: -60.0 dBc in 30 kHz BW
- Capable of Handling 10:1 VSWR, @ 26 Vdc, 880 MHz, 170 Watts CW Output Power

Features

- Internally Matched for Ease of Use
- High Gain, High Efficiency and High Linearity
- Integrated ESD Protection
- Designed for Maximum Gain and Insertion Phase Flatness
- Excellent Thermal Stability
- Characterized with Series Equivalent Large-Signal Impedance Parameters
- RoHS Compliant
- In Tape and Reel. R6 Suffix = 150 Units per 56 mm, 13 inch Reel.



CASE 375D-05, STYLE 1
NI-1230

ARCHIVE INFORMATION

ARCHIVE INFORMATION

Table 1. Maximum Ratings

Rating	Symbol	Value	Unit
Drain-Source Voltage	V_{DSS}	-0.5, +65	Vdc
Gate-Source Voltage	V_{GS}	-0.5, +15	Vdc
Total Device Dissipation @ T_C = 25°C Derate above 25°C	P_D	388 2.22	W W/°C
Storage Temperature Range	T_{stg}	-65 to +150	°C
Case Operating Temperature	T_C	150	°C
Operating Junction Temperature	T_J	200	°C

Table 2. Thermal Characteristics

Characteristic	Symbol	Value	Unit
Thermal Resistance, Junction to Case	$R_{\theta JC}$	0.45	°C/W

Table 3. ESD Protection Characteristics

Test Conditions	Class
Human Body Model	1 (Minimum)
Machine Model	M1 (Minimum)

© Freescale Semiconductor, Inc., 2006, 2008-2009. All rights reserved.

freescale semiconductor

Table 4. Electrical Characteristics (T_C = 25°C unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
Off Characteristics (1)					
Zero Gate Voltage Drain Leakage Current (V_{DS} = 65 Vdc, V_{GS} = 0 Vdc)	I_{DSS}	—	—	10	μAdc
Zero Gate Voltage Drain Leakage Current (V_{DS} = 26 Vdc, V_{GS} = 0 Vdc)	I_{DSS}	—	—	1	μAdc
Gate-Source Leakage Current (V_{GS} = 5 Vdc, V_{DS} = 0 Vdc)	I_{GSS}	—	—	1	μAdc
On Characteristics					
Gate Threshold Voltage (1) (V_{DS} = 10 Vdc, I_D = 300 μAdc)	$V_{GS(th)}$	2	2.9	4	Vdc
Gate Quiescent Voltage (2) (V_{DS} = 26 Vdc, I_D = 1400 mAdc)	$V_{GS(Q)}$	—	3.7	—	Vdc
Drain-Source On-Voltage (1) (V_{GS} = 10 Vdc, I_D = 2 Adc)	$V_{DS(on)}$	—	0.19	0.5	Vdc
Forward Transconductance (1) (V_{DS} = 10 Vdc, I_D = 6 Adc)	g_{fs}	—	6	—	S
Dynamic Characteristics (1,3)					
Output Capacitance (V_{DS} = 26 Vdc ± 30 mV(rms)ac @ 1 MHz, V_{GS} = 0 Vdc)	C_{oss}	—	77	—	pF
Reverse Transfer Capacitance (V_{DS} = 26 Vdc ± 30 mV(rms)ac @ 1 MHz, V_{GS} = 0 Vdc)	C_{rss}	—	3.8	—	pF
Functional Tests (2) (In Freescale Test Fixture, 50 ohm system)					
Two-Tone Common-Source Amplifier Power Gain (V_{DD} = 26 Vdc, P_{out} = 170 W PEP, I_{DQ} = 1400 mA, f1 = 880.0 MHz, f2 = 880.1 MHz)	G_{ps}	16	17.5	—	dB
Two-Tone Drain Efficiency (V_{DD} = 26 Vdc, P_{out} = 170 W PEP, I_{DQ} = 1400 mA, f1 = 880.0 MHz, f2 = 880.1 MHz)	η	35	39	—	%
3rd Order Intermodulation Distortion (V_{DD} = 26 Vdc, P_{out} = 170 W PEP, I_{DQ} = 1400 mA, f1 = 880.0 MHz, f2 = 880.1 MHz)	IMD	—	-31	-28	dBc
Input Return Loss (V_{DD} = 26 Vdc, P_{out} = 170 W PEP, I_{DQ} = 1400 mA, f1 = 880.0 MHz, f2 = 880.1 MHz)	IRL	—	-15	-9	dB
Two-Tone Common-Source Amplifier Power Gain (V_{DD} = 26 Vdc, P_{out} = 170 W PEP, I_{DQ} = 1400 mA, f1 = 865.0 MHz, f2 = 865.1 MHz)	G_{ps}	—	17.5	—	dB
Two-Tone Drain Efficiency (V_{DD} = 26 Vdc, P_{out} = 170 W PEP, I_{DQ} = 1400 mA, f1 = 865.0 MHz, f2 = 865.1 MHz)	η	—	38.5	—	%
3rd Order Intermodulation Distortion (V_{DD} = 26 Vdc, P_{out} = 170 W PEP, I_{DQ} = 1400 mA, f1 = 865.0 MHz, f2 = 865.1 MHz)	IMD	—	-31	—	dBc
Input Return Loss (V_{DD} = 26 Vdc, P_{out} = 170 W PEP, I_{DQ} = 1400 mA, f1 = 865.0 MHz, f2 = 865.1 MHz)	IRL	—	-13	—	dB

1. Each side of device measured separately.
2. Measurement made with device in push-pull configuration.
3. Part internally input matched.

ARCHIVE INFORMATION
ARCHIVE INFORMATION


Table 4. Electrical Characteristics (T_C = 25°C unless otherwise noted) **(continued)**

Characteristic	Symbol	Min	Typ	Max	Unit
Functional Tests [1] (In Freescale Test Fixture, 50 ohm system) **(continued)**					
Power Output, 1 dB Compression Point (V_{DD} = 26 Vdc, CW, I_{DQ} = 1400 mA, f1 = 880.0 MHz)	P_{1dB}	—	170	—	W
Common-Source Amplifier Power Gain (V_{DD} = 26 Vdc, P_{out} = 170 W CW, I_{DQ} = 1400 mA, f1 = 880.0 MHz)	G_{ps}	—	16.5	—	dB
Drain Efficiency (V_{DD} = 26 Vdc, P_{out} = 170 W CW, I_{DQ} = 1400 mA, f1 = 880.0 MHz)	η	—	55	—	%

1. Measurement made with device in push-pull configuration.

ARCHIVE INFORMATION
ARCHIVE INFORMATION

ARCHIVE INFORMATION

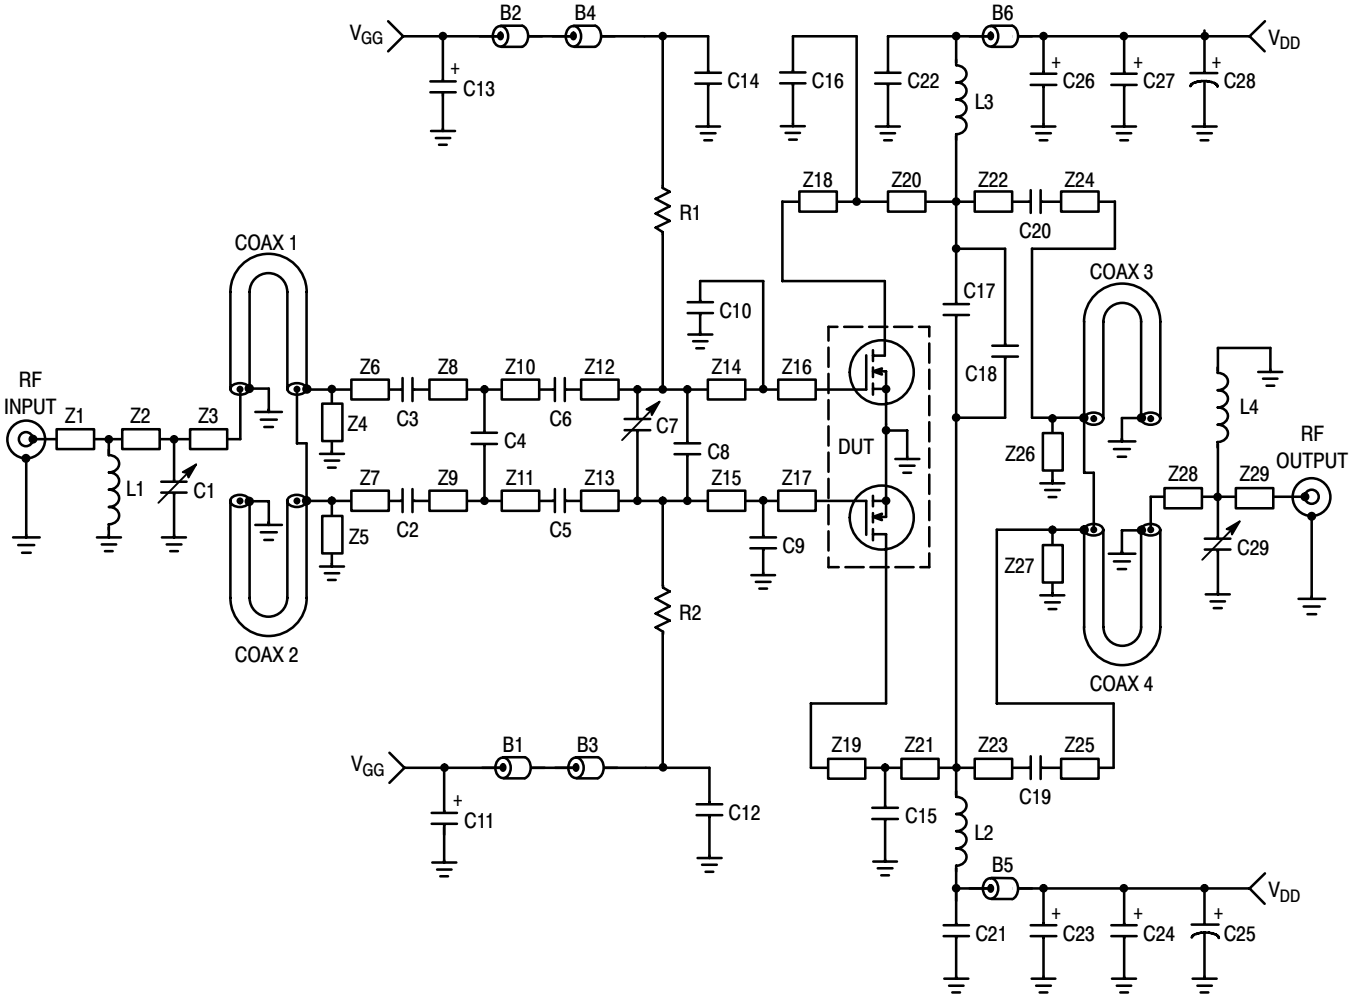


B1, B2, B5, B6	Long Ferrite Beads, Surface Mount
B3, B4	Short Ferrite Beads, Surface Mount
C1	0.6-4.5 pF Variable Capacitor
C2, C3, C5, C6, C12, C14, C19, C20, C21, C22	47 pF Chip Capacitors
C4, C9, C10, C15, C16	12 pF Chip Capacitors
C7	0.8-9.1 pF Variable Capacitor
C8	7.5 pF Chip Capacitor
C11, C13	10 μF, 35 V Tantalum Surface Mount Chip Capacitors
C17	3.6 pF Chip Capacitor
C18	5.1 pF Chip Capacitor
C23, C24, C26, C27	22 μF, 35 V Tantalum Surface Mount Chip Capacitors
C25, C28	220 μF, 50 V Electrolytic Capacitors
C29	0.4-2.5 pF Variable Capacitor
Coax1, Coax2	25 Ω, Semi Rigid Coax, 70 mil OD, 1.05″ Long
Coax3, Coax4	50 Ω, Semi Rigid Coax, 85 mil OD, 1.05″ Long
L1, L2, L3	18.5 nH Mini Spring Inductors, Coilcraft
L4	12.5 nH Mini Spring Inductor, Coilcraft
R1, R2	510 Ω, 1/10 W Chip Resistors

Z1	0.420″ x 0.080″ Microstrip
Z2	0.190″ x 0.080″ Microstrip
Z3	0.097″ x 0.080″ Microstrip
Z4, Z5, Z26, Z27	2.170″ x 0.080″ Microstrip
Z6, Z7	0.075″ x 0.080″ Microstrip
Z8, Z9	0.088″ x 0.220″ Microstrip
Z10, Z11	0.088″ x 0.220″ Microstrip
Z12, Z13	0.460″ x 0.220″ Microstrip
Z14, Z15	0.685″ x 0.625″ Microstrip
Z16, Z17	0.055″ x 0.625″ Microstrip
Z18, Z19	0.055″ x 0.632″ Microstrip
Z20, Z21	0.685″ x 0.632″ Microstrip
Z22, Z23	0.732″ x 0.080″ Microstrip
Z24, Z25	0.060″ x 0.080″ Microstrip
Z28	0.230″ x 0.080″ Microstrip
Z29	0.460″ x 0.080″ Microstrip
Board Material	30 mil Teflon®, εr = 2.55, Copper Clad, 2 oz Cu

Figure 1. 880 MHz Broadband Test Circuit Schematic

ARCHIVE INFORMATION

ARCHIVE INFORMATION

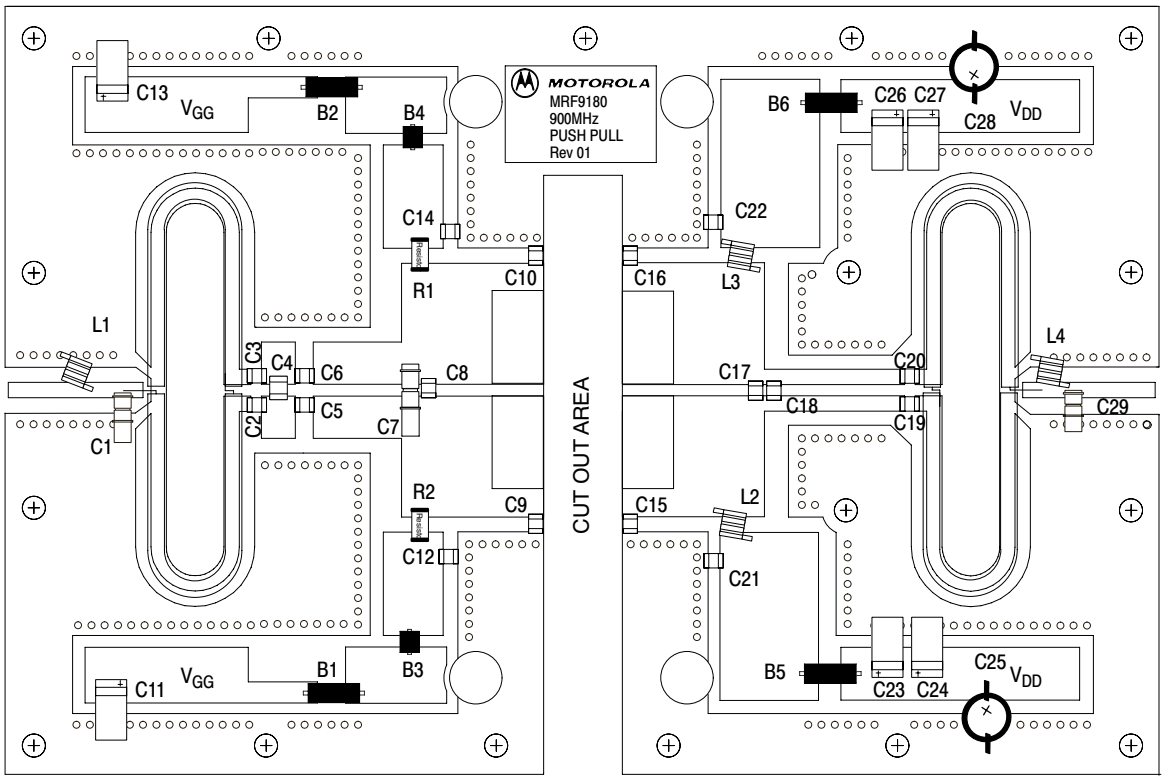

Freescale has begun the transition of marking Printed Circuit Boards (PCBs) with the Freescale Semiconductor signature/logo. PCBs may have either Motorola or Freescale markings during the transition period. These changes will have no impact on form, fit or function of the current product.

Figure 2. 880 MHz Broadband Test Circuit Component Layout

ARCHIVE INFORMATION

ARCHIVE INFORMATION

TYPICAL CHARACTERISTICS

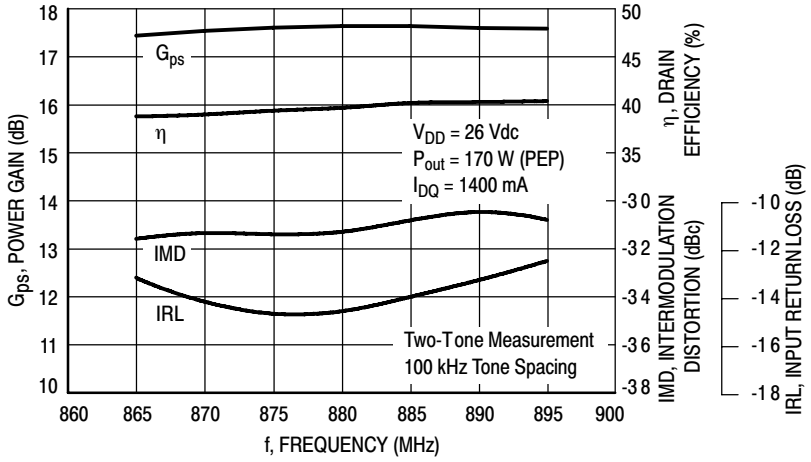


Figure 3. Class AB Broadband Circuit Performance

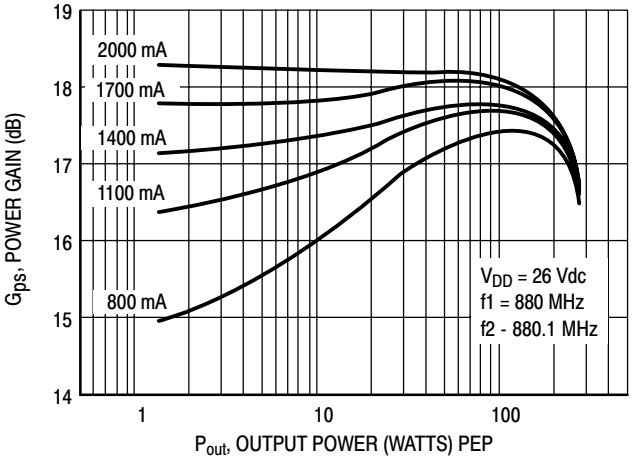


Figure 4. Power Gain versus Output Power

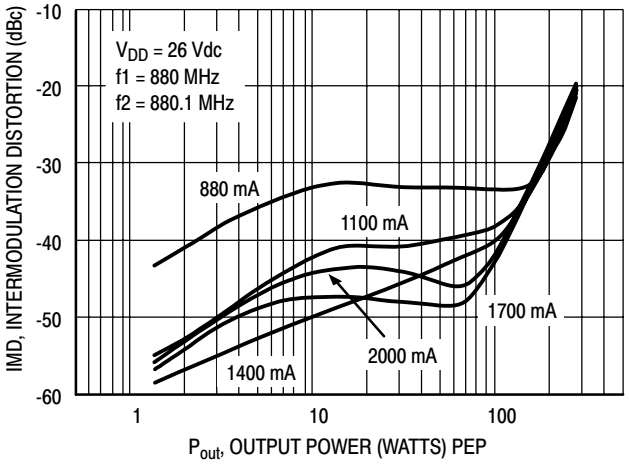


Figure 5. Intermodulation Distortion versus Output Power

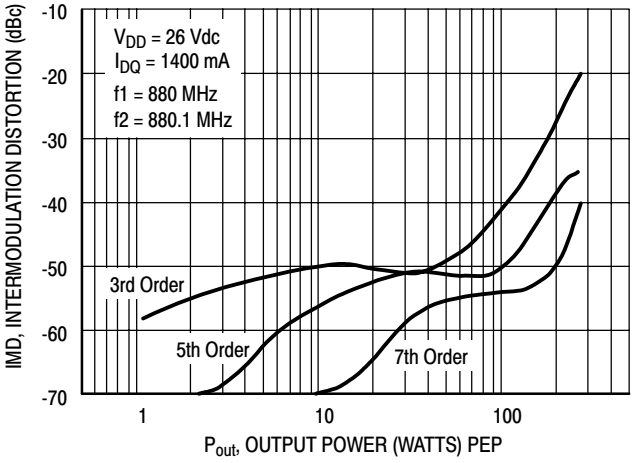


Figure 6. Intermodulation Distortion Products versus Output Power

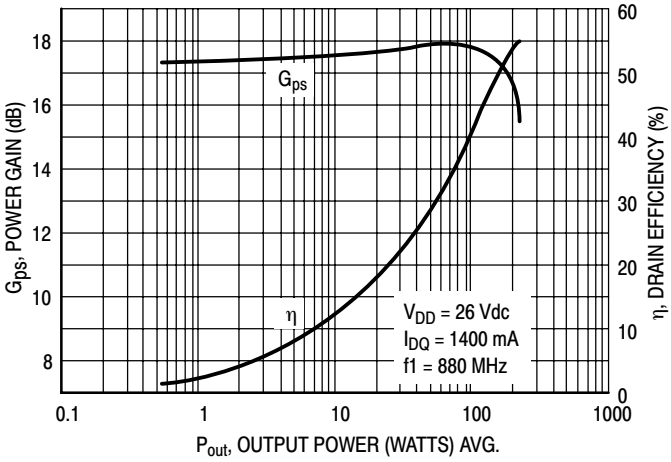


Figure 7. Power Gain and Efficiency versus Output Power

ARCHIVE INFORMATION

ARCHIVE INFORMATION

TYPICAL CHARACTERISTICS

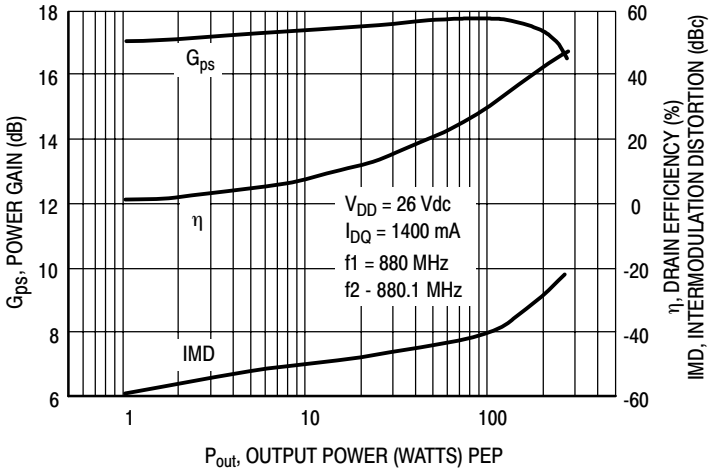


Figure 8. Power Gain, Efficiency and IMD versus Output Power


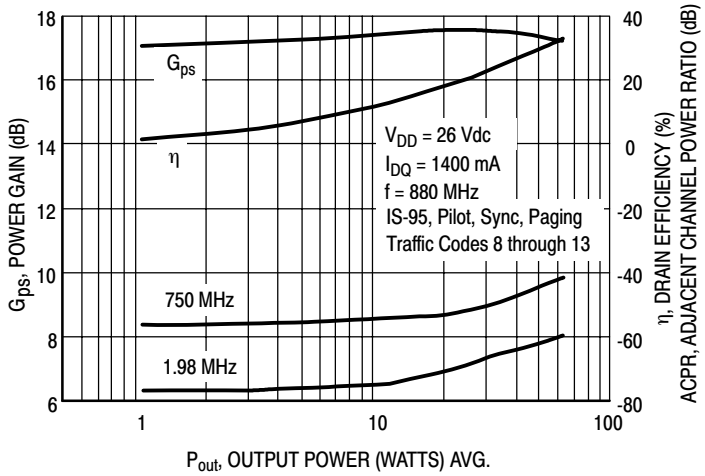


Figure 9. Power Gain, Efficiency and ACPR versus Output Power

ARCHIVE INFORMATION

ARCHIVE INFORMATION

ARCHIVE INFORMATION

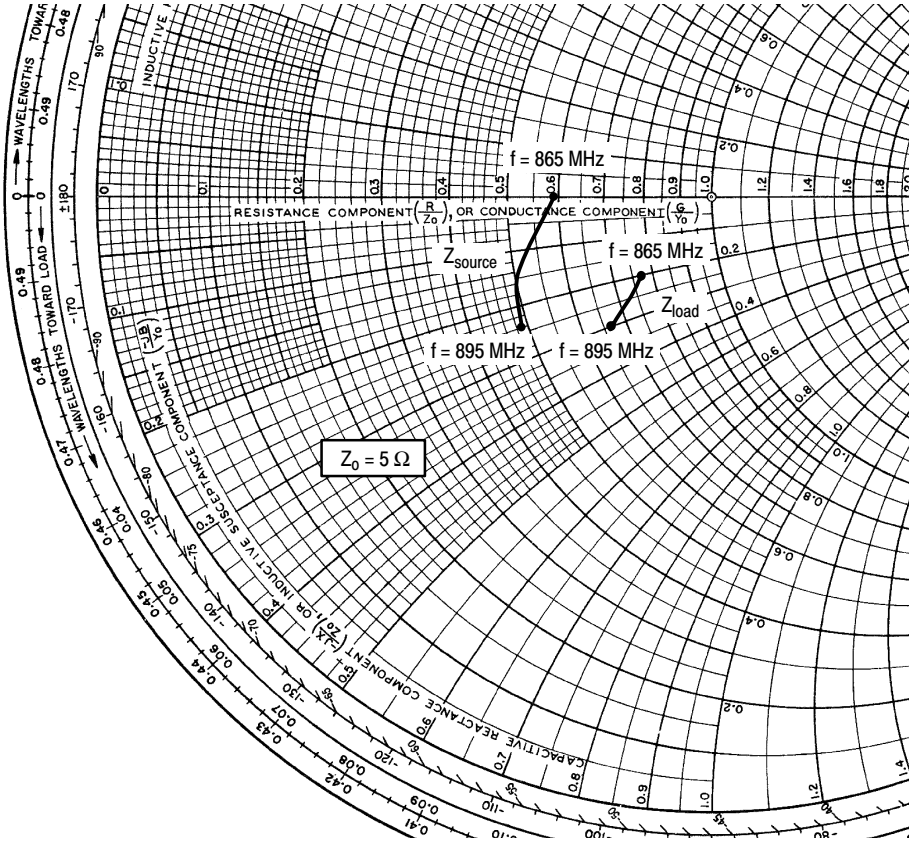

V_{DD} = 26 V, I_{DQ} = 1400 mA, P_{out} = 170 W PEP

f MHz	Z_{source} Ω	Z_{load} Ω
865	2.95 - j0.00	3.83 - j1.02
880	2.48 - j0.67	3.55 - j1.38
895	2.44 - j1.18	3.34 - j1.51

Z_{source} = Test circuit impedance as measured from gate to gate, balanced configuration.

Z_{load} = Test circuit impedance as measured from drain to drain, balanced configuration.


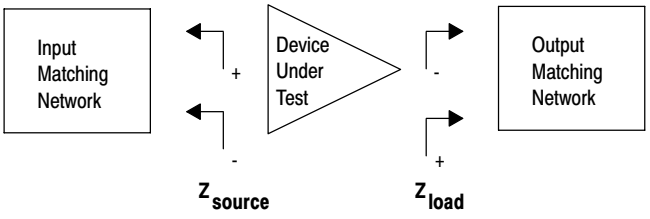


Figure 10. Series Equivalent Source and Load Impedance

PACKAGE DIMENSIONS

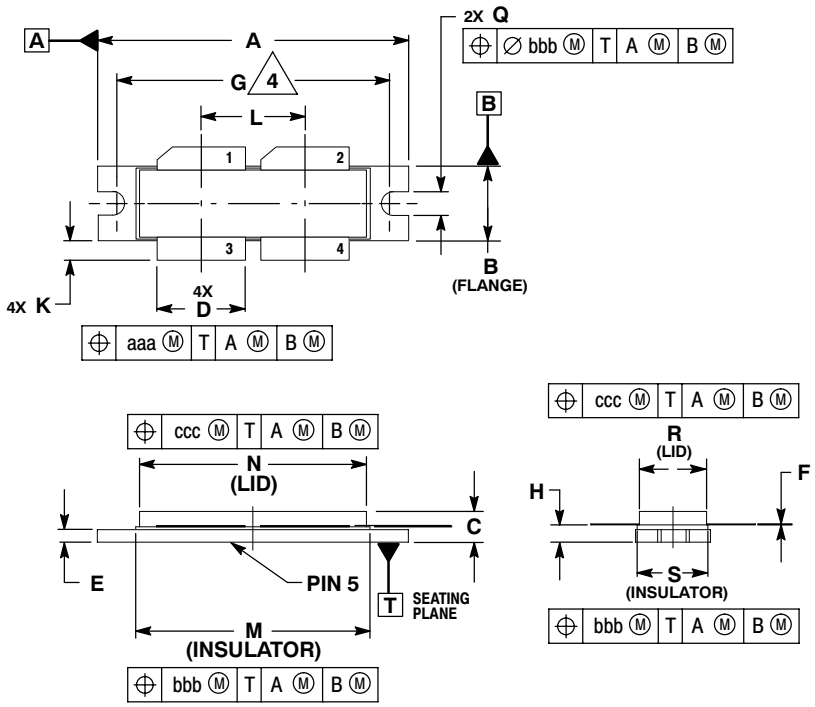

NOTES:
1. INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M-1994.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION H IS MEASURED 0.030 (0.762) AWAY FROM PACKAGE BODY.
4. RECOMMENDED BOLT CENTER DIMENSION OF 1.52 (38.61) BASED ON M3 SCREW.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
A	1.615	1.625	41.02	41.28
B	0.395	0.405	10.03	10.29
C	0.150	0.200	3.81	5.08
D	0.455	0.465	11.56	11.81
E	0.062	0.066	1.57	1.68
F	0.004	0.007	0.10	0.18
G	1.400 BSC		35.56 BSC	
H	0.082	0.090	2.08	2.29
K	0.117	0.137	2.97	3.48
L	0.540 BSC		13.72 BSC	
M	1.219	1.241	30.96	31.52
N	1.218	1.242	30.94	31.55
Q	0.120	0.130	3.05	3.30
R	0.355	0.365	9.01	9.27
S	0.365	0.375	9.27	9.53
aaa	0.013 REF		0.33 REF	
bbb	0.010 REF		0.25 REF	
ccc	0.020 REF		0.51 REF	

STYLE 1:
PIN 1. DRAIN
2. DRAIN
3. GATE
4. GATE
5. SOURCE

CASE 375D-05
ISSUE E
NI-1230

ARCHIVE INFORMATION
ARCHIVE INFORMATION

REVISION HISTORY

The following table summarizes revisions to this document.

Revision	Date	Description
10	Dec. 2009	• Data sheet archived. Part no longer manufactured.

ARCHIVE INFORMATION

ARCHIVE INFORMATION

ARCHIVE INFORMATION

ARCHIVE INFORMATION

How to Reach Us:

Home Page:
www.freescale.com

Web Support:
http://www.freescale.com/support

USA/Europe or Locations Not Listed:
Freescale Semiconductor, Inc.
Technical Information Center, EL516
2100 East Elliot Road
Tempe, Arizona 85284
1-800-521-6274 or +1-480-768-2130
www.freescale.com/support

Europe, Middle East, and Africa:
Freescale Halbleiter Deutschland GmbH
Technical Information Center
Schatzbogen 7
81829 Muenchen, Germany
+44 1296 380 456 (English)
+46 8 52200080 (English)
+49 89 92103 559 (German)
+33 1 69 35 48 48 (French)
www.freescale.com/support

Japan:
Freescale Semiconductor Japan Ltd.
Headquarters
ARCO Tower 15F
1-8-1, Shimo-Meguro, Meguro-ku,
Tokyo 153-0064
Japan
0120 191014 or +81 3 5437 9125
support.japan@freescale.com

Asia/Pacific:
Freescale Semiconductor China Ltd.
Exchange Building 23F
No. 118 Jianguo Road
Chaoyang District
Beijing 100022
China
+86 10 5879 8000
support.asia@freescale.com

For Literature Requests Only:
Freescale Semiconductor Literature Distribution Center
P.O. Box 5405
Denver, Colorado 80217
1-800-441-2447 or +1-303-675-2140
Fax: +1-303-675-2150
LDCForFreescaleSemiconductor@hibbertgroup.com

Information in this document is provided solely to enable system and software implementers to use Freescale Semiconductor products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits or integrated circuits based on the information in this document.

Freescale Semiconductor reserves the right to make changes without further notice to any products herein. Freescale Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Freescale Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. “Typical” parameters that may be provided in Freescale Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including “Typicals”, must be validated for each customer application by customer’s technical experts. Freescale Semiconductor does not convey any license under its patent rights nor the rights of others. Freescale Semiconductor products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Freescale Semiconductor product could create a situation where personal injury or death may occur. Should Buyer purchase or use Freescale Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold Freescale Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Freescale Semiconductor was negligent regarding the design or manufacture of the part.

Freescale™ and the Freescale logo are trademarks of Freescale Semiconductor, Inc. All other product or service names are the property of their respective owners.
© Freescale Semiconductor, Inc. 2006, 2008-2009. All rights reserved.

Document Number: MRF9180
Rev. 10, 5/2006