



EVB-USB3503 QFN Evaluation Board User's Guide

Note the following details of the code protection feature on Microchip devices:

- Microchip products meet the specification contained in their particular Microchip Data Sheet.
- Microchip believes that its family of products is one of the most secure families of its kind on the market today, when used in the intended manner and under normal conditions.
- There are dishonest and possibly illegal methods used to breach the code protection feature. All of these methods, to our knowledge, require using the Microchip products in a manner outside the operating specifications contained in Microchip's Data Sheets. Most likely, the person doing so is engaged in theft of intellectual property.
- Microchip is willing to work with the customer who is concerned about the integrity of their code.
- Neither Microchip nor any other semiconductor manufacturer can guarantee the security of their code. Code protection does not mean that we are guaranteeing the product as "unbreakable."

Code protection is constantly evolving. We at Microchip are committed to continuously improving the code protection features of our products. Attempts to break Microchip's code protection feature may be a violation of the Digital Millennium Copyright Act. If such acts allow unauthorized access to your software or other copyrighted work, you may have a right to sue for relief under that Act.

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION, INCLUDING BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any Microchip intellectual property rights.

Trademarks

The Microchip name and logo, the Microchip logo, dsPIC, FlashFlex, KEELOQ, KEELOQ logo, MPLAB, PIC, PICmicro, PICSTART, PIC³² logo, rPIC, SST, SST Logo, SuperFlash and UNI/O are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

FilterLab, Hampshire, HI-TECH C, Linear Active Thermistor, MTP, SEEVAL and The Embedded Control Solutions Company are registered trademarks of Microchip Technology Incorporated in the U.S.A.

Silicon Storage Technology is a registered trademark of Microchip Technology Inc. in other countries.

Analog-for-the-Digital Age, Application Maestro, BodyCom, chipKIT, chipKIT logo, CodeGuard, dsPICDEM, dsPICDEM.net, dsPICworks, dsSPEAK, ECAN, ECONOMONITOR, FanSense, HI-TIDE, In-Circuit Serial Programming, ICSP, Mindi, MiWi, MPASM, MPF, MPLAB Certified logo, MPLIB, MPLINK, mTouch, Omniscent Code Generation, PICC, PICC-18, PICDEM, PICDEM.net, PICKit, PICtail, REAL ICE, rLAB, Select Mode, SQL, Serial Quad I/O, Total Endurance, TSHARC, UniWinDriver, WiperLock, ZENA and Z-Scale are trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

SQTP is a service mark of Microchip Technology Incorporated in the U.S.A.

GestIC and ULPP are registered trademarks of Microchip Technology Germany II GmbH & Co. KG, a subsidiary of Microchip Technology Inc., in other countries.

flexPWR, JukeBlox, Kleer, KleerNet, MediaLB, and MOST

The preceding is a non-exhaustive list of trademarks in use in the US and other countries. For a complete list of trademarks, email a request to legal.department@microchip.com. The absence of a trademark (name, logo, etc.) from the list does not constitute a waiver of any intellectual property rights that SMSC has established in any of its trademarks.

All other trademarks mentioned herein are property of their respective companies.

© 2014, Microchip Technology Incorporated, Printed in the U.S.A., All Rights Reserved.

ISBN: 9781620779804

QUALITY MANAGEMENT SYSTEM
CERTIFIED BY DNV
== ISO/TS 16949 ==

Microchip received ISO/TS-16949:2009 certification for its worldwide headquarters, design and wafer fabrication facilities in Chandler and Tempe, Arizona; Gresham, Oregon and design centers in California and India. The Company's quality system processes and procedures are for its PIC® MCUs and dsPIC® DSCs, KEELOQ® code hopping devices, Serial EEPROMs, microperipherals, nonvolatile memory and analog products. In addition, Microchip's quality system for the design and manufacture of development systems is ISO 9001:2000 certified.

Object of Declaration: EVB-USB3503 QFN Evaluation Board User's Guide

EU Declaration of Conformity

This declaration of conformity is issued by the manufacturer.

The development/evaluation tool is designed to be used for research and development in a laboratory environment. This development/evaluation tool is not a Finished Appliance, nor is it intended for incorporation into Finished Appliances that are made commercially available as single functional units to end users under EU EMC Directive 2004/108/EC and as supported by the European Commission's Guide for the EMC Directive 2004/108/EC (8th February 2010).

This development/evaluation tool complies with EU RoHS2 Directive 2011/65/EU.

For information regarding the exclusive, limited warranties applicable to Microchip products, please see Microchip's standard terms and conditions of sale, which are printed on our sales documentation and available at www.microchip.com.

Signed for and on behalf of Microchip Technology Inc. at Chandler, Arizona, USA


Derek Carlson
VP Development Tools

16-July-2013
Date

Table of Contents

Preface	5
Introduction	5
Document Layout	5
Conventions Used in this Guide	6
Warranty Registration	7
The Microchip Web Site	7
Customer Support	7
Document Revision History	7
Chapter 1. Overview	
1.1 EVB-USB3503 QFN Overview and Features	9
1.2 Features	9
1.3 General Description	9
Chapter 2. Hardware Configuration	
2.1 Hardware Description	10
2.1.1 Port Assignment	10
2.1.2 USB3503 Configuration	11
2.1.3 Clock Source – 26 MHz Oscillator	12
2.1.4 Power Source – Self-Powered	13
2.1.5 Interrupt LED	14
2.1.6 Connector Descriptions	14
Chapter 3. Operation	
3.1 Contents of the Kit	17
3.2 Initial Bring-Up	17
3.3 Evaluation Software	17
3.3.1 Digital Control	18
3.3.2 I2C Communication	19
3.3.3 Quick Configuration and Customization	19
Appendix A. EVB-USB3503 QFN Evaluation Board Schematics	
A.1 Introduction	21
Appendix B. Bill of Materials (BOM)	
B.1 Introduction	23
Worldwide Sales and Service	26

Preface

NOTICE TO CUSTOMERS

All documentation becomes dated, and this manual is no exception. Microchip tools and documentation are constantly evolving to meet customer needs, so some actual dialogs and/or tool descriptions may differ from those in this document. Please refer to our web site (www.microchip.com) to obtain the latest documentation available.

Documents are identified with a “DS” number. This number is located on the bottom of each page, in front of the page number. The numbering convention for the DS number is “DSXXXXA”, where “XXXX” is the document number and “A” is the revision level of the document.

For the most up-to-date information on development tools, see the MPLAB® IDE online help. Select the Help menu, and then Topics to open a list of available online help files.

INTRODUCTION

This chapter contains general information that will be useful to know before using the EVB-USB3503 QFN Evaluation Board. Items discussed in this chapter include:

- Document Layout
- Conventions Used in this Guide
- Warranty Registration
- The Microchip Web Site
- Customer Support
- Document Revision History

DOCUMENT LAYOUT

This document describes how to use the EVB-USB3503 QFN Evaluation Board as a demonstration platform optimized for portable applications. The manual layout is as follows:

- **Chapter 1. “Overview”** – Shows a brief description of the EVB-USB3503 QFN Evaluation Board
- **Chapter 2. “Hardware Configuration”** – Includes information about the hardware configuration of the EVB-USB3503 QFN Evaluation Board.
- **Chapter 3. “Operation”** – Provides information about installing and operating the EVB-USB3503 QFN Evaluation Board and Evaluation Software.
- **Appendix A. “EVB-USB3503 QFN Evaluation Board Schematics”** – Provides information about known issues and limitations associated with EVB-USB3503.

CONVENTIONS USED IN THIS GUIDE

This manual uses the following documentation conventions:

DOCUMENTATION CONVENTIONS

Description	Represents	Examples
Arial font:		
Italic characters	Referenced books	<i>MPLAB® IDE User's Guide</i>
	Emphasized text	...is the <i>only</i> compiler...
Initial caps	A window	the Output window
	A dialog	the Settings dialog
	A menu selection	select Enable Programmer
Quotes	A field name in a window or dialog	"Save project before build"
Underlined, italic text with right angle bracket	A menu path	<u><i>File>Save</i></u>
Bold characters	A dialog button	Click OK
	A tab	Click the Power tab
N'Rnnnn	A number in verilog format, where N is the total number of digits, R is the radix and n is a digit.	4'b0010, 2'hF1
Text in angle brackets < >	A key on the keyboard	Press <Enter>, <F1>
Courier New font:		
Plain Courier New	Sample source code	#define START
	Filenames	autoexec.bat
	File paths	c:\mcc18\h
	Keywords	_asm, _endasm, static
	Command-line options	-Opa+, -Opa-
	Bit values	0, 1
	Constants	0xFF, 'A'
Italic Courier New	A variable argument	<i>file.o</i> , where <i>file</i> can be any valid filename
Square brackets []	Optional arguments	mcc18 [options] <i>file</i> [options]
Curly brackets and pipe character: { }	Choice of mutually exclusive arguments; an OR selection	errorlevel {0 1}
Ellipses...	Replaces repeated text	var_name [, var_name...]
	Represents code supplied by user	void main (void) { ... }

WARRANTY REGISTRATION

Please complete the enclosed Warranty Registration Card and mail it promptly. Sending the Warranty Registration Card entitles users to receive new product updates. Interim software releases are available at the Microchip web site.

THE MICROCHIP WEB SITE

Microchip provides online support via our web site at www.microchip.com. This web site is used as a means to make files and information easily available to customers. Accessible by using your favorite Internet browser, the web site contains the following information:

- **Product Support** – Data sheets and errata, application notes and sample programs, design resources, user's guides and hardware support documents, latest software releases and archived software
- **General Technical Support** – Frequently Asked Questions (FAQs), technical support requests, online discussion groups, Microchip consultant program member listing
- **Business of Microchip** – Product selector and ordering guides, latest Microchip press releases, listing of seminars and events, listings of Microchip sales offices, distributors and factory representatives

CUSTOMER SUPPORT

Users of Microchip products can receive assistance through several channels:

- Distributor or Representative
- Local Sales Office
- Field Application Engineer (FAE)
- Technical Support

Customers should contact their distributor, representative or field application engineer (FAE) for support. Local sales offices are also available to help customers. A listing of sales offices and locations is included in the back of this document.

Technical support is available through the web site at:

<http://www.microchip.com/support>

DOCUMENT REVISION HISTORY

Revision A (March 2014)

- Initial Release of this Document.

NOTES:

Chapter 1. Overview

1.1 EVB-USB3503 QFN OVERVIEW AND FEATURES

The USB3503 is a low-power, full-featured and OEM configurable Multi-Transaction Translator (MTT) USB 2.0 hub controller with three downstream ports optimized for portable applications. The USB3503 is fully compliant with the USB 2.0 Specification, High-Speed Inter-Chip (HSIC) USB Electrical Specification Revision 1.0 and attaches to an upstream port as a high-speed hub. The 3-port hub supports low-speed, full-speed and high-speed downstream devices on all of the enabled downstream ports. The upstream HSIC port supports only high-speed operation. The EVB-USB3503 QFN Evaluation Board demonstrates a stand-alone application for the USB3503 device. See [Section 1.2 “Features”](#) for additional information.

1.2 FEATURES

- USB3503 in a 32-pin QFN RoHS compliant package
- One upstream HSIC port
- Three USB 2.0 downstream ports with ganged port power and overcurrent sense (OCS)
- High-Speed (480 Mbps), Full-Speed (12 Mbps) and Low-Speed (1.5 Mbps) compatible on downstream USB ports
- Multi-Transaction Translator is enabled
- Supports internal default hub configuration. Optionally supports external configuration via I²C
- I²C interface header available
- Self-Powered operation
- Operates from one single voltage (+5.0 VDC, 4 Amp regulated) external power supply
- On Board +3.3 VDC and +1.8 VDC regulators
- Interrupt LED indicator
- Single 26 MHz oscillator clock source
- Schematics, layout and bill of materials are available to minimize new product development time

1.3 GENERAL DESCRIPTION

The EVB-USB3503 QFN is an evaluation and demonstration platform featuring the USB3503 Ultra Fast USB 2.0 Hub on an RoHS compliant Printed Circuit Board (PCB).

The EVB-USB3503 QFN is designed to demonstrate the unique features of this device using a low-cost PCB implementation with ganged port power control for the three downstream USB 2.0 ports.

The EVB-USB3503 QFN is designed to support internal default configuration settings or external configuration through I²C via the SDA and SCL header pins. [Figure 2-6](#) details the top and bottom level silk screen and copper layers. A block diagram of the evaluation board can be seen in [Figure 2-7](#).

Chapter 2. Hardware Configuration

2.1 HARDWARE DESCRIPTION

2.1.1 Port Assignment

The USB 2.0 downstream ports are numbered 1 through 3. All downstream ports have USB 2.0 connectors with USB 2.0 compliant decoupling and separate shield grounds. Power to all downstream ports is controlled through the MIC2026-1B device U4. When port power is enabled via the PRTPWR pin on the USB3503, port power is delivered to all 3 downstream USB ports.

Note: Do not exceed 4 A total current consumption from the + 5 VDC power supply.

The EVB-USB3503 QFN must be connected to an HSIC upstream host via the DATA (J5) and STROBE (J4) connectors using the provided U.FL coaxial cables. When removing these cables from the EVB for any reason, the provided HSIC Extraction tool must be used. [Figure 2-1](#) shows the recommended usage of the HSIC extraction tool per the Hirose U.FL data sheet on proper use of the plugs.

FIGURE 2-1: RECOMMENDED USAGE OF THE HSIC EXTRACTION TOOL


Usage Precautions

1. Plugs


(1) Mating/Unmating

- 1) To disconnect the connectors, insert the end portion of U.FL-LP-N-2 under the connector flanges and pull off vertically, in the direction of the connector mating axis.
- 2) To mate the connectors, the mating axes of both connectors must be aligned. The “click” confirms a fully-mated connection. Do not attempt to insert on an extreme angle.

U.FL-LP-N-2 Plug Extraction Tool

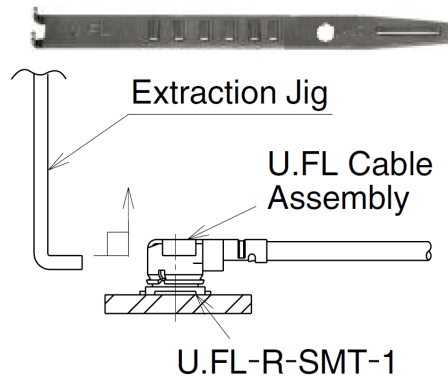

- (2) Pull forces on the cable after the connectors are mated. Do not apply a load to the cable in excess of the values indicated in the diagram below.

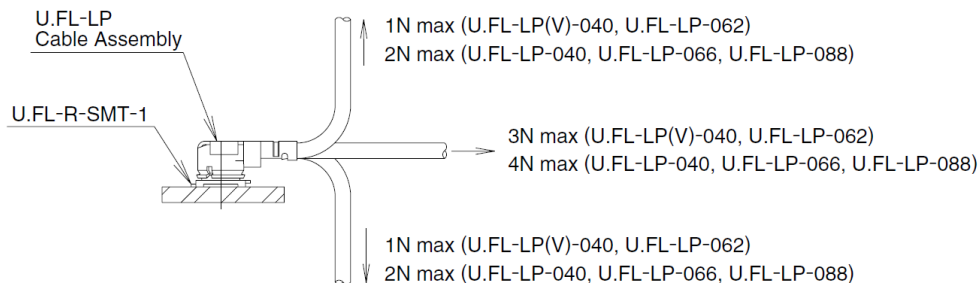

(3) Precautions


Do NOT forcefully twist or deform wires.

2.1.2 USB3503 Configuration

Default: I²C configuration is bypassed by default on the EVB-USB3503 QFN evaluation board. The hub will use the internal default configuration and automatically transition to the hub communication stage when it is powered on.

I²C Option: SW3 must be switched to the 1-2 (see [Figure 2-2](#)) position before powering on the hub. SW3 in position 1-2 pulls HUB_CONNECT to ground and will hold the hub in its configuration stage. The hub will not transition to the hub communication stage until CONNECT_N bit of SP_ILOCK register is negated or until SW3 is switched back to position 2-3. Additional hardware capable of two-wire I²C communication is required for I²C operation. For additional information regarding I²C communication protocol on the USB3503, see the USB3503 data sheet.

FIGURE 2-2: HUB_CONNECT SWITCH POSITIONS

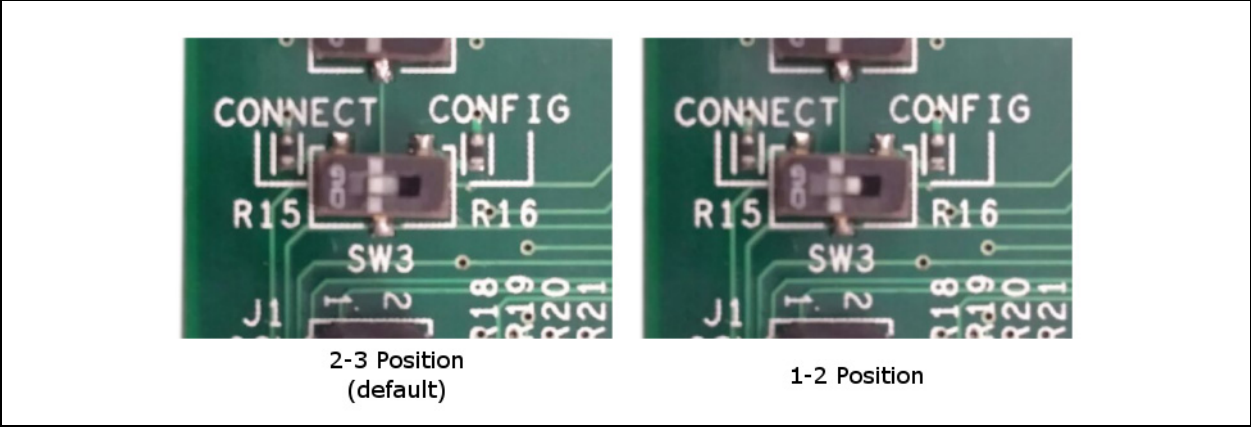


2.1.3 Clock Source – 26 MHz Oscillator

By default, a 26 MHz oscillator (Y1) is populated on the evaluation board as the clock source for the USB3503. The REFSEL[1:0] pins are used to select the frequency of the clock. The board is configured by default to select a 26 MHz clock source by both pulling the REF_SEL0 pin high to +3.3 VDC and pulling the REF_SEL1 pin low to ground. The USB3503 can accept several clock frequencies. If the clock source on the EVB is changed, the resistors connected to the REF_SEL[1:0] pins must be reconfigured to select the appropriate frequency. Table 2-1 shows the resistors that are required in order to select the compatible frequency. The location of the resistors on the EVB can be seen in Figure 2.1.4.

TABLE 2-1: CLOCK FREQUENCY SELECTION RESISTOR CONFIGURATION

REFSEL[1:0]	Clock Frequency	R18	R21	R27	R30
00	38.4 MHz	Empty	Empty	Install	Install
01	26.0 MHz (default)	Empty	Install	Install	Empty
10	19.2 MHz	Install	Empty	Empty	Install
11	12.0 MHz	Install	Install	Empty	Empty

FIGURE 2-3: CLOCK FREQUENCY SELECTION REGISTERS

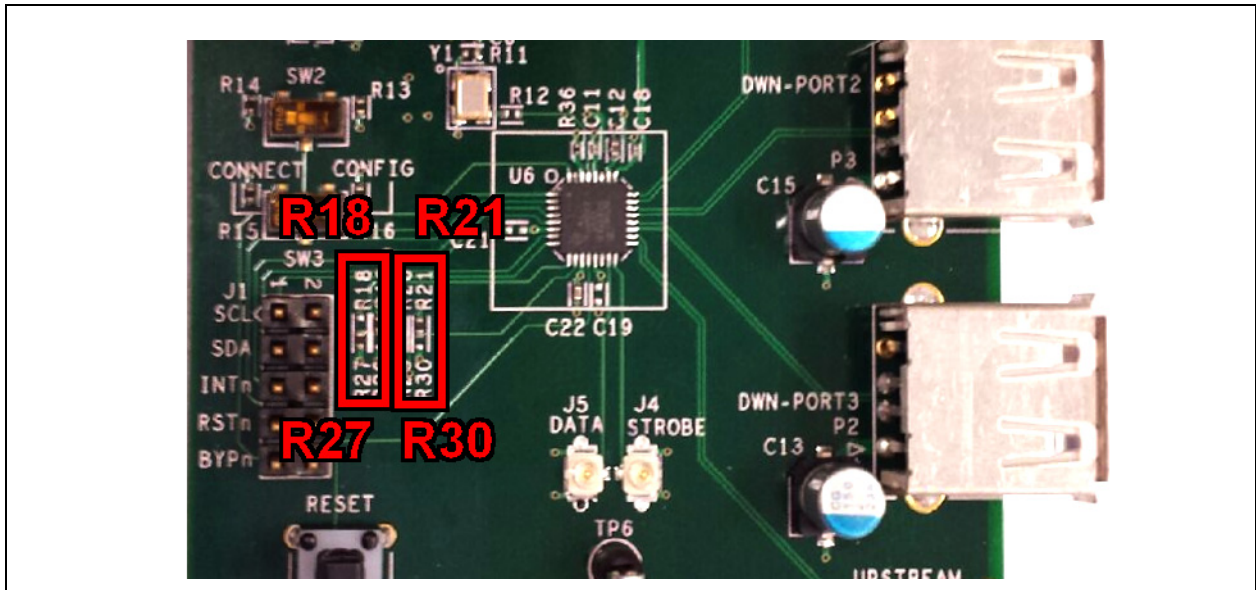

2.1.4 Power Source – Self-Powered

The EVB-USB3503 QFN only supports self-powered operation and is powered by one +5 VDC regulated external power supply. The +5 VDC, 4 A power supply plugs into the board via a 2.1 mm connector (J3). The external power supply controls the on board +3.3 VDC voltage regulator and on board +1.8 VDC voltage regulator. The on board +3.3 VDC voltage regulator feeds VBAT on the USB3503. The on board +1.8 VDC voltage regulator feeds VDD_CORE_REG on the USB3503. The USB3503 also has an internal on-chip 1.2 V regulator to power the digital logic core.

To supply 3.3 VDC externally, remove resistor R1 and connect a 3.3 VDC voltage supply to test point TP2.

To supply 1.8 VDC externally, remove resistor R8 and connect a 1.8 VDC voltage supply to test point TP3.


The USB3503 can also function with a single power supply; to do this remove R8 and place a 0 Ohm resistor on R9. This connects the VDD_CORE_REG pin to the VDD33_BYP pin allowing the USB3503's internal 3.3V regulator to supply the VDD_CORE_REG voltage.

Table 2-2 summarizes the different power options and defines what resistors must be populated for each configuration. Figure 2.1.5 shows the locations of the back-side resistors that are used to configure the different power options.

TABLE 2-2: VBAT AND VDD_CORE_REG VOLTAGE SOURCE CONTROL

VBAT Source	VDD_CORE_REG Source	R1	R8	R9
On Board Regulator	On Board Regulator	Install	Install	Empty
External (TP2)	On Board Regulator	Empty	Install	Empty
External (TP2)	External (TP3)	Empty	Empty	Empty
On Board Regulator	VDD33_BYP	Install	Empty	Install
External (TP2)	VDD33_BYP	Empty	Empty	Install

FIGURE 2-4: VOLTAGE SOURCE CONTROL RESISTORS

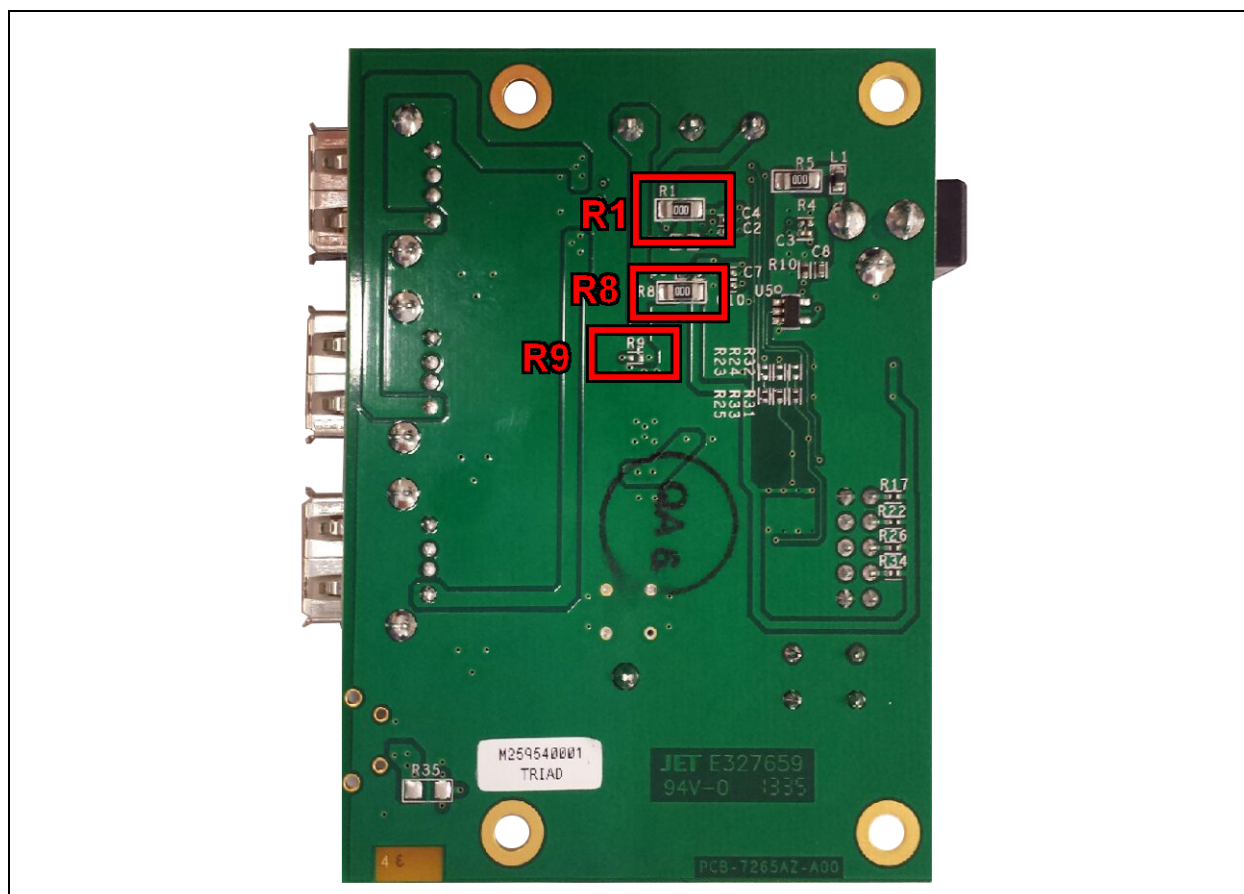

2.1.5 Interrupt LED

LED1 shows the status of the INT_N pin and allows the user to monitor interrupts. The behavior of the INT_N pin is user-configurable and can be changed by writing to a configuration register.

2.1.6 Connector Descriptions

The EVB-USB3503 features HSIC upstream and 3 downstream USB ports, an I²C configuration header, and several voltage test points. See [Table 2-3](#) for the complete list of connectors. See [Figure 2-2](#) for an image of the connectors on the EVB. For more details, please see [Appendix A. "EVB-USB3503 QFN Evaluation Board Schematics"](#).


TABLE 2-3: CONNECTOR DESCRIPTION

CONNECTOR	TYPE	DESCRIPTION
J1	2x5 headers	Aardvark I ² C connection
J3	2.1 mm power jack	+5 VDC power supply connection
J4	U.FL connector	Upstream HSIC Data line connection
J5	U.FL connector	Upstream HSIC Strobe line connection
TP1	Test point	Ground test point
TP2	Test point	VBAT +3.3 VDC test point

TABLE 2-3: CONNECTOR DESCRIPTION (CONTINUED)

CONNECTOR	TYPE	DESCRIPTION
TP3	1x3 headers	VDD_CORE +1.8 VDC test point
TP6	1x8 headers	Ground test point
P1	USB-A connector	Downstream port 1 connector
P2	USB-A connector	Downstream port 2 connector
P3	USB-A connector	Downstream port 3 connector
SW1	Push-Button Switch	USB3503 Reset
SW2	2 Position Switch	Not Used
SW3	2 Position Switch	HUB_CONNECT mode (see Section 2.1.2 “USB3503 Configuration”)

FIGURE 2-5: CONNECTOR, TEST POINT, AND SWITCH LOCATIONS

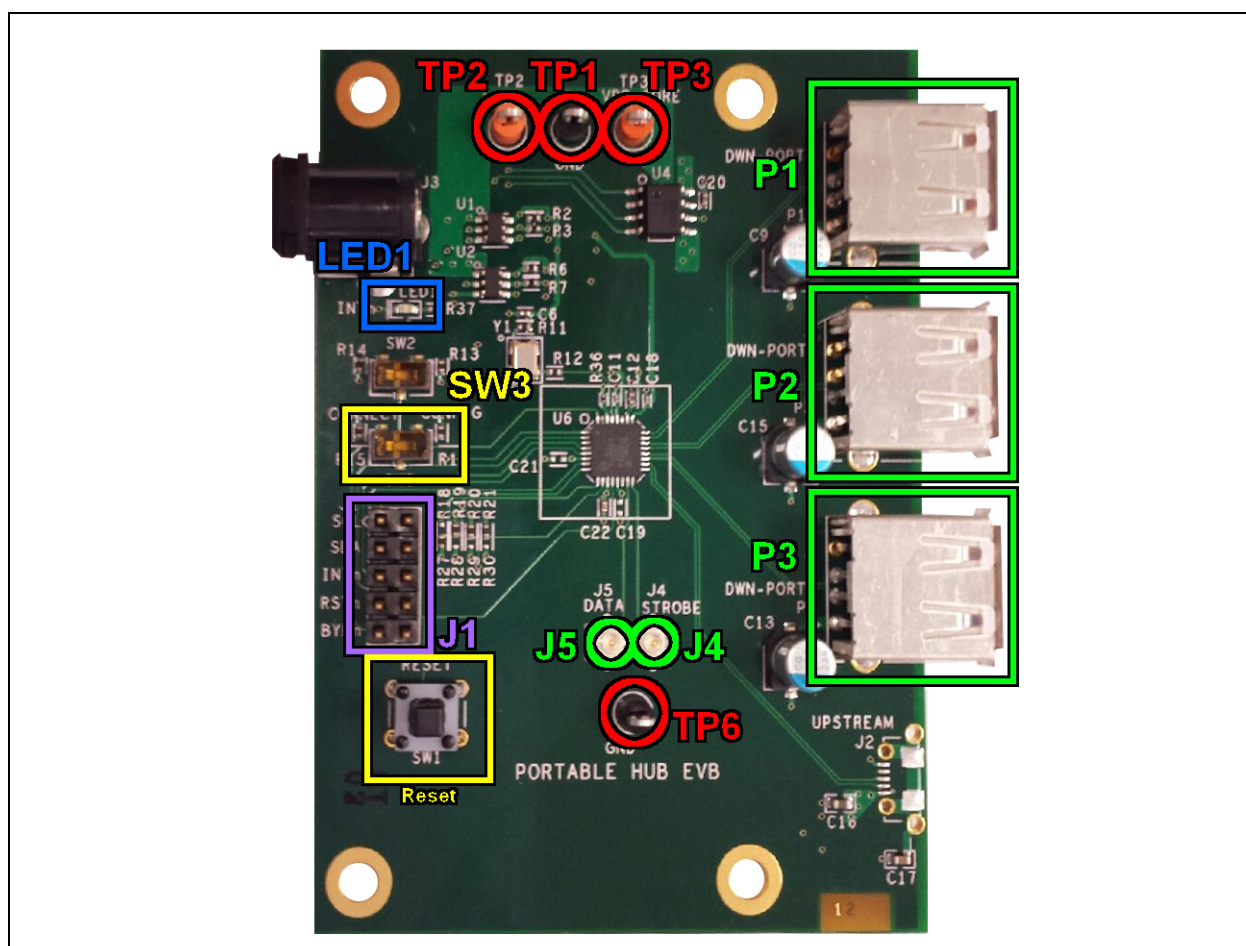

Component side top and bottom silk screen layers are shown in [Figure 2-6](#). A block diagram of the EVB is shown in [Figure 2-7](#).

FIGURE 2-6: PCB TOP AND BOTTOM SILK SCREEN IMAGES


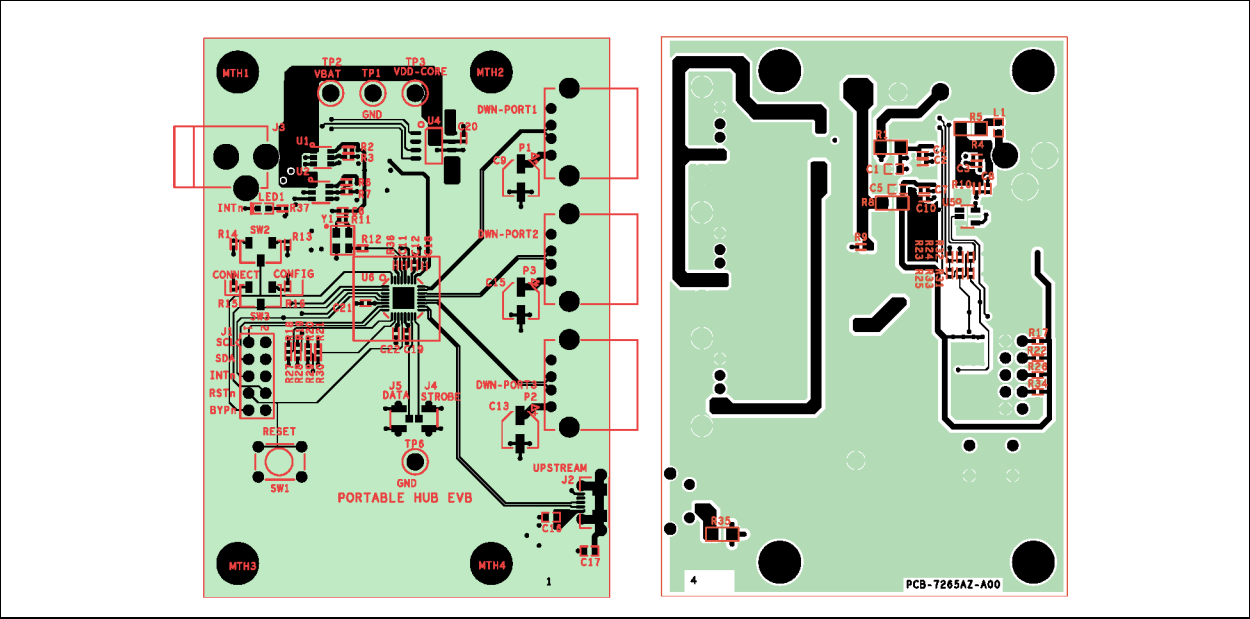


FIGURE 2-7: EVB-USB3503 QFN BLOCK DIAGRAM

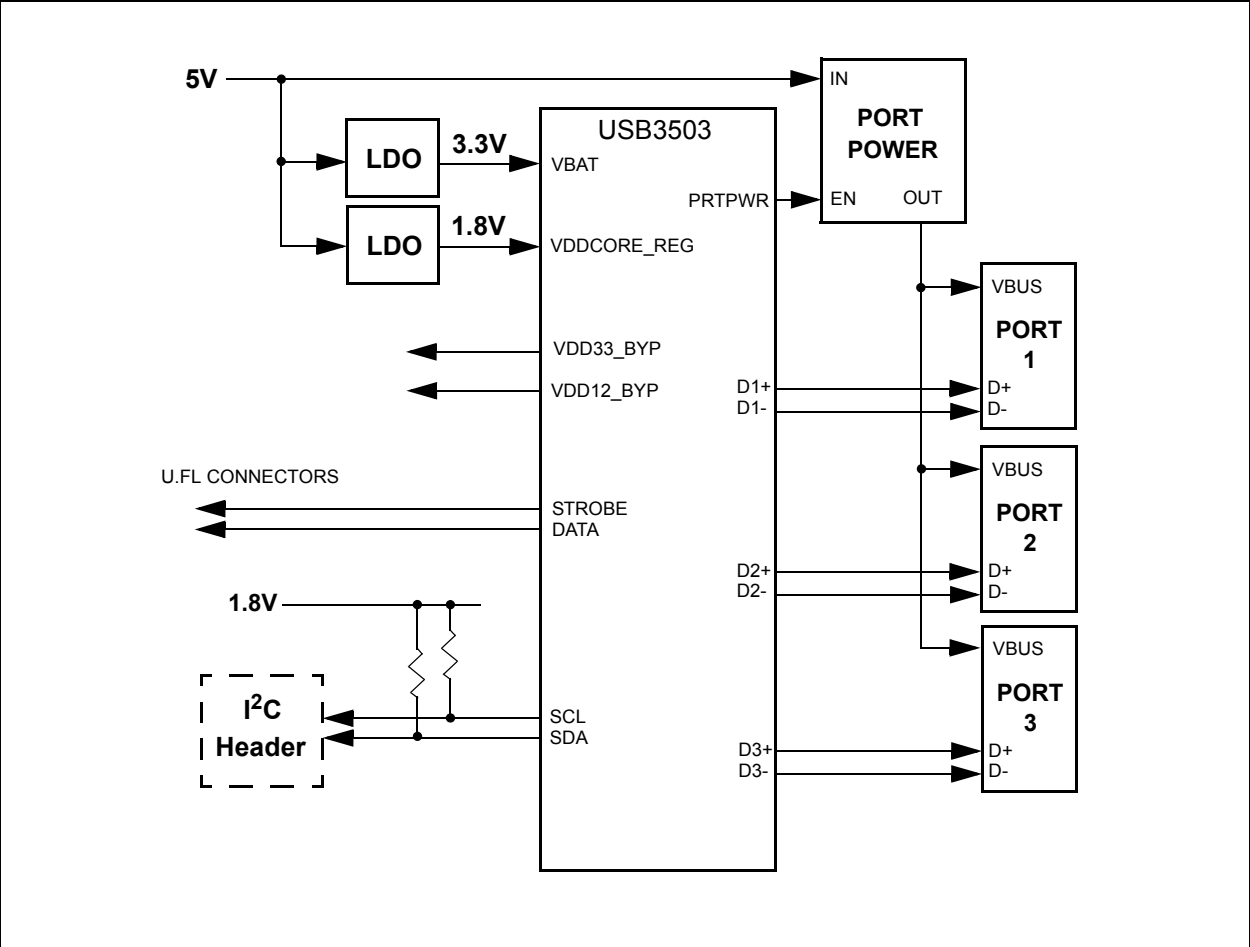

Chapter 3. Operation

3.1 CONTENTS OF THE KIT

The USB3503 EVB includes the basic equipment necessary for evaluation. The items included in the kit are:

1. USB3503 QFN EVB
2. 5V DC Power Supply
3. U.FL Extraction Tool
4. Documentation

The kit does not include an HSIC host device, U.FL cables, any downstream USB devices, I²C master hardware, or other components for board customization.

3.2 INITIAL BRING-UP


The USB3503 EVB has a default configuration that allows it to operate as a stand alone hub. To begin, connect the U.FL connectors to an HSIC host. Then, plug the evaluation board into the 5V power supply. The USB3503 EVB will enumerate as a Generic USB Hub with the VID and PID equal to the default values found in the USB3503 data sheet.

The default configuration of the USB3503 is to enumerate as a Self Powered Hub. This means that, according to the USB 2.0 specification, the downstream ports are only allowed to provide 500mA of current to the downstream device. Refer to the next section for customization options associated with the evaluation kit.

3.3 EVALUATION SOFTWARE

The USB3503 EVB supports evaluation software available online that can be used to configure the USB3503. This software requires the use of a Total Phase Aardvark USB-I²C adapter (not included with the Evaluation Kit). To install the software, run **Setup.exe**. This will install the USB3503 Evaluation Software, the LabVIEW Runtime engine (to run the executable), and the Total Phase drivers to communicate with the Aardvark. Once the software has been installed, locate and run the **USB3503 Evaluation.exe** program on the computer. Connect the Aardvark to the USB3503 EVB with the red wire facing the power port, as in [Figure](#) .

FIGURE 3-1: AARDVARK CONNECTION

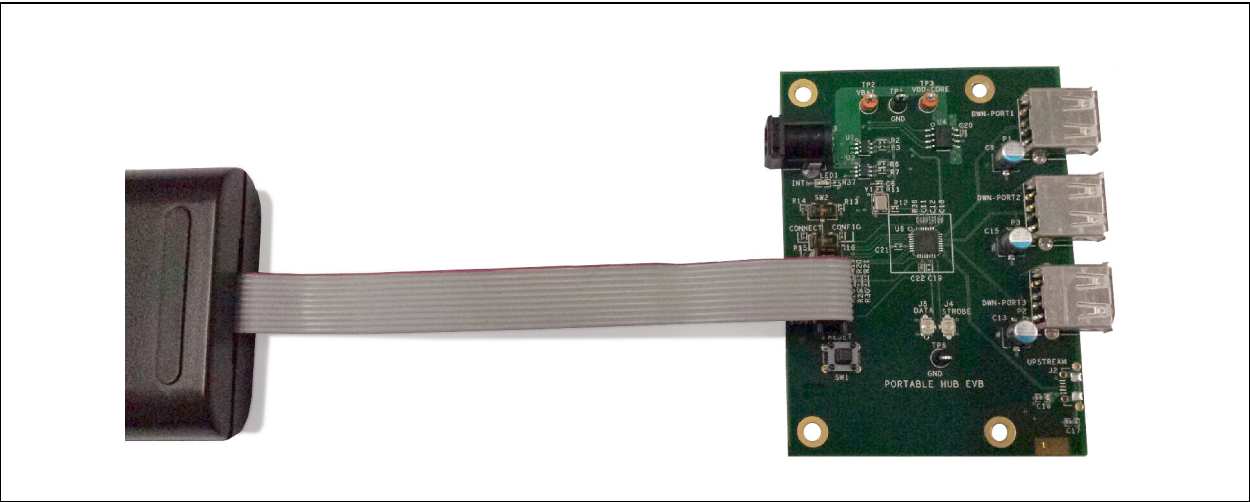

The software allows the user to control the digital input pins RESET_N and CONNECT. It also can monitor the INT_N pin for interrupts. There is a section to communicate with the I²C serial port, as well as some additional quick configuration and customization options.

FIGURE 3-2: USB3503 EVALUATION SCREEN



3.3.1 Digital Control

The RESET_N and HUB_CONNECT pins can be controlled in real time with the **Digital Control** array. Each button in the array corresponds to the pin with the matching name. When the button is orange, the pin is at logic level high. When the button is black the voltage is a logic level low. Refer to the green box in [Figure 3.3.2](#) for the **Digital Con-**

ctrl array location. Set the RESET_N pin low to reset the part and place it into the lowest power state. If the CONNECT pin is low when the RESET pin transitions from low to high, the USB3503 will remain in a state that allows the serial interface registers to be manipulated. To enumerate the hub, either write 00h to register E7h, or drive the CONNECT pin high by pressing the **CONNECT** button in the **Digital Control**. Once the USB3503 has enumerated, the serial interface registers should not be modified.

Note: To prevent the Aardvark from driving against another voltage, the Aardvark is running in an Open/Drain mode. Therefore it is important that all switches on the board pull the pins up to the VCC value.

FIGURE 3-3: DIGITAL CONTROL (GREEN) AND REGISTERS (YELLOW)



3.3.2 I²C Communication

The application also contains a general I²C register read/write section. The **Bit** and **Description** display the serial interface register descriptions found in the USB3503 data sheet. The **Register** display can be used to select the proper serial interface register to manipulate. Click on the **Value** or **Bit** box above to change the value of the register. Once the desired value and register are selected, press the **Write** button to change the value on the part. Click on the **Read** button and the **Value** and **Bit** boxes will update the current value on the part. Refer to the USB3503 data sheet for a detailed description of each register and operation of the device.

3.3.3 Quick Configuration and Customization

The USB3503 Evaluation program also contains some quick configuration and customization options that automatically update the registers to match the desired configuration. The USB3503 can enumerate as a Self Powered or Bus Powered Hub with 1, 2 or 3 downstream ports. The VID, PID, DID and enumeration strings can also be customized to allow the USB3503 to enumerate with whatever identification is desired.

To change these values; update the configuration section to the desired options, then press the **Configure** button. The part will then reset, pull the CONNECT pin low and update the registers as specified. To run with these options, either raise the CONNECT pin, or press the **Connect** button.

FIGURE 3-4: QUICK CONFIGURATION OPTIONS






EVB-USB3503 QFN EVALUATION BOARD USER'S GUIDE

Appendix A. EVB-USB3503 QFN Evaluation Board Schematics

A.1 INTRODUCTION

This appendix shows the EVB-USB3503 QFN Evaluation Board schematics.

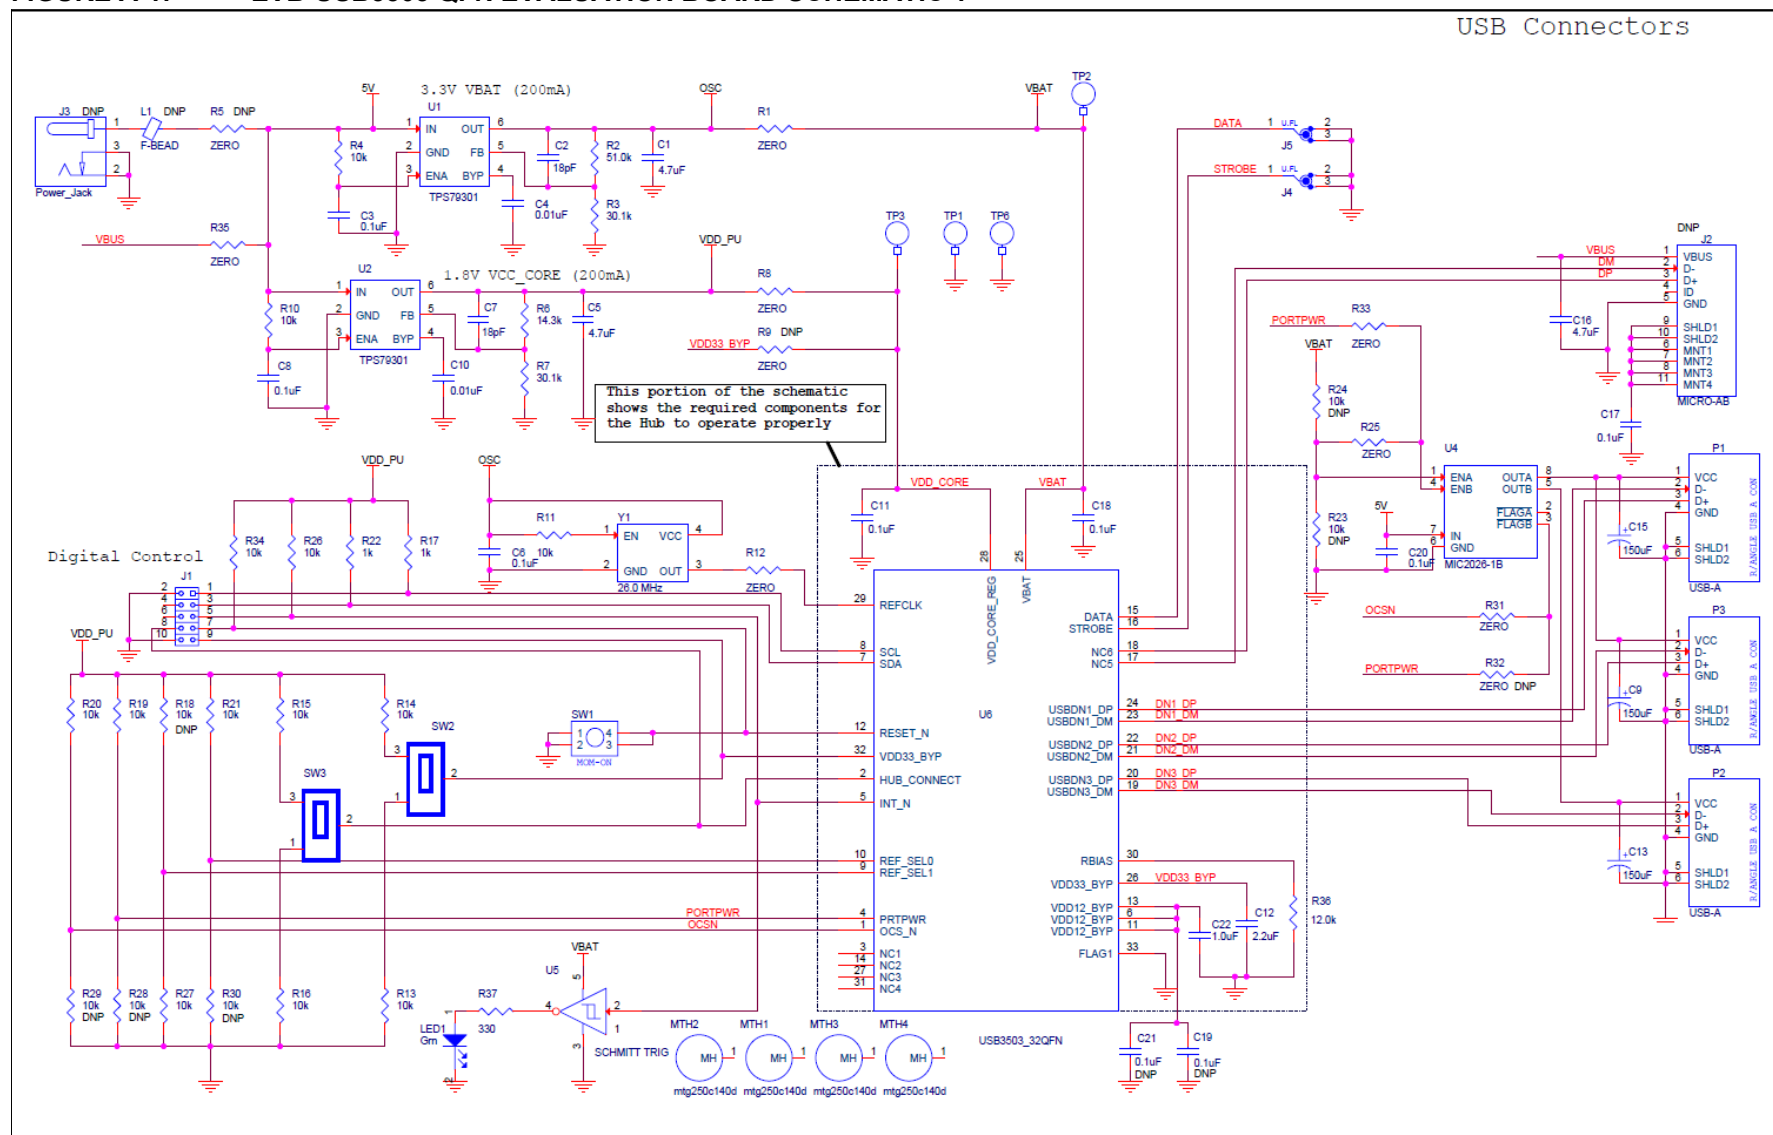FIGURE A-1: EVB-USB3503 QFN EVALUATION BOARD SCHEMATIC 1



EVB-USB3503 QFN EVALUATION BOARD USER'S GUIDE

Appendix B. Bill of Materials (BOM)

B.1 INTRODUCTION

This appendix shows the EVB-USB3503 QFN Evaluation Board Bill of Materials (BOM).

TABLE B-1: EVB-USB3503 QFN EVALUATION BOARD BILL OF MATERIALS

Item	Qty	Reference Designator(s)	Description	Manufacturer	Manufacturer Part Number	Notes
1	3	C1 C5 C16	CAPACITOR CERAMIC 4.7UF 10V X5R 0603	TAIYO YUDEN	LMK107BJ475KA-T	
2	2	C2 C7	CAPACITOR CERAMIC 18PF 50V 0402 SMD	PANASONIC	ECJ-0EC1H180J	
3	4	C3 C6 C8 C19 C20 C21	CAPACITOR CERAMIC 0.1UF 10V X5R 0402	PANASONIC	ECJ-0EB1A104K	DNP: C19 C21
4	2	C4 C10	CAPACITOR CERAMIC 0.01UF 10% 16V X7R 040	AVX	0402YC103KAT2A	
5	3	C9 C13 C15	CAP ALUM 150UF 6.3V 20% SMD	NICHICON	PCG0J151MCL1G5	
6	2	C11 C18	CAP CERAMIC .1UF 6.3V X5R 0201	MURATA ERIE	GRM033R60J104KE19D	
7	1	C12	CAPACITOR CERAMIC 2.2UF 6.3V X5R 0402	MURATA ERIE	ECJ-0EB0J225M	
8	1	C17	CAPACITOR CERAMIC 0.1UF 16V 10% X7R 0603	PANASONIC	ECJ-1VB1C104K	
9	1	C22	CAPACITOR CERAMIC 1.0UF 6.3V 20% X5R 040	MURATA ERIE	GRM155R60J105ME19D	
10	1	J1	HEADER, 2 X 5, 0.1 INCH, VERTICAL	SAMTEC	TSW-105-07-L-D	
11	0	J2	CONNECTOR RECEPT MICRO USB TYPE AB SMT	JAE Electronics	DX4R205JJAR1800	DNP: J2
12	1	J3	CONNECTOR POWER JACK 2.1X5.5MM HIGH CURR	CUI STACK	PJ-002AH	
13	2	J4 J5	CONN RECPT ULTRA-MINI COAX SMD	HIROSE	U.FL-R-SMT(10)	
14	1	L1	FERRITE BEAD, 120 OHM, 0.5A, 0.1DCR, 060	PANASONIC	EXC-3BP121H	
15	1	LED1	LED GREEN SMT	STANLEY	BG1111C-TR	
16	3	P1 P2 P3	RECEPTACLE, USB, STYLE B, RIGHT ANGLE	FCI	87520-0010BLF	
17	3	R1 R5 R8 R35	RESISTOR ZERO OHM 1/4W 5% 1206	YAGEO	RC1206JR-070RL	DNP: R35
18	1	R2	RESISTOR 51.0K OHM 1/10W 1% 0402 SMD	PANASONIC	ERJ-2RKF5102X	
19	2	R3 R7	RESISTOR 30.1K OHM 1/10W 1% 0402 SMD	PANASONIC	ERJ-2RKF3012X	
20	13	R4 R10 R11 R13 R14 R15 R16 R18 R19 R20 R21 R23 R24 R26 R27 R28 R29 R30 R34	RESISTOR 10K OHM 1/16W 5% 0402 SMD	PANASONIC	ERJ-2GEJ103X	DNP: R18 R23 R24 R28 R29 R30
21	1	R6	RESISTOR 14.3K OHM 1/10W 1% 0402 SMD	PANASONIC	ERJ-2RKF1432X	
22	4	R9 R12 R25 R31 R32 R33	RESISTOR ZERO OHM 1/16W 5% 0402 SMD	YAGEO	RC0402JR-070RL	DNP: R9 R32
23	2	R17 R22	RESISTOR 1.0K OHM 1/16W 5% 0402 SMD	PANASONIC	ERJ-2GEJ102X	
24	1	R36	RESISTOR 12.0K OHM 1/20W 1% 0201 SMD	PANASONIC	ERJ-1GEF1202C	
25	1	R37	RESISTOR 330 OHM 1/16W 1% 0402 SMD	YAGEO	RC0402FR-07330RL	
26	1	SW1	SWITCH TACTILE 6MM EXTEND ACT 160GF	E-SWITCH	TL1105SPF160Q	

TABLE B-1: EVB-USB3503 QFN EVALUATION BOARD BILL OF MATERIALS (CONTINUED)

Item	Qty	Reference Designator(s)	Description	Manufacturer	Manufacturer Part Number	Notes
27	2	SW2 SW3	SWITCH SLIDE SPDT SMD GULL	COPAL ELECTRONICS	CJS-1200TB	
28	2	TP1 TP6	TEST POINT LOOP COMPACT BLACK	KEystone	5006	
29	2	TP2 TP3	TEST POINT LOOP COMPACT ORANGE	KEystone	5008	
30	2	U1 U2	IC 200MA LDO LINEAR REG SOT23-6	TEXAS INSTRUMENTS	TPS79301DBVRQ1	
31	1	U4	POWER SWITCH USB MIC2026-1B	MICREL	MIC2026-1YM	
32	1	U5	IC SCHMITT-TRG INV GATE SOT23-5	TEXAS INSTRUMENTS	SN74AHC1G14DBVR	
33	1	U6	USB3503	MICROCHIP	USB3503	
34	1	Y1	OSCILLATOR PROG 3.3V +-50PPM SMD	ABRACON	AP3S-26.0MHz	

Worldwide Sales and Service

AMERICAS

Corporate Office
2355 West Chandler Blvd.
Chandler, AZ 85224-6199
Tel: 480-792-7200
Fax: 480-792-7277
Technical Support:
<http://www.microchip.com/support>
Web Address:
www.microchip.com

Atlanta
Duluth, GA
Tel: 678-957-9614
Fax: 678-957-1455

Austin, TX
Tel: 512-257-3370

Boston
Westborough, MA
Tel: 774-760-0087
Fax: 774-760-0088

Chicago
Itasca, IL
Tel: 630-285-0071
Fax: 630-285-0075

Cleveland
Independence, OH
Tel: 216-447-0464
Fax: 216-447-0643

Dallas
Addison, TX
Tel: 972-818-7423
Fax: 972-818-2924

Detroit
Novi, MI
Tel: 248-848-4000

Houston, TX
Tel: 281-894-5983

Indianapolis
Noblesville, IN
Tel: 317-773-8323
Fax: 317-773-5453

Los Angeles
Mission Viejo, CA
Tel: 949-462-9523
Fax: 949-462-9608

New York, NY
Tel: 631-435-6000

San Jose, CA
Tel: 408-735-9110

Canada - Toronto
Tel: 905-673-0699
Fax: 905-673-6509

ASIA/PACIFIC

Asia Pacific Office
Suites 3707-14, 37th Floor
Tower 6, The Gateway
Harbour City, Kowloon
Hong Kong
Tel: 852-2401-1200
Fax: 852-2401-3431

Australia - Sydney
Tel: 61-2-9868-6733
Fax: 61-2-9868-6755

China - Beijing
Tel: 86-10-8569-7000
Fax: 86-10-8528-2104

China - Chengdu
Tel: 86-28-8665-5511
Fax: 86-28-8665-7889

China - Chongqing
Tel: 86-23-8980-9588
Fax: 86-23-8980-9500

China - Hangzhou
Tel: 86-571-2819-3187
Fax: 86-571-2819-3189

China - Hong Kong SAR
Tel: 852-2943-5100
Fax: 852-2401-3431

China - Nanjing
Tel: 86-25-8473-2460
Fax: 86-25-8473-2470

China - Qingdao
Tel: 86-532-8502-7355
Fax: 86-532-8502-7205

China - Shanghai
Tel: 86-21-5407-5533
Fax: 86-21-5407-5066

China - Shenyang
Tel: 86-24-2334-2829
Fax: 86-24-2334-2393

China - Shenzhen
Tel: 86-755-8864-2200
Fax: 86-755-8203-1760

China - Wuhan
Tel: 86-27-5980-5300
Fax: 86-27-5980-5118

China - Xian
Tel: 86-29-8833-7252
Fax: 86-29-8833-7256

China - Xiamen
Tel: 86-592-2388138
Fax: 86-592-2388130

China - Zhuhai
Tel: 86-756-3210040
Fax: 86-756-3210049

ASIA/PACIFIC

India - Bangalore
Tel: 91-80-3090-4444
Fax: 91-80-3090-4123

India - New Delhi
Tel: 91-11-4160-8631
Fax: 91-11-4160-8632

India - Pune
Tel: 91-20-3019-1500

Japan - Osaka
Tel: 81-6-6152-7160
Fax: 81-6-6152-9310

Japan - Tokyo
Tel: 81-3-6880-3770
Fax: 81-3-6880-3771

Korea - Daegu
Tel: 82-53-744-4301
Fax: 82-53-744-4302

Korea - Seoul
Tel: 82-2-554-7200
Fax: 82-2-558-5932 or
82-2-558-5934

Malaysia - Kuala Lumpur
Tel: 60-3-6201-9857
Fax: 60-3-6201-9859

Malaysia - Penang
Tel: 60-4-227-8870
Fax: 60-4-227-4068

Philippines - Manila
Tel: 63-2-634-9065
Fax: 63-2-634-9069

Singapore
Tel: 65-6334-8870
Fax: 65-6334-8850

Taiwan - Hsin Chu
Tel: 886-3-5778-366
Fax: 886-3-5770-955

Taiwan - Kaohsiung
Tel: 886-7-213-7830

Taiwan - Taipei
Tel: 886-2-2508-8600
Fax: 886-2-2508-0102

Thailand - Bangkok
Tel: 66-2-694-1351
Fax: 66-2-694-1350

EUROPE

Austria - Wels
Tel: 43-7242-2244-39
Fax: 43-7242-2244-393

Denmark - Copenhagen
Tel: 45-4450-2828
Fax: 45-4485-2829

France - Paris
Tel: 33-1-69-53-63-20
Fax: 33-1-69-30-90-79

Germany - Dusseldorf
Tel: 49-2129-3766400

Germany - Munich
Tel: 49-89-627-144-0
Fax: 49-89-627-144-44

Germany - Pforzheim
Tel: 49-7231-424750

Italy - Milan
Tel: 39-0331-742611
Fax: 39-0331-466781

Italy - Venice
Tel: 39-049-7625286

Netherlands - Drunen
Tel: 31-416-690399
Fax: 31-416-690340

Poland - Warsaw
Tel: 48-22-3325737

Spain - Madrid
Tel: 34-91-708-08-90
Fax: 34-91-708-08-91

Sweden - Stockholm
Tel: 46-8-5090-4654

UK - Wokingham
Tel: 44-118-921-5800
Fax: 44-118-921-5820