
2.7-V TO 5.5-V, 12-BIT QUAD DAC IN WAFER CHIP SCALE PACKAGE

FEATURES

- Four 12-Bit D/A Converters
- Programmable Settling Time of Either 3 μs or 9 μs Typ
- TMS320™ DSP Family, (Q)SPI™, and Microwire™ Compatible Serial Interface
- Internal Power-On Reset
- Low Power Consumption:
  - 8 mW, Slow Mode − 5-V Supply
  - 3.6 mW, Slow Mode − 3-V Supply
- Reference Input Buffer
- Voltage Output Range . . . 2× the Reference Input Voltage
- Monotonic Over Temperature
- Dual 2.7-V to 5.5-V Supply (Separate Digital and Analog Supplies)
- Hardware Power Down (10 nA)
- Software Power Down (10 nA)
- Simultaneous Update

APPLICATIONS

- Battery Powered Test Instruments
- Digital Offset and Gain Adjustment
- Industrial Process Controls
- Machine and Motion Control Devices
- Communications
- Arbitrary Waveform Generation

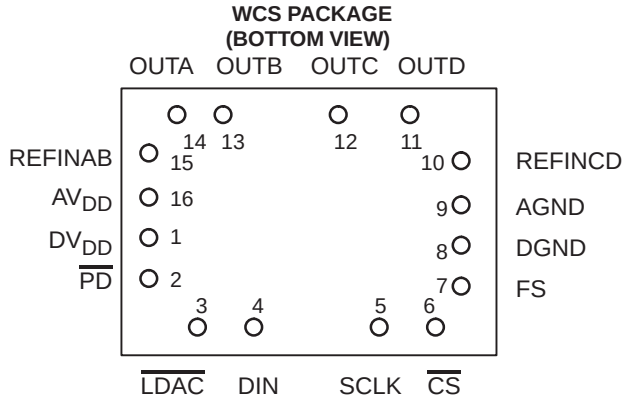

DESCRIPTION

The TLV5614IYE is a quadruple 12-bit voltage output digital-to-analog converter (DAC) with a flexible 4-wire serial interface. The serial interface allows glueless interface to TMS320, SPI, QSPI, and Microwire serial ports. The TLV5614IYE is programmed with a 16-bit serial word comprised of a DAC address, individual DAC control bits, and a 12-bit DAC value. The device has provision for two supplies: one digital supply for the serial interface (via pins DV_{DD} and DGND), and one for the DACs, reference buffers, and output buffers (via pins AV_{DD} and AGND). Each supply is independent of the other, and can be any value between 2.7 V and 5.5 V. The dual supplies allow a typical application where the DAC is controlled via a microprocessor operating on a 3 V supply (also used on pins DV_{DD} and DGND), with the DACs operating on a 5 V supply. Of course, the digital and analog supplies can be tied together.

The resistor string output voltage is buffered by a x2 gain rail-to-rail output buffer. The buffer features a Class AB output stage to improve stability and reduce settling time. A rail-to-rail output stage and a power-down mode makes it ideal for single voltage, battery based applications. The settling time of the DAC is programmable to allow the designer to optimize speed versus power dissipation. The settling time is chosen by the control bits within the 16-bit serial input string. A high-impedance buffer is integrated on the REFINAB and REFINCD terminals to reduce the need for a low source impedance drive to the terminal. REFINAB and REFINCD allow DACs A and B to have a different reference voltage then DACs C and D.

The TLV5614IYE is implemented with a CMOS process and is available in a 16-terminal WCS package. The TLV5614IYE is characterized for operation from −40°C to 85°C in a wire-bonded small outline (SOIC) package.

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

TMS320 DSP is a trademark of Texas Instruments.
SPI and QSPI are trademarks of Motorola, Inc.
Microwire is a trademark of National Semiconductor Corporation.

PRODUCTION DATA information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2003, Texas Instruments Incorporated


These devices have limited built-in ESD protection. The device should be placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

AVAILABLE OPTIONS

T_A	PACKAGE
	WCS(1) (YE)
−40°C to 85°C	TLV5614IYE

(1) Wafer chip scale package. See Figure 17.

FUNCTIONAL BLOCK DIAGRAM

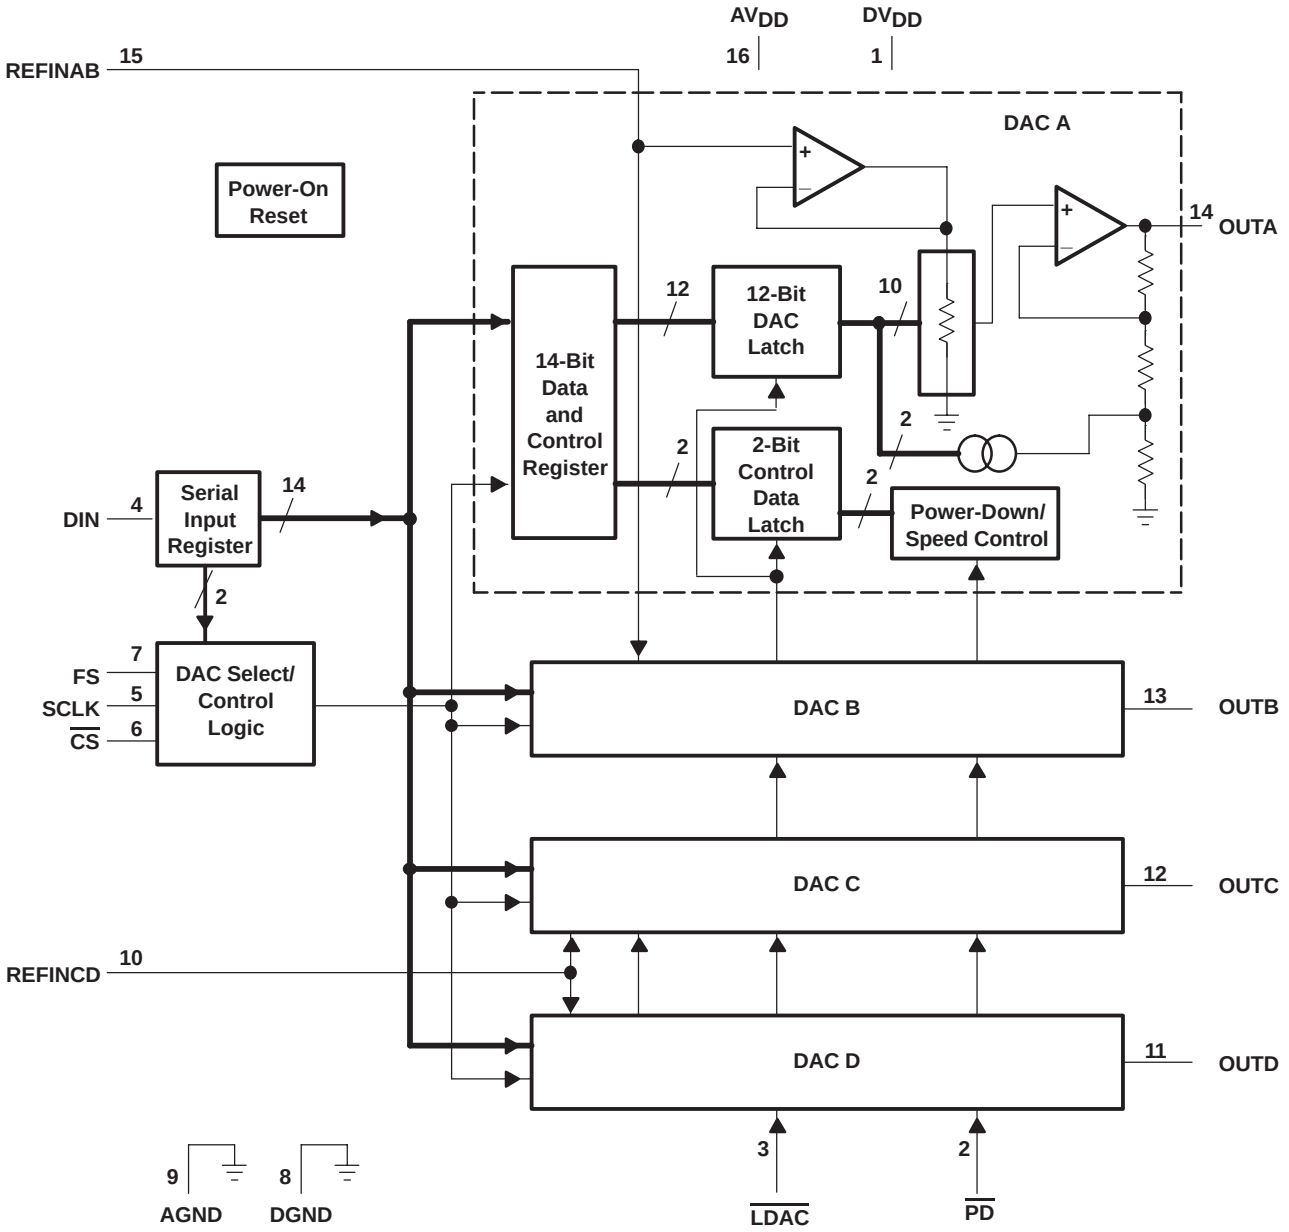

Terminal Functions

TERMINAL NAME	TERMINAL NO.	I/O	DESCRIPTION
AGND	9		Analog ground
AV_{DD}	16		Analog supply
$\overline{CS}$	6	I	Chip select. This terminal is active low.
DGND	8		Digital ground
DIN	4	I	Serial data input
DV_{DD}	1		Digital supply
FS	7	I	Frame sync input. The falling edge of the frame sync pulse indicates the start of a serial data frame shifted out to the TLV5614IYE.
$\overline{PD}$	2	I	Power down pin. Powers down all DACs (overriding their individual power down settings), and all output stages. This terminal is active low.
$\overline{LDAC}$	3	I	Load DAC. When the $\overline{LDAC}$ signal is high, no DAC output updates occur when the input digital data is read into the serial interface. The DAC outputs are only updated when $\overline{LDAC}$ is low.
REFINAB	15	I	Voltage reference input for DACs A and B.
REFINCD	10	I	Voltage reference input for DACs C and D.
SCLK	5	I	Serial clock input
OUTA	14	O	DACA output
OUTB	13	O	DACB output
OUTC	12	O	DACC output
OUTD	11	O	DACD output

ABSOLUTE MAXIMUM RATINGS

over operating free-air temperature range unless otherwise noted(1)

	UNIT
Supply voltage, (DV_{DD}, AV_{DD} to GND)	7 V
Supply voltage difference, (AV_{DD} to DV_{DD})	−2.8 V to 2.8 V
Digital input voltage range	−0.3 V to DV_{DD} + 0.3 V
Reference input voltage range	−0.3 V to AV_{DD} + 0.3 V
Operating free-air temperature range, T_A	−40°C to 85°C

(1) Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

RECOMMENDED OPERATING CONDITIONS

		MIN	NOM	MAX	UNIT
Supply voltage, AV_{DD}, DV_{DD}	5-V supply	4.5	5	5.5	V
	3-V supply	2.7	3	3.3	
High-level digital input voltage, V_{IH}	DV_{DD} = 2.7 V	2			V
	DV_{DD} = 5.5 V	2.4			
Low-level digital input voltage, V_{IL}	DV_{DD} = 2.7 V			0.6	V
	DV_{DD} = 5.5 V			1	
Reference voltage, V_{ref} to REFINAB, REFINCD terminal	5-V supply(1)	0	2.048	V_{DD}−1.5	V
	3-V supply(1)	0	1.024	V_{DD}−1.5	
Load resistance, R_L		2	10		kΩ
Load capacitance, C_L				100	pF
Serial clock rate, SCLK				20	MHz
Operating free-air temperature	TLV5614IYE	−40		85	°C

(1) Voltages greater than AV_{DD}/2 cause output saturation for large DAC codes.

ELECTRICAL CHARACTERISTICS

over recommended operating free-air temperature range, supply voltages, and reference voltages (unless otherwise noted)

PARAMETER			TEST CONDITIONS		MIN	TYP	MAX	UNIT
STATIC DAC SPECIFICATIONS								
	Resolution				12			bits
	Integral nonlinearity (INL), end point adjusted		See Note 1			±1.5	±4	LSB
	Differential nonlinearity (DNL)		See Note 2			±0.5	±1	LSB
E_{ZS}	Zero scale error (offset error at zero scale)		See Note 3				±12	mV
	Zero scale error temperature coefficient		See Note 4			10		ppm/°C
E_G	Gain error		See Note 5				±0.6	% of FS voltage
	Gain error temperature coefficient		See Note 6			10		ppm/°C
PSRR	Power supply rejection ratio	Zero scale	See Notes 7 and 8			−80		dB
		Full scale				−80		dB
INDIVIDUAL DAC OUTPUT SPECIFICATIONS								
V_O	Voltage output range		R_L = 10 kΩ		0		AV_{DD}−0.4	V
	Output load regulation accuracy		R_L = 2 kΩ vs 10 kΩ			0.1	0.25	% of FS voltage
REFERENCE INPUTS (REFINAB, REFINCD)								
V_I	Input voltage range		See Note 9		0		AV_{DD}−1.5	V
R_I	Input resistance					10		MΩ
C_I	Input capacitance					5		pF
	Reference feed through		REFIN = 1 V_{pp} at 1 kHz + 1.024 V dc (see Note 10)			−75		dB
	Reference input bandwidth		REFIN = 0.2 V_{pp} + 1.024 V dc large signal	Slow		0.5		MHz
				Fast		1		
DIGITAL INPUTS (DIN, $\overline{CS}$, $\overline{LDAC}$, $\overline{PD}$								
I_{IH}	High-level digital input current		$V_I = V_{DD}$				±1	µA
I_{IL}	Low-level digital input current		V_I = 0 V				±1	µA
C_I	Input capacitance					3		pF
$\overline{\text{POWER SUPPLY}}$								
I_{DD}	Power supply current		5-V supply, No load, Clock running, All inputs 0 V or V_{DD}	Slow		1.6	2.4	mA
				Fast		3.8	5.6	
			3-V supply, No load, Clock running, All inputs 0 V or DV_{DD}	Slow		1.2	1.8	mA
				Fast		3.2	4.8	
	Power down supply current (see Figure 12)					10		nA

(1) The relative accuracy or integral nonlinearity (INL) sometimes referred to as linearity error, is the maximum deviation of the output from the line between zero and full scale excluding the effects of zero code and full-scale errors.

(2) The differential nonlinearity (DNL) sometimes referred to as differential error, is the difference between the measured and ideal 1 LSB amplitude change of any two adjacent codes. Monotonic means the output voltage changes in the same direction (or remains constant) as a change in the digital input code.

(3) Zero-scale error is the deviation from zero voltage output when the digital input code is zero.

(4) Zero-scale-error temperature coefficient is given by: E_{ZS} TC = $[E_{ZS} (T_{max}) - E_{ZS} (T_{min})]/V_{ref} \times 10^6/(T_{max} - T_{min})$.

(5) Gain error is the deviation from the ideal output (2 V_{ref} − 1 LSB) with an output load of 10 kΩ excluding the effects of the zero-error.

(6) Gain temperature coefficient is given by: E_G TC = $[E_G(T_{max}) - E_G (T_{min})]/V_{ref} \times 10^6/(T_{max} - T_{min})$.

(7) Zero-scale-error rejection ratio (EZS−RR) is measured by varying the AV_{DD} from 5 ± 0.5 V and 3 ± 0.3 V dc, and measuring the proportion of this signal imposed on the zero-code output voltage.

(8) Full-scale rejection ratio (EG-RR) is measured by varying the AV_{DD} from 5 ± 0.5 V and 3 ± 0.3 V dc and measuring the proportion of this signal imposed on the full-scale output voltage after subtracting the zero scale change.

(9) Reference input voltages greater than $V_{DD}/2$ cause output saturation for large DAC codes

(10) Reference feedthrough is measured at the DAC output with an input code = 000 hex and a $V_{ref\ (REFINAB\ or\ REFINCD)}$ input = 1.024 Vdc + 1 V_{pp} at 1 kHz.

ELECTRICAL CHARACTERISTICS (CONTINUED)

over recommended operating free-air temperature range, supply voltages, and reference voltages (unless otherwise noted)

ANALOG OUTPUT DYNAMIC PERFORMANCE							
PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
SR	Output slew rate	C_L = 100 pF, R_L = 10 kΩ, V_O = 10% to 90%, V_{ref} = 2.048 V, 1024 V	Fast		5		V/µs
			Slow		1		V/µs
t_S	Output settling time	To ± 0.5 LSB, C_L = 100 pF, R_L = 10 kΩ, See Notes 1 and 3	Fast		3	5.5	µs
			Slow		9	20	
$t_{S(c)}$	Output settling time, code to code	To ± 0.5 LSB, C_L = 100 pF, R_L = 10 kΩ, See Note 2	Fast		1		µs
			Slow		2		
	Glitch energy	Code transition from 7FF to 800			10		nV-sec
SNR	Signal-to-noise ratio	Sinewave generated by DAC, Reference voltage = 1.024 at 3 V and 2.048 at 5 V, f_S = 400 KSPS, f_{OUT} = 1.1 kHz sinewave, C_L = 100 pF, R_L = 10 kΩ, BW = 20 kHz			74		dB
S/(N+D)	Signal to noise + distortion				66		
THD	Total harmonic distortion				−68		
SFDR	Spurious free dynamic range				70		
DIGITAL INPUT TIMING REQUIREMENTS							
$t_{su(CS-FS)}$	Setup time, $\overline{CS}$ low before FS↓			10			ns
$t_{su(FS-CK)}$	Setup time, FS low before first negative SCLK edge			8			ns
$t_{su(C16-FS)}$	Setup time, sixteenth negative SCLK edge after FS low on which bit D0 is sampled before rising edge of FS			10			ns
$t_{su(C16-CS)}$	Setup time. The first positive SCLK edge after D0 is sampled before $\overline{CS}$ rising edge. If FS is used instead of the SCLK positive edge to update the DAC, then the setup time is between the FS rising edge and $\overline{CS}$ rising edge.			10			ns
t_{wH}	Pulse duration, SCLK high			25			ns
t_{wL}	Pulse duration, SCLK low			25			ns
$t_{su(D)}$	Setup time, data ready before SCLK falling edge			8			ns
$t_{h(D)}$	Hold time, data held valid after SCLK falling edge			5			ns
$t_{wH(FS)}$	Pulse duration, FS high			20			ns

(1) Settling time is the time for the output signal to remain within ±0.5 LSB of the final measured value for a digital input code change ofFFF hex to 080 hex for 080 hex to FFF hex.

(2) Settling time is the time for the output signal to remain within ±0.5 LSB of the final measured value for a digital input code change of one count.

(3) Limits are ensured by design and characterization, but are not production tested.

PARAMETER MEASUREMENT INFORMATION

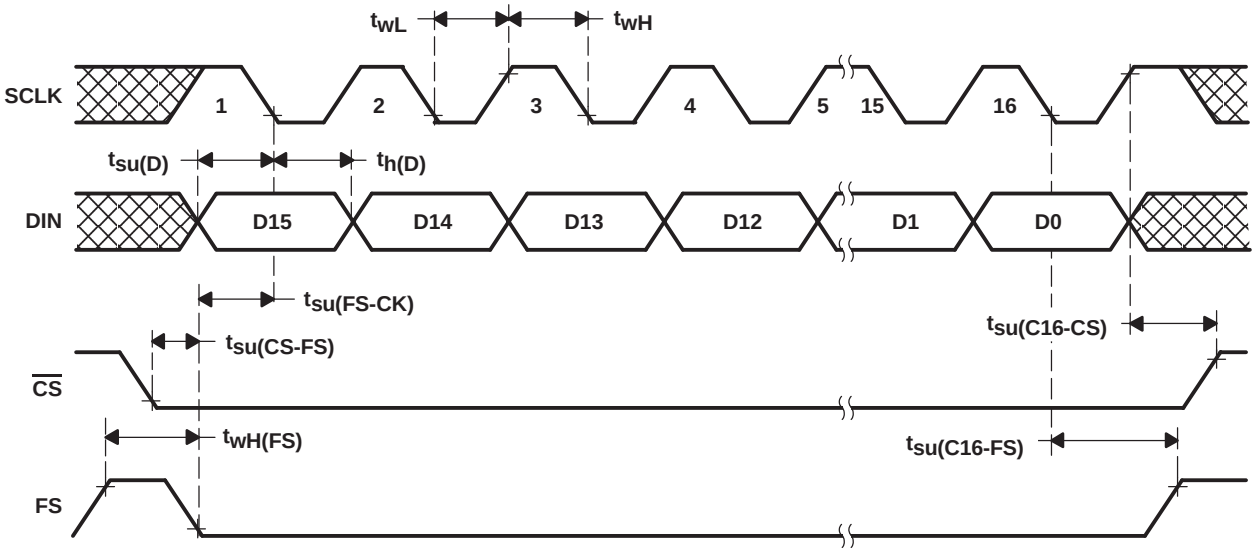


Figure 1. Timing Diagram

TYPICAL CHARACTERISTICS

LOAD REGULATION

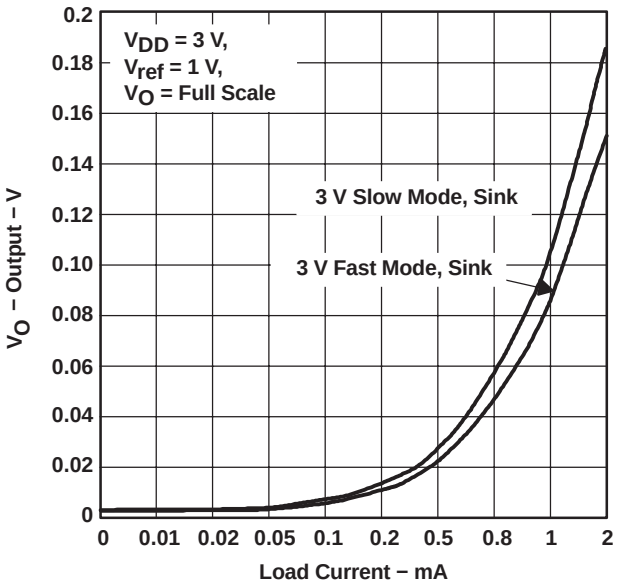


Figure 2

LOAD REGULATION

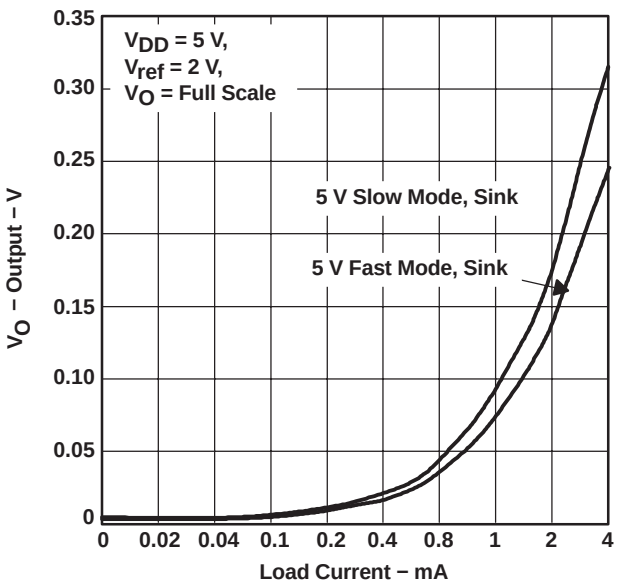


Figure 3

LOAD REGULATION

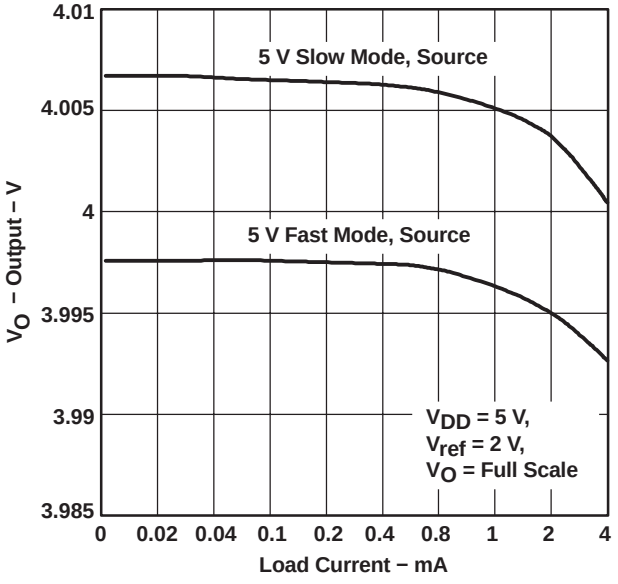


Figure 4

LOAD REGULATION

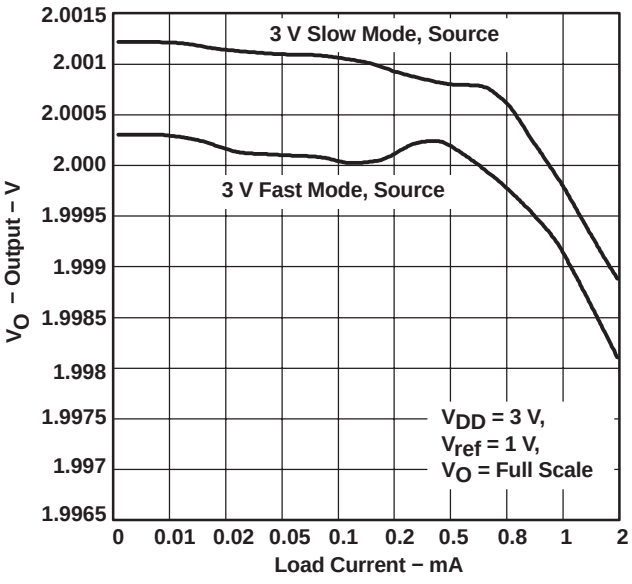


Figure 5

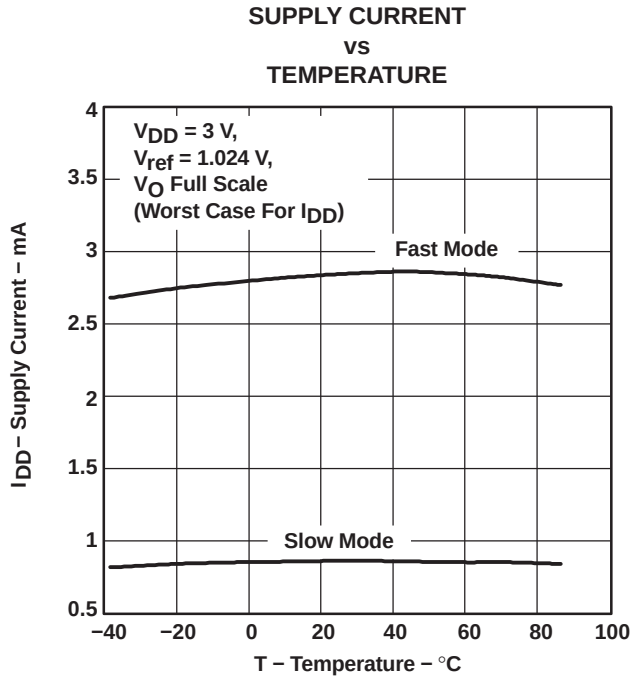


Figure 6

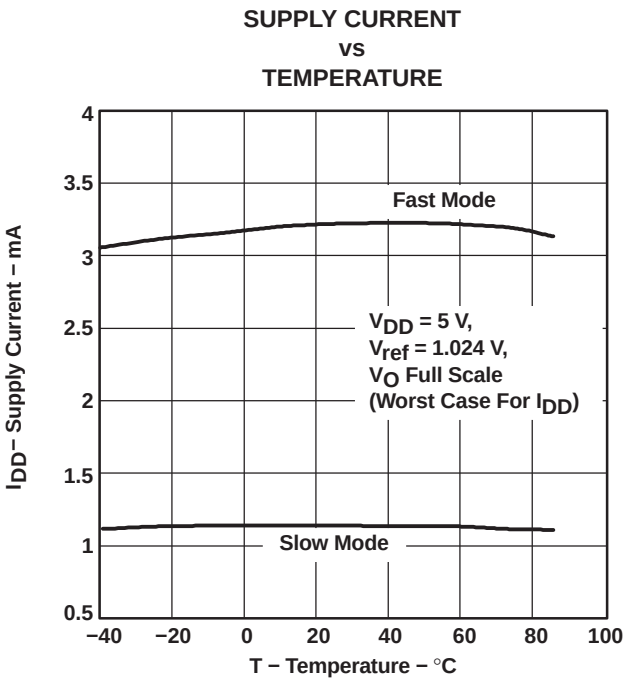


Figure 7

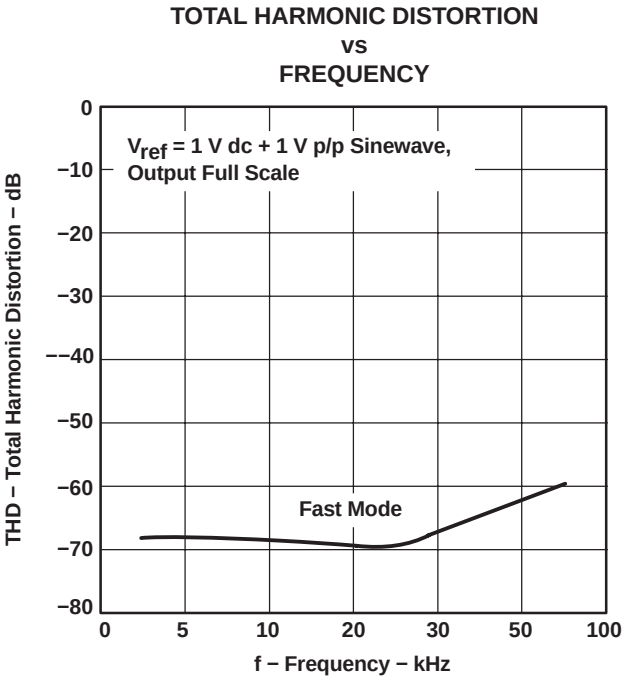


Figure 8

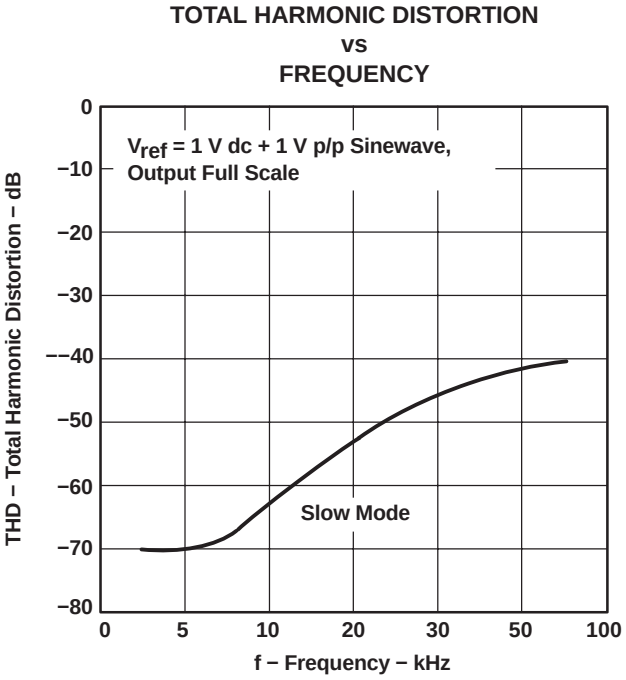


Figure 9

TOTAL HARMONIC DISTORTION AND NOISE vs FREQUENCY

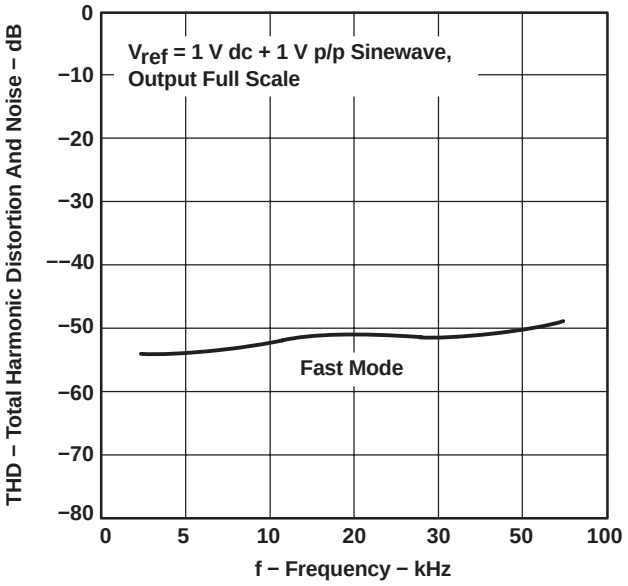


Figure 10

TOTAL HARMONIC DISTORTION AND NOISE vs FREQUENCY

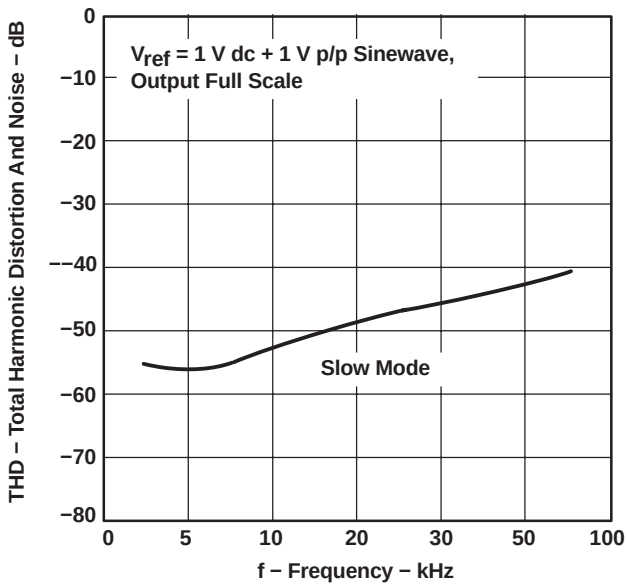


Figure 11

SUPPLY CURRENT vs TIME (WHEN ENTERING POWER-DOWN MODE)

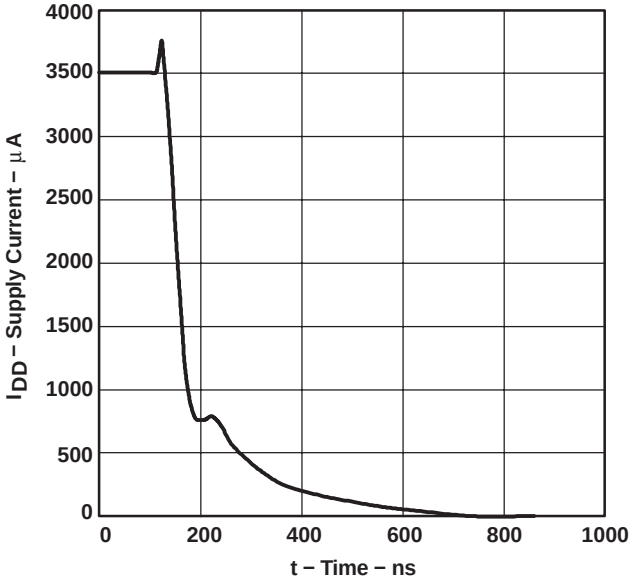


Figure 12

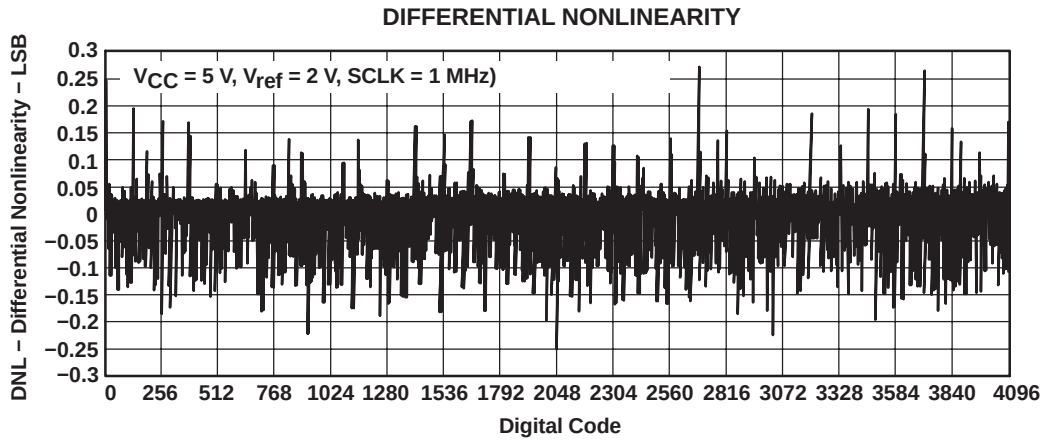


Figure 13

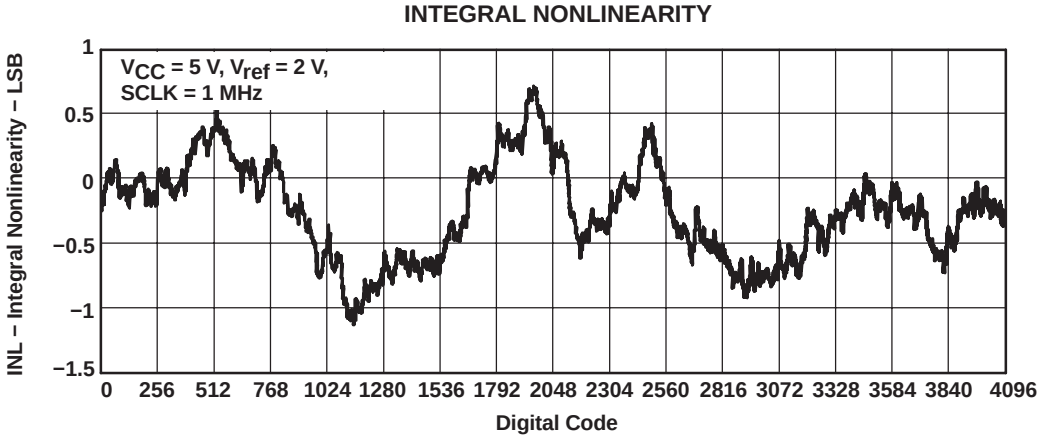


Figure 14

APPLICATION INFORMATION

GENERAL FUNCTION

The TLV5614IYE is a 12-bit single supply DAC based on a resistor string architecture. The device consists of a serial interface, speed and power down control logic, a reference input buffer, a resistor string, and a rail-to-rail output buffer.

The output voltage (full scale determined by external reference) is given by:

$$2\ \mathrm{REF}\ \frac{\mathrm{CODE}}{2^n}\ [\mathrm{V}]$$

where REF is the reference voltage and CODE is the digital input value within the range of 0_{10} to 2^n-1, where n=12 (bits). The 16-bit data word, consisting of control bits and the new DAC value, is illustrated in the *data format* section. A power-on reset initially resets the internal latches to a defined state (all bits zero).

SERIAL INTERFACE

Explanation of data transfer: First, the device has to be enabled with $\overline{CS}$ set to low. Then, a falling edge of FS starts shifting the data bit-per-bit (starting with the MSB) to the internal register on the falling edges of SCLK. After 16 bits have been transferred or FS rises, the content of the shift register is moved to the DAC latch, which updates the voltage output to the new level.

The serial interface of the TLV5614IYE can be used in two basic modes:

- Four wire (with chip select)
- Three wire (without chip select)

Using chip select (four wire mode), it is possible to have more than one device connected to the serial port of the data source (DSP or microcontroller). The interface is compatible with the TMS320™ DSP family. Figure 15 shows an example with two TLV5614IYEs connected directly to a TMS320 DSP.

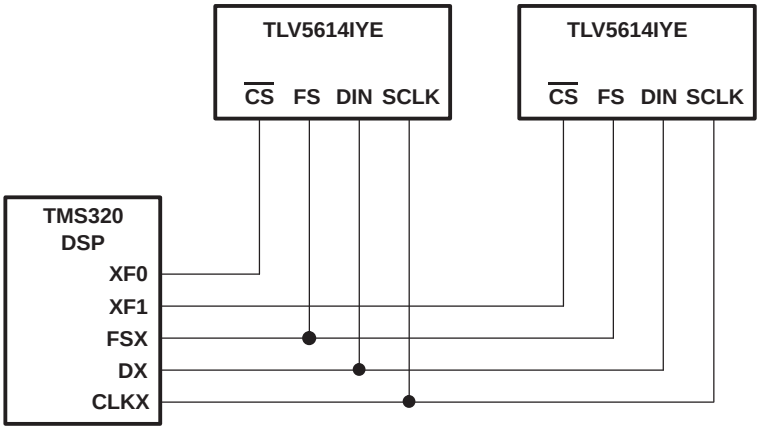


Figure 15. TMS320 Interface

TMS320 is a trademark of Texas Instruments.

If there is no need to have more than one device on the serial bus, then $\overline{CS}$ can be tied low. Figure 16 shows an example of how to connect the TLV5614IYE to a TMS320, SPI, or Microwire port using only three pins.

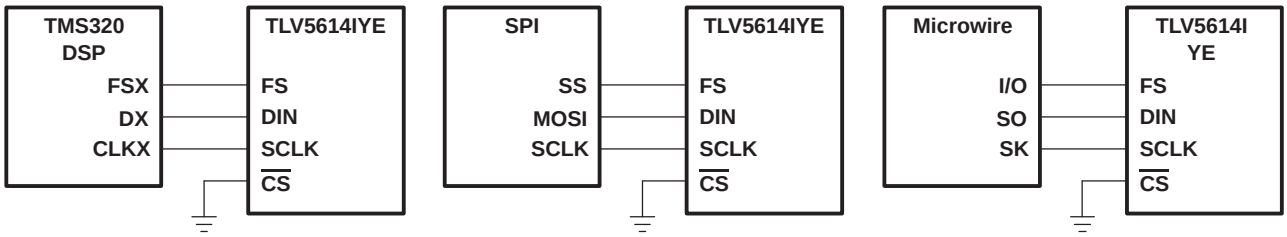


Figure 16. Three-Wire Interface

Notes on SPI and Microwire: Before the controller starts the data transfer, the software has to generate a falling edge on the I/O pin connected to FS. If the word width is 8 bits (SPI and Microwire), two write operations must be performed to program the TLV5614IYE. After the write operation(s), the DAC output is updated automatically on the next positive clock edge following the sixteenth falling clock edge.

SERIAL CLOCK FREQUENCY AND UPDATE RATE

The maximum serial clock frequency is given by:

$$f_{SCLKmax} = \frac{1}{t_{wH(min)} + t_{wL(min)}} = 20\ MHz$$

The maximum update rate is:

$$f_{UPDATEmax} = \frac{1}{16\left(t_{wH(min)} + t_{wL(min)}\right)} = 1.25\ MHz$$

Note that the maximum update rate is a theoretical value for the serial interface since the settling time of the TLV5614IYE has to be considered also.

DATA FORMAT

The 16-bit data word for the TLV5614IYE consists of two parts:

- Control bits (D15 . . . D12)
- New DAC value (D11 . . . D0)

D15	D14	D13	D12	D11	D10	D9	D8	D7	D6	D5	D4	D3	D2	D1	D0
A1	A0	PWR	SPD	New DAC value (12 bits)											

X: don't care
SPD: Speed control bit. 1 → fast mode 0 → slow mode
PWR: Power control bit. 1 → power down 0 → normal operation

In power-down mode, all amplifiers within the TLV5614IYE are disabled. A particular DAC (A, B, C, D) of the TLV5614IYE is selected by A1 and A0 within the input word.

A1	A0	DAC
0	0	A
0	1	B
1	0	C
1	1	D

USING TLV5614IYE, WAFER CHIP SCALE PACKAGE (WCSP)


- TLV5614 DIE qualification was done using a wire-bonded small outline (SOIC) package and includes: steady state life, thermal shock, ESD, latch-up, and characterization. This qualified device is orderable as TLV5614ID.
- The wafer chip-scale package (WCS), TLV5614IYE, uses the same DIE as TLV5614ID, but is not qualified. WCS qualification, including board level reliability (BLR), is the responsibility of the customer.
- It is recommended that underfill be used for increased reliability. BLR is application dependent, but may include test such as: temperature cycling, drop test, key push, bend, vibration, and package shear.

The following WCSP information provides the user of the TLV5614IYE with some general guidelines for board assembly.

- Melting point of eutectic solder is 183°C.
- Recommended peak reflow temperatures are in the 220°C to 230°C range.
- The use of underfill is required. The use of underfill greatly reduces the risk of thermal mismatch fails.

Underfill is an epoxy/adhesive that may be added during the board assembly process to improve board level/system level reliability. The process is to dispense the epoxy under the dice after die attach reflow. The epoxy adheres to the body of the device and to the printed-circuit board. It reduces stress placed upon the solder joints due to the thermal coefficient of expansion (TCE) mismatch between the board and the component. Underfill material is highly filled with silica or other fillers to increase an epoxy's modulus, reduce creep sensitivity, and decrease the material's TCE.

The recommendation for peak flow temperatures of 220°C to 230°C is based on general empirical results that indicate that this temperature range is needed to facilitate good wetting of the solder bump to the substrate or circuit board pad. Lower peak temperatures may cause nonwets (cold solder joints).

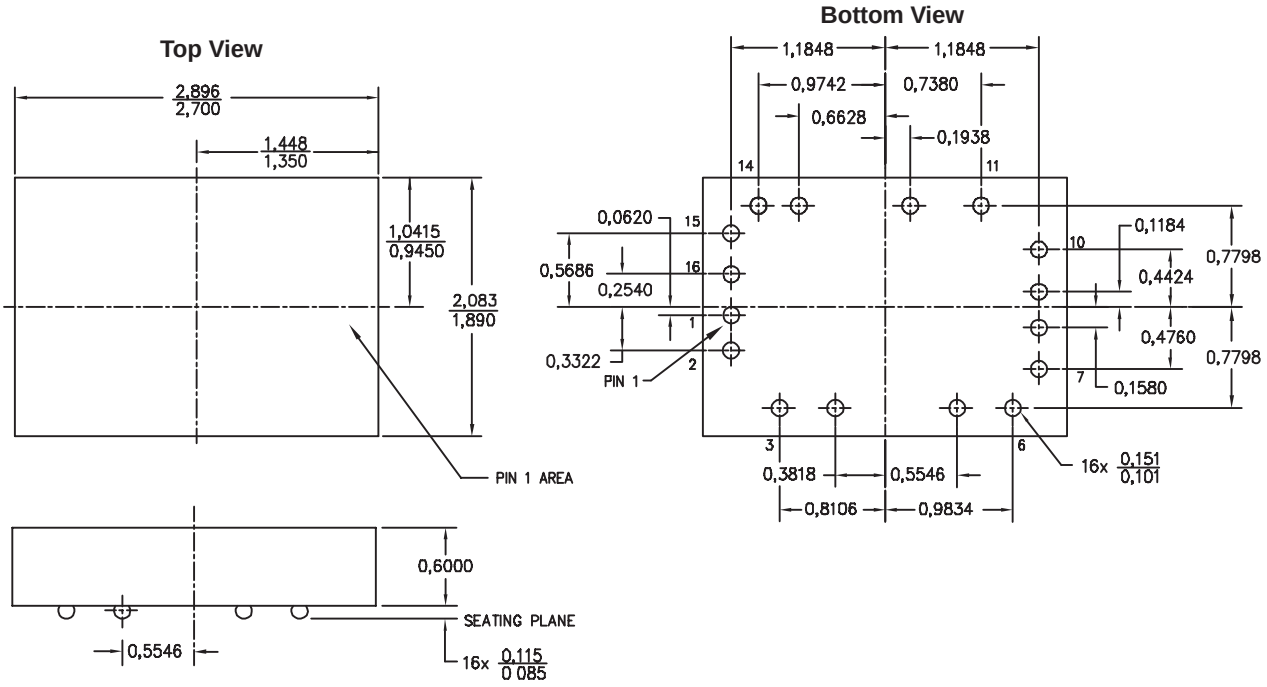

NOTES:A. All linear dimensions are in millimeters.
B. This drawing is subject to change without notice.

Figure 17. TLV5614IYE Wafer Chip Scale Package

TLV5614IYE INTERFACED TO TMS320C203 DSP

Hardware Interfacing

Figure 18 shows an example of how to connect the TLV5614IYE to a TMS320C203 DSP. The serial port is configured in burst mode, with FSX generated by the TMS320C203 to provide the frame sync (FS) input to the TLV5614IYE. Data is transmitted on the DX line, with the serial clock input on the CLKX line. The general-purpose input/output port bits IO0 and IO1 are used to generate the chip select ($\overline{CS}$) and DAC latch update ($\overline{LDAC}$) inputs to the TLV5614IYE. The active low power down ($\overline{PD}$) is pulled high all the time to ensure the DACs are enabled.

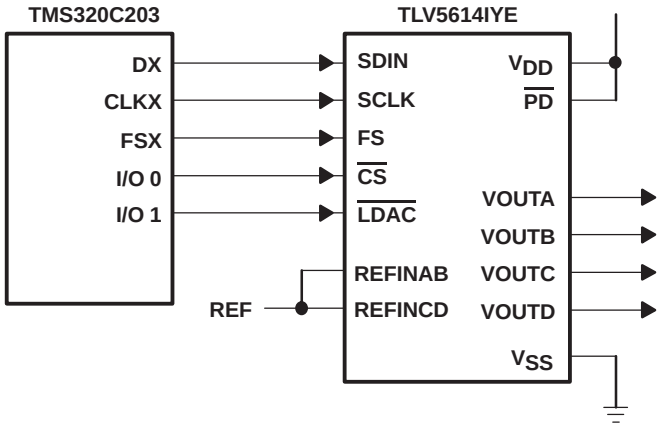


Figure 18. TLV5614IYE Interfaced With TMS320C203

Software

The application example outputs a differential in-phase (sine) signal between the VOUTA and VOUTB pins, and its quadrature (cosine) signal as the differential signal between VOUTC and VOUTD.

The on-chip timer is used to generate interrupts at a fixed frequency. The related interrupt service routine pulses $\overline{LDAC}$ low to update all 4 DACs simultaneously, then fetches and writes the next sample to all 4 DACs. The samples are stored in a look-up table, which describes two full periods of a sine wave.

The synchronous serial port of the DSP is used in burst mode. In this mode, the processor generates an FS pulse preceding the MSB of every data word. If multiple, contiguous words are transmitted, a violation of the tsu(C16−FS) timing requirement occurs. To avoid this, the program waits until the transmission of the previous word has been completed.

```
;-------------------------------------------------------------------------------------
; Processor:  TMS320C203 runnning at 40 MHz
;
; Description:
;
; This program generates a differential in-phase (sine) on (OUTA-OUTB) and it's quadrature
   (cosine) as a differential signal on (OUTC-OUTD).
;
; The DAC codes for the signal samples are stored as a table of 64 12-bit values, describing
; 2 periods of a sine function. A rolling pointer is used to address the table location in
; the first period of this waveform, from which the DAC A samples  are read. The samples for
; the other 3 DACs are read at an offset to this rolling pointer
;  DAC    Function     Offset from rolling pointer
;   A     sine         0
;   B     inverse sine 16
;   C     cosine       8
;   D     inverse cosine24
;
; The on-chip timer is used to generate interrupts at a fixed rate. The interrupt service
; routine first pulses LDAC low to update all DACs simultaneously with the values which
; were written to them in the previous interrupt. Then all 4 DAC values are fetched and
; written out through the synchronous serial interface. Finally, the rolling pointer is
; incremented to address the next sample, ready for the next interrupt.

; © 1998, Texas Instruments Inc.
;-------------------------------------------------------------------------------------
```

```
;------------------------------I/O and memory mapped regs ----------------------------
       .include "regs.asm"
;-------jump vectors ------------------------------------------------------------------
       .ps    0h
       b      start
       b      int1
       b      int23
       b      timer_isr;
----------- variables ----------------------------------------------------------------
temp          .equ   0060h
r_ptr         .equ   0061h
iosr_stat     .equ   0062h
DACa_ptr      .equ   0063h
DACb_ptr      .equ   0064h
DACc_ptr      .equ   0065h
DACd_ptr      .equ   0066h
;-----------constants----------------------------------------------------------------
; DAC control bits to be OR'ed onto data
; all fast mode
DACa_control  .equ   01000h
DACb_control  .equ   05000h
DACc_control  .equ   09000h
DACd_control  .equ   0d000h
;----------- tables --------------------------------
   .ds    02000h
sinevals
    .word  00800h
    .word  0097Ch
    .word  00AE9h
    .word  00C3Ah
    .word  00D61h
    .word  00E53h
    .word  00F07h
    .word  00F76h
    .word  00F9Ch
    .word  00F76h
    .word  00F07h
    .word  00E53h
    .word  00D61h
    .word  00C3Ah
    .word  00AE9h
    .word  0097Ch
    .word  00800h
    .word  00684h
    .word  00517h
    .word  003C6h
    .word  0029Fh
    .word  001ADh
    .word  000F9h
    .word  0008Ah
    .word  00064h
    .word  0008Ah
    .word  000F9h
    .word  001ADh
    .word  0029Fh
    .word  003C6h
    .word  00517h
    .word  00684h
    .word  00800h
    .word  0097Ch
    .word  00AE9h
    .word  00C3Ah
    .word  00D61h
    .word  00E53h
    .word  00F07h
    .word  00F76h
    .word  00F9Ch
    .word  00F76h
    .word  00F07h
    .word  00E53h
    .word  00D61h
    .word  00C3Ah
    .word  00AE9h
```

```
    .word  0097Ch
    .word  00800h
    .word  00684h
    .word  00517h
    .word  003C6h
    .word  0029Fh
    .word  001ADh
    .word  000F9h
    .word  0008Ah
    .word  00064h
    .word  0008Ah
    .word  000F9h
    .word  001ADh
    .word  0029Fh
    .word  003C6h
    .word  00517h
    .word  00684h

;-------------------------------------------------------------------------------------------------
; Main Program
;-------------------------------------------------------------------------------------------------
       .ps    1000h
       .entry
start
;-------------------------------------------------------------------------------------------------
; disable interrupts
;-------------------------------------------------------------------------------------------------
       setc   INTM      ; disable maskable interrupts
       splk   #0ffffh, IFR; clear all interrupts
       splk   #0004h, IMR; timer interrupts unmasked
;-------------------------------------------------------------------------------------------------
; set up the timer
; timer period set by values in PRD and TDDR
; period = (CLKOUT1 period) x (1+PRD) x (1+TDDR)
; examples for TMS320C203 with 40MHz main clock
; Timer rate     TDDR   PRD
;   80 kHz         9     24 (18h)
;   50 kHz         9     39 (27h)
;-------------------------------------------------------------------------------------------------
prd_val.equ      0018h
tcr_val.equ      0029h
       splk   #0000h, temp; clear timer
       out    temp, TIM
       splk   #prd_val, temp; set PRD
       out    temp, PRD
       splk   #tcr_val, temp; set TDDR, and TRB=1 for auto-reload
       out    temp, TCR
;-------------------------------------------------------------------------------------------------
; Configure IO0/1 as outputs to be :
; IO0  CS  - and set high
; IO1  LDAC   - and set high
;-------------------------------------------------------------------------------------------------
       in     temp, ASPCR; configure as output
       lacl   temp
       or     #0003h
       sacl   temp
       out    temp, ASPCR
       in     temp, IOSR; set them high
       lacl   temp
       or     #0003h
       sacl   temp
       out    temp, IOSR
;-------------------------------------------------------------------------------------------------
; set up serial port for
; SSPCR.TXM=1    Transmit mode - generate FSX
; SSPCR.MCM=1    Clock mode - internal clock source
; SSPCR.FSM=1    Burst mode
;-------------------------------------------------------------------------------------------------
       splk   #0000Eh, temp
       out    temp, SSPCR; reset transmitter
       splk   #0002Eh, temp
       out    temp,SSPCR
;-------------------------------------------------------------------------------------------------
```

```
; reset the rolling pointer
;-------------------------------------------------------------------------------------
      lacl   #000h
      sacl   r_ptr
;-------------------------------------------------------------------------------------
; enable interrupts
;-------------------------------------------------------------------------------------
      clrc   INTM      ; enable maskable interrupts
;-------------------------------------------------------------------------------------
; loop forever!
;-------------------------------------------------------------------------------------

    next   idle             ;wait for interrupt
           b      next
    ;-------------------------------------------------------------------------------------

    ;all else fails stop here
    ;-------------------------------------------------------------------------------------

    done   b      done      ;hang there
    ;-------------------------------------------------------------------------------------
    ; Interrupt Service Routines
    ;-------------------------------------------------------------------------------------
    int1   ret       ; do nothing and return
    int23  ret       ; do nothing and return
    timer_isr:
       in     iosr_stat, IOSR; store IOSR value into variable space
       lacl   iosr_stat     ; load acc with iosr status
       and    #0FFFDh       ; reset IO1 - LDAC low
       sacl   temp          ;
       out    temp, IOSR;
       or     #0002h        ; set IO1 - LDAC high
       sacl   temp          ;
       out    temp, IOSR;
       and    #0FFFEh       ; reset IO0 - CS low
       sacl   temp          ;
       out    temp, IOSR;
       lacl   r_ptr         ; load rolling pointer to accumulator
       add    #sinevals     ; add pointer to table start
       sacl   DACa_ptr      ; to get a pointer for next DAC a sample
       add    #08h          ; add 8 to get to DAC C pointer
       sacl   DACc_ptr
       add    #08h          ; add 8 to get to DAC B pointer
       sacl   DACb_ptr
       add    #08h          ; add 8 to get to DAC D pointer
       sacl   DACd_ptr
       mar    *,ar0         ; set ar0 as current AR

       ; DAC A
       lar    ar0, DACa_ptr ; ar0 points to DAC a sample
       lacl   *             ; get DAC a sample into accumulator
       or     #DACa_control ; OR in DAC A control bits
       sacl   temp          ;
       out    temp, SDTR; send data
    ;-------------------------------------------------------------------------------------;
    We must wait for transmission to complete before writing next word to the SDTR.;
    TLV5614/04 interface does not allow the use of burst mode with the full packet; rate, as
    we need a CLKX –ve edge to clock in last bit before FS goes high again,; to allow SPI
    compatibility.
    ;-------------------------------------------------------------------------------------
```

```
    rpt    #016h         ; wait long enough for this configuration
    nop                  ; of MCLK/CLKOUT1 rate

    ; DAC B
    lar    ar0, dacb_ptr ; ar0 points to DAC a sample
    lacl   *             ; get DAC a sample into accumulator
    or     #DACb_control ; OR in DAC B control bits
    sacl   temp          ;
    out    temp, SDTR; send data
    rpt    #016h         ; wait long enough for this configuration
    nop                  ; of MCLK/CLKOUT1 rate

; DAC C
    lar    ar0, dacc_ptr ; ar0 points to dac a sample
    lacl   *             ; get DAC a sample into accumulator
    or     #DACc_control ; OR in DAC C control bits
    sacl      temp       ;
    out       temp, SDTR; send data
    rpt       #016h      ; wait long enough for this configuration
    nop                  ; of MCLK/CLKOUT1 rate

; DAC D
    lar       ar0, dacd_ptr; ar0 points to DAC a sample
    lacl   *             ; get DAC a sample into accumulator
    or     #dacd_control ; OR in DAC D control bits
    sacl   temp          ;
    out    temp, SDTR; send data

    lacl   r_ptr         ; load rolling pointer to accumulator
    add    #1h           ; increment rolling pointer
    and    #001Fh        ; count 0-31 then wrap back round
    sacl   r_ptr         ; store rolling pointer
    rpt    #016h         ; wait long enough for this configuration
    nop                  ; of MCLK/CLKOUT1 rate

; now take CS high again
    lacl   iosr_stat     ; load acc with iosr status
    or     #0001h        ; set IO0 - CS high
    sacl   temp          ;
    out    temp, IOSR;
    clrc   intm          ; re-enable interrupts
    ret                  ; return from interrupt
.end
```

TLV5614IYE INTERFACED TO MCS®51 MICROCONTROLLER

Hardware Interfacing

Figure 19 shows an example of how to connect the TLV5614IYE to an MCS®51 Microcontroller. The serial DAC input data and external control signals are sent via I/O Port 3 of the controller. The serial data is sent on the RxD line, with the serial clock output on the TxD line. Port 3 bits 3, 4, and 5 are configured as outputs to provide the DAC latch update ($\overline{\text{LDAC}}$), chip select ($\overline{\text{CS}}$) and frame sync (FS) signals for the TLV5614IYE. The active low power down pin ($\overline{\text{PD}}$) of the TLV5614IYE is pulled high to ensure that the DACs are enabled.

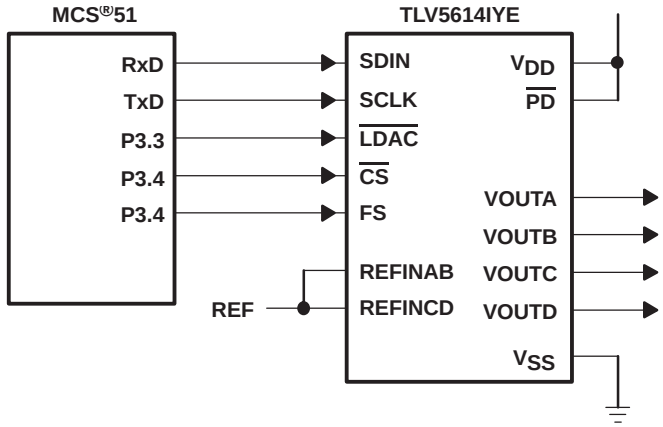


Figure 19. TLV5614IYE Interfaced With MCS®51

Software

The example is the same as for the TMS320C203 in this data sheet, but adapted for a MCS®51 controller. It generates a differential in-phase (sine) signal between the VOUTA and VOUTB pins, and its quadrature (cosine) signal is the differential signal between VOUTC and VOUTD.

The on-chip timer is used to generate interrupts at a fixed frequency. The related interrupt service routine pulses $\overline{\text{LDAC}}$ low to update all 4 DACs simultaneously, then fetches and writes the next sample to all 4 DACs. The samples are stored as a look-up table, which describes one full period of a sine wave.

The serial port of the controller is used in Mode 0, which transmits 8 bits of data on RxD, accompanied by a synchronous clock on TxD. Two writes concatenated together are required to write a complete word to the TLV5614IYE. The $\overline{\text{CS}}$ and FS signals are provided in the required fashion through control of IO port 3, which has bit addressable outputs.

```
;-------------------------------------------------------------------------------------------
; Processor:  80C51
;
; Description:
;
; This program generates a differential in-phase
(sine) on (OUTA-OUTB) ; and it's quadrature (cosine)
 as a differential signal on (OUTC-OUTD).
;
; © 1998, Texas Instruments Inc.
;-------------------------------------------------------------------------------------------
NAME   GENIQ
MAIN   SEGMENT      CODE
ISR    SEGMENT      CODE
SINTBL SEGMENT      CODE
VAR1   SEGMENT      DATA
STACK  SEGMENT      IDATA
;-------------------------------------------------------------------------------------------
; Code start at address 0, jump to start
;-------------------------------------------------------------------------------------------
   CSEG  AT   0
   LJMP   start        ; Execution starts at address 0 on power-up.
;-------------------------------------------------------------------------------------------
```

```
; Code in the timer0 interrupt vector
;-------------------------------------------------------------------------------------------
   CSEG  AT   0BH
   LJMP   timer0isr     ; Jump vector for timer 0 interrupt is 000Bh
;-------------------------------------------------------------------------------------------
; Global variables need space allocated
;-------------------------------------------------------------------------------------------
   RSEG      VAR1
temp_ptr:    DS     1
rolling_ptr: DS     1
;-------------------------------------------------------------------------------------------
; Interrupt service routine for timer 0 interrupts
;-------------------------------------------------------------------------------------------
   RSEG      ISR
timer0isr:
   PUSH      PSW
   PUSH      ACC
   CLR       INT1       ; pulse LDAC low
   SETB      INT1       ; to latch all 4 previous values at the same time
                        ; 1st thing done in timer isr => fixed period
   CLR    T0            ; set CS low

   ; The signal to be output on each DAC is a sine function.  One cycle of a sine wave is
   ; held in a table @ sinevals as 32 samples of msb, lsb pairs (64 bytes).
   ; We have ; one pointer which rolls round this table, rolling_ptr incrementing by
   ; 2 bytes (1 sample) on each interrupt (at the end of this routine).

   ; The DAC samples are read at an offset to this rolling pointer:
   ; DAC  Function  Offset from rolling_ptr
   ;  A   sine          0
   ;  B   inverse sine  32
   ;  C   cosine        16
   ;  D   inverse cosine48
   MOV    DPTR,#sinevals; set DPTR to the start of the table of sine signal values
   MOV    R7,rolling_ptr; R7 holds the pointer into the sine table
   MOV    A,R7          ; get DAC A msb
   MOVC   A,@A+DPTR     ; msb of DAC A is in the ACC
   CLR    T1            ; transmit it – set FS low
   MOV    SBUF,A        ; send it out the serial port

   INC    R7            ; increment the pointer in R7
   MOV    A,R7          ; to get the next byte from the table
   MOVC   A,@A+DPTR     ; which is the lsb of this sample, now in ACC
   A_MSB_TX:
   JNB    TI,A_MSB_TX   ; wait for transmit to complete
   CLR    TI            ; clear for new transmit
   MOV    SBUF,A        ; and send out the lsb of DAC A

   ; DAC C next
   ; DAC C codes should be taken from 16 bytes (8 samples) further on
   ; in the sine table – this gives a cosine function
   MOV    A,R7          ; pointer in R7
   ADD    A,#0FH        ; add 15 – already done one INC
   ANL       A,#03FH    ; wrap back round to 0 if > 64
   MOV    R7,A          ; pointer back in R7

   MOVC   A,@A+DPTR     ; get DAC C msb from the table
   ORL    A,#01H        ; set control bits to DAC C address
A_LSB_TX:
   JNB    TI,A_LSB_TX   ; wait for DAC A lsb transmit to complete
   SETB   T1            ; toggle FS
   CLR T1
   CLR    TI            ; clear for new transmit
   MOV    SBUF,A        ; and send out the msb of DAC C
   INC    R7            ; increment the pointer in R7
   MOV    A,R7          ; to get the next byte from the table
   MOVC   A,@A+DPTR     ; which is the lsb of this sample, now in ACC
C_MSB_TX:
   JNB    TI,C_MSB_TX   ; wait for transmit to complete
   CLR    TI            ; clear for new transmit
   MOV    SBUF,A        ; and send out the lsb of DAC C
```

```
    ; DAC B next
    ; DAC B codes should be taken from 16 bytes (8 samples) further on
    ; in the sine table - this gives an inverted sine function
    MOV    A,R7          ; pointer in R7
    ADD       A,#0FH     ; add 15 - already done one INC
    ANL    A,#03FH       ; wrap back round to 0 if > 64
    MOV    R7,A          ; pointer back in R7

    MOVC   A,@A+DPTR     ; get DAC B msb from the table
    ORL       A,#02H     ; set control bits to DAC B address

C_LSB_TX:
    JNB    TI,C_LSB_TX   ; wait for DAC C lsb transmit to complete
    SETB   T1            ; toggle FS
    CLR    T1
    CLR    TI            ; clear for new transmit
    MOV    SBUF,A        ; and send out the msb of DAC B

    ; get DAC B LSB
    INC    R7            ; increment the pointer in R7
    MOV    A,R7          ; to get the next byte from the table
    MOVC   A,@A+DPTR     ; which is the lsb of this sample, now in ACC

B_MSB_TX:
    JNB    TI,B_MSB_TX   ; wait for transmit to complete
    CLR    TI            ; clear for new transmit
    MOV       SBUF,A     ; and send out the lsb of DAC B

    ; DAC D next
    ; DAC D codes should be taken from 16 bytes (8 samples) further on
    ; in the sine table - this gives an inverted cosine function
    MOV    A,R7          ; pointer in R7
    ADD    A,#0FH        ; add 15 - already done one INC
    ANL       A,#03FH    ; wrap back round to 0 if > 64
    MOV    R7,A          ; pointer back in R7
    MOVC   A,@A+DPTR     ; get DAC D msb from the table
    ORL    A,#03H        ; set control bits to DAC D address

B_LSB_TX:
    JNB    TI,B_LSB_TX   ; wait for DAC B lsb transmit to complete
    SETB   T1            ; toggle FS
    CLR    T1
    CLR    TI  ; clear for new transmit
MOV    SBUF,A            ; and send out the msb of DAC D

    INC    R7            ; increment the pointer in R7
    MOV    A,R7          ; to get the next byte from the table
    MOVC   A,@A+DPTR     ; which is the lsb of this sample, now in ACC
D_MSB_TX:
    JNB    TI,D_MSB_TX   ; wait for transmit to complete
    CLR    TI            ; clear for new transmit
    MOV    SBUF,A        ; and send out the lsb of DAC D

    ; increment the rolling pointer to point to the next sample
    ; ready for the next interrupt
    MOV    A,rolling_ptr
    ADD    A,#02H        ; add 2 to the rolling pointer
    ANL    A,#03FH       ; wrap back round to 0 if > 64
    MOV    rolling_ptr,A ; store in memory again
D_LSB_TX:
    JNB    TI,D_LSB_TX   ; wait for DAC D lsb transmit to complete
    CLR    TI            ; clear for next transmit
    SETB   T1            ; FS high
    SETB   T0            ; CS high
    POP    ACC
    POP    PSW
    RETI

;-------------------------------------------------------------------------------
; Stack needs definition
;-------------------------------------------------------------------------------
    RSEG  STACK
    DS    10h            ; 16 Byte Stack!
```

```
;-------------------------------------------------------------------------------
; Main program code
;-------------------------------------------------------------------------------
   RSEG   MAIN
start:
   MOV    SP,#STACK-1   ; first set Stack Pointer
   CLR A
   MOV    SCON,A        ; set serial port 0 to mode 0
   MOV    TMOD,#02H     ; set timer 0 to mode 2 - auto-reload
   MOV    TH0,#038H     ; set TH0 for 5kHs interrupts
   SETB   INT1          ; set LDAC = 1
   SETB   T1            ; set FS = 1
   SETB   T0            ; set CS = 1
   SETB   ET0           ; enable timer 0 interrupts
   SETB   EA            ; enable all interrupts
   MOV    rolling_ptr,A ; set rolling pointer to 0
   SETB   TR0           ; start timer 0
always:
   SJMP   always        ; while(1) !
   RET
;-------------------------------------------------------------------------------
; Table of 32 sine wave samples used as DAC data
;-------------------------------------------------------------------------------
   RSEG   SINTBL

    sinevals:
       DW     01000H
       DW     0903EH
       DW     05097H
       DW     0305CH
       DW     0B086H
       DW     070CAH
       DW     0F0E0H
       DW     0F06EH
       DW     0F039H
       DW     0F06EH
       DW     0F0E0H
       DW     070CAH
       DW     0B086H
       DW     0305CH
       DW     05097H
       DW     0903EH
       DW     01000H
       DW     06021H
       DW     0A0E8H
       DW     0C063H
       DW     040F9H
       DW     080B5H
       DW     0009FH
       DW     00051H
       DW     00026H
       DW     00051H
       DW     0009FH
       DW     080B5H
       DW     040F9H
       DW     0C063H
       DW     0A0E8H
       DW  06021H
    END
```

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish	MSL Peak Temp (3)	Samples (Requires Login)
TLV5614IYE	OBSOLETE	DIESALE	YE	16		TBD	Call TI	Call TI	

(1) The marketing status values are defined as follows:
ACTIVE: Product device recommended for new designs.
LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.
NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.
PREVIEW: Device has been announced but is not in production. Samples may or may not be available.
OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.
TBD: The Pb-Free/Green conversion plan has not been defined.
Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.
Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.
Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as “components”) are sold subject to TI’s terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI’s terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers’ products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers’ products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI’s goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or “enhanced plastic” are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have ***not*** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products		**Applications**	
Audio	www.ti.com/audio	Automotive and Transportation	www.ti.com/automotive
Amplifiers	amplifier.ti.com	Communications and Telecom	www.ti.com/communications
Data Converters	dataconverter.ti.com	Computers and Peripherals	www.ti.com/computers
DLP® Products	www.dlp.com	Consumer Electronics	www.ti.com/consumer-apps
DSP	dsp.ti.com	Energy and Lighting	www.ti.com/energy
Clocks and Timers	www.ti.com/clocks	Industrial	www.ti.com/industrial
Interface	interface.ti.com	Medical	www.ti.com/medical
Logic	logic.ti.com	Security	www.ti.com/security
Power Mgmt	power.ti.com	Space, Avionics and Defense	www.ti.com/space-avionics-defense
Microcontrollers	microcontroller.ti.com	Video and Imaging	www.ti.com/video
RFID	www.ti-rfid.com		
OMAP Applications Processors	www.ti.com/omap	**TI E2E Community**	e2e.ti.com
Wireless Connectivity	www.ti.com/wirelessconnectivity		

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2013, Texas Instruments Incorporated