

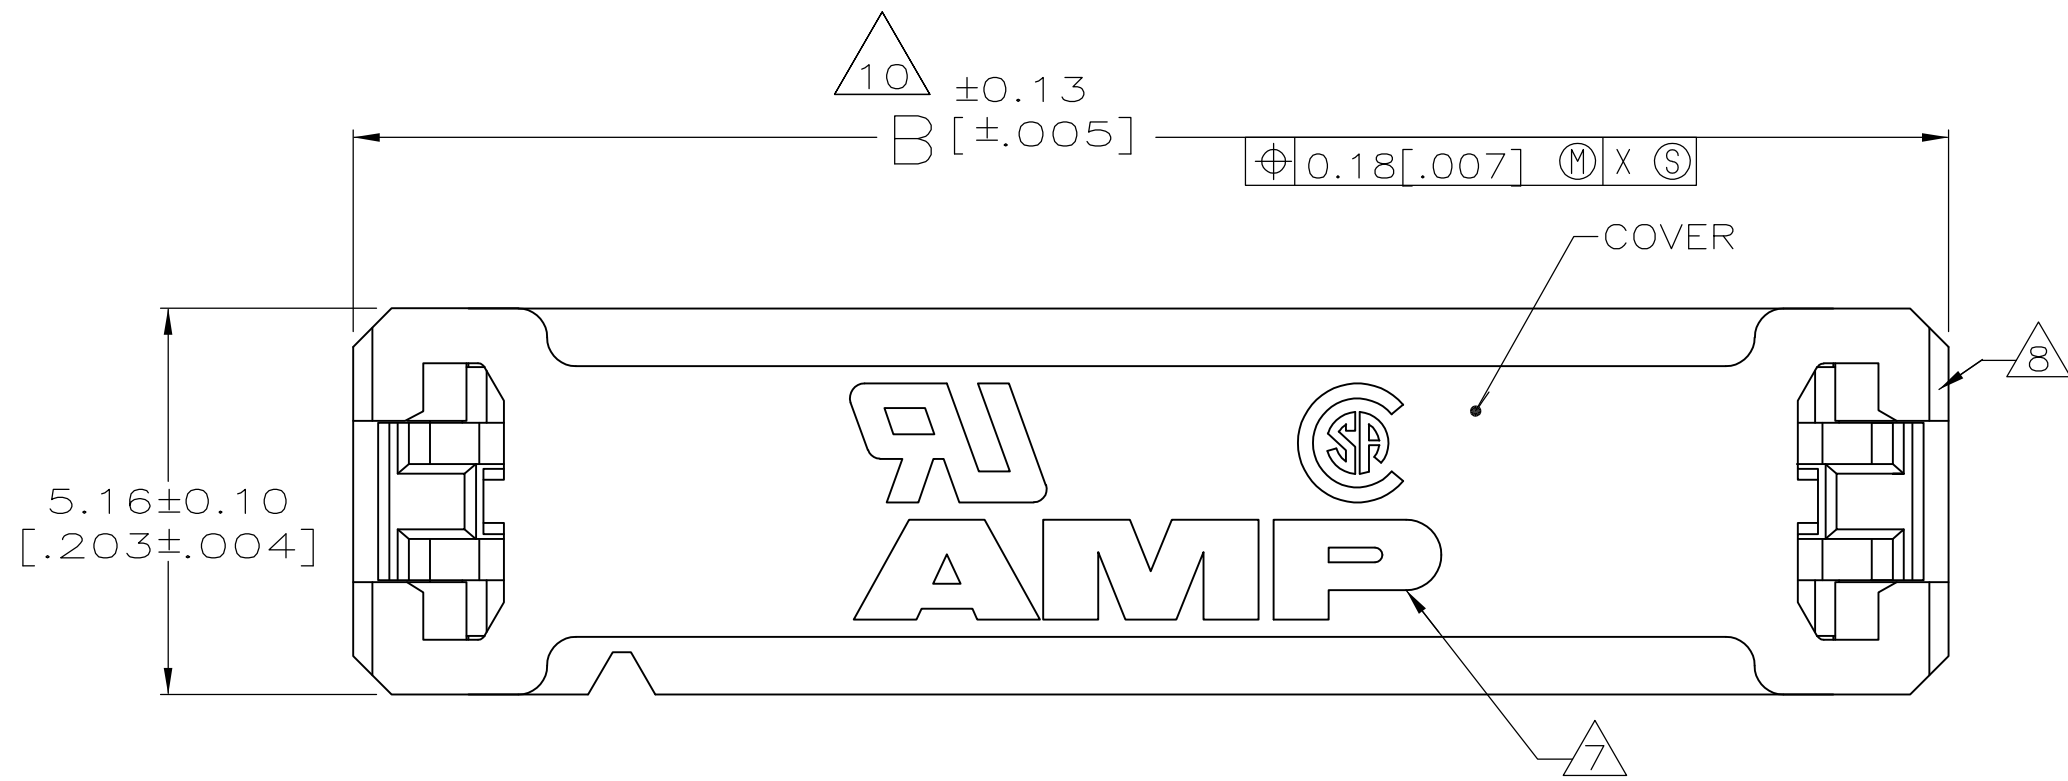
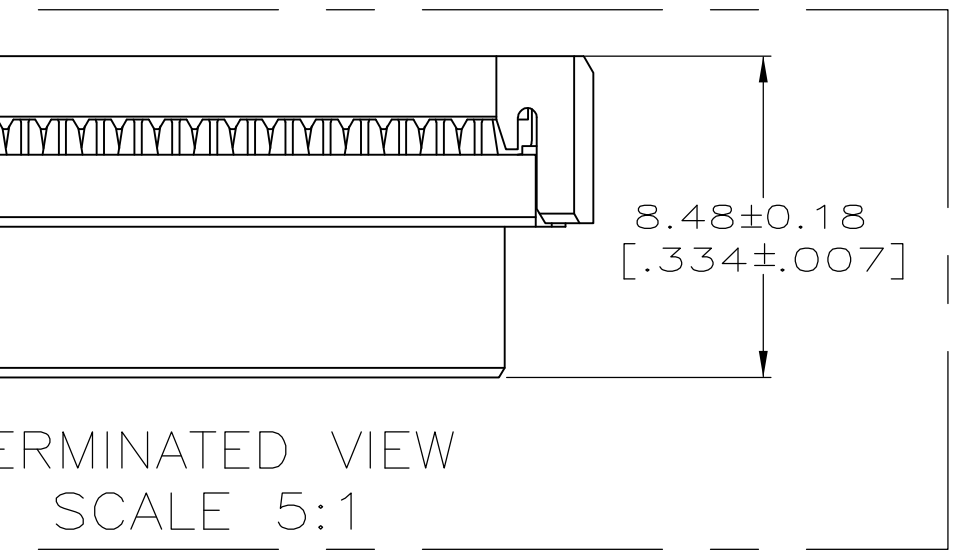


D




- 1. MOLDED PARTS: POLYESTER, UL RATED 94V-O, BLACK. CONTACTS: BERYLLIUM COPPER.
- 2. 2.54µm [.000100] MIN TIN-LEAD ON TERMINATION END, 0.76µm [.000030] MIN GOLD ON CONTACT AREA, ALL OVER 1.27µm [.000050] MIN NICKEL.
- 3. POSITION TOLERANCE APPLIES 0.76 [.030] ABOVE DATUM V.
- 4. POSITION NUMBER 1 INDICATOR.
- 5. ELECTRICAL ENGAGEMENT ZONE.
- 6. RECOMMENDED 28 AWG RIBBON CABLE, 0.61 - 0.97 [.024 - .038] THICK PVC, 1.0000[.03937] PITCH.
- 7. AMP LOGO ORIENTATION IS OPTIONAL.
- 8. RECESS ON EACH END, OPPOSITE CORNER.
- 9. 0.13µm [.000005] MIN GOLD ON TERMINATION END, 0.76µm [.000030] MIN GOLD ON CONTACT AREA, ALL OVER 1.27µm [.000050] MIN NICKEL.
- 10. MOLD GATE PROJECTION ON EITHER END OF COVER TO BE EXCLUDED FROM DIMENSION 'B' MEASUREMENT.


C

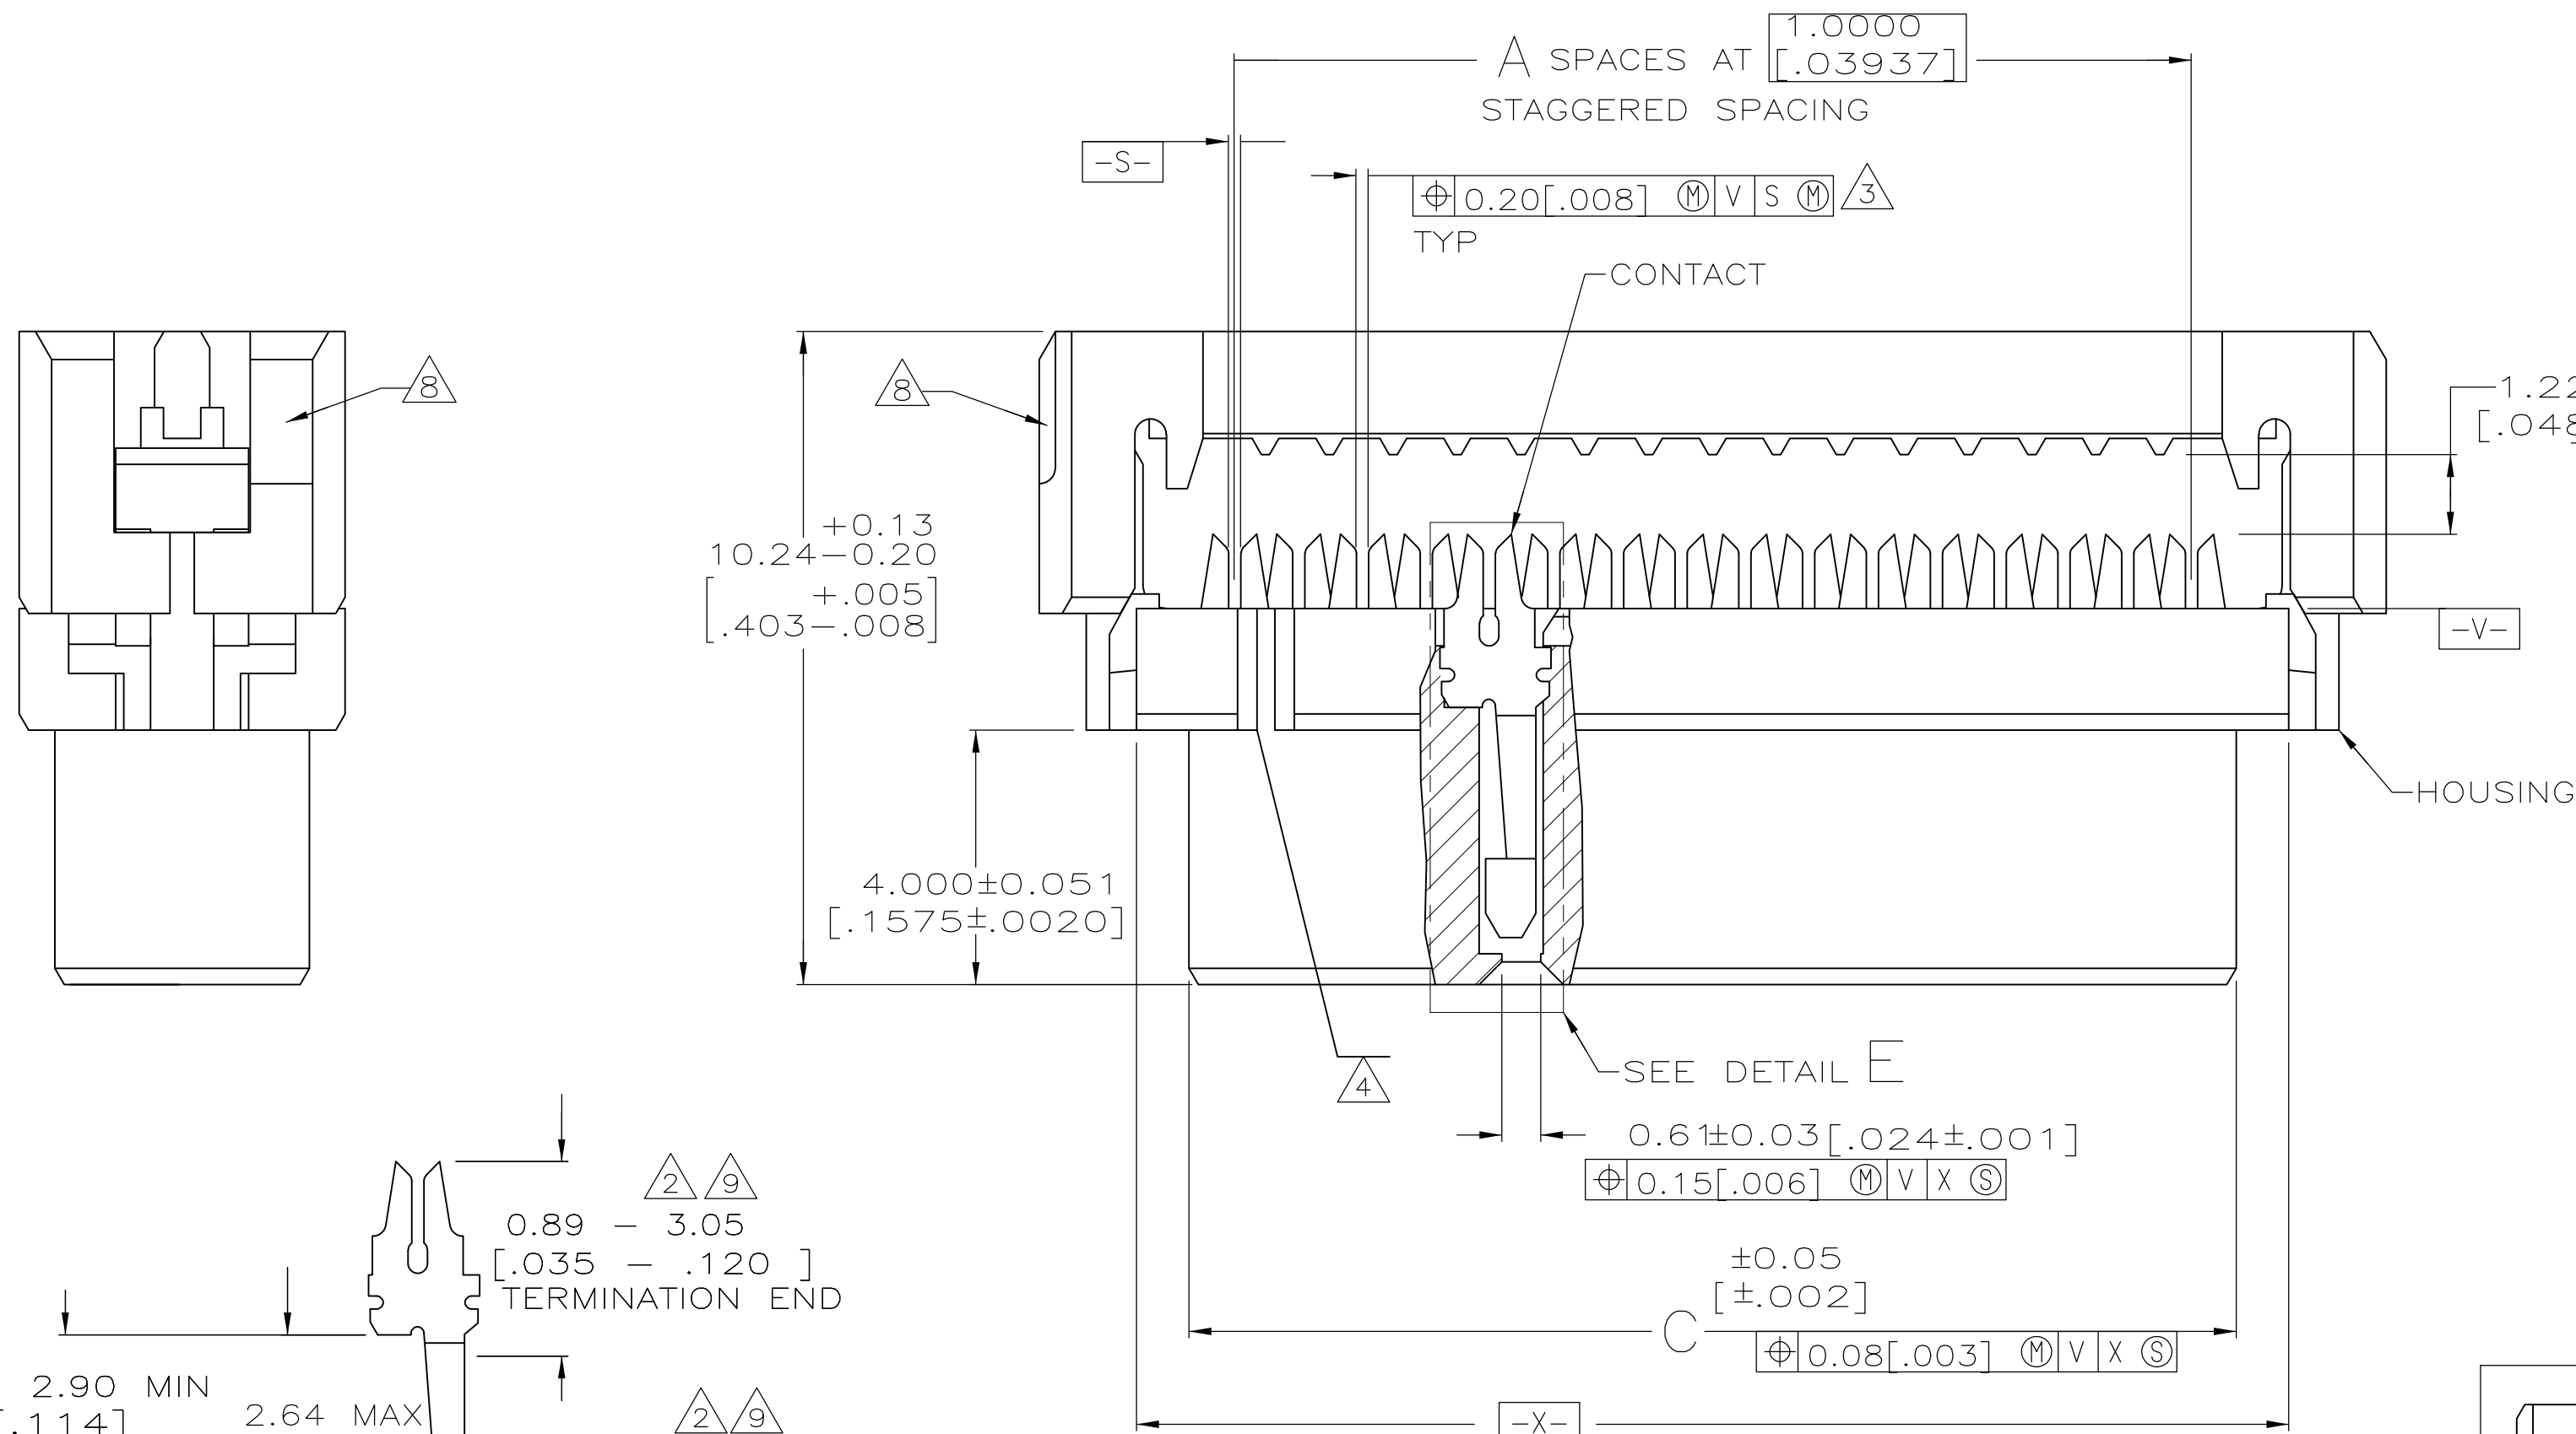

B

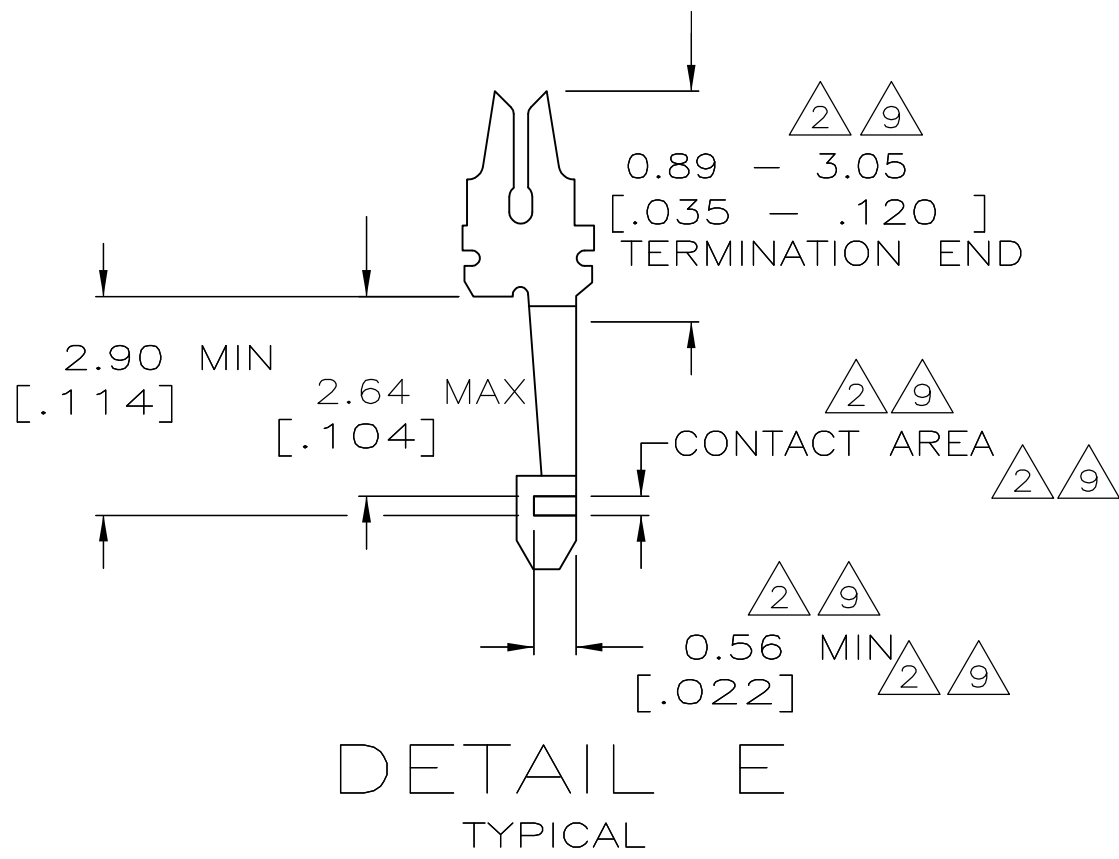

A

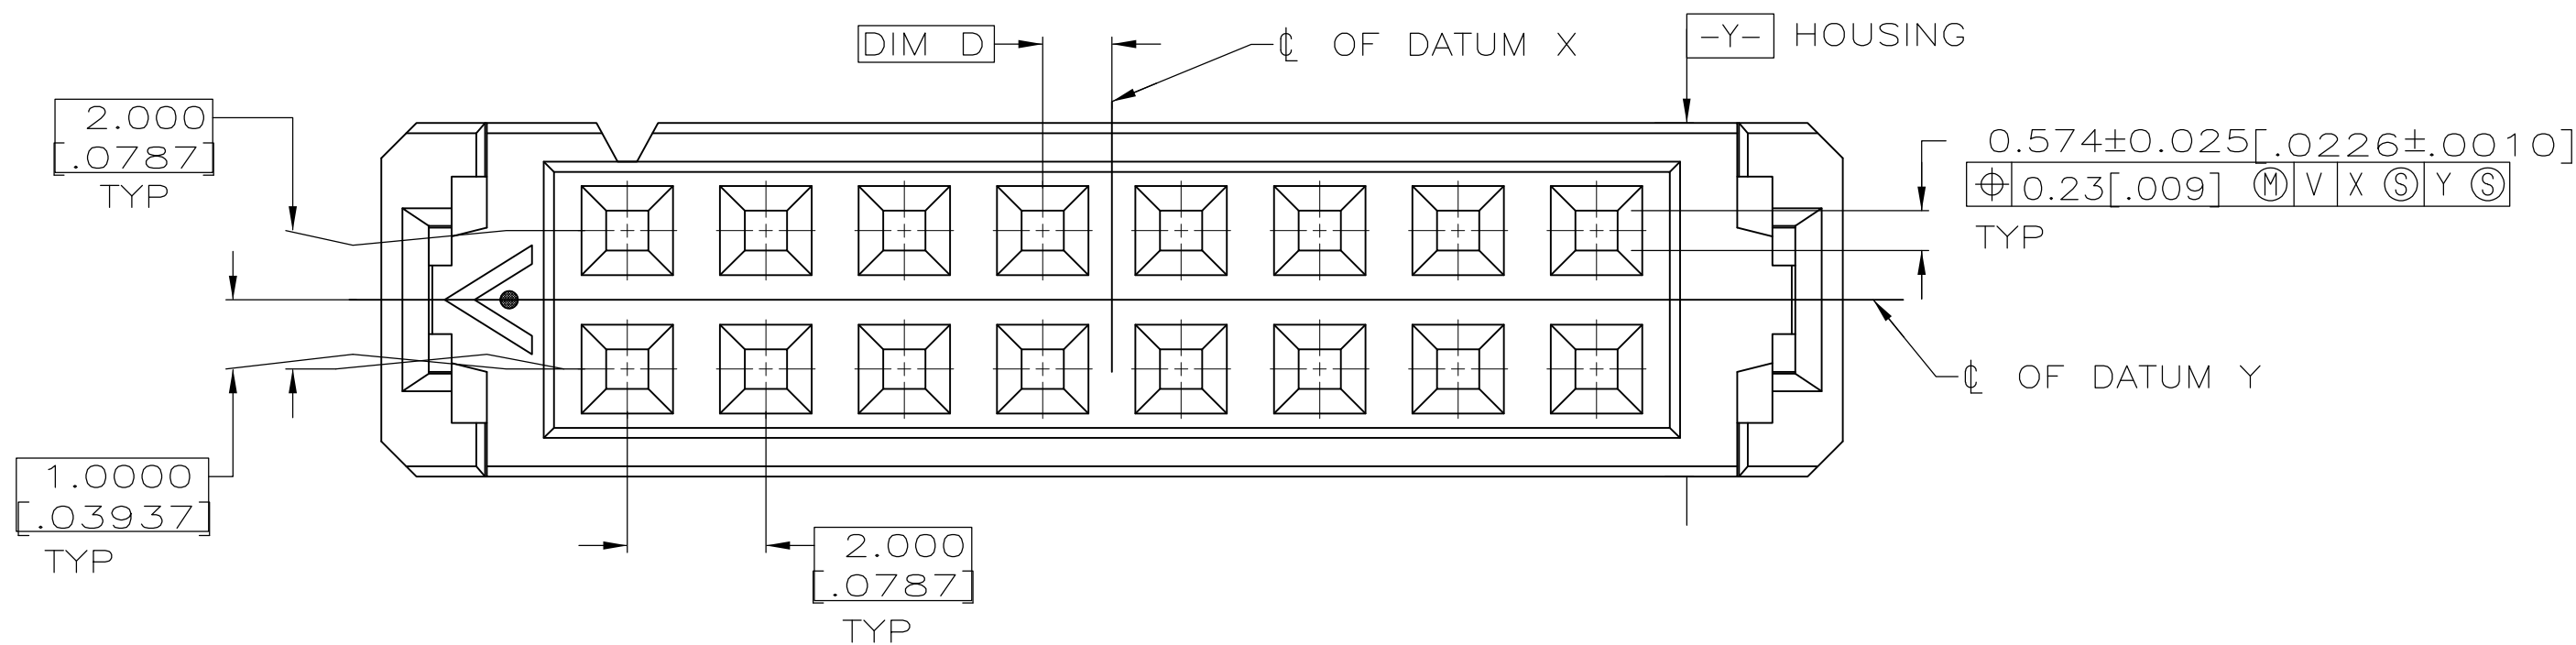

9	0.0000	26.42	31.17	25	26	2-111626-7
9	.000000	[1.040]	[1.227]	23	24	2-111626-6
9	.03937	[.961]	[1.149]	15	16	2-111626-5
9	1.0000	16.41	21.18	7	8	2-111626-4
9	.03937	[.646]	[.834]	49	50	2-111626-3
9	1.0000	8.41	13.18	43	44	2-111626-2
9	.03937	[.331]	[.519]	39	40	2-111626-1
9	0.0000	50.39	55.17	33	34	2-111626-0
9	.000000	[1.984]	[2.172]	19	20	1-111626-9
9	1.0000	44.40	49.17	13	14	1-111626-8
9	.03937	[1.748]	[1.936]	9	10	1-111626-7
9	1.0000	40.41	45.19	7	8	1-111626-6
9	.03937	[1.591]	[1.779]	21	22	1-111626-5
9	0.0000	34.42	39.17	67	68	1-111626-4
9	.000000	[1.355]	[1.542]	63	64	1-111626-3
9	1.0000	20.40	25.17	59	60	1-111626-2
9	.03937	[.803]	[.991]	49	50	1-111626-1
9	0.0000	14.40	19.18	43	44	1-111626-0
9	.000000	[.567]	[.755]	39	40	111626-9
9	0.0000	10.41	15.16	33	34	111626-8
9	.000000	[.410]	[.597]	29	30	111626-7
9	1.0000	8.41	13.18	25	26	111626-6
9	.03937	[.331]	[.519]	23	24	111626-5
9	0.0000	22.40	27.18	19	20	111626-4
9	.000000	[.882]	[1.070]	15	16	111626-3
9	1.0000	68.40	73.18	13	14	111626-2
9	.03937	[2.693]	[2.881]	9	10	111626-1
9	1.0000	64.41	69.16	43	44	111626-0
9	.03937	[2.536]	[2.723]	39	40	111626-9
9	0.0000	60.40	65.18	33	34	111626-8
9	.03937	[2.378]	[2.566]	29	30	111626-7
9	0.0000	50.39	55.17	25	26	111626-6
9	.000000	[1.984]	[2.172]	23	24	111626-5
9	1.0000	44.40	49.17	19	20	111626-4
9	.03937	[1.748]	[1.936]	15	16	111626-3
9	1.0000	40.41	45.19	13	14	111626-2
9	.03937	[1.591]	[1.779]	9	10	111626-1
9	0.0000	34.42	39.17	43	44	111626-0
9	.000000	[1.355]	[1.542]	39	40	111626-9
9	1.0000	30.40	35.18	33	34	111626-8
9	.000000	[1.197]	[1.385]	29	30	111626-7
9	0.0000	26.42	31.17	25	26	111626-6
9	.000000	[1.040]	[1.227]	23	24	111626-5
9	1.0000	24.41	29.18	19	20	111626-4
9	.03937	[.961]	[1.149]	15	16	111626-3
9	1.0000	16.41	21.18	13	14	111626-2
9	.03937	[.646]	[.834]	9	10	111626-1
9	0.0000	14.40	19.18	43	44	111626-0
9	.000000	[.567]	[.755]	39	40	111626-9
9	0.0000	10.41	15.16	33	34	111626-8
9	.000000	[.410]	[.597]	29	30	111626-7

		CONTACT FINISH	D	C	B	A	NO OF POSN	PART NO	
THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN C. OBERMAN 02-24-92 CHK J. MCCLINTON 3-9-92		 TE Connectivity			
DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD --		NAME			