MICRO SWITCH
FREEPORT ILLINOIS, U S A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH-ENCLOSED


CATALOG LISTING
1LS47


DRAWING NUMBER: 1LS47
RELEASE NO.: M
ISSUE: 14


REVISIONS
A CO-77031 J D B 22 DEC 93

DRAWN: J D B 06 JAN 94
CHECK: DAW 24 JAN 94

FO-52851-A

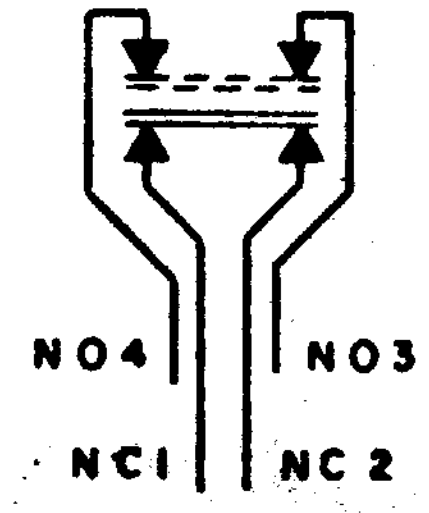

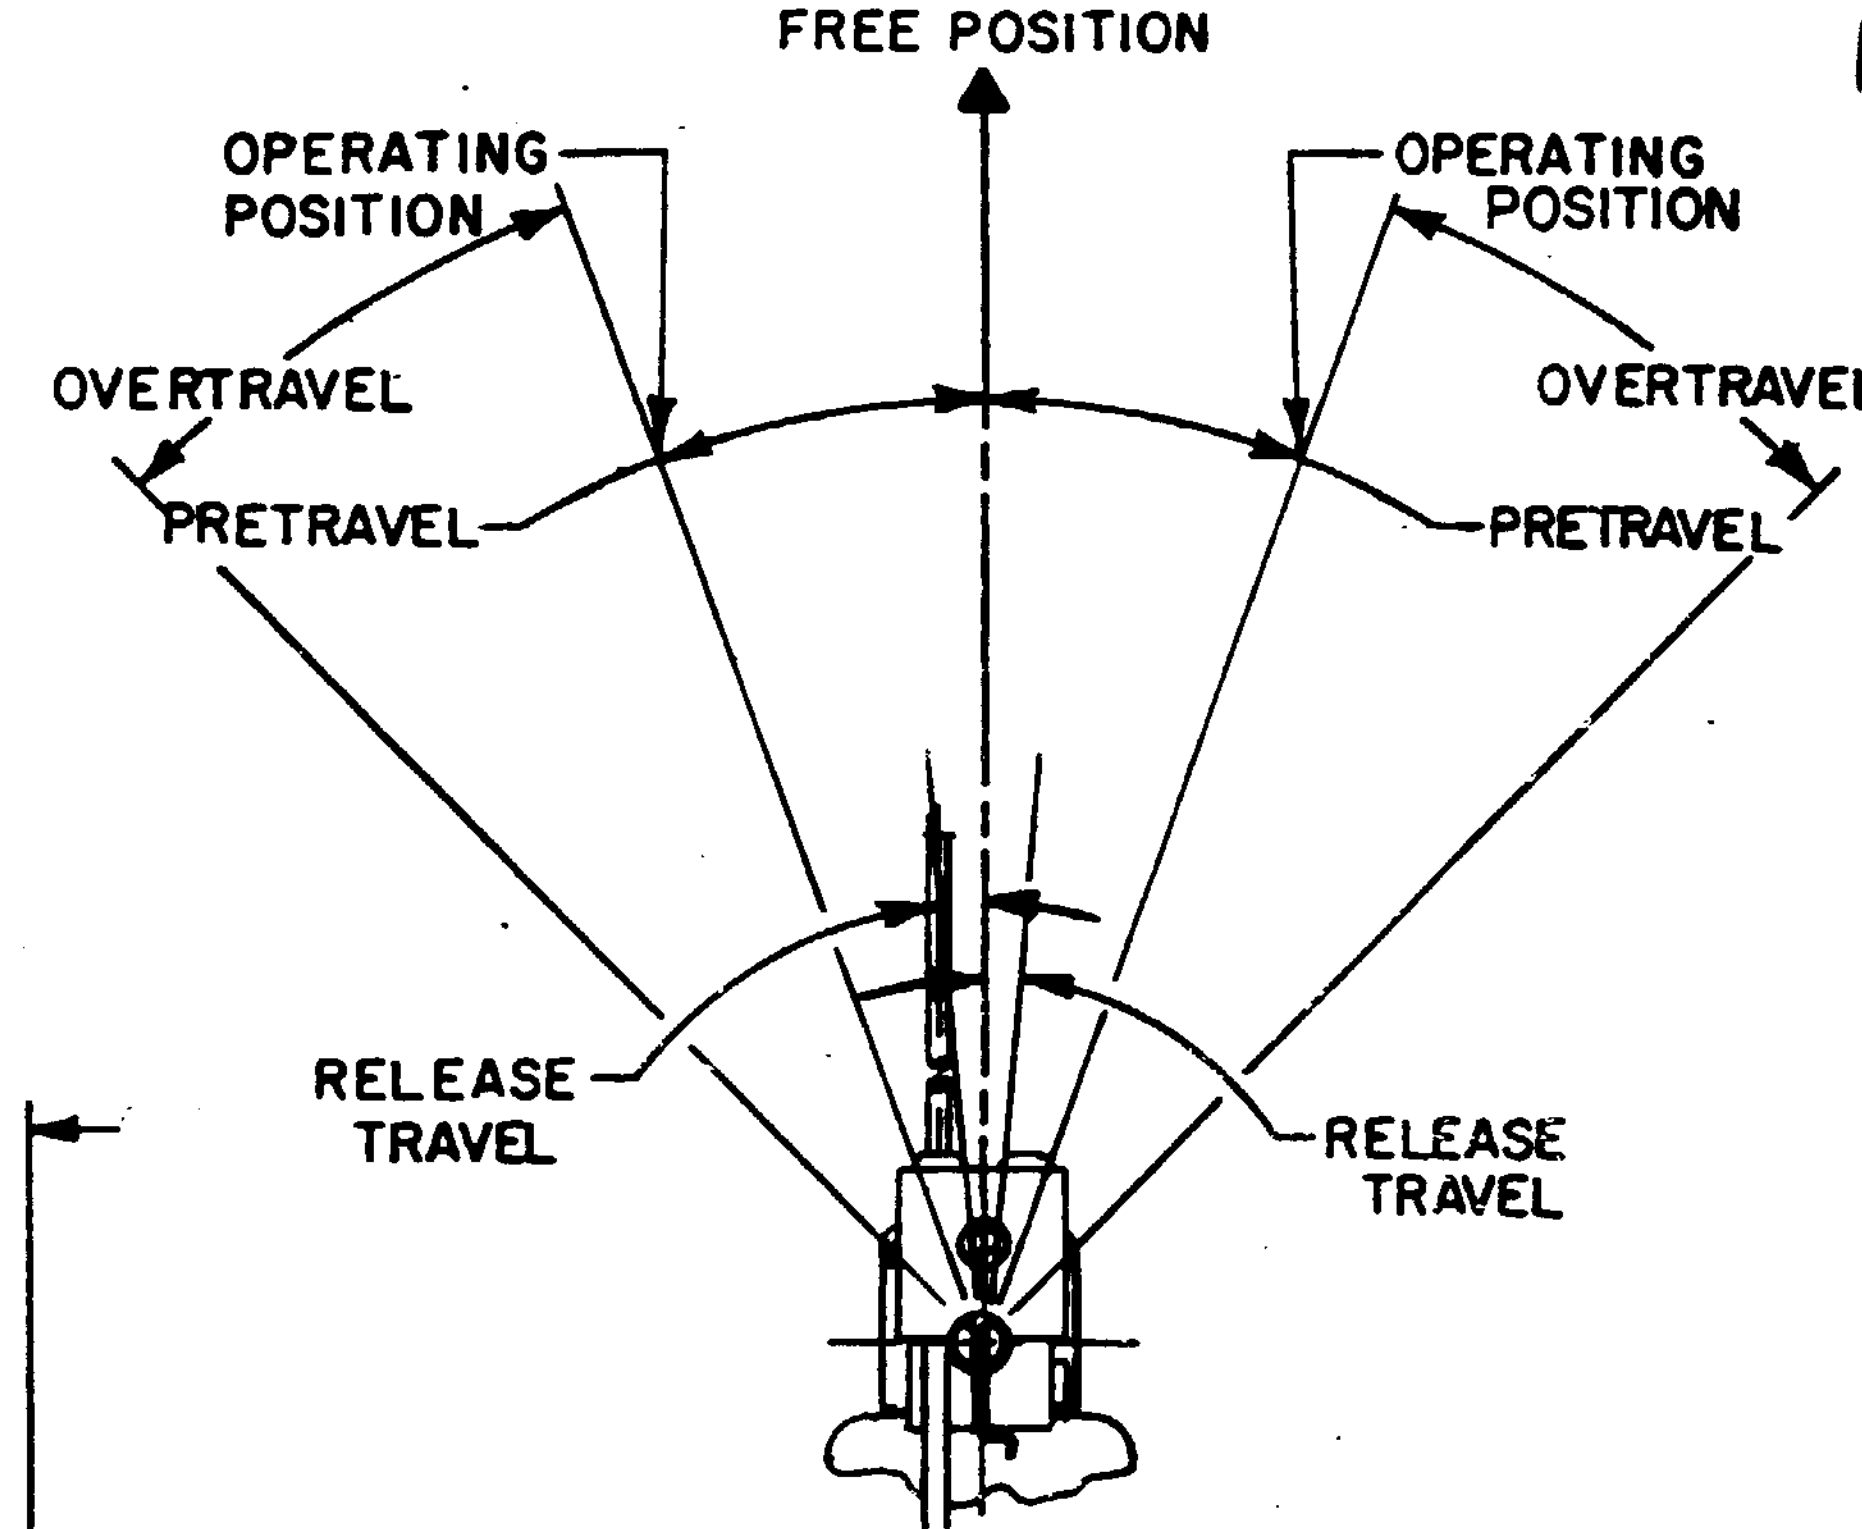

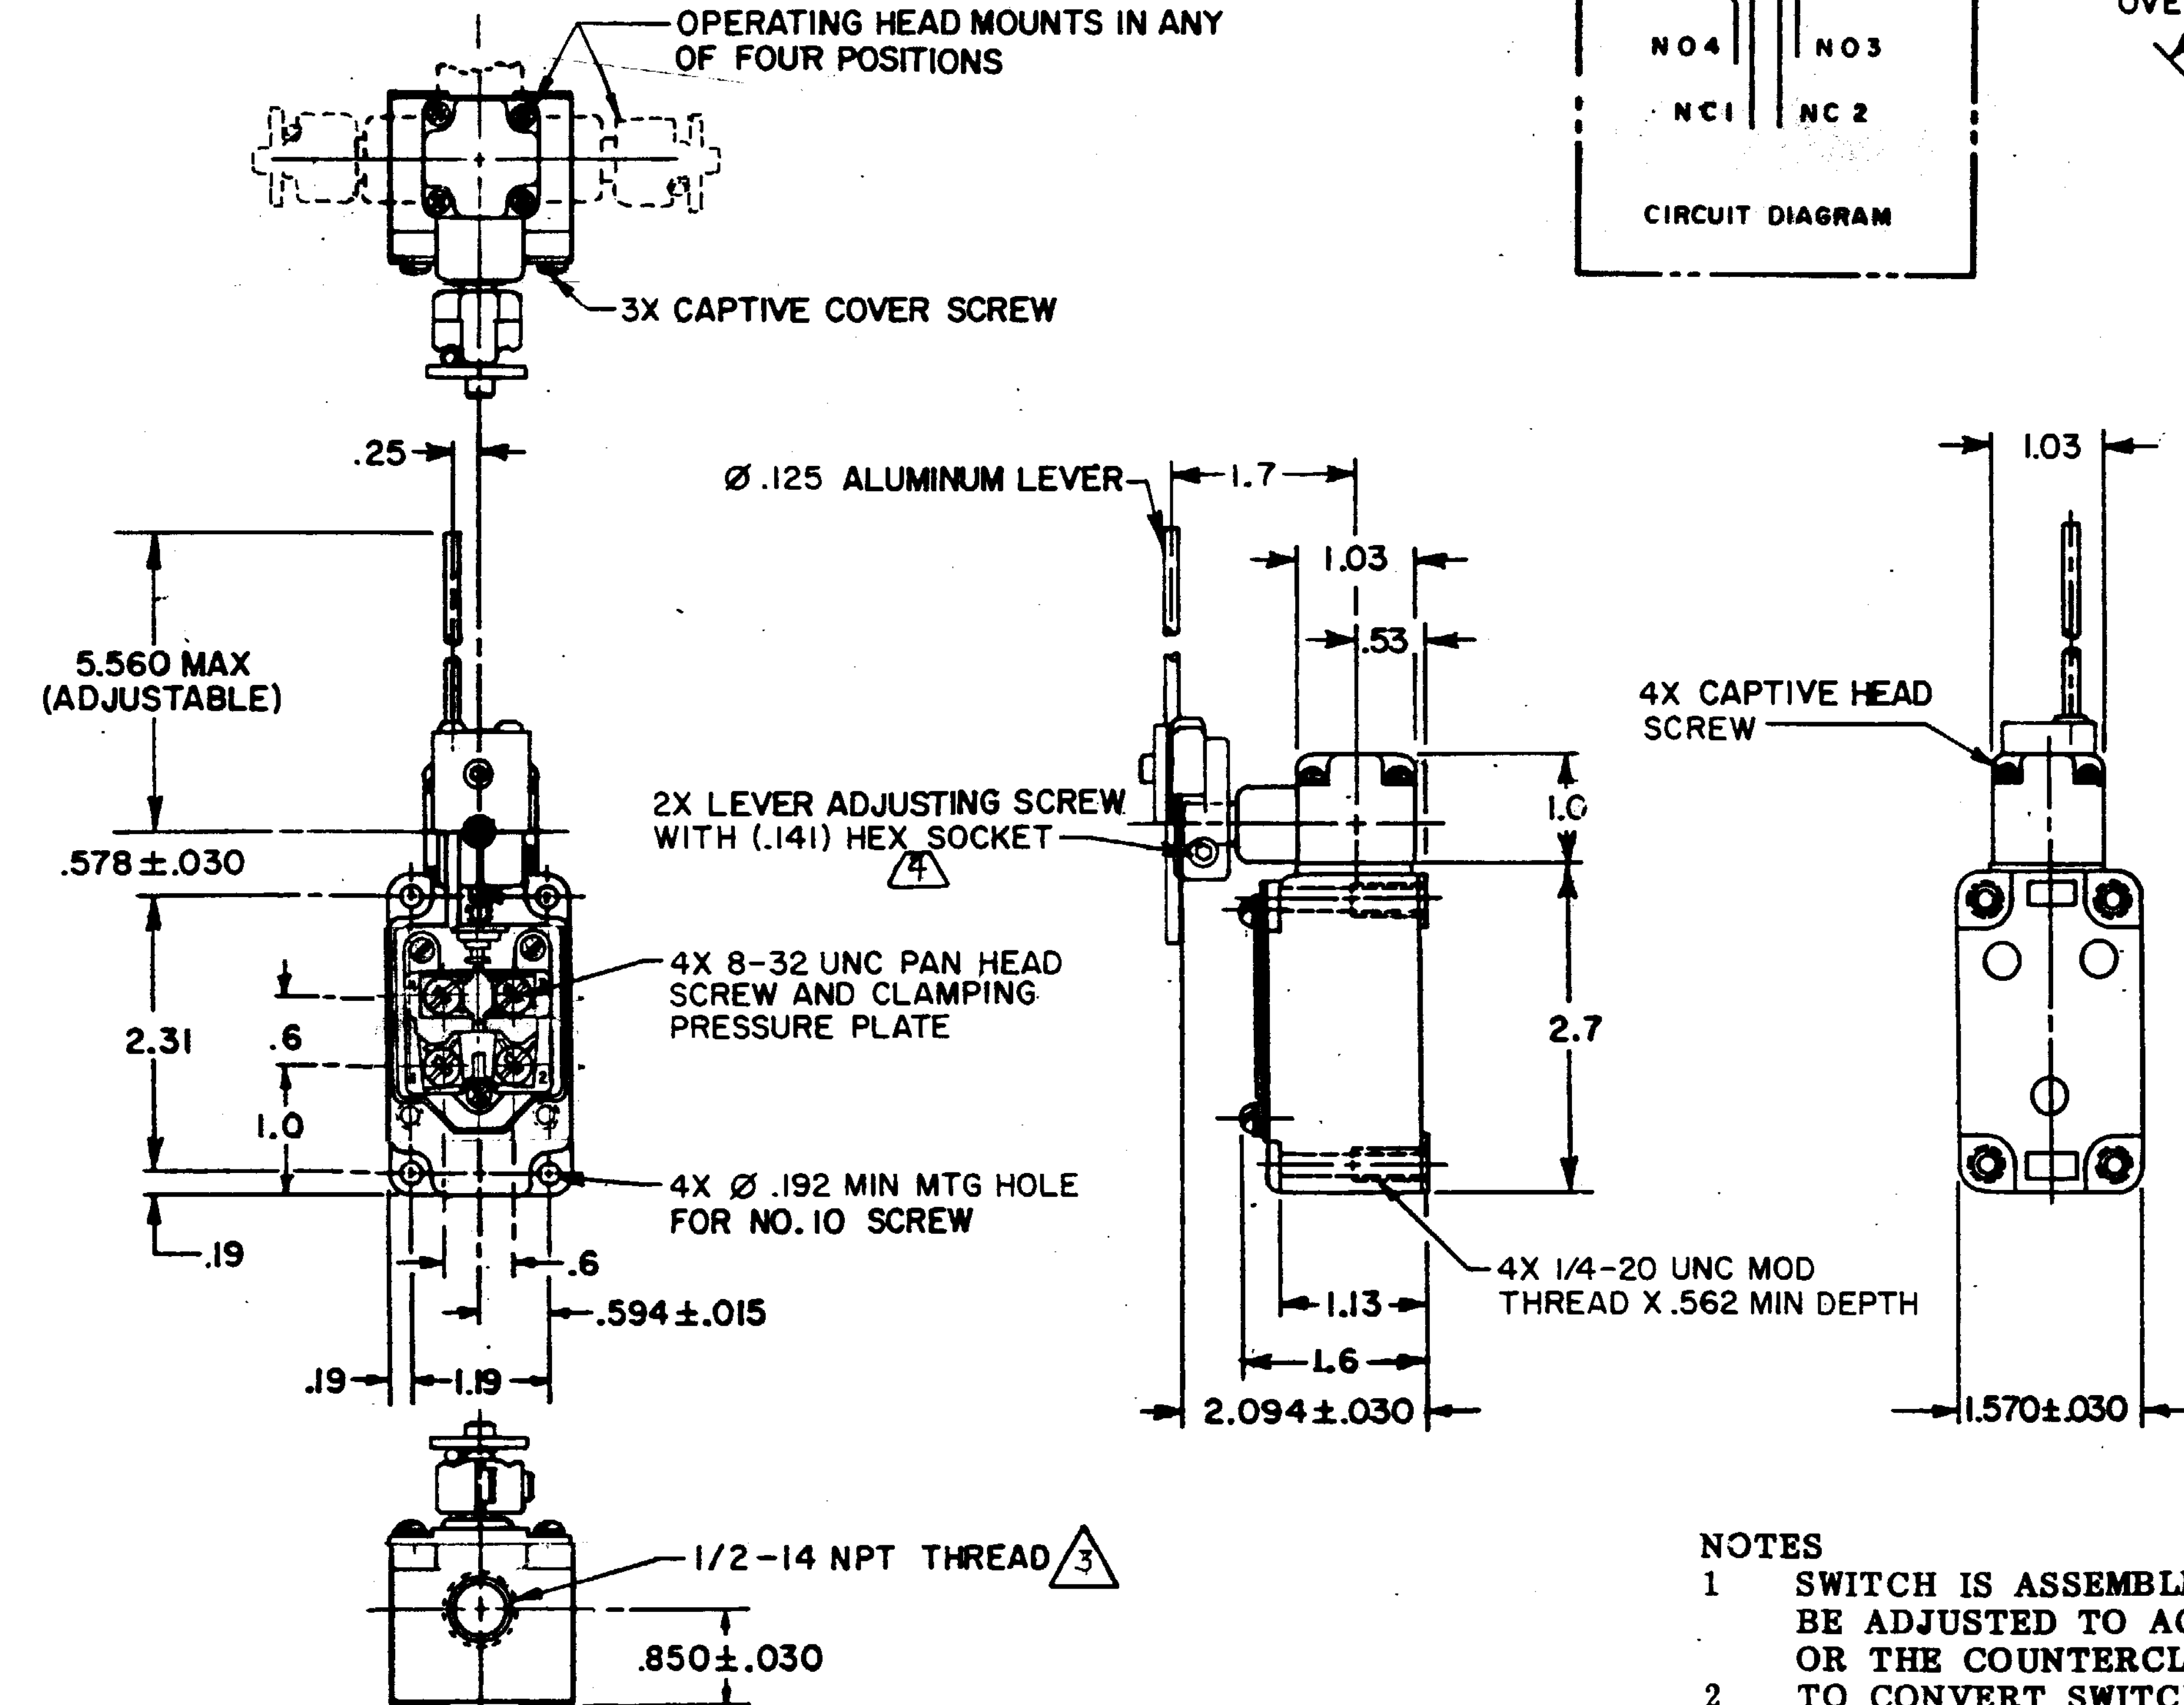

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	
OPERATING TORQUE	1.7 IN-LB MAX
FULL OVERTRAVEL TORQUE	2.4 IN-LB MAX
RELEASE TORQUE	.35 IN-LB MIN
PRETRAVEL	5° MAX
OVERTRAVEL	30° MIN
RELEASE TRAVEL	0°30' MIN
SWITCH-BASIC REPLACEMENT	2MN8

ELECTRICAL DATA

CONTACT ARRANGEMENT
(SEE CIRCUIT DIAGRAM)

10A - 120, 240 OR 480 VAC
1/4 HP - 120 VAC; 1/2 HP - 240 VAC
PILOT DUTY: 600 VAC MAX

SCALE 1/2 TO 1

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

NOTES
1. SWITCH IS ASSEMBLED FOR ACTUATION IN BOTH DIRECTIONS BUT MAY BE ADJUSTED TO ACTUATE IN EITHER THE CLOCKWISE DIRECTION ONLY OR THE COUNTERCLOCKWISE DIRECTION ONLY
2. TO CONVERT SWITCH FOR ACTUATION IN EITHER THE CLOCKWISE OR COUNTERCLOCKWISE DIRECTION ONLY, REMOVE ACTUATOR HEAD AND ROTATE THE NOTCHED PLUNGER 90° TO THE RIGHT FOR CLOCKWISE ACTUATION OR 90° TO THE LEFT FOR COUNTERCLOCKWISE ACTUATION

3. SEAL TO BE FURNISHED BY USER
4. LEVER MAY BE LOCKED IN ANY POSITION THRU 360°
5. LEVER FURNISHED UNASSEMBLED IN UNIT PACKING BOX

ANSI Y14.5M-1982 APPLIES