

KR Electronics, Inc.

General Description


KR 2297-1-BNC is a 1 MHz lowpass filter. The filter has a minimum 0.5 dB bandwidth of 1 MHz and is designed for a source and load impedance of 50 Ω . Other passband frequencies are available. Please consult the factory.

Features

- 1 MHz Lowpass Filter
- Sharp Transition to Stopband
- Elliptic Response
- Flat Passband Response
- BNC Connectors
- Other configurations available

Typical Performance

Overall Response (5 dB/div)

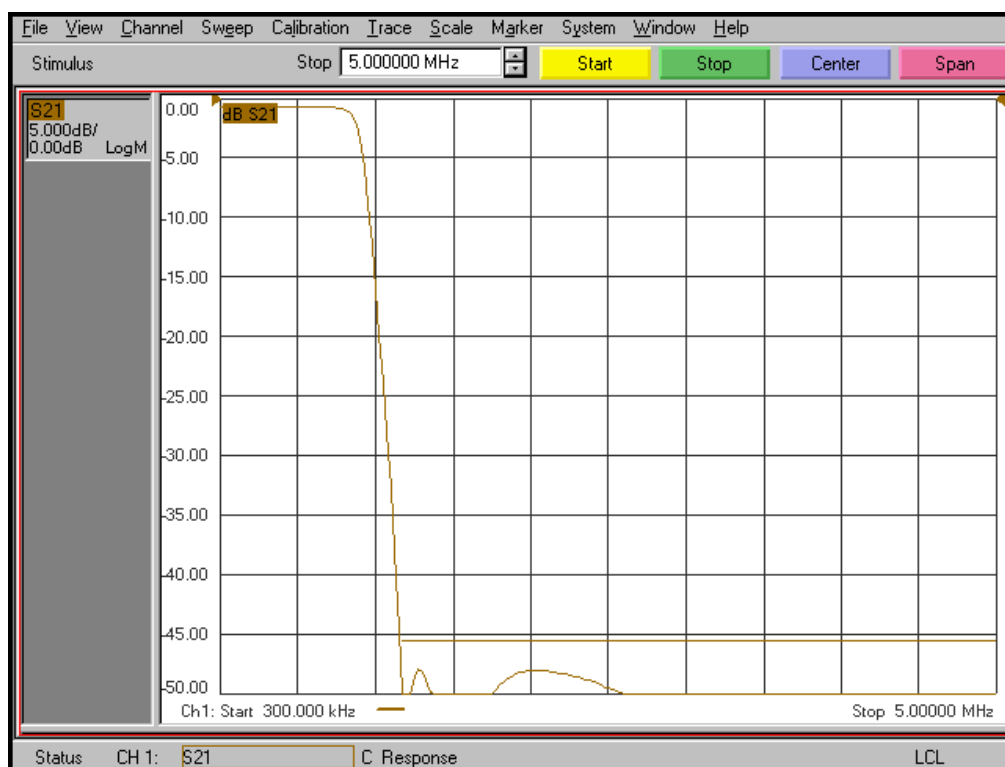


KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

Typical Performance


Passband Amplitude

(1 dB/div)

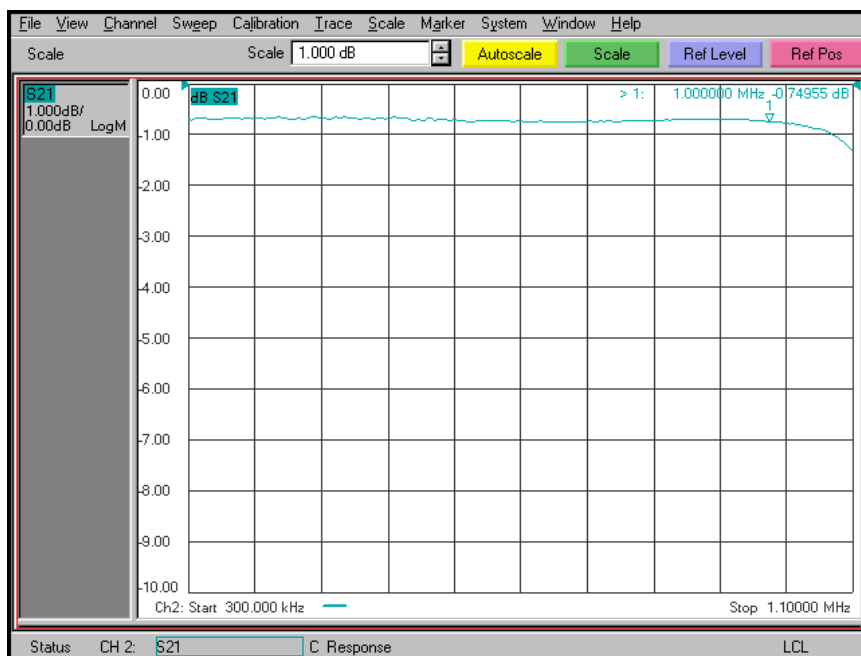

Overall Response

(10 dB/div)

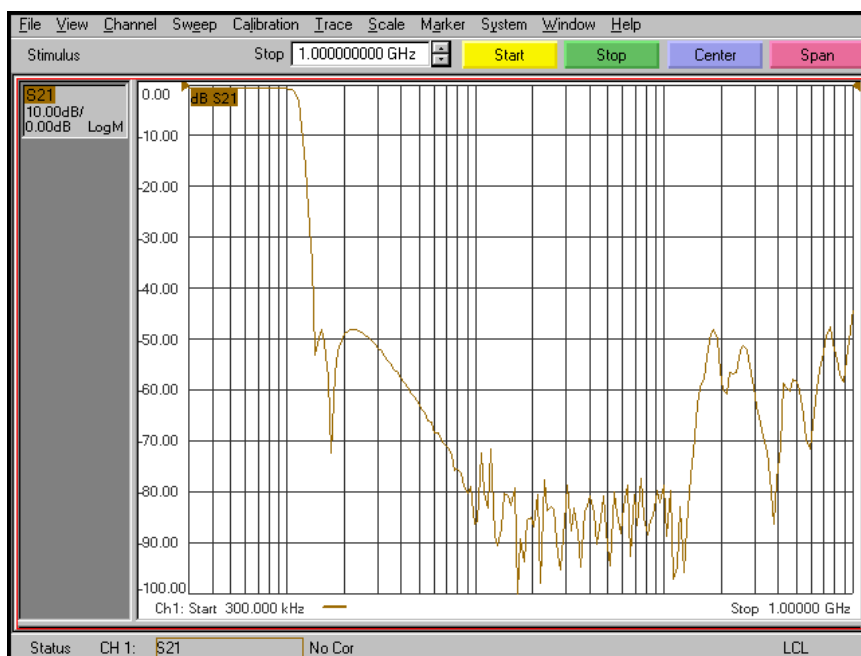

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web
Email
Phone
Fax


www.krfilters.com
sales@krfilters.com
(732) 636-1900
(732) 636-1982

KR Electronics 2297-1-BNC

Specifications

Parameter	Specification	Notes
Filter type	Lowpass	
Insertion Loss at 100 KHz	1 dB max	
Passband Flatness to 1 MHz	0.5 dB pk-pk	
Stopband Rejection at 1.4 MHz	45 dB min	
Source and Load	50 Ω	

Physical Dimensions

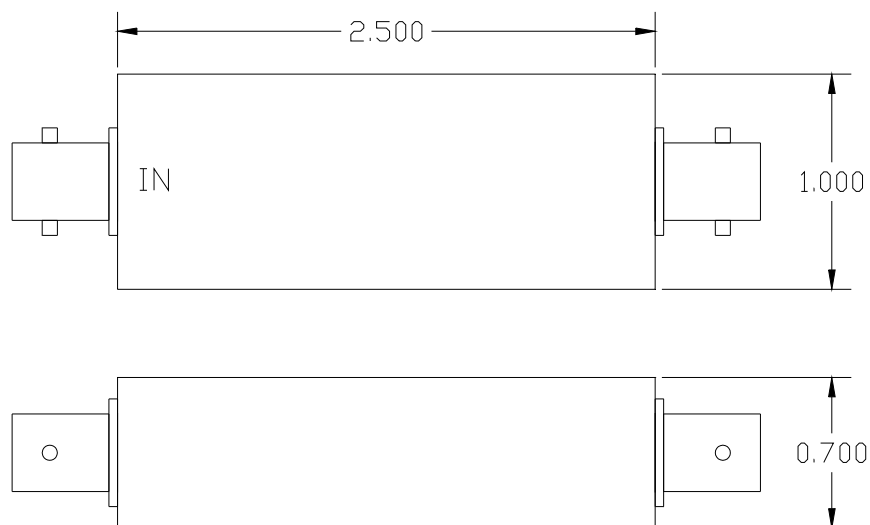

Notes:

1. Dimensions in inches
2. BNC(f)/BNC(F) Connectors
3. Rectangular case

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982