

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT – By – TE CONNECTIVITY ALL RIGHTS RESERVED.


LOC	DIST
HB	–


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	D2	CHANGE LOGO&ADD LINE IDENTIFICAITON ECO-12-001771	21Aug2012	YS.H	BH.Y

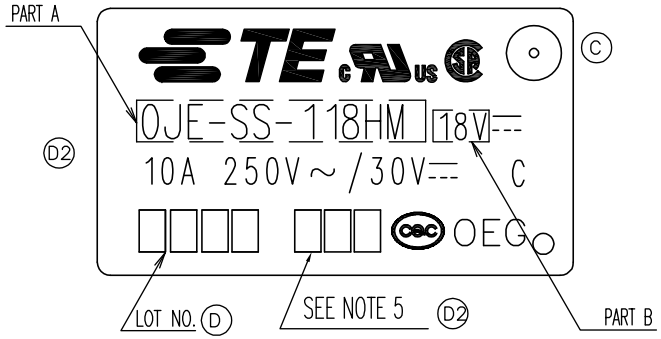

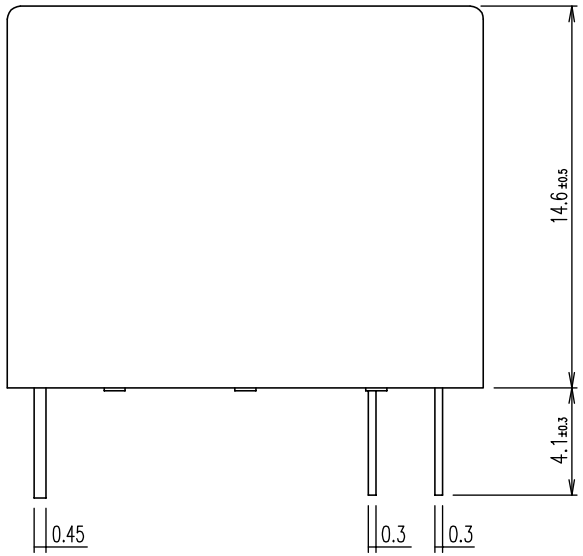

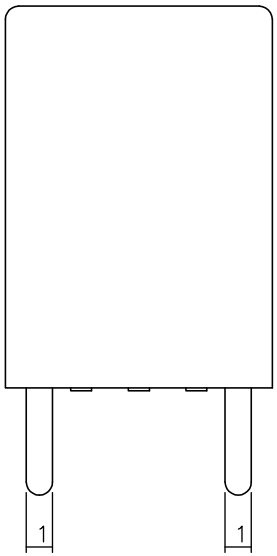

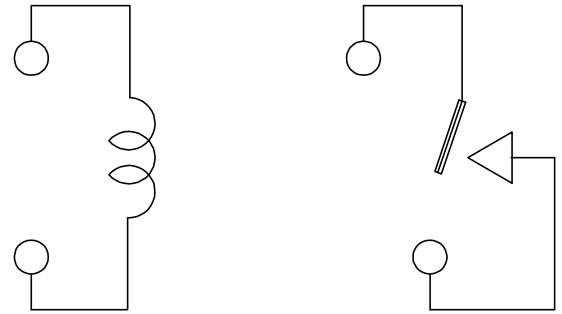

CONNECTION FIGURE


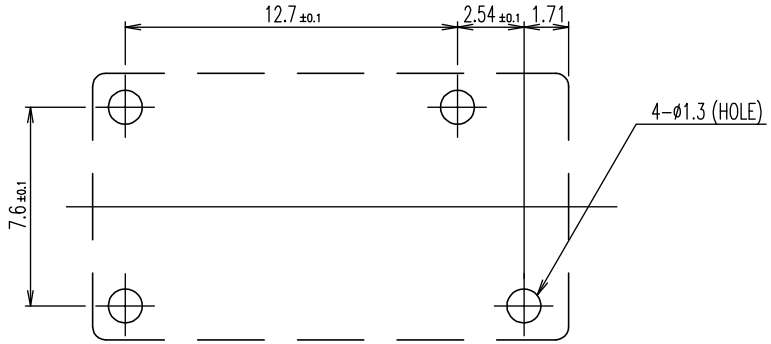


FIGURE FOR PRINTED CIRCUIT BOARD PROCESSING
(BOTTOM VIEW)

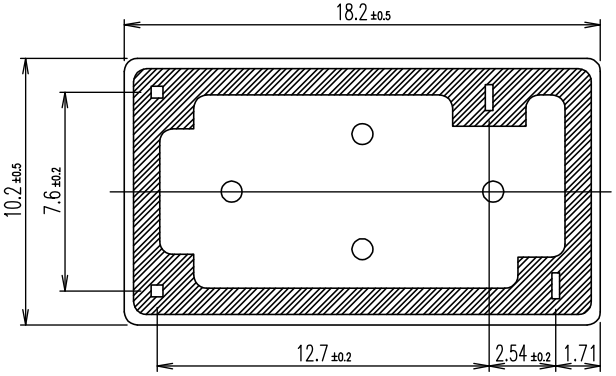

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –

FINISH –

DWN	H.Sasaki –
CHK	Y.Oikawa –
APVD	A.Nagai –
PRODUCT SPEC	–
APPLICATION SPEC	–
WEIGHT	–

TE Connectivity

NAME
–
OJE-SS-HM SPEC,000 CUSTOMER DRAWING
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C- 1461103	–

CUSTOMER DRAWING	SCALE 5:1	SHEET 1 OF 2	REV D2

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - TE CONNECTIVITY ALL RIGHTS RESERVED.

LOC	DIST
HB	—

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	–	SEE SHEET 1	–	–	–

	ACTIVE	1461103-3	OJE-SS-148HM, 000	48V	OJE-SS-148HM	h
	ACTIVE	6-1419128-4	OJE-SS-124HM, 000	24V	OJE-SS-124HM	g
D2 C	OBSOLETE	1461103-2	OJE-SS-118HM, 000	18V	OJE-SS-118HM	f
	ACTIVE	4-1419128-3	OJE-SS-112HM, 000	12V	OJE-SS-112HM	e
	ACTIVE	3-1419128-5	OJE-SS-109HM, 000	9V	OJE-SS-109HM	d
	ACTIVE	3-1419128-2	OJE-SS-106HM, 000	6V	OJE-SS-106HM	c
	ACTIVE	2-1419128-9	OJE-SS-105HM, 000	5V	OJE-SS-105HM	b
	ACTIVE	1461103-1	OJE-SS-103HM, 000	3V	OJE-SS-103HM	a
	PART STATUS	PART NO	DESCRIPTION	PART B	PART A	TYPE

D C NOTES:

1.LOT NO. SYSTEM AS FOLLOWING:

01704

WEEK:04

YEAR :07

D2 2.TERMINAL DIMENSION IS BEFORE SOLDER DIP;

D2 3.FOR THE TIN-PLATING OF THE PINS:

+0.1mm FOR WIDTH,THICKENSS AND DIAMETER.

+0.5mm FOR LENGTH.

D2 4.MARKING FROM INK TO LASER.

D2 5.ADD LOT NO. SYSTEM AS FOLLOWING;

1 1 A

I II III

I, DIGITS FOR DAY OF THE WEEK

1...MONDAY IN THIS WEEK;

2...TUESDAY IN THIS WEEK;

.....

7...SUNDAY IN THIS WEEK

II, DIGITS FOR SHIFT OF THE DAY

1...DAY SHIFT IN THIS DAY;

2...NIGHT SHIFT IN THIS DAY;

III, ONE CHARACTER DISTINGUISH THE LINE IDENTITY,

SUCH AS: A,B.....Z

		EPOXY RESIN	SEAL (BASE & BOBBIN)	15
		3UEW	MAGNETIC WIRE	14
94V-0		P.B.T	CASE	13
94V-0		P.B.T	BASE	12
94V-0		P.B.T	BOBBIN	11
	SOLDER DIP	C.P WIRE	COIL TERMINAL	10
94V-0			CARD	9
		Ag ALLOY	MOVABLE CONTACT	8
		Ag	NO.CONTACT	7
		STEEL	HINGE SPRING	6
	SOLDER DIP	PBP	NO.TERMINAL	5
	SOLDER DIP	Cu ALLOY	MOVABLE SPRING	4
	NIP	STEEL	CORE	3
	NIP	STEEL	ARMATURE	2
	NIP	STEEL	YOKE	1
INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –

FINISH –

DWN	H,Sasaki –
CHK	Y.Oikawa –
APVD	A.Nagai –
PRODUCT SPEC	—
APPLICATION SPEC	—
WEIGHT	—

TE Connectivity

NAME

–

OJE-SS-HM SPEC,000 CUSTOMER DRAWING

–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C- 1461103	—

CUSTOMER DRAWING | SCALE 5:1 | SHEET 2 OF 2 | REV D2