
Bandpass Filter


KR Model 2316

KR Model is 500 KHz Bandpass Filter that maintains high attenuation to 100 MHz

Passband Amplitude

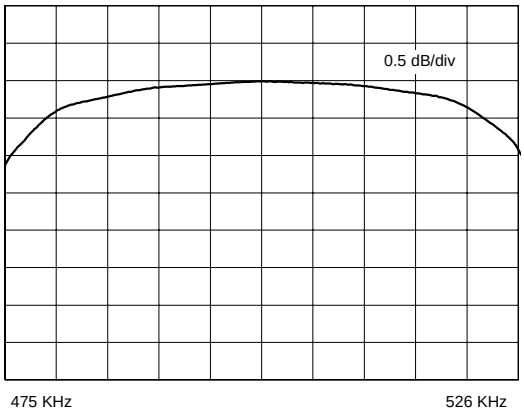


Overall Amplitude

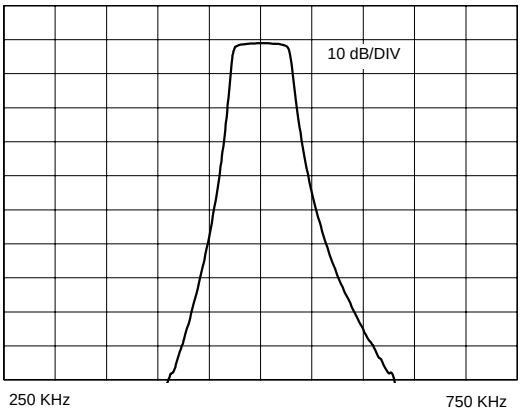

Specifications

KR Part Number	2316
Filter Type	Bandpass
Center Frequency	500 KHz
Insertion Loss	< 3 dB (1 dB Typ)
< 3 dB Passband Frequencies	475 KHz & 526.3 KHz
> 90 dB Stopband Frequencies	400 KHz & 625 KHz (to 100 MHz)
Source and Load Impedance	50 Ω

Outline Drawing

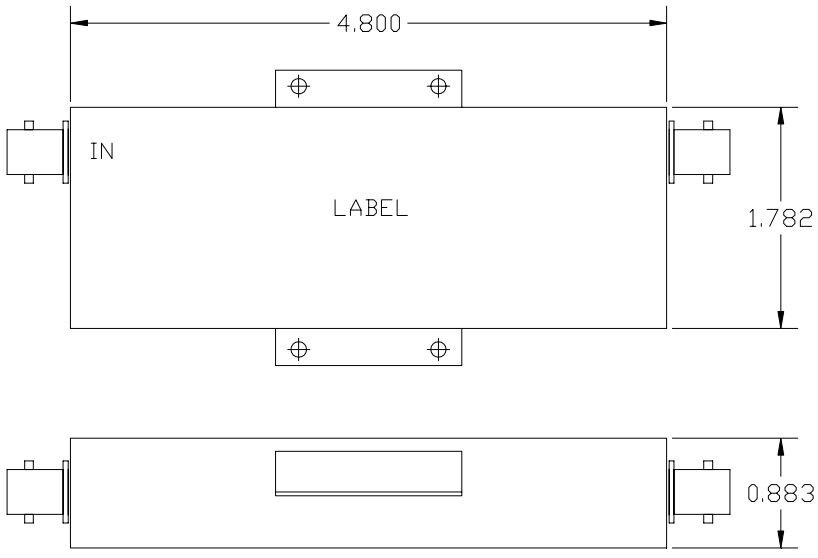

BNC Connectors
Metal Case

KR Electronics
www.krfilters.com
91 Avenel Street
Avenel, NJ 07001
732-636-1900