
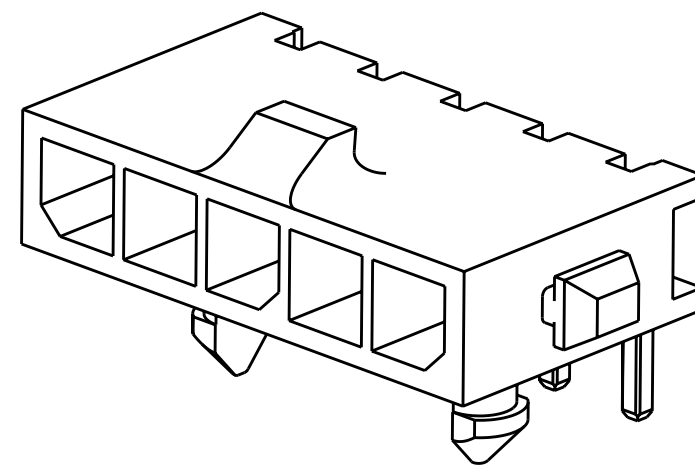
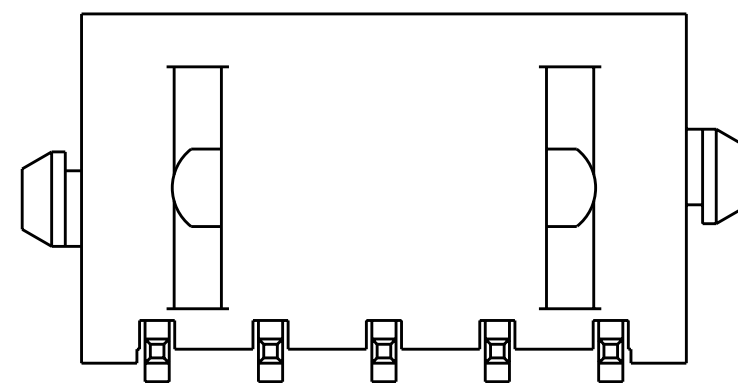


LOC	DIST	REVISONS					
CM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			AI	REVISED PER ECO-11-005027	14MAR2011	RK	HMR

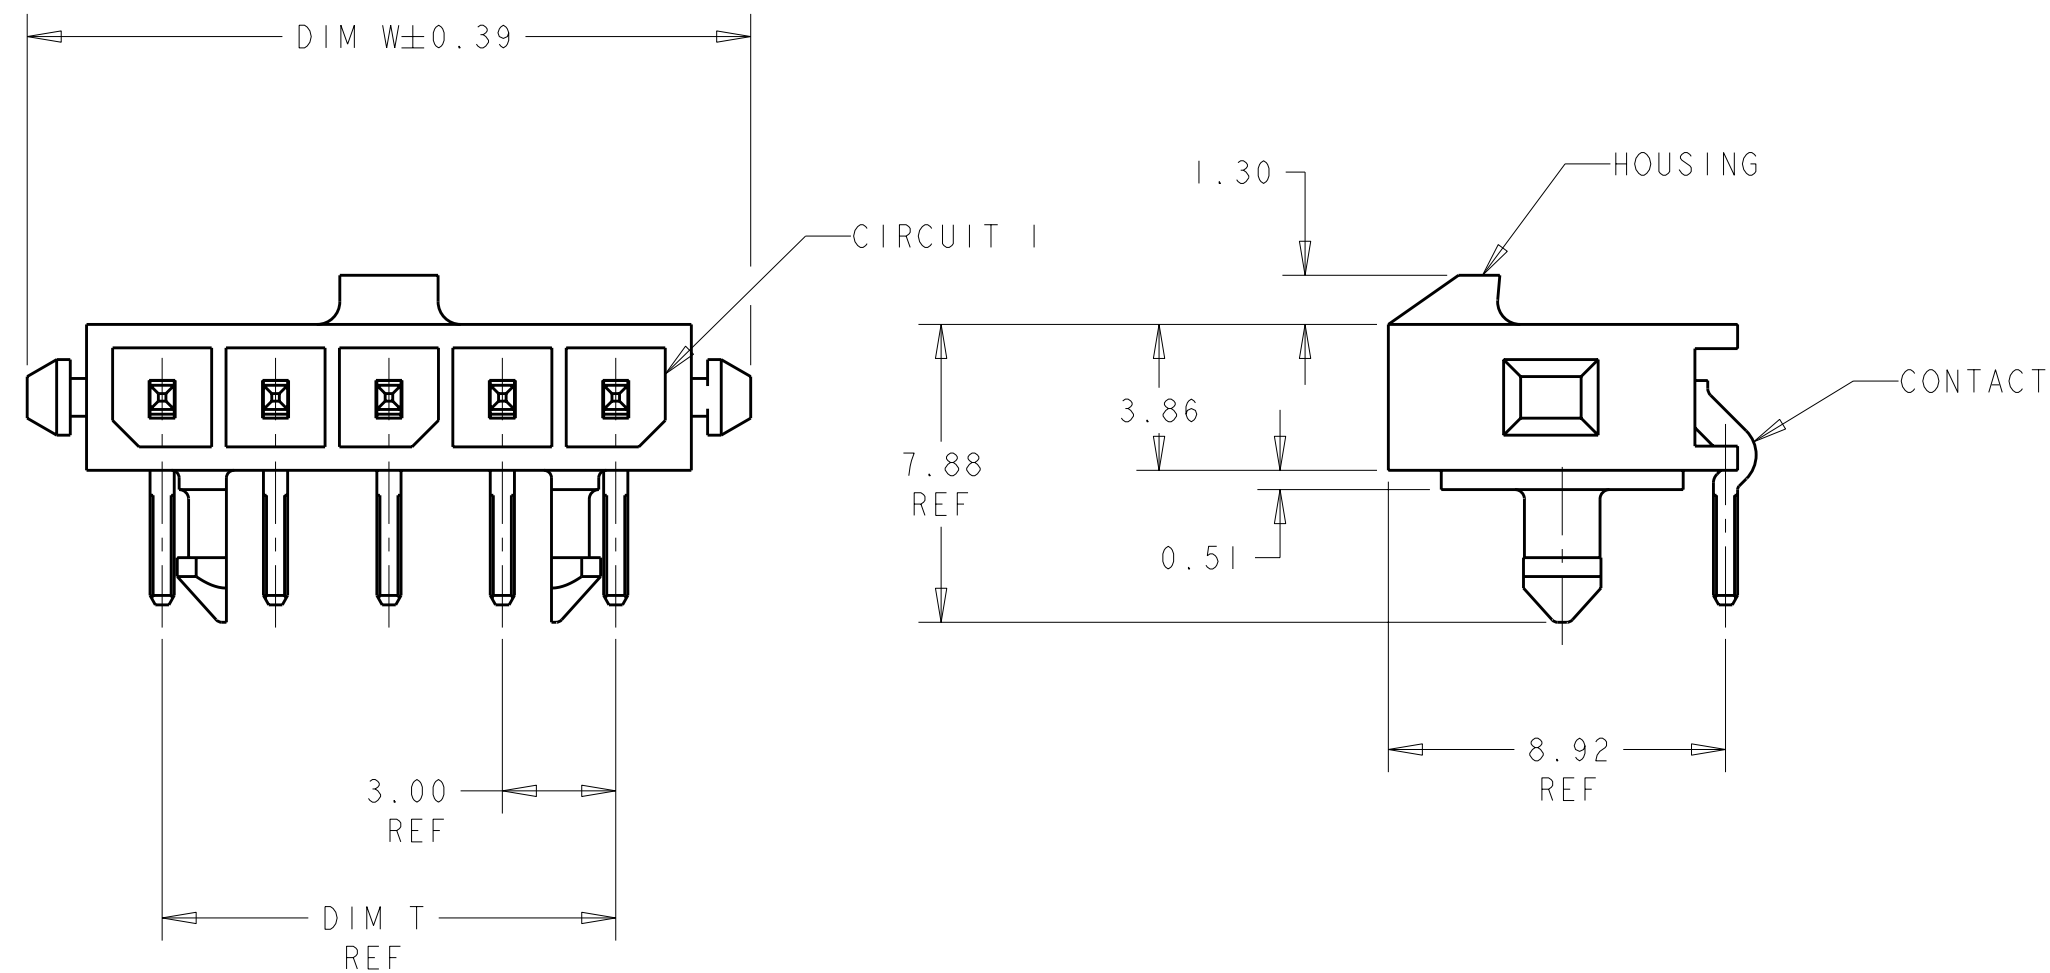


- 1 MATERIAL: CONTACTS - BRASS
HOUSING - UL 94V-O RATED HIGH TEMP NYLON, COLOR BLACK.
- 2 PLATING: CONTACTS - 2.54μm MINIMUM TIN-LEAD OVER 1.27μm MINIMUM NICKEL.
- 4 RECOMMENDED PC BOARD THICKNESS OF 1.57.
- 5 PLATING: CONTACTS - 2.54μm MINIMUM MATTE TIN OVER 1.27μm MINIMUM NICKEL.

	33.00	28.70	33.00	40.14	12	3-1445055-2
	30.00	25.70	30.00	37.14	11	3-1445055-1
	27.00	22.70	27.00	34.14	10	3-1445055-0
	24.00	19.70	24.00	31.14	9	2-1445055-9
	21.00	16.70	21.00	28.14	8	2-1445055-8
	18.00	13.70	18.00	25.14	7	2-1445055-7
	15.00	10.70	15.00	22.14	6	2-1445055-6
	12.00	7.70	12.00	19.14	5	2-1445055-5
	9.00	4.70	9.00	16.14	4	2-1445055-4
	-	-	6.00	13.14	3	2-1445055-3
	-	-	3.00	10.14	2	2-1445055-2
	33.00	28.70	33.00	40.14	12	1-1445055-2
	30.00	25.70	30.00	37.14	11	1-1445055-1
	27.00	22.70	27.00	34.14	10	1-1445055-0
	24.00	19.70	24.00	31.14	9	1445055-9
	21.00	16.70	21.00	28.14	8	1445055-8
	18.00	13.70	18.00	25.14	7	1445055-7
	15.00	10.70	15.00	22.14	6	1445055-6
	12.00	7.70	12.00	19.14	5	1445055-5
	9.00	4.70	9.00	16.14	4	1445055-4
	-	-	6.00	13.14	3	1445055-3
	-	-	3.00	10.14	2	1445055-2
FINISH	DIM Z	DIM V	DIM T	DIM W	NO. OF POSN	PART NUMBER


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 060C12000 J. ROOT		 TE Connectivity	
		CHK 13-MAR-2001 K. WHITAKER			
DIMENSIONS: mm		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME RIGHT ANGLE THRU HOLEHEADER ASSY, TIN CONTACTS W/PLASTIC HOLDDOWNS, SINGLE ROW, MICRO MATE-N-LOK™	
		APVD 13-MAR-2001 K. WHITAKER			
		PRODUCT SPEC			
		APPLICATION SPEC			
0 PLC ±. 1 PLC ±. 2 PLC ±0.13 3 PLC ±. 4 PLC ±. ANGLES ±.		WEIGHT -		SIZE A2 CAGE CODE 00779 DRAWING NO. C-1445055	
MATERIAL		FINISH		RESTRICTED TO	
		SEE TABLE		SCALE 5.1 SHEET 1 OF 2 REV A1	
		CUSTOMER DRAWING			

METRIC


LOC	DIST	REVISIONS					
CM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			-	SEE SHEET 1	-	-	-

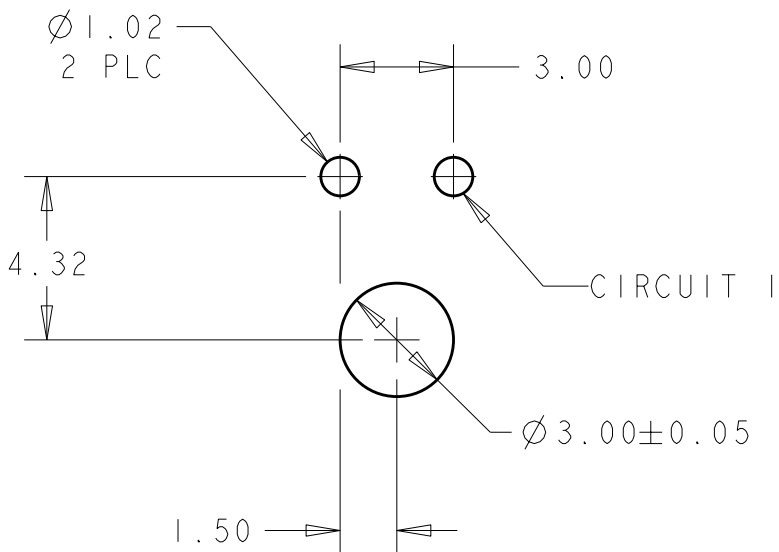


PCB LAYOUT FOR 2 POSITION 
COMPONENT SIDE

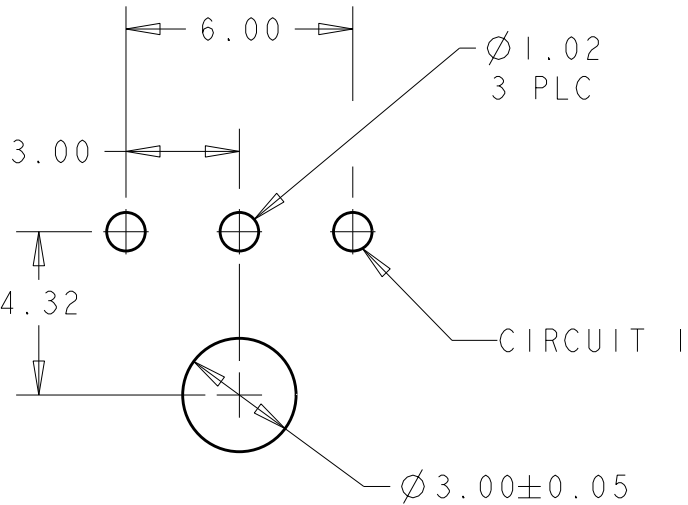


PCB LAYOUT FOR 3 POSITION 
COMPONENT SIDE

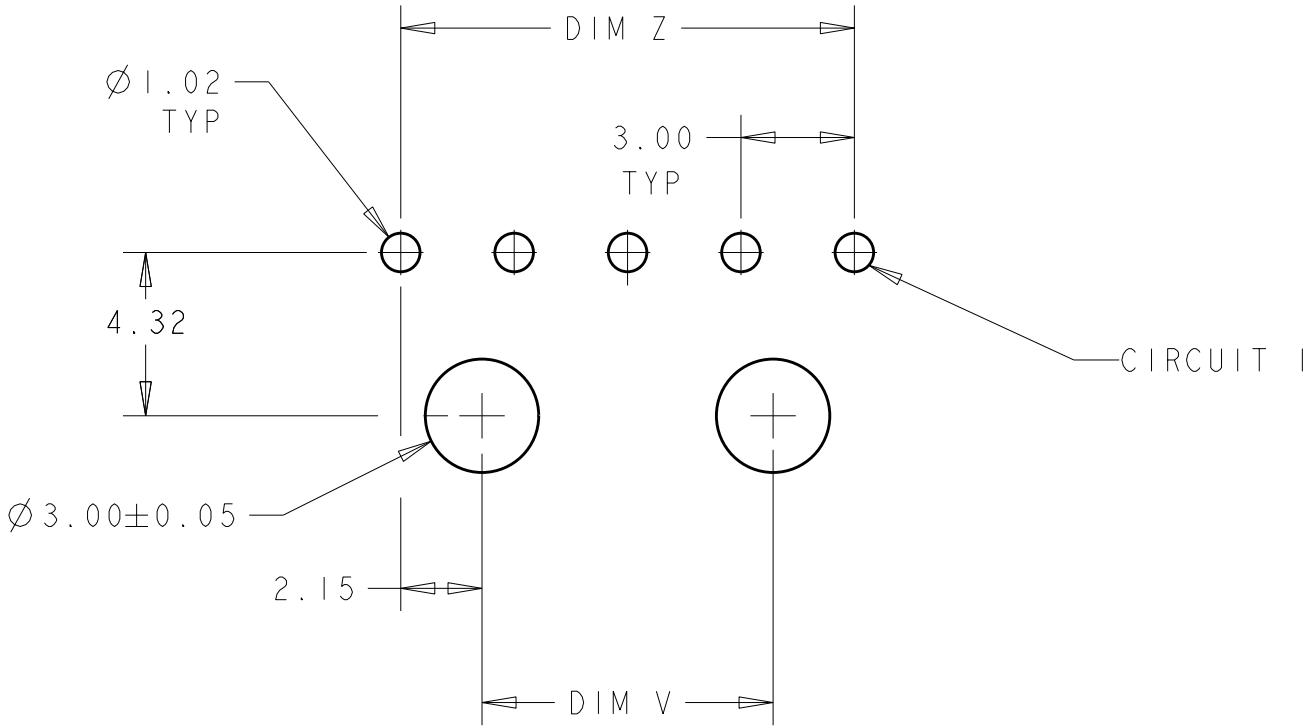

PCB LAYOUT FOR 4-12 POSITION 
COMPONENT SIDE

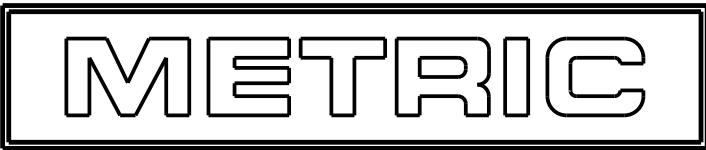

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.ROOT 06OCT2000	 TE Connectivity			
DIMENSIONS:		CHK K.WHITAKER 13-MAR-2001				
mm		APVD K.WHITAKER 13-MAR-2001	NAME RIGHT ANGLE THRU HOLEHEADER ASSY, TIN CONTACTS W/PLASTIC HOLDDOWNS, SINGLE ROW, MICRO MATE-N-LOK™			
		PRODUCT SPEC				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	SIZE		CAGE CODE	DRAWING NO
0 PLC ±		-	A2		00779	C-1445055
1 PLC ±		-	SCALE		5:1	SHEET 2 OF 2
2 PLC ±0.13		-	WEIGHT		-	REV A1
3 PLC ±		-	CUSTOMER DRAWING			
4 PLC ±		-				
ANGLES ±		-				
FINISH		-				
SEE TABLE		-				