

D

D

C




C

B



B

A


A

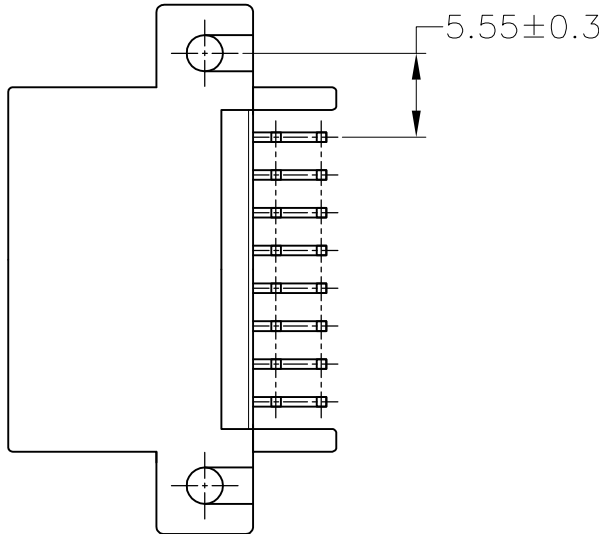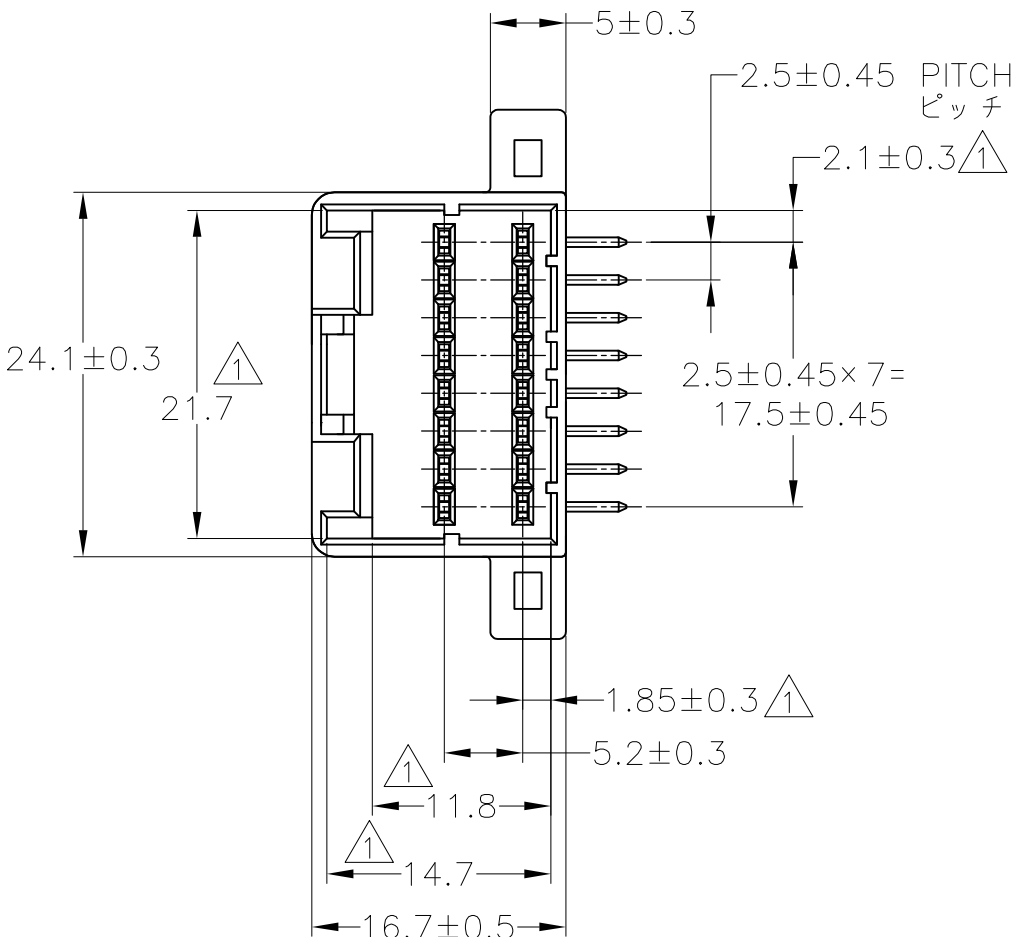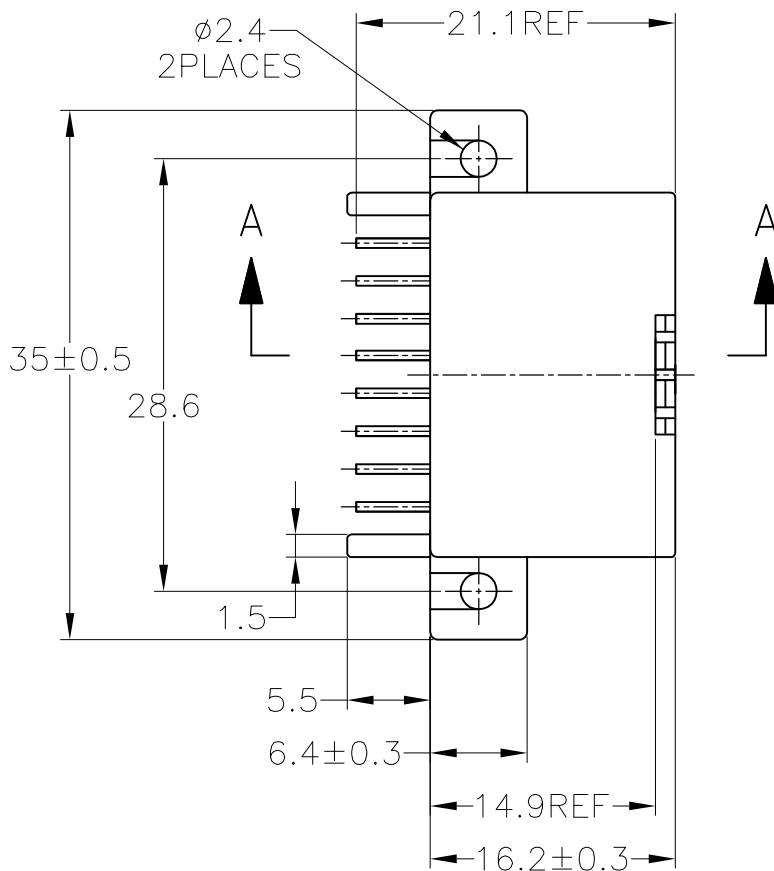


1. [-Z-]面より2mmの範囲で測定。
2. 適用プリント基板厚：1.6mm
3. 嵌合相手ハウジング型番：174046
4. 推奨取付けねじ：JIS B1115, B1122 タッピンねじ, なべ2種
呼び径3, 長さ7mm以上 (締付けトルク：0.4N・m以下)
5. 回路番号：FIG.1 参照
6. 製品規格番号：108-5244, 取扱説明書：411-5883
1. TO BE MEASURED WITHIN 2mm FROM [-Z-]
2. APPLICABLE P.C.BOARD THICKNESS: 1.6mm
3. THE MATING PLUG HOUSING PART NUMBER: 174046
4. RECOMMENDED MOUNTING SCREW: 3mm DIA, 7mm LENGTH (MIN.)
PAN HEAD, CLASS 2 TAPPING SCREW SPRICIFIED IN JIS B1115,
B1122 (TIGHTENING TORQUE: 0.4N・m MAX.)
5. CIRCUIT NUMBER: SEE FIG.1
6. PRODUCT SPECIFICATION: 108-5244
INSTRUCTION SHEET: 411-5883

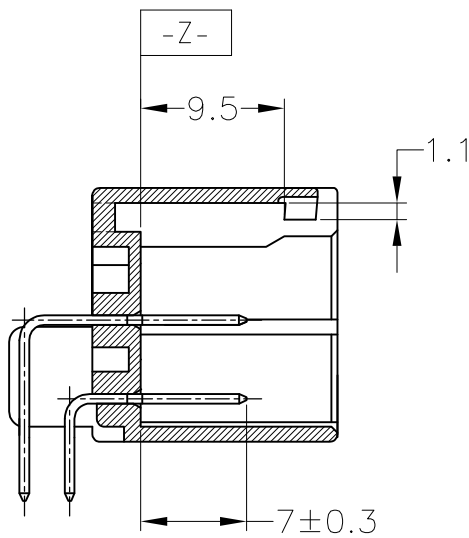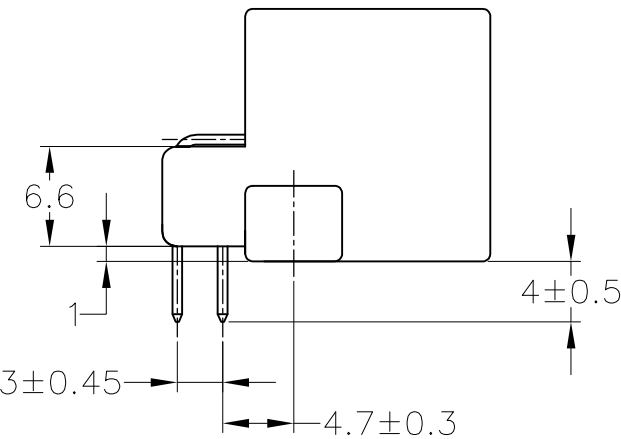

A-A

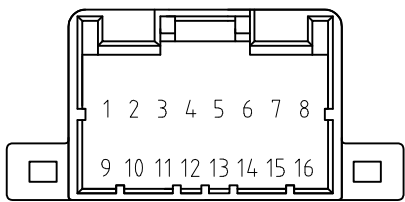

5 FIG.1

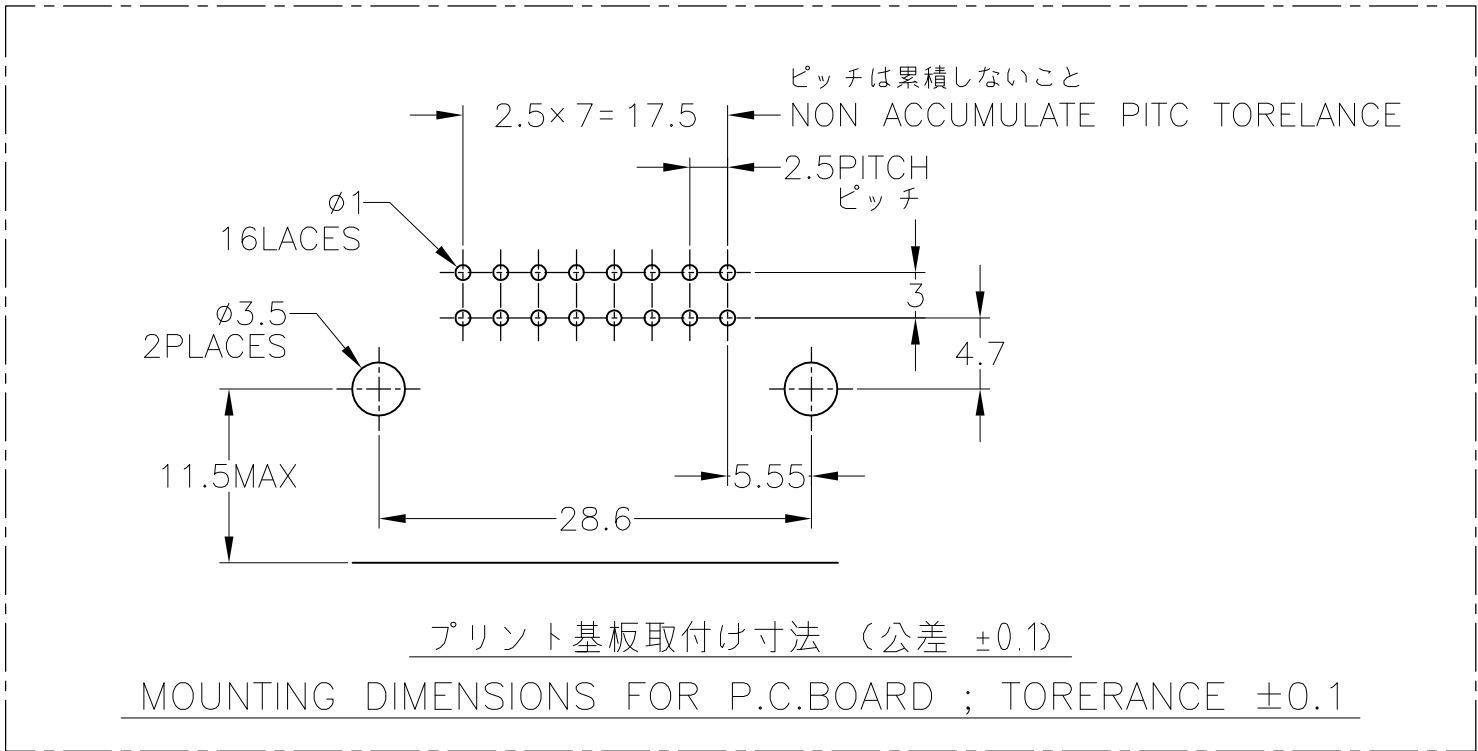

TOLERANCE UNLESS OTHERWISE SPECIFIED:	
一般公差	
0<×≤ 10	: ±0.2
10<×≤ 30	: ±0.25
30<×≤ 100	: ±0.3
ANGLE	: ±3°
角度	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T.SHINOHARA 06JAN09	TE Connectivity		
DIMENSIONS: mm		CHK K.BETSUI 06JAN09			
		APVD K.BETSUI 06JAN09	NAME		
		PRODUCT SPEC SEE NOTE 6			
MATERIAL HOUSING: PBT CONTACT: BRASS		APPLICATION SPEC —	WEIGHT 8.4 g	SIZE A2	CAGE CODE 00779
		FINISH SEE TABLE	CUSTOMER DRAWING	DRAWING NO C=174053	RESTRICTED TO —
			SCALE 2:1	SHEET 1 of 1	REV H2