



D

C

B

A


SEE SHEET 2 FOR
WIRING COLOR CODE

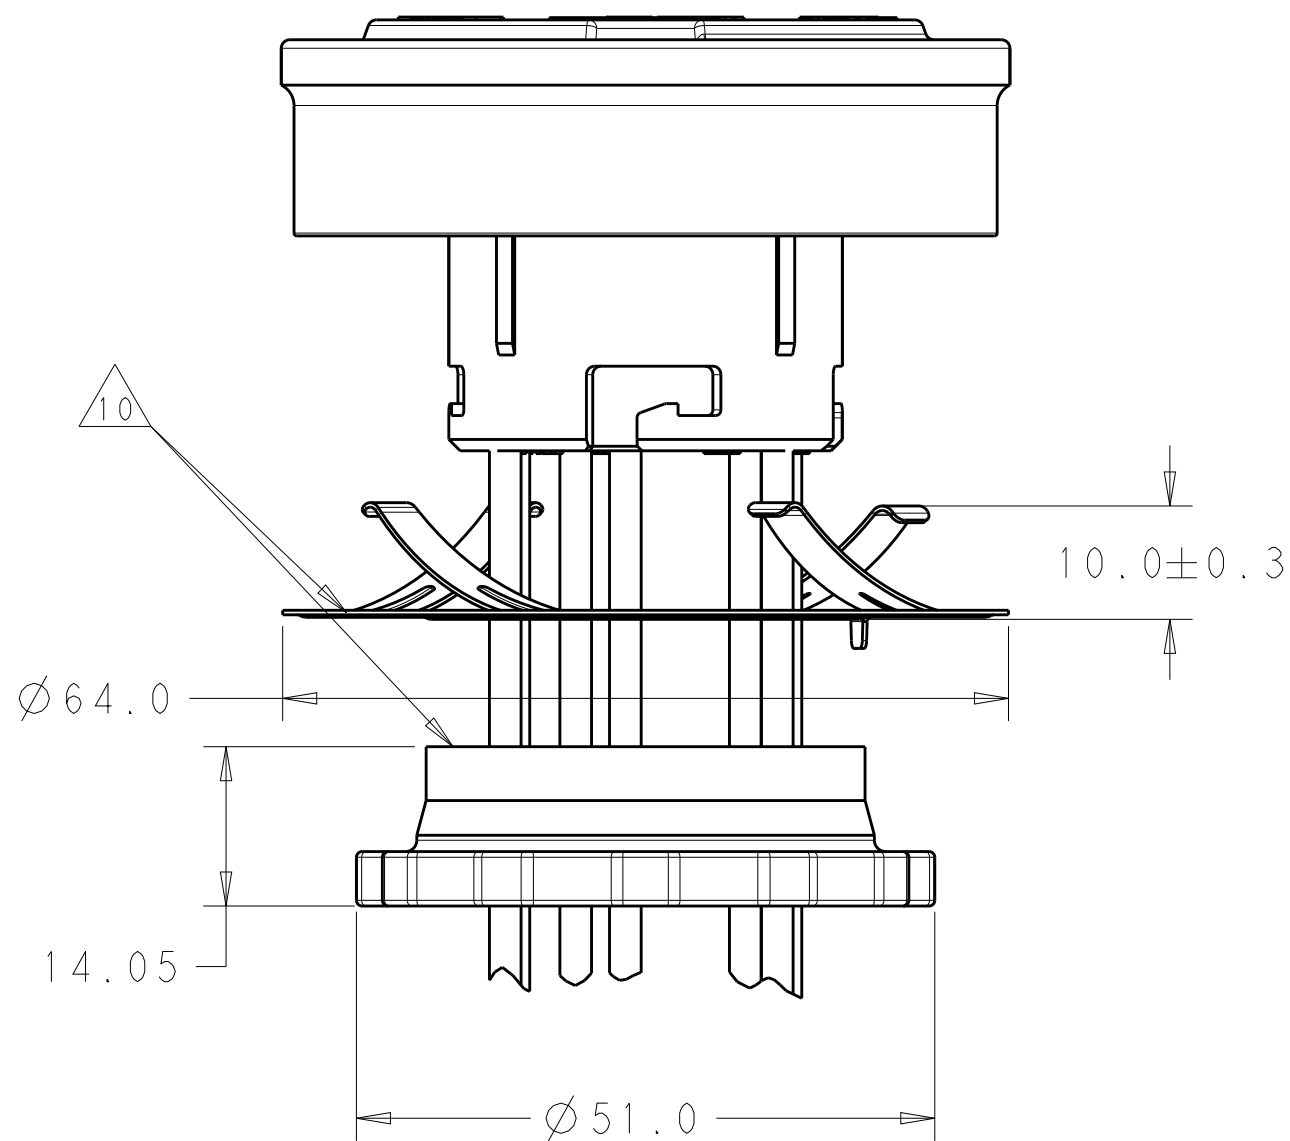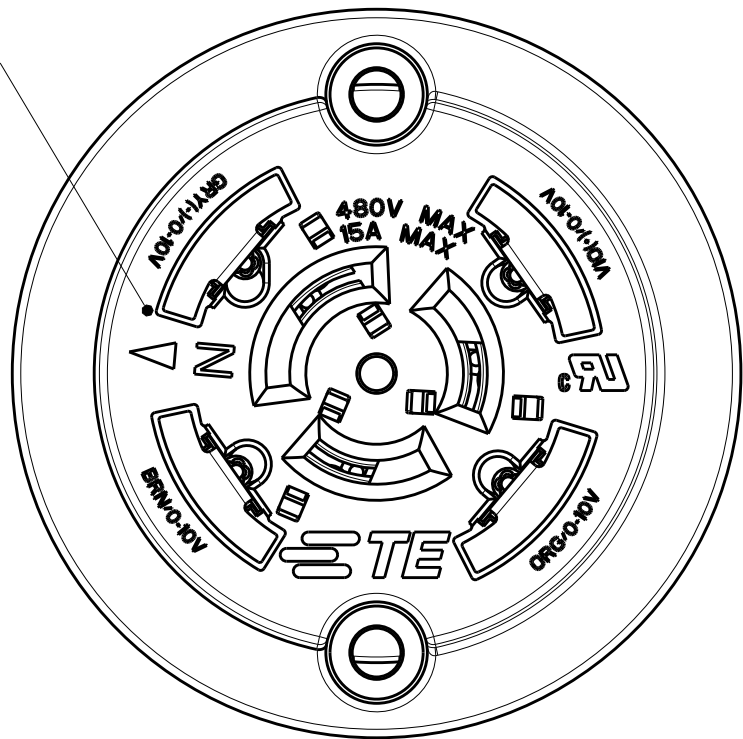


NOTES:

1. MATERIALS:
HOUSING: GLASS-FILLED THERMOPLASTIC, UL 94V-0 RATED
DIMMING CONTACTS (2 OR 4): COPPER ALLOY
LINE VOLTAGE CONTACTS (3): COPPER ALLOY
SPRING PLATE: STAINLESS STEEL
LOCKING RING: PBT
2. FINISH:
DIMMING CONTACTS (2 OR 4): NICKEL UNDERPLATE ENTIRE CONTACT
0.127 µm MIN THICK. GOLD PLATE CONTACT PAD AREA (MATING FACE
SIDE ONLY) 0.76 µm MIN THICK. MATTE TIN PLATE TAB ON BOTH SIDES
0.30 µm MIN THICK.
LINE VOLTAGE CONTACTS (3): TIN PLATE.
3. LINE VOLTAGE CONDUCTORS (3):
14 AWG, 600V, 150°C RATED, COPPER 41/30 STRANDED
PER UL STYLE AWM 3321.
4. MATING INTERFACE PER ANSI C136.41-2013.
5. OPTIONAL DIMMING CONTACTS (2) SUPPLIED.
6. DIMMING CONDUCTORS (2 OR 4):
18 AWG, 600V, 150°C RATED, 16/30 STRANDED,
PER UL STYLE AWM 3321.
7. LINE VOLTAGE CONDUCTORS (3):
14 AWG, 600V, 105°C RATED, COPPER 41/30 STRANDED.
PER UL STYLE AWM 1015.
8. DIMMING CONDUCTORS (2 OR 4):
18 AWG, 600V, 105°C RATED, COPPER 16/30 STRANDED.
PER UL STYLE AWM 1015.
9. MUST COMPLY WITH DIRECTIVE 2002/95/EC (ROHS)
10. LOCKING RING (REF P/N: 2333095-1) AND
SPRING PLATE (REF P/N: 2333094-1) NOT ASSEMBLED,
SHIPPED BULK PACKED
11. MUST BE USED WITH GASKET (REF P/N: 2332473-1) SOLD SEPARATELY

304.8	291.3	7 AND 8	4 5	2-2332966-4
304.8	291.3	7 AND 8	2	2-2332966-3
304.8	291.3	3 AND 6	4 5	2-2332966-2
304.8	291.3	3 AND 6	2	2-2332966-1
A	B	WIRE STYLE	QUANTITY OF DIMMING CONTACTS	PART NO.
WIRE LENGTH				

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. DAILY 15MAR2018	 TE Connectivity			
		CHK E. HOWARD 15MAR2018				
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD -	NAME			
	0 PLC ±-	PRODUCT SPEC	RECEPTACLE ASSEMBLY, LUMAWISE ENDURANCE N TOOL-LESS ROTATABLE			
	1 PLC ±0.2	108-133114				
	2 PLC ±0.13	APPLICATION SPEC				
	3 PLC ±-	114-133114				
4 PLC ±-	ANGLES ±1°	WEIGHT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
MATERIAL	FINISH	-	A2	00779	C-2332966	-
		CUSTOMER DRAWING	SCALE		SHEET	REV
			1:1		1 OF 3	A3

LOC	DIST	REVISIONS					
-	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
			-	SEE SHEET 1	-	-	-

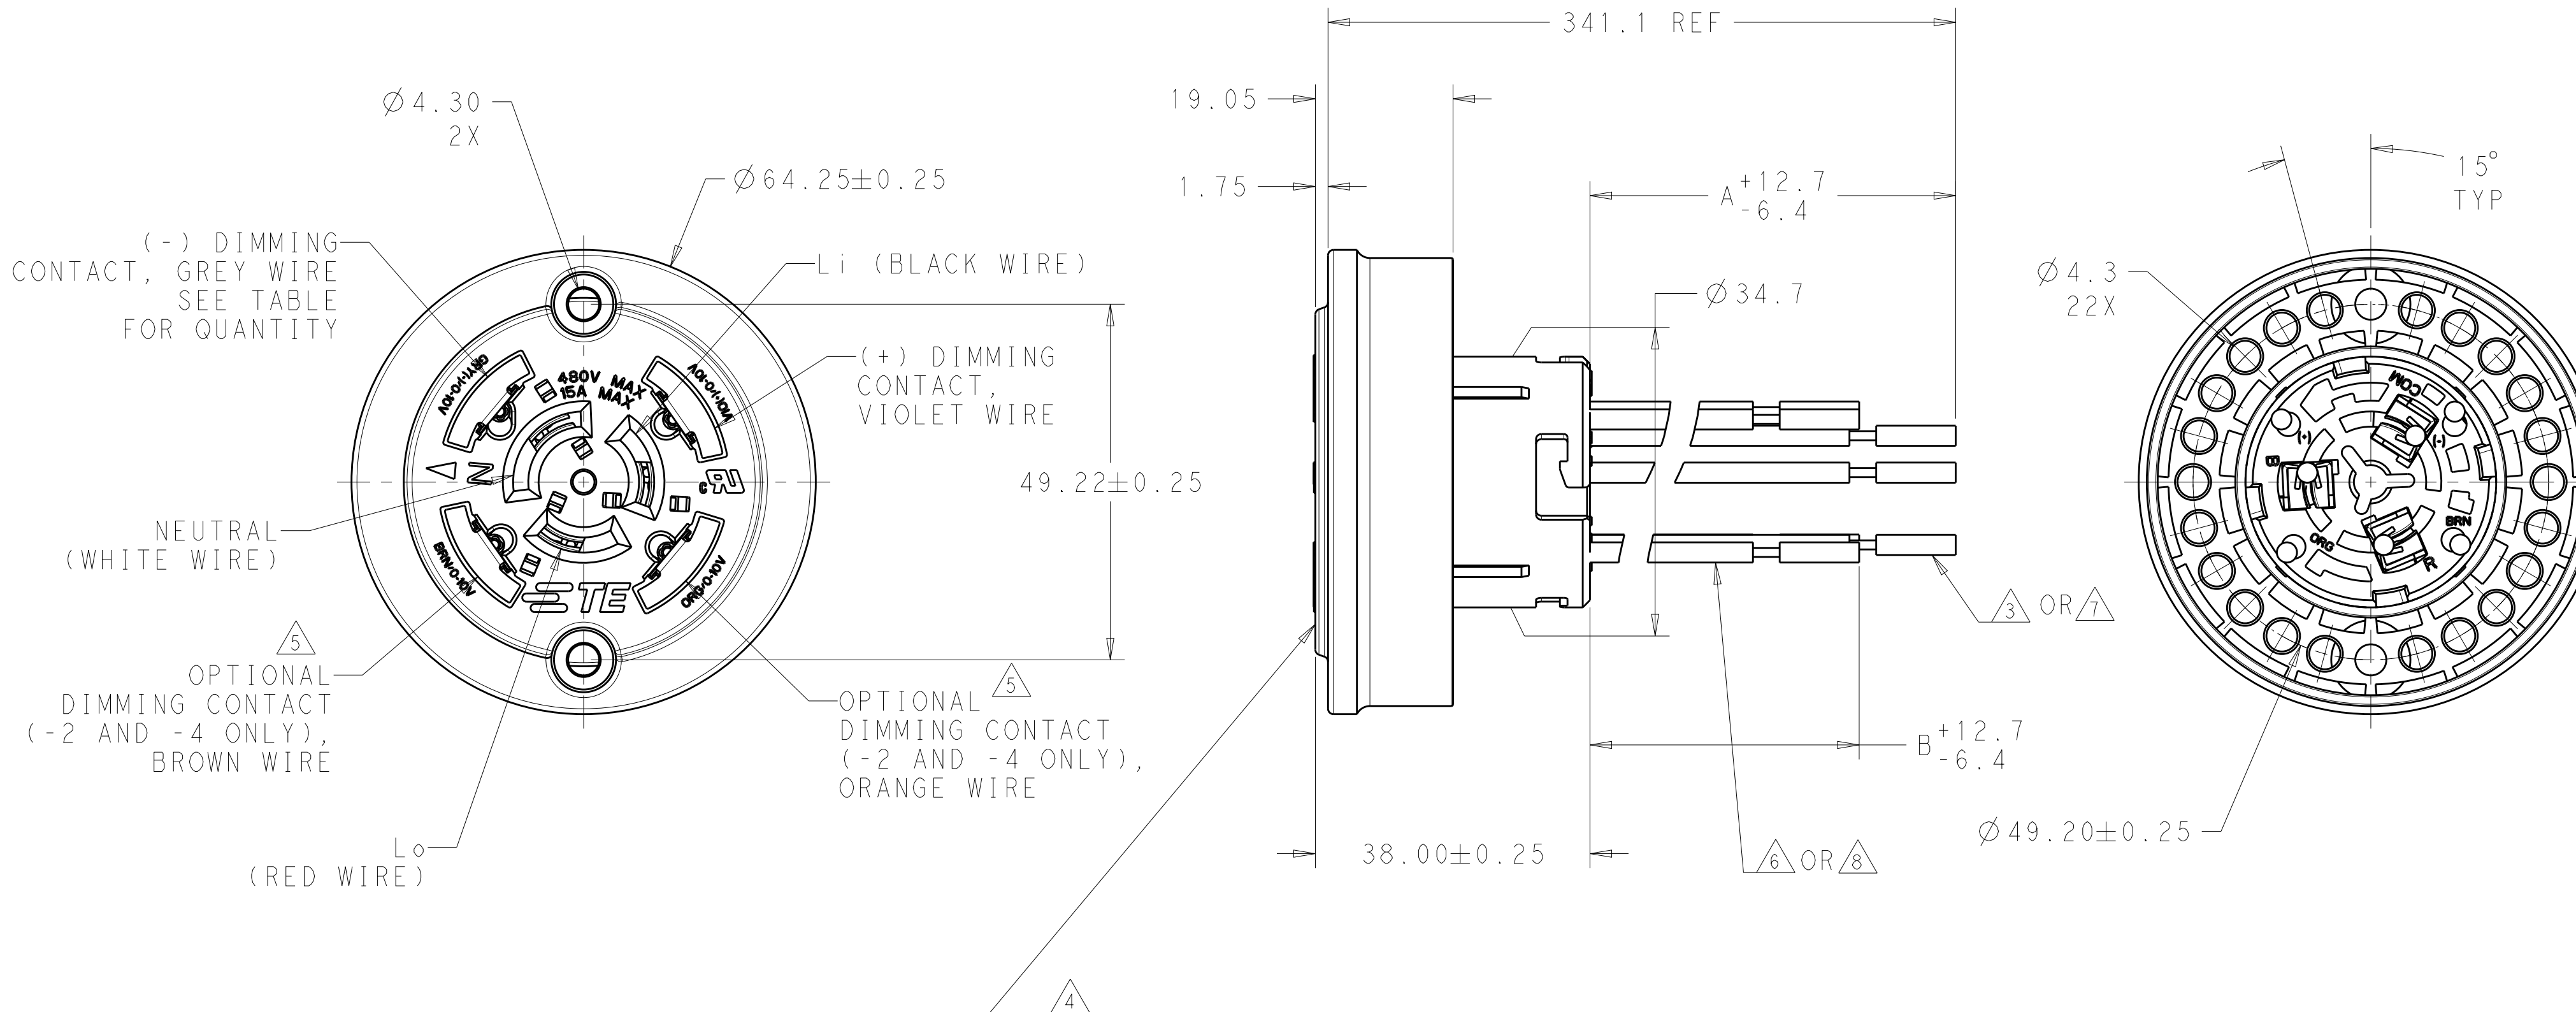

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
C. DAILY
15MAR2018

CHK
E. HOWARD
15MAR2018

APVD
-

TE Connectivity

RECEPTACLE ASSEMBLY,
LUMAWISE ENDURANCE N
TOOL-LESS ROTATABLE

DIMENSIONS:
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±0.2
2 PLC ±0.13
3 PLC ±-
4 PLC ±-
ANGLES ±1°
FINISH

MATERIAL
-

PRODUCT SPEC
108-133114

APPLICATION SPEC
114-133114

WEIGHT
-

CUSTOMER DRAWING

NAME

SIZE
A2

CAGE CODE
00779

DRAWING NO
C-2332966


RESTRICTED TO
-

SCALE
1:1

SHEET
2

OF
3

REV
A3

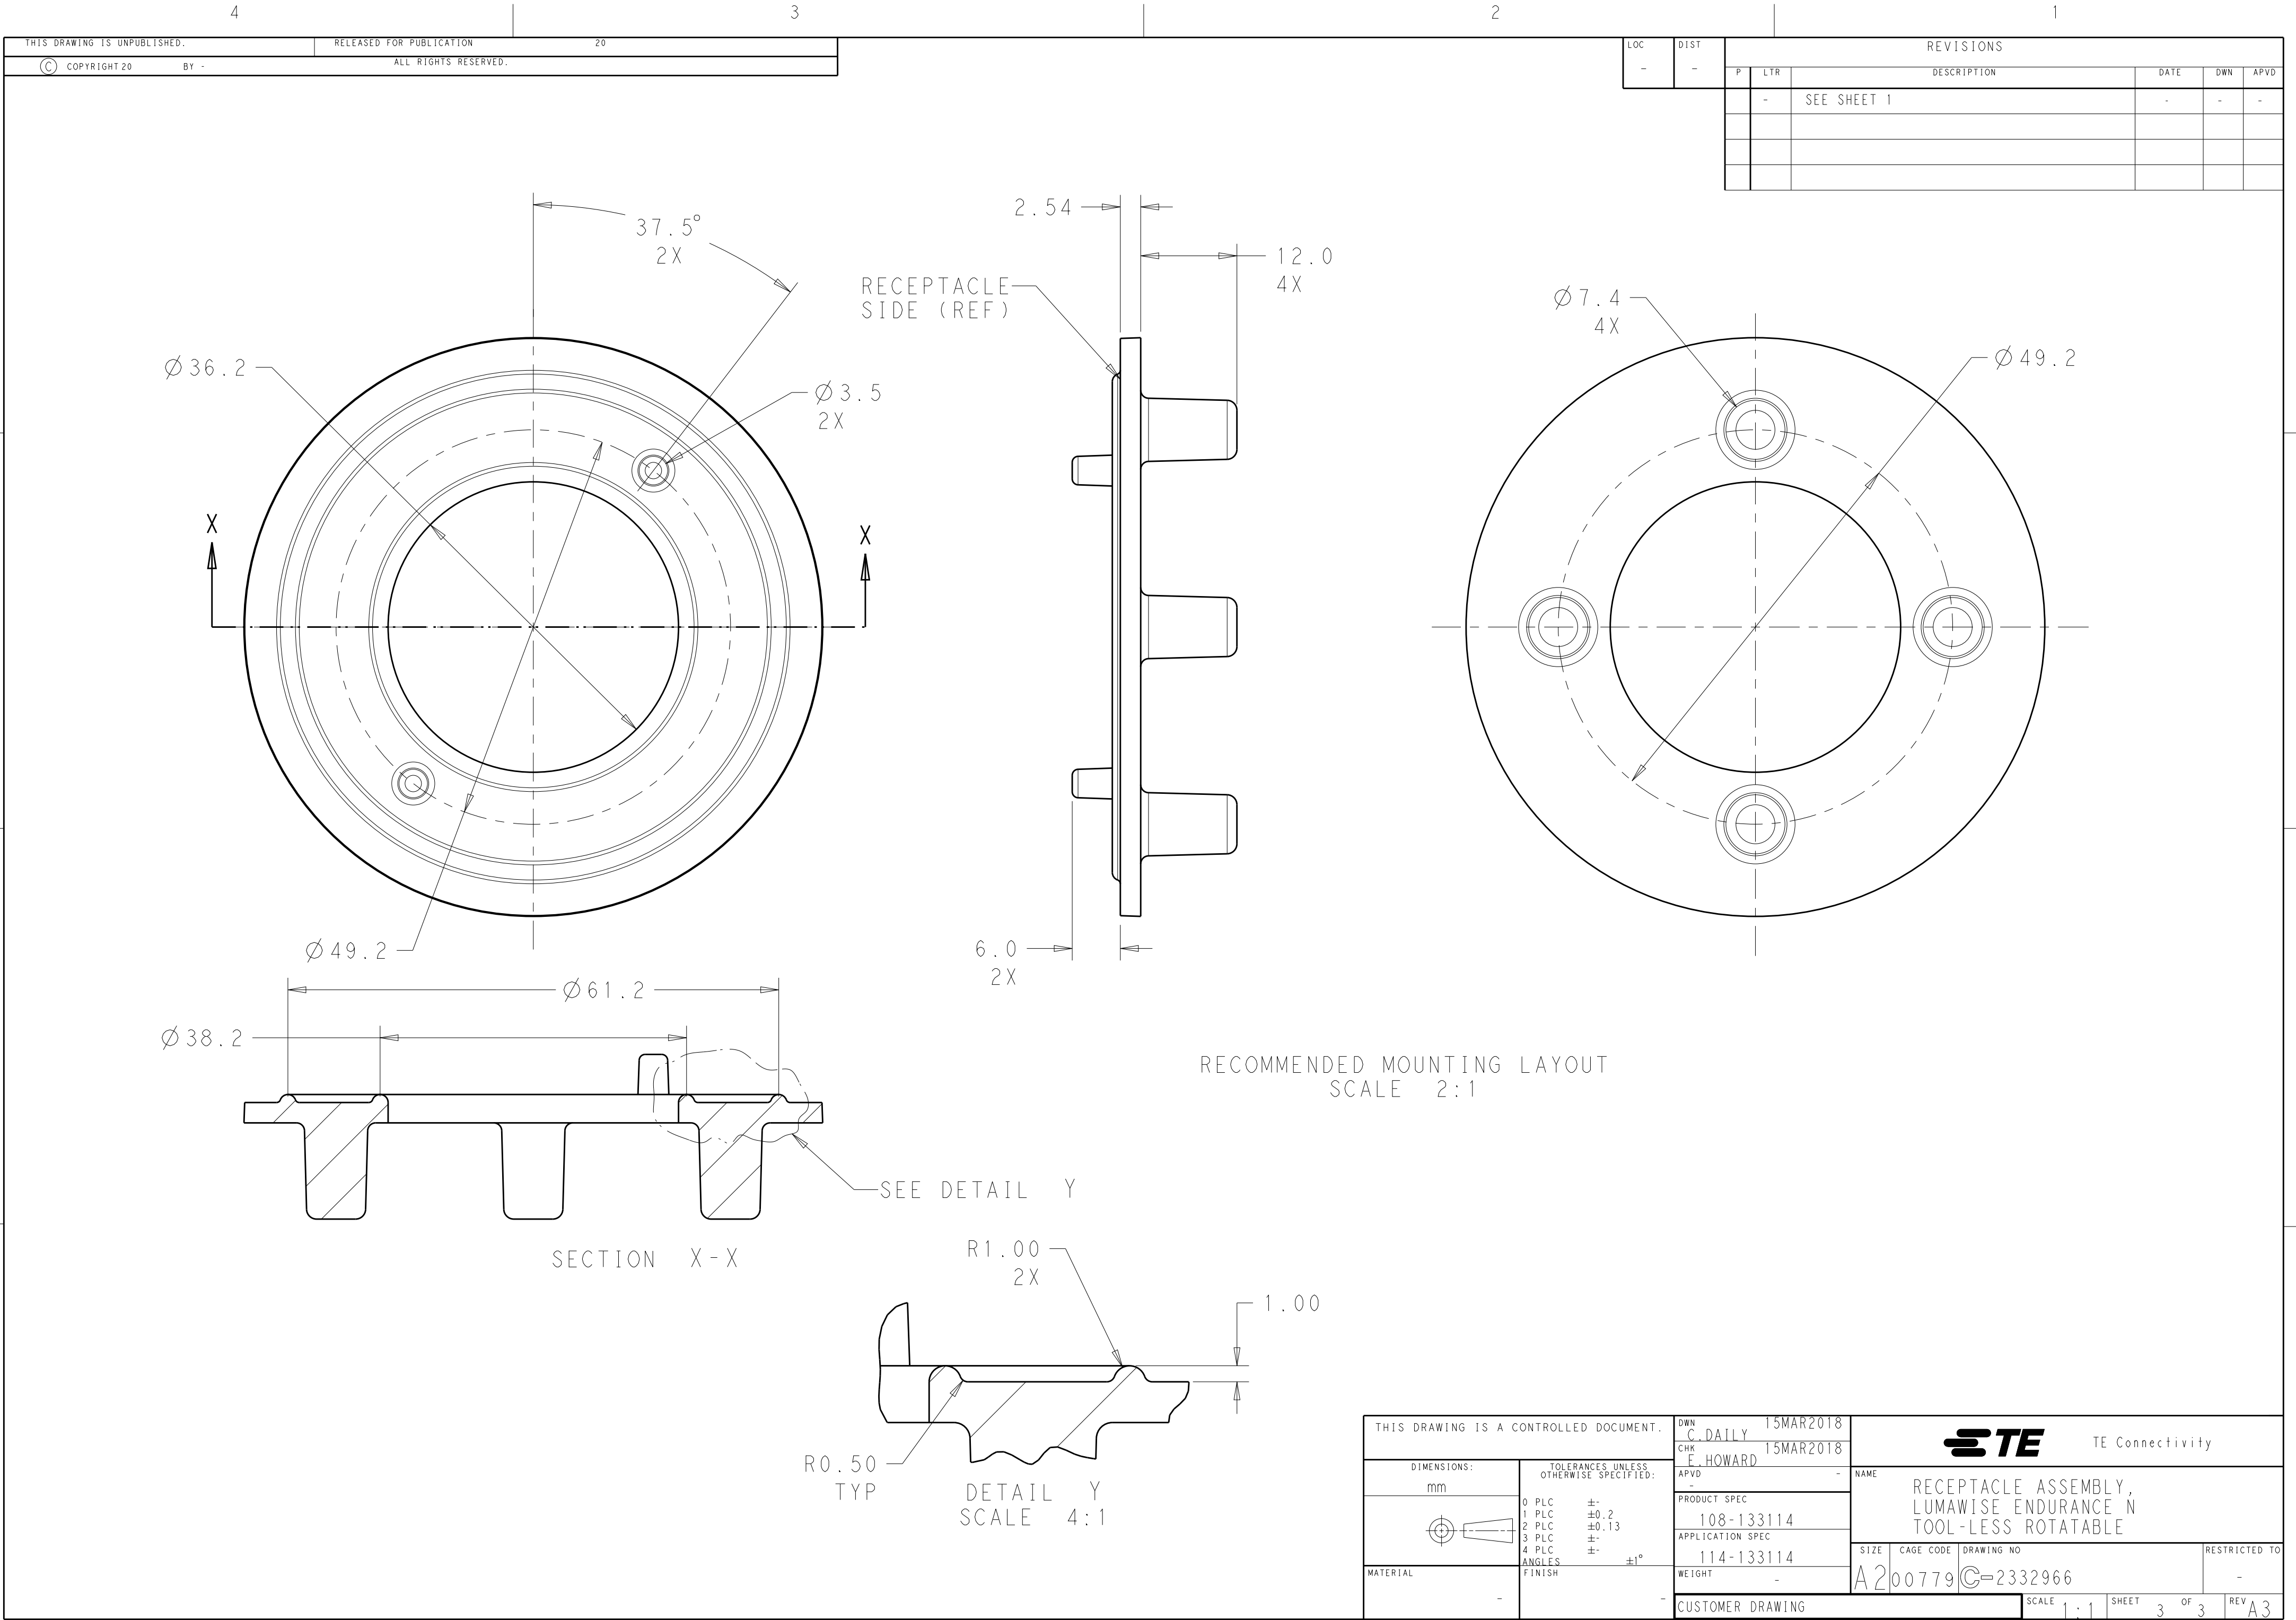

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. DAILY CHK E. HOWARD APVD -	15MAR2018	STE TE Connectivity		
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		
mm		0 PLC $\pm$ - 1 PLC ± 0.2 2 PLC ± 0.13 3 PLC $\pm$ - 4 PLC $\pm$ - ANGLES $\pm 1^\circ$ FINISH		RECEPTACLE ASSEMBLY, LUMAWISE ENDURANCE N TOOL-LESS ROTATABLE		
MATERIAL		-		PRODUCT SPEC 108-133114	SIZE A2	CAGE CODE 00779
-		-		APPLICATION SPEC 114-133114	DRAWING NO C-2332966	RESTRICTED TO -
-		-		WEIGHT -	SCALE 1:1	
-		-		CUSTOMER DRAWING		SHEET 3 OF 3
-		-		REV A3		