

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION - ,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.


LOC	DIST
AD	00


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	Y6	REVISED PER ECO-13-005565	02APR13	KH	JO

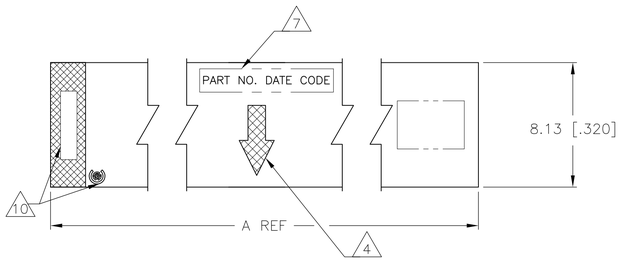

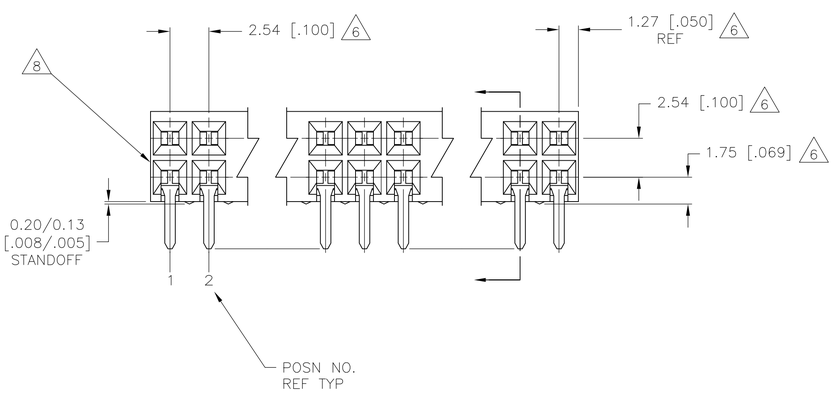

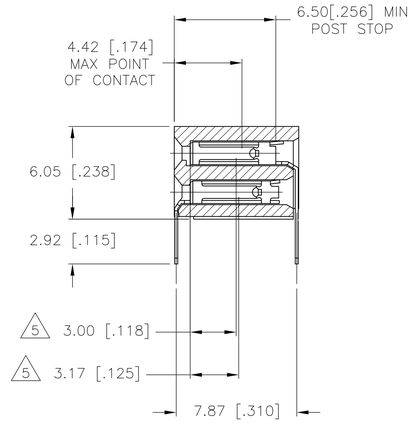

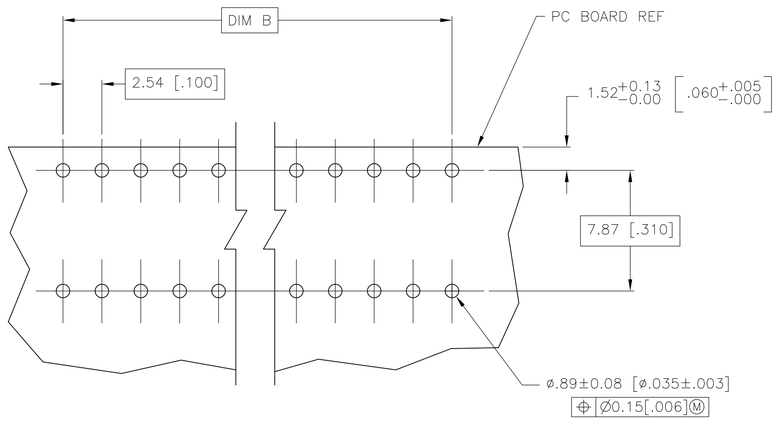

RECOMMENDED PC BOARD LAYOUT

1. HOUSING MATERIAL: GLASS FILLED POLYESTER, COLOR- BLACK
2. CONTACT MATERIAL: PHOSPHOR BRONZE
3. CONTACT FINISH: 0.00076[.000030] THK DUPLEX PLATED GOLD ON CONTACT AREA, 0.00127[.000050] MIN THK BRIGHT TIN-LEAD ON SOLDERLEADS, ALL OVER 0.00127[.000050] NICKEL
4. MOLDED IN ARROW DESIGNATES THE MATING FACE OF THE CONNECTOR
5. POINT OF MEASUREMENT FOR PLATING THICKNESS OF CONTACT AREA
6. DIMENSIONS PERTAIN TO HOUSING CAVITY CENTERLINES
7. PART NUMBER AND DATE CODE MARKED IN APPROXIMATE LOCATION SHOWN,EITHER END.
8. ALTERNATE LOCATION FOR DATE CODE FOR 4 AND 6 POSITION.
10. TE LOGO AND CSA LOGO ARE MOLDED INTO HOUSING, THIS LOCATION.

	B	A	NO. OF POSN	ASSEMBLY PART NUMBER
	10.16[.400]	12.70[.500]	10	6-535512-4
	7.62[.300]	10.16[.400]	8	6-535512-3
	5.08[.200]	7.62[.300]	6	8 6-535512-2
	2.54[.100]	5.08[.200]	4	8 6-535512-1
	162.56[6.400]	165.10[6.500]	130	6-535512-0
	160.02[6.300]	162.56[6.400]	128	5-535512-9
	157.48[6.200]	160.02[6.300]	126	5-535512-8
	152.40[6.000]	154.94[6.100]	122	5-535512-7
	149.86[5.900]	152.40[6.000]	120	5-535512-6
	147.32[5.800]	149.86[5.900]	118	5-535512-5
	144.78[5.700]	147.32[5.800]	116	5-535512-4
	142.24[5.600]	144.78[5.700]	114	5-535512-3
	139.70[5.500]	142.24[5.600]	112	5-535512-2
	137.16[5.400]	139.70[5.500]	110	5-535512-1
	134.62[5.300]	137.16[5.400]	108	5-535512-0
	132.08[5.200]	134.62[5.300]	106	4-535512-9
	129.54[5.100]	132.08[5.200]	104	4-535512-8
	127.00[5.000]	129.54[5.100]	102	4-535512-7
	124.46[4.900]	127.00[5.000]	100	4-535512-6
SUPERCEDED BY 4-5535512-5	121.92[4.800]	124.46[4.900]	98	4-535512-5
	119.38[4.700]	121.92[4.800]	96	4-535512-4
	116.84[4.600]	119.38[4.700]	94	4-535512-3
	114.30[4.500]	116.84[4.600]	92	4-535512-2
	111.76[4.400]	114.30[4.500]	90	4-535512-1
	109.22[4.300]	111.76[4.400]	88	4-535512-0
SUPERCEDED BY 3-5535512-9	106.68[4.200]	109.22[4.300]	86	3-535512-9
	104.14[4.100]	106.68[4.200]	84	3-535512-8
	101.16[4.000]	104.14[4.100]	82	3-535512-7
	91.44[3.600]	93.98[3.700]	74	3-535512-6
	88.90[3.500]	91.44[3.600]	72	3-535512-5
	83.82[3.300]	86.36[3.400]	68	3-535512-4
	81.28[3.200]	83.82[3.300]	66	3-535512-3
	78.74[3.100]	81.28[3.200]	64	3-535512-2
	76.20[3.000]	78.74[3.100]	62	3-535512-1
	73.66[2.900]	76.20[3.000]	60	3-535512-0
	71.12[2.800]	73.66[2.900]	58	2-535512-9
	63.50[2.500]	66.04[2.600]	52	2-535512-8
	55.88[2.200]	58.42[2.300]	46	2-535512-7
	50.8[2.000]	53.34[2.100]	42	2-535512-6
	48.26[1.900]	50.8[2.000]	40	2-535512-5
	45.72[1.800]	48.26[1.900]	38	2-535512-4
	38.10[1.500]	40.64[1.600]	32	2-535512-3
	35.56[1.400]	38.10[1.500]	30	2-535512-2
	33.02[1.300]	35.56[1.400]	28	2-535512-1
	30.48[1.200]	33.02[1.300]	26	2-535512-0
	25.40[1.000]	27.94[1.100]	22	1-535512-9
	17.78[.700]	20.32[.800]	16	1-535512-8
	15.24[.600]	17.78[.700]	14	1-535512-7
	20.32[.800]	22.86[.900]	18	1-535512-6
	58.42[2.300]	60.96[2.400]	48	1-535512-5
	154.94[6.100]	157.48[6.200]	124	1-535512-4
	99.06[3.900]	101.16[4.000]	80	1-535512-3
	96.52[3.800]	99.06[3.900]	78	1-535512-2
	93.98[3.700]	96.52[3.800]	76	1-535512-1
	86.36[3.400]	88.90[3.500]	70	1-535512-0
	68.58[2.700]	71.12[2.800]	56	535512-9
	66.04[2.600]	68.58[2.700]	54	535512-8
	60.96[2.400]	63.50[2.500]	50	535512-7
	53.34[2.100]	55.88[2.200]	44	535512-6
	43.18[1.700]	45.72[1.800]	36	535512-5
	40.64[1.600]	43.18[1.700]	34	535512-4
	27.94[1.100]	30.48[1.200]	24	535512-3
	22.86[.900]	25.40[1.000]	20	535512-2
	12.70[.500]	15.24[.600]	12	535512-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± 0.13[.005]
4 PLC ± -
ANGLES ± -

MATERIAL 1 2
FINISH 3

DWN R BROWN 17MAY02
CHK J OLSON 17MAY02
APVD J OLSON 17MAY02

TE Connectivity

NAME AMPMODU MOD II RECEPTACLE ASSEMBLY, HORIZONTAL, .100 CL, 2 ROW, CLOSED-ENTRY, SHORT POINT OF CONTACT, END-TO-END STACKABLE

PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-535512	-

CUSTOMER DRAWING

SCALE 5:1 SHEET 1 OF 1 REV Y6

4805 (3/11)