2.0mm DUAL ROW SOCKET S.M.D. BOTTOM ENTRY TYPE

(2.25mm PLASTIC HEIGHT)

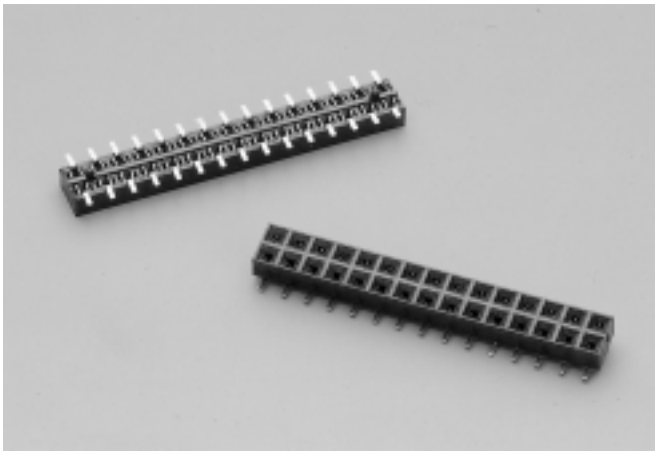

200189FA Series

Mates With SUYIN 200109,200112,200114,200121,2008□□ ,200194 Series

Specifications:

- **8-60Circuits**
- **Insulator material** : Black High Temp . Plastic
- **Operating Temp.Range** : -40˚C to +105˚C
- **Terminal Material** : Phosphor Bronze
- **Plating** : Full Gold Plated
- **Max. Current Rating** : 1.5A
- **Voltage Rating** : 150V AC
- **Dielectric Strength** : 500V(Min. 60 seconds)

2.0 mm

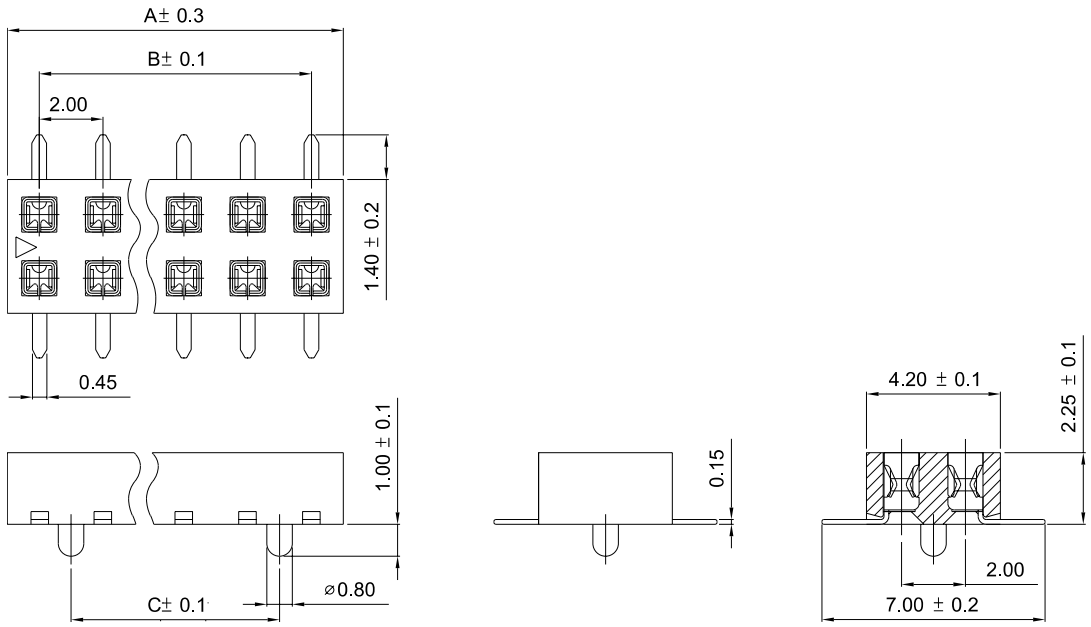

Order Information

200189FA□□□□□00ZU
1 2 3 4 5

1. 'A' : Straight SMT Type
2. No. of Pins
3. Plating
4. Color 'Z' : Black
5. Package
   'U' : Tube Package Without CAP

Reference Page 11

Dimensional Information

SUYIN P/NO.	DIM.A	DIM.B	DIM.C
200189FA008□□00ZU	8.0	6.0	4.0
200189FA010□□00ZU	10.0	8.0	6.0
200189FA012□□00ZU	12.0	10.0	8.0
200189FA014□□00ZU	14.0	12.0	10.0
200189FA016□□00ZU	16.0	14.0	12.0
200189FA018□□00ZU	18.0	16.0	14.0
200189FA020□□00ZU	20.0	18.0	16.0

SUYIN P/NO.	DIM.A	DIM.B	DIM.C
200189FA022□□00ZU	22.0	20.0	18.0
200189FA024□□00ZU	24.0	22.0	20.0
200189FA030□□00ZU	30.0	28.0	26.0
200189FA040□□00ZU	40.0	38.0	36.0
200189FA044□□00ZU	44.0	42.0	40.0
200189FA050□□00ZU	50.0	48.0	46.0
200189FA060□□00ZU	60.0	58.0	56.0

Recommended P.C.B Layout

