
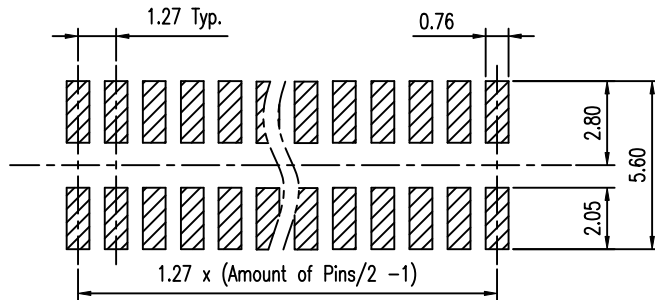

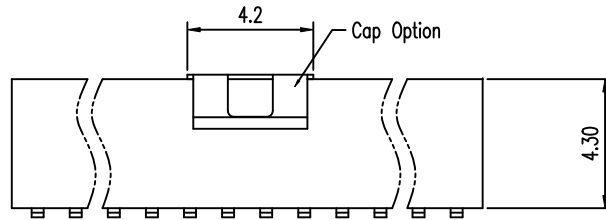
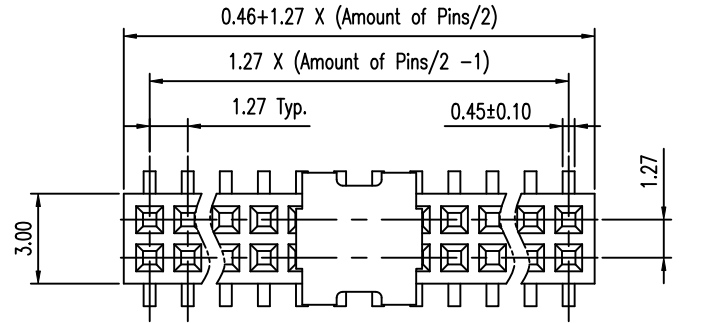





Recommended P.C.B. Layout
Layout Tolerance = ± 0.05 mm

NOTE:

- MATERIAL,
HOUSING: HIGH TEMP PLASTIC, UL94-V0
TERMINAL: COPPER ALLOY, T=0.15MM
CAP: STAINLESS STEEL, T=0.1MM
- FINISH:
TERMINAL: GOLD AT CONTACT,
G/F OVER 1.27um (50u")MIN Ni OVER ALL
- SPEC.:
PRODUCT SPEC: GS-12-629
PACKING SPEC: GS-14-1420
- THE HSG. WILL WITHSTAND EXPOSURE TO 260C
PEAK TEMP. FOR 10 SEC. IN A CONVECTION, INFRA-RED
OR VAPOR PHASE REFLOW OVEN.
- PRODUCT NUMBERING:
20021321 - 0 0 0 XX X X LF
 - LEAD FREE
 - PLATING:
1: GOLD FLASH ALL OVER
4: 0.25um(10U")GOLD AT CONTACT
8: 0.76um(30U")GOLD AT CONTACT
 - PACKING
D: TUBE+ CAP
T: TUBE
C: REEL+CAP(6,8,10,12,16,20P)
 - PIN COUNT
6,8,10,12, ,,,, 98, A0
(EVERY EVEN PIN)
 - SELECTED LOADED OPTION
0: FULLY LOADED
1: SEE TABLE 1

mat'l. code				tolerances unless otherwise specified		CUSTOMER COPY	 www.fciconnect.com	
ltr	ecn no	dr	date					
A	T09-1117	S.LIN	09/15/09	linear	.X $\pm$ 0.38	 MM	title 1.27X1.27MM BTB, RECEPTACLE SMT	
B	T10-0019	S.LIN	01/20/10		.XX $\pm$ 0.25			
C	T10-0061	S.LIN	10'-5-07	angles	.XXX $\pm$ 0.10 0° $\pm$ 2°			
				dr	STERLING LIN 09/15/09	 NA	product family 585	
				engr	STERLING LIN 09/15/09		code	
				chr	GARY HSIEH 09/15/09		size dwg no	
				appd	JOSEPH HSIA 09/15/09		A4	
sheet index	revision sheet	C 1	C 2				20021321	
							1 of 2	
							cage code	
							STATUS: Released	
							Printed: May 11, 2010	

P/N: 20021321-00108D4LF

DASH No. \ DIM	Amount of Pins	PIN REMOVED	PIN FILLED
-001 08 D4 LF	8	—	4

[illegible]