

2010

10 Watt - 28 Volts, Class C
Microwave 2000 MHz

GENERAL DESCRIPTION


The 2010 is a COMMON BASE transistor capable of providing 10 Watts Class C, RF output power at 2000 MHz. Gold metalization and diffused ballasting are used to provide high reliability and supreme ruggedness. The transistor uses a fully hermetic High Temperature Solder Sealed package.

ABSOLUTE MAXIMUM RATINGS

Maximum Power Dissipation @ 25°C	30 Watts
Maximum Voltage and Current	
BVces Collector to Emitter Voltage	50 Volts
BVebo Emitter to Base Voltage	3.5 Volts
Ic Collector Current	2.0 A
Maximum Temperatures	
Storage Temperature	- 65 to + 200°C
Operating Junction Temperature	+ 200°C

CASE OUTLINE

55BT-1, Style

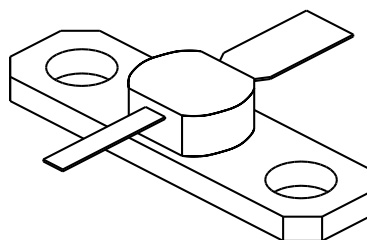

ELECTRICAL CHARACTERISTICS @ 25 °C

SYMBOL	CHARACTERISTICS	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Pout	Power Out	F = 2 GHz	10			Watt
Pin	Power Input	Vcb = 28 Volts			2	Watt
Pg	Power Gain	Po = 10 Watts	7.0	8.0		dB
η_c	Collector Efficiency	As Above		40		%
VSWR ₁	Load Mismatch Tolerance	F = 2 GHz, Po = 10 W			20:1	


BVces	Collector to Emitter Breakdown	Ic = 20 mA	50			Volts
BVcbo	Collector to Base Breakdown	Ic = 4 mA	45			Volts
BVebo	Emitter to Base Breakdown	Ie = 4 mA	3.5			Volts
Icbo	Collector to Base Current	Vcb = 28 Volts			4.0	mA
h _{FE}	Current Gain	Vce = 5 V, Ic = 400 mA	20			
Cob	Output Capacitance	F = 1 MHz, Vcb = 28 V			6.0	pF
θ_{jc}	Thermal Resistance					°C/W

Issue August 1996


GHz TECHNOLOGY INC. RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE. GHz RECOMMENDS THAT BEFORE THE PRODUCT(S) DESCRIBED HEREIN ARE WRITTEN INTO SPECIFICATIONS, OR USED IN CRITICAL APPLICATIONS, THAT THE PERFORMANCE CHARACTERISTICS BE VERIFIED BY CONTACTING THE FACTORY.

GHz Technology Inc. 3000 Oakmead Village Drive, Santa Clara, CA 95051-0808 Tel. 408 / 986-8031 Fax 408 / 986-8120


POWER GAIN VS FREQUENCY

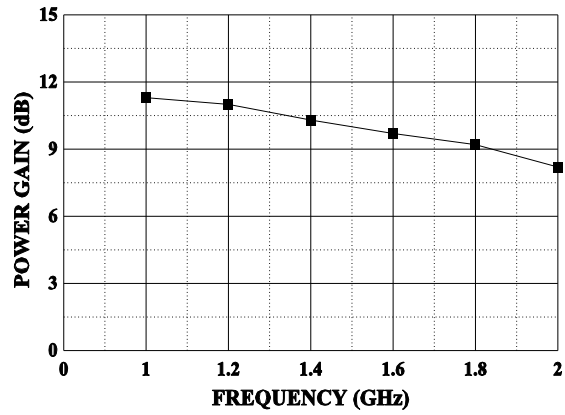


POWER OUTPUT VS FREQUENCY

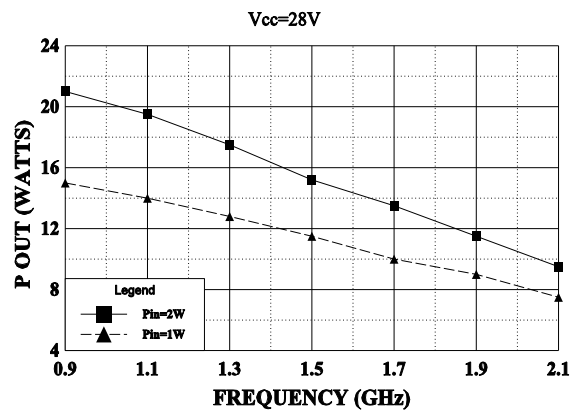


SERIES INPUT IMPEDANCE VS FREQUENCY

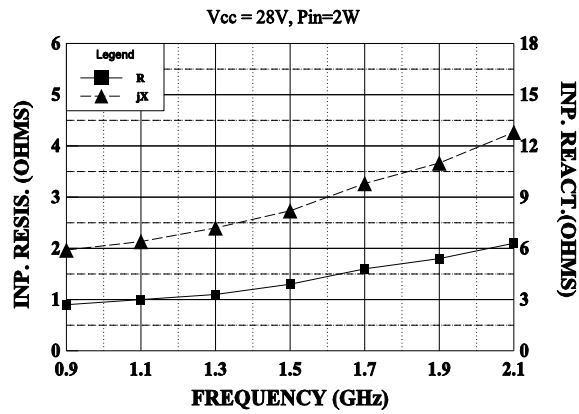

SERIES LOAD IMPEDANCE VS FREQUENCY

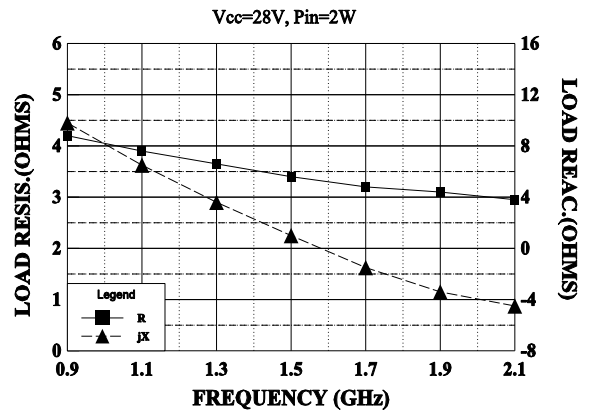

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED



SHEET