
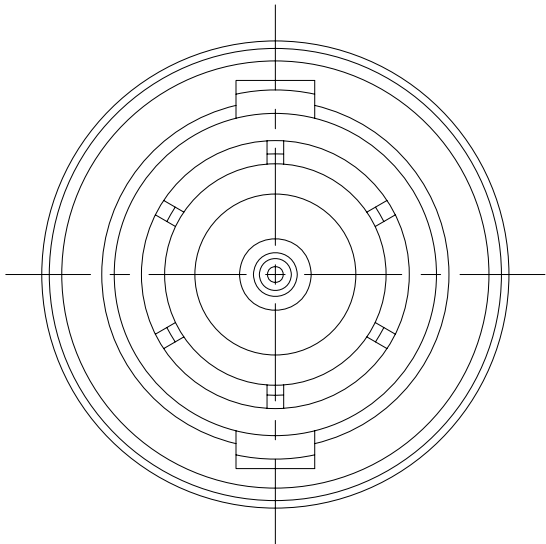


SD

2065-11-9

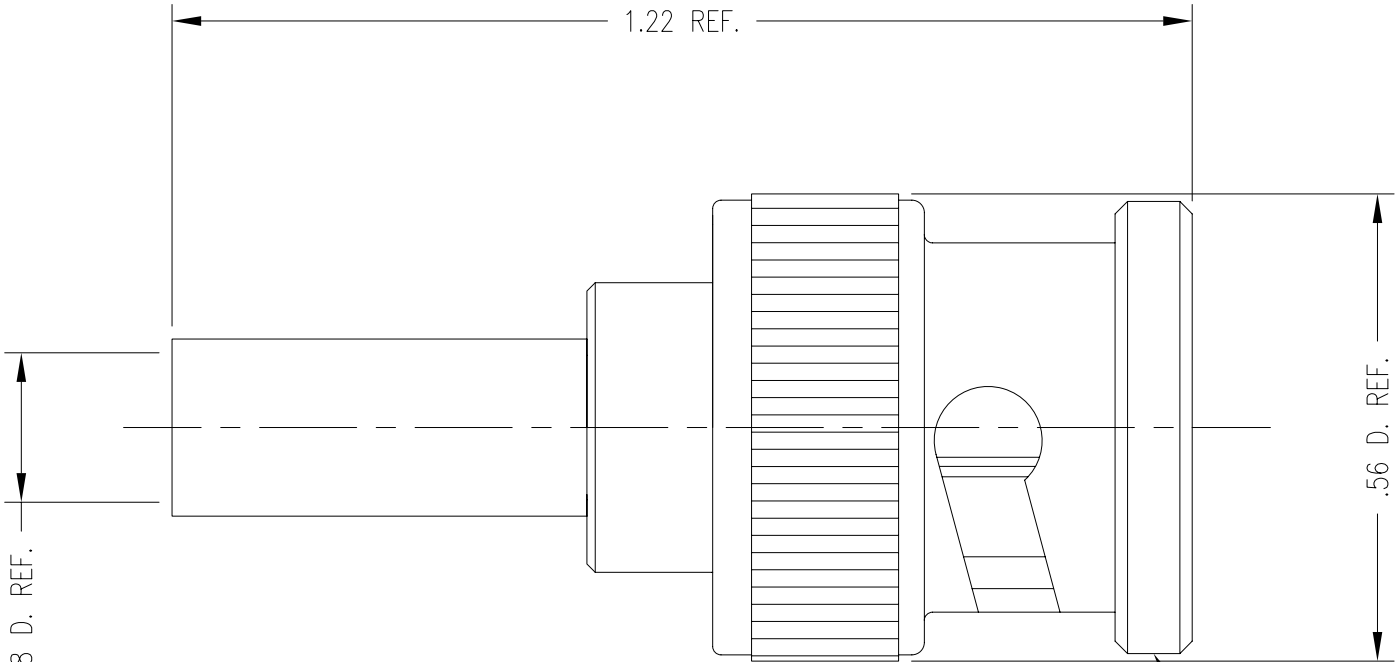

MARK: KINGS 2065-11-9
YRWK (DATE CODE)

NOTES:

1. FOR USE WITH COMMScope 77538 & BELDEN 1855A & 1865A CABLES.
2. FOR CRIMPING USE DIE KTH-2025.
3. FOR CABLING INSTRUCTIONS SEE 3-661-1.
4. CENTER CONTACT, 1-6690-7MA9, AND K-GRIP SLEEVE 1-3983-1M06 SUPPLIED USASSEMBLED.
5. INTERFACE PER MIL-STD-348, FIG. 301-1 (AS APPLICABLE).
6. MATERIAL:
INSULATOR- TEFLON, ASTM-D-4894
GASKET- SILICONE RUBBER, ZZ-R-765
SPRING WASHER } BERYLLIUM COPPER, ASTM-B-196
OUTER CONTACT }
ALL OTHER METAL PARTS- BRASS, ASTM-B16
7. FINISHES:
CENTER CONTACT- GOLD PLATED, PER MIL-G-45204
SPRING WASHER- SILVER PLATED, PER QQ-S-365
ALL OTHER METAL PARTS- NICKEL PLATE PER QQ-N-290
8. MARK PACKAGE: KINGS 2065-11-9
9. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE- 75 OHMS
WORKING VOLTAGE- 500 VRMS
FREQUENCY RANGE- DC TO 6 GHz
RETURN LOSS: UP TO 1.5GHz, <-30dB
UP TO 3.0GHz, <-22dB
UP TO 6.0GHz, <-18dB
10. COMPLIANT TO SMPTE 424M (3G-SDI) SPECIFICATION

REVISIONS		
ISSUE	CHANGES	
0	ER 37747 DCT 12/18/98	
1	CN 37837 C TML 05/21/99	
2	CN 37933 D TML 11/09/99	
3	CN 37965 E DCT 02/29/00	
4	CN 38011 D HVN 05/23/00	
5	CN 38046 E DCT 7/10/00	
6	CN 38144 C BDH 12/12/00	
7	CN 38495 E TML 02/01/02	
J	ER 14184 PSM 03/09/09	
SCALE 4:1		
APPROX SURFACE AREA		
WAS: E-19661		
USED ON		
REF:		
PL, 75 BNC		
DRAWN	VLS	DATE 06/12/98
DESIGN	VLS	DATE 06/12/98
APPR.	VLS	DATE 06/12/98
 by WINCHESTER ELECTRONICS		Winchester Electronics 62 Barnes Industrial Road North Wallingford, CT 06492
		B SIZE
2065-11-9		

SD