


SD

2065-19-7

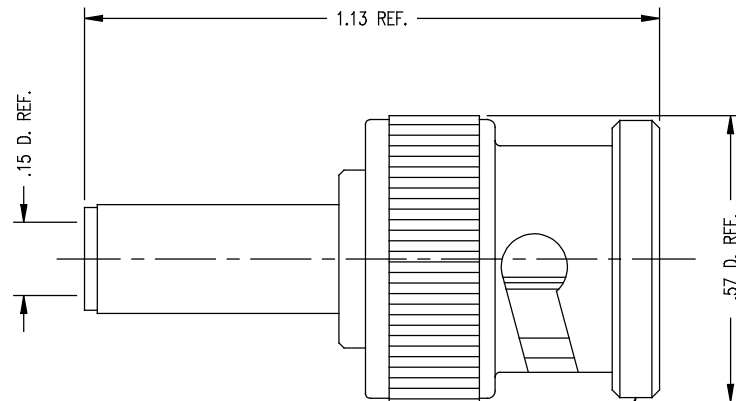

STAMP: KINGS 2065-19-7
YRWK (DATE CODE)

NOTES:

1. FOR USE WITH TYPE 735 CABLE.
2. FOR CABLING INSTRUCTIONS SEE 3-690 (BULK PACKAGING) OR 3-688 (BAG PACKAGING).
3. FOR CRIMPING USE DIE SIZE KTH-2185.
4. CENTER CONTACT AND SLEEVE TO BE SUPPLIED UNASSEMBLED.
5. INTERFACE PER MIL-STD-348, FIG. 301-1 (AS APPLICABLE).
6. MARK PACKAGE: KINGS 2065-19-7
YRWK (DATE CODE)
7. MATERIAL:
INSULATOR- TEFLON
GASKET- SILICONE RUBBER
K-GRIP SLEEVE: COM'L BRONZE
OUTER CONTACT } BERYLLIUM COPPER
SPRING WASHER }
ALL OTHER METAL PARTS- BRASS
8. FINISHES:
CENTER CONTACT- GOLD PLATED
SPRING WASHER- SILVER PLATED
ALL OTHER METAL PARTS- NICKEL PLATE
9. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE- 75 OHMS
FREQUENCY RANGE- DC TO 2 GHz
WORKING VOLTAGE- 500 VRMS

REVISIONS

ISSUE	CHANGES
0	ER 38147 TML 12/12/00

2065197S

SCALE	4:1
APPROX SURFACE AREA	
WAS: E-19877	
USED ON	
REF: EQR 221	
75 OHM BNC PLUG	
DRAWN TML	DATE 12/08/00
DESIGN TML	DATE 12/08/00
APPR.	DATE

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

2065-19-7

SD