

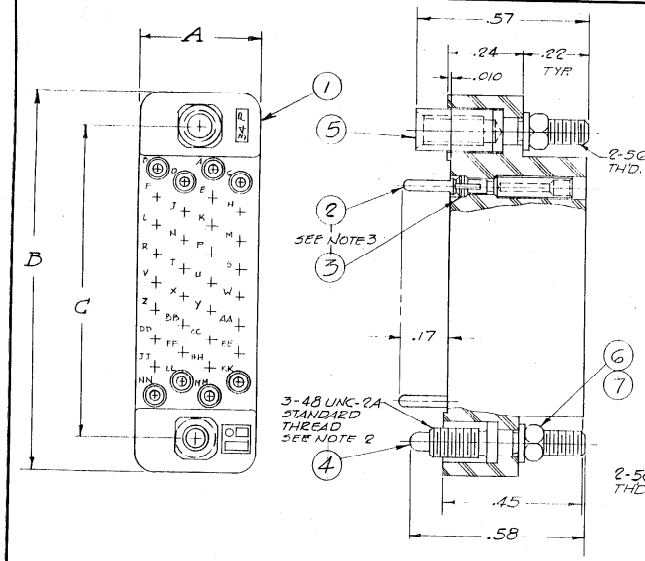


SREC 34 P J SHOWN



SREC ** PJ-859
JACKSOCKET



SREC ** PJ-859
JACKSCREW

CATALOG No.	A	B	C
SREC 7 PJ	.21	.78	.562
© SREC 11 PJ	.28	.78	.531
SREC 14 PJ	.28	.88	.625
© SREC 18 PJ	.39	.88	.656
SREC 20 PJ	.28	1.06	.814
SREC 26 PJ	.28	1.25	1.000
SREC 34 PJ	.39	1.25	1.032
SREC 44 PJ	.39	1.48	1.267
SREC 50 PJ	.39	1.63	1.408


© SEE NOTE 4

(1) MOLDING, MALE - DIALLYL PHTHALATE, MIL-M-14, 3DG-F
(2) PIN CONTACT - LEADED COMM'L BRONZE, GOLD OVER COPPER
(3) CLIP - BERYLLIUM COPPER, QQ-C-533, GOLD OVER COPPER
(4) JACKSCREW - STAINLESS STEEL, QQ-S-763, PASSIVATING DIP
(5) JACKSOCKET - STAINLESS STEEL, QQ-S-763, PASSIVATING DIP
(6) LOCKWASHER - PHOSPHOR BRONZE, QQ-B-750, CAD. PLATE PLUS NAT. IRIDITE
(7) NUT - BRASS, QQ-B-626, CAD. PLATE PLUS NAT. IRIDITE

NOTE:-
1. ** INDICATES NO. OF CONTACTS
2. WHEN 2-56 UNC-2 THREADS ARE REQUIRED, SPECIFY CATALOG NO. AND SUFFIX DASH NO. - 859
© 3. CONTACTS WITH CUPS ASSEMBLED ARE NOT INCLUDED WITH CONNECTOR & MUST BE ORDERED SEPARATELY
4. -859 NOT AVAILABLE ON SIZE 44

FACES OF THE "SREC" MOLDINGS ©

MALE CONTACT NO. 4 THRU 50
(FACE OF SIZE 18 NOT SHOWN)

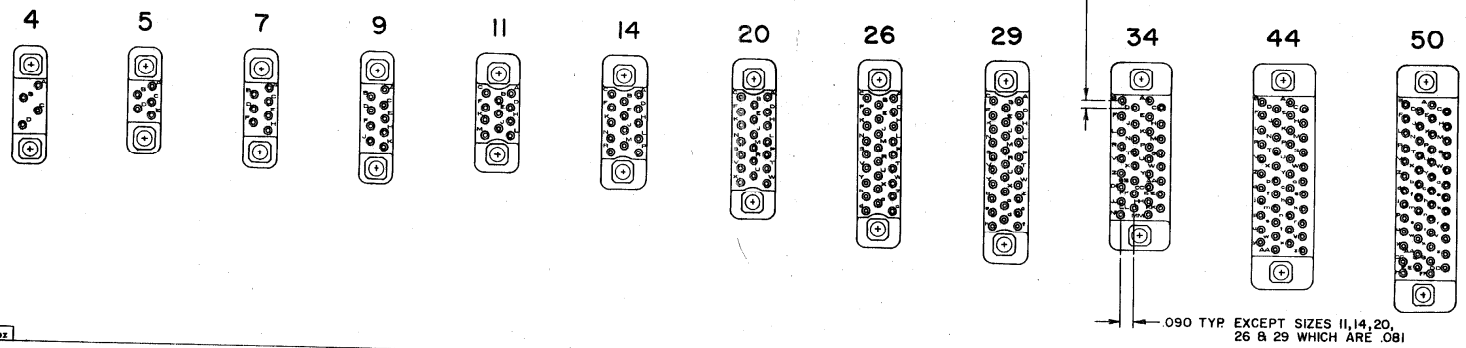

20906 D

REV	CHANGE	DATE	APP'D
B	REDRAWN & REVISED PER EN-11463	10-7-68	S.K.
C	ADDED NOTE 4 PER EN-11834	2/11/70	J.L.G.
D	REVISED Note 3 EN-12641	2/11/70	J.L.G.

WT. oz

TOLERANCE UNLESS OTHERWISE SPECIFIED: .XX ±.02 .XXX ±.007 ANGULAR ± 1°

TITLE: COMPOSITE OUTLINE ASS'Y. SREC ** PJ SREC ** PJ-859
FINISH
SCALE 4:1 | DR. T. DALEY DATE 10-21-65 | CK'D. ZIEM DATE 2-2-66 | AP'D. Calvin DATE 2-2-66
WINCHESTER ELECTRONICS, OAKVILLE, CONN.
DWG SIZE C 20906 REV D

B+E

ENIII142

June 2006 - This drawing became the property of Winchester Electronics Corporation, Wallingford, CT.