

The Effect of PCB Design on the Thermal Performance of SIMPLE SWITCHER® Power Modules

Summary

The SIMPLE SWITCHER® Power Modules use a TO-PMOD package similar to a TO-263. This application note focuses on the low current modules which come in a 7 Lead, 10.16 x 4.57 x 9.81 mm package. This package has excellent thermal performance enabled by an exposed pad, which can be soldered to the PCB. The key thermal characteristics are:

- $\theta_{JC} = 1.9^{\circ}\text{C/W}$
- $\theta_{JC} = 21.6^{\circ}\text{C/W}$ (On a 4-layer thermal board)

What Determines θ_{JA}

In order to understand how a PCB's thermal performance determines the thermal resistance (θ_{JA}) of a Power Module mounted on the PCB, a brief analysis for θ_{JA} is given as follows. There are two heat dissipation paths, i.e., Junction-PCB-Ambient and Junction-PKG surface-Ambient. Because the two paths are in parallel, θ_{JA} can be expressed as

$$\theta_{JA} = (\theta_{JCA} \times \theta_{JTA}) / (\theta_{JCA} + \theta_{JTA})$$

θ_{JCA} is the thermal resistance from junction to ambient through the PCB and θ_{JTA} is the thermal resistance through the package surface to ambient (mainly package top). For the situation where no heat sink is applied on the package top, 95% or more of the power dissipates through the PCB, meaning that θ_{JA} is dominated by θ_{JCA} (also meaning that θ_{JTA} is much bigger than θ_{JCA}). As a result, θ_{JA} can be simply expressed as

$$\theta_{JA} = \theta_{JCA} - R_{JTA} = \theta_{JC} + \theta_{CA} - R_{JTA}$$

θ_{CA} is the thermal resistance from package bottom case to ambient through the PCB. It is mainly dependent on the thermal conductivity of the PCB and the thermal connection between the package and the PCB. R_{JTA} gives a small reduction of θ_{JA} caused by the power dissipation through the package top.

So, it is seen from the equation above that on any given board, the small θ_{JC} and large exposed thermal pad should make the

National Semiconductor
Application Note 2026
Lianxi Shen
February 8, 2010



Power Module better in thermal performance than other package types. For example, LGA packages have a θ_{JC} of about 5C/W or larger for the similar package size, depending on the copper and thermal vias in its substrate.

Parametric Study


In order to optimize the PCB design to get the best thermal performance out of the SIMPLE SWITCHER® Power Module and to understand the effect of environmental conditions, this application note analyzes how some factors affect the thermal performance of a PCB or the θ_{JA} of a package mounted on it. These factors include:

1. Size of direct thermal attachment pad
2. Copper layers (2 or 4 layers)
3. PCB size
4. Air flow
5. Heat sink

Figure 1 shows these factors schematically.

For the parametric study, the above factors were varied as follows:

1. The sizes of copper area on top and bottom layers include:
Copper Area = DAP size (8.5x5.4mm)
Copper Area = Package body size (10x10mm)
Copper Area = 2 X package body size (20x20mm)
Copper Area = Full copper layer (4 solid copper layers)
2. 2 layer and 4 layer boards
3. The PCB size varies from 4"x3" (102x76mm) to 1.5"x1.5" (38x38mm)
4. The air flow includes Natural Convection, 200LFPM, and 400LFPM
5. The heat sink may be on the package top or on the PCB bottom side

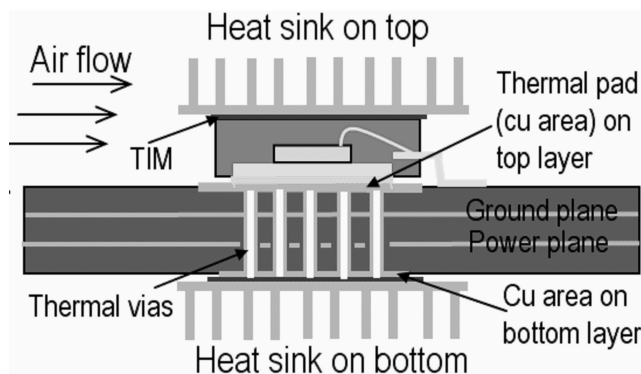

30112901

FIGURE 1. Thermal Management of the SIMPLE SWITCHER® Power Module on a 4-Layer PCB

Thermal Measurement and Simulation

The thermal performance of the module on a 4-layer evaluation board is measured. This is used to validate our thermal model for the parametric study. The 4-layer evaluation board is 3"x1.75" with a thickness of 1.6mm and 4 solid copper layers.

Note: θ_{JC} is the junction-to-case thermal resistance, which characterizes the thermal performance of package itself, and can be used to rate different packages.

Note: θ_{JA} is the junction-to-ambient thermal resistance, which is used to evaluate the thermal performance of a package in an application environment.

ers of 1oz thickness. Thermal simulations are carried out using CFD software Flotherm, where ambient temperature is 25°C and power dissipation is 1.82W. The thermal model is validated by comparing measured and simulated data. Finally, a parametric study for the previously mentioned five factors is done using the validated simulation model. The results are plotted in Figures 2-6.


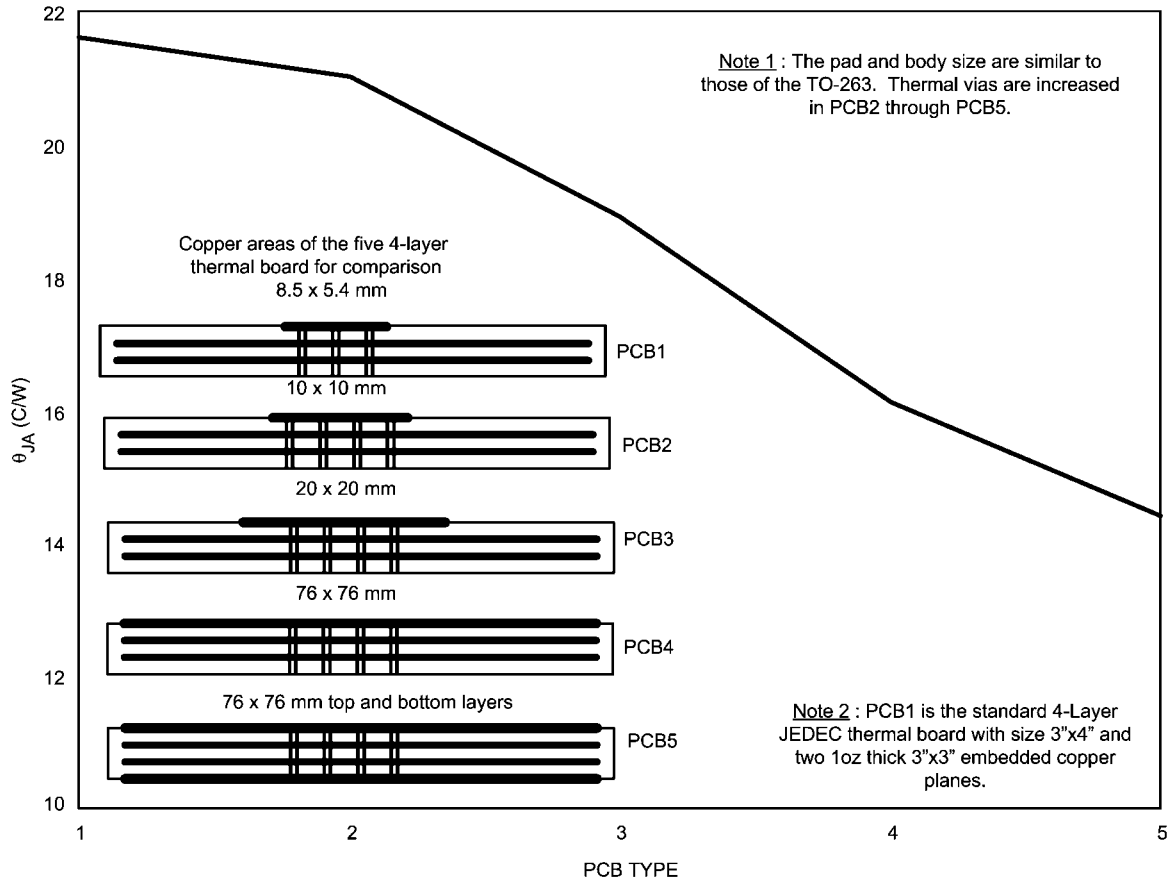



FIGURE 2. Effect of Cu Area on Top and Bottom Layers of 4-Layer PCB

30112902

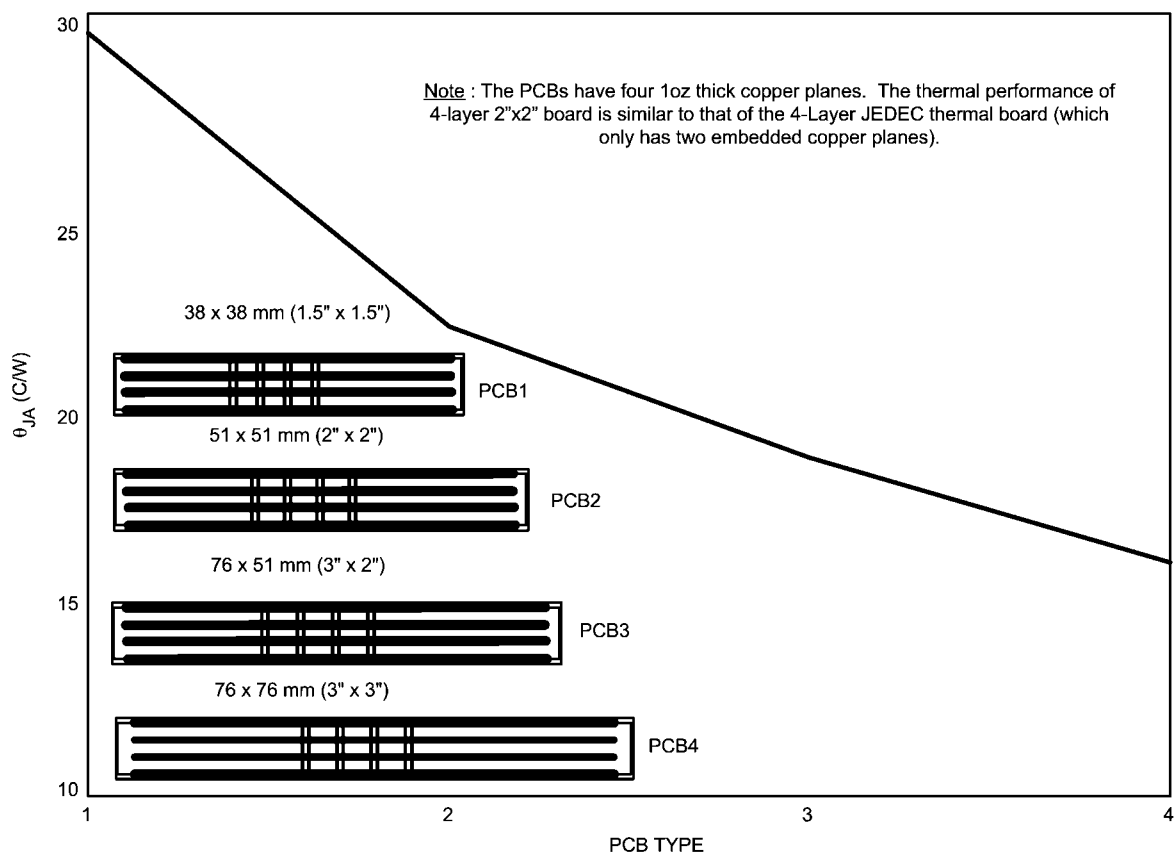

30112903

FIGURE 3. Effect of PCB Size of 4-Layer PCB

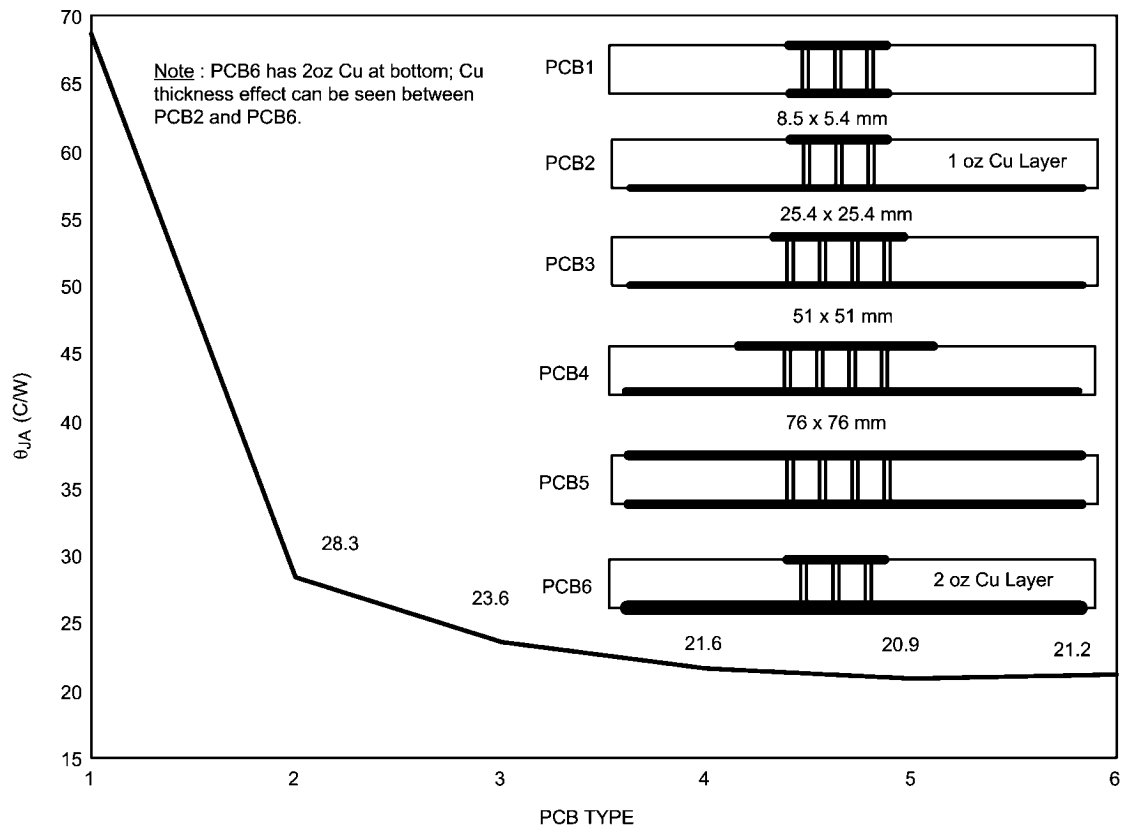

30112904

FIGURE 4. Effect of Cu Area on Top and Bottom Layers of 2-Layer PCB

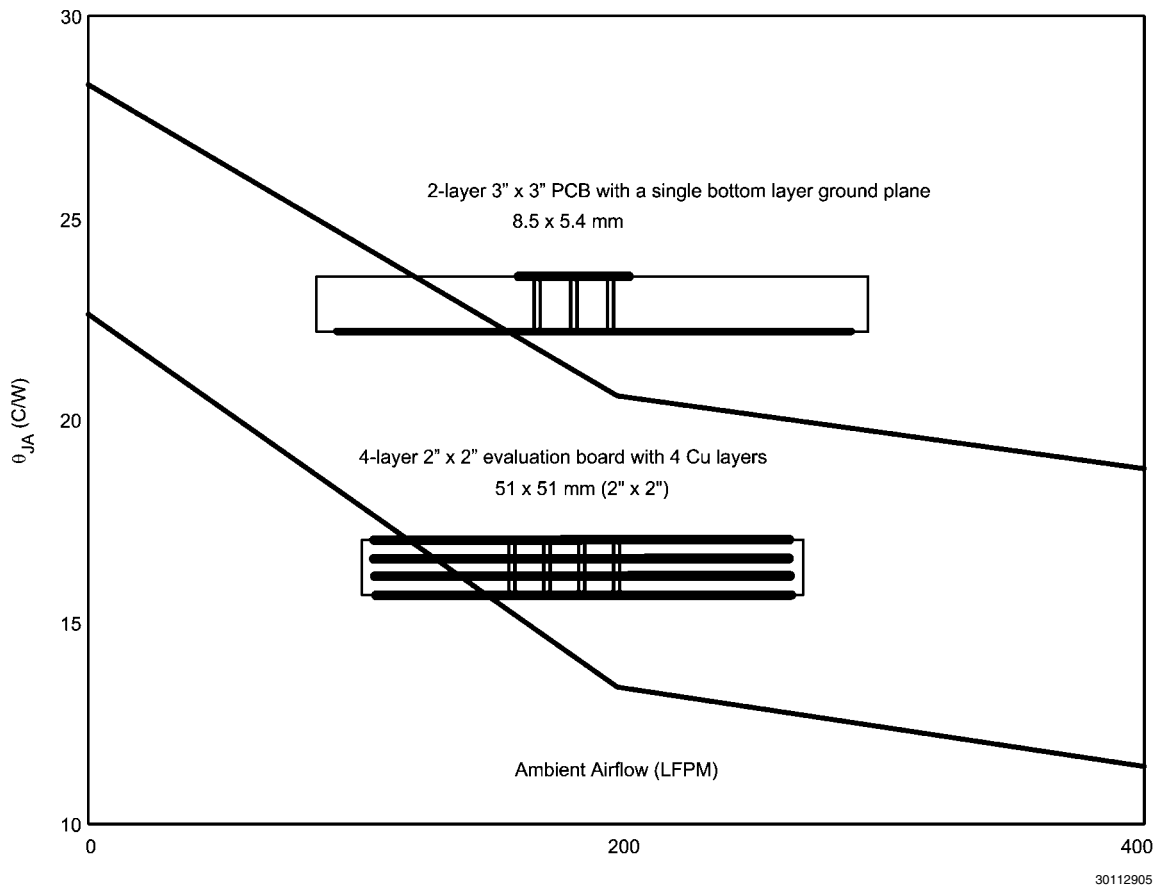


FIGURE 5. Effect of Airflow for Two PCBs

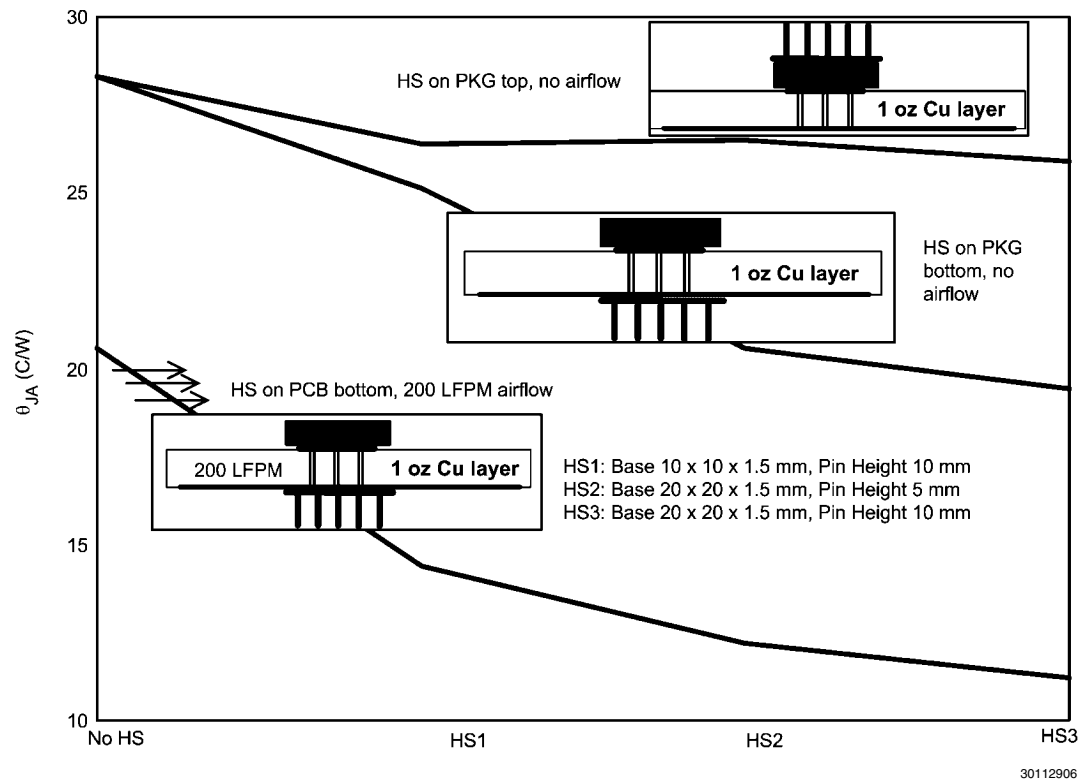


FIGURE 6. Effect of Heatsink

Conclusion

The TO-PMOD package has excellent thermal performance, as demonstrated by its low θ_{JA} and θ_{JC} . The thermal performance of any package strongly depends on its application environment. But how well a package can take advantage of a high thermal conductivity PCB is determined by the package itself, that is, its θ_{JC} and its exposed pad size. The TO-PMOD package module has been optimized on both sides, giving excellent thermal performance. For a specific application,

users of the SIMPLE SWITCHER® Power Module can refer to the results of the parametric study plotted in [Figure 2](#) - [Figure 6](#) to quickly estimate the real θ_{JA} and evaluate the maximum power dissipation that the device can handle. Note that the effect of other heating sources on the same PCB is not considered in this thermal analysis. So, a system level simulation may be needed when other complicated factors are involved. For this purpose, a Flotherm model is available upon request.

Notes

For more National Semiconductor product information and proven design tools, visit the following Web sites at:
www.national.com

Products		Design Support	
Amplifiers	www.national.com/amplifiers	WEBENCH® Tools	www.national.com/webench
Audio	www.national.com/audio	App Notes	www.national.com/appnotes
Clock and Timing	www.national.com/timing	Reference Designs	www.national.com/refdesigns
Data Converters	www.national.com/adc	Samples	www.national.com/samples
Interface	www.national.com/interface	Eval Boards	www.national.com/evalboards
LVDS	www.national.com/lvds	Packaging	www.national.com/packaging
Power Management	www.national.com/power	Green Compliance	www.national.com/quality/green
Switching Regulators	www.national.com/switchers	Distributors	www.national.com/contacts
LDOs	www.national.com/ldo	Quality and Reliability	www.national.com/quality
LED Lighting	www.national.com/led	Feedback/Support	www.national.com/feedback
Voltage References	www.national.com/vref	Design Made Easy	www.national.com/easy
PowerWise® Solutions	www.national.com/powerwise	Applications & Markets	www.national.com/solutions
Serial Digital Interface (SDI)	www.national.com/sdi	Mil/Aero	www.national.com/milaero
Temperature Sensors	www.national.com/tempsensors	SolarMagic™	www.national.com/solarmagic
PLL/VCO	www.national.com/wireless	PowerWise® Design University	www.national.com/training

THE CONTENTS OF THIS DOCUMENT ARE PROVIDED IN CONNECTION WITH NATIONAL SEMICONDUCTOR CORPORATION ("NATIONAL") PRODUCTS. NATIONAL MAKES NO REPRESENTATIONS OR WARRANTIES WITH RESPECT TO THE ACCURACY OR COMPLETENESS OF THE CONTENTS OF THIS PUBLICATION AND RESERVES THE RIGHT TO MAKE CHANGES TO SPECIFICATIONS AND PRODUCT DESCRIPTIONS AT ANY TIME WITHOUT NOTICE. NO LICENSE, WHETHER EXPRESS, IMPLIED, ARISING BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT.

TESTING AND OTHER QUALITY CONTROLS ARE USED TO THE EXTENT NATIONAL DEEMS NECESSARY TO SUPPORT NATIONAL'S PRODUCT WARRANTY. EXCEPT WHERE MANDATED BY GOVERNMENT REQUIREMENTS, TESTING OF ALL PARAMETERS OF EACH PRODUCT IS NOT NECESSARILY PERFORMED. NATIONAL ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR BUYER PRODUCT DESIGN. BUYERS ARE RESPONSIBLE FOR THEIR PRODUCTS AND APPLICATIONS USING NATIONAL COMPONENTS. PRIOR TO USING OR DISTRIBUTING ANY PRODUCTS THAT INCLUDE NATIONAL COMPONENTS, BUYERS SHOULD PROVIDE ADEQUATE DESIGN, TESTING AND OPERATING SAFEGUARDS.

EXCEPT AS PROVIDED IN NATIONAL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, NATIONAL ASSUMES NO LIABILITY WHATSOEVER, AND NATIONAL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY RELATING TO THE SALE AND/OR USE OF NATIONAL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE CHIEF EXECUTIVE OFFICER AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

Life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

National Semiconductor and the National Semiconductor logo are registered trademarks of National Semiconductor Corporation. All other brand or product names may be trademarks or registered trademarks of their respective holders.

Copyright© 2010 National Semiconductor Corporation

For the most current product information visit us at www.national.com



**National Semiconductor
Americas Technical
Support Center**
Email: support@nsc.com
Tel: 1-800-272-9959

**National Semiconductor Europe
Technical Support Center**
Email: europe.support@nsc.com

**National Semiconductor Asia
Pacific Technical Support Center**
Email: ap.support@nsc.com

**National Semiconductor Japan
Technical Support Center**
Email: jpn.feedback@nsc.com