



SAW Components

Data Sheet B3807

Data Sheet

An abstract graphic with a dark, textured background. The word "EPCOS" is rendered in large, glowing, 3D letters that appear to be floating or emerging from the background. Behind the letters, there is a faint, stylized globe showing the outlines of continents. The overall effect is one of high-tech and global connectivity.



SAW Components

B3807

Low-Loss Filter

326,4 MHz

Data Sheet


Features

- Low-loss IF filter for W-CDMA base station
- Usable bandwidth 15 MHz
- Ceramic SMD package

Terminals

- Gold plated


Ceramic package **QCC8C**

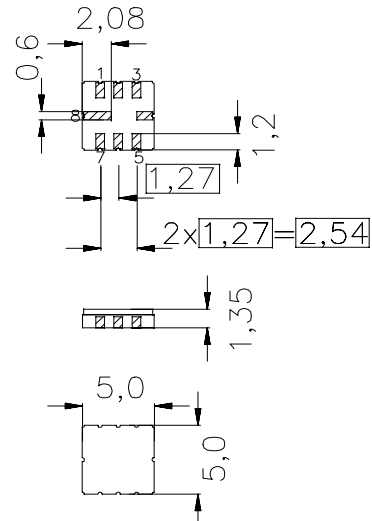

Dimensions in mm, approx. weight 0,10 g

Pin configuration

7	Input
6	Input Ground
3	Output
2	Output Ground
1, 4, 5, 8	Ground

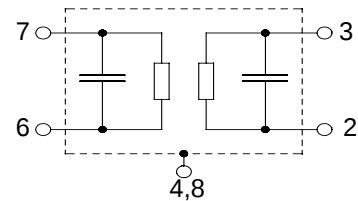

Type	Ordering code	Marking and Package according to	Packing according to
B3807	B39331-B3807-U310	C61157-A7-A56	F61074-V8070-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	-40/ +85	°C
Storage temperature range	T_{stg}	-40/ +85	°C
DC voltage	V_{DC}	0	V
Source power	P_s	15	dBm



SAW Components	B3807
Low-Loss Filter	326,4 MHz

Data Sheet

Characteristics


Operating temperature:	$T = -10 \dots +80 \text{ }^{\circ}\text{C}$
Terminating source impedance:	$Z_S = 50 \text{ }\Omega$ and matching network
Terminating load impedance:	$Z_S = 50 \text{ }\Omega$ and matching network

		min.	typ.	max.	
Nominal frequency	f_N	—	326,4	—	MHz
Minimum insertion attenuation	$\alpha_{\min}$	—	2,0	4,0	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
	$f_N - 2,5 \text{ MHz} \dots f_N + 2,5 \text{ MHz}$	—	0,3	0,5	dB
	$f_N - 7,5 \text{ MHz} \dots f_N + 7,5 \text{ MHz}$	—	1,0	3,0	dB
Pass bandwidth	$B_{1,0\text{dB}}$				
	$\alpha_{\text{rel}} \leq 1,0 \text{ dB}$	—	15	—	MHz
	$B_{10\text{dB}}$				
	$\alpha_{\text{rel}} \leq 10 \text{ dB}$	—	20	—	MHz
Relative attenuation (relative to $\alpha_{\min}$)	α_{rel}				
	10,0 MHz ... $f_N - 18,0 \text{ MHz}$	40	50	—	dB
	$f_N - 38,395 \text{ MHz} \dots f_N - 38,405 \text{ MHz}$	43	50	—	dB
	$f_N - 19,195 \text{ MHz} \dots f_N - 19,205 \text{ MHz}$	43	50	—	dB
	$f_N - 18,0 \text{ MHz} \dots f_N - 12,5 \text{ MHz}$	13	15	—	dB
	$f_N + 12,5 \text{ MHz} \dots f_N + 30,0 \text{ MHz}$	11	13	—	dB
	$f_N + 30,0 \text{ MHz} \dots f_N + 450,0 \text{ MHz}$	25	30	—	dB
Group delay ripple (p-p)	$\Delta\tau$				
	$f_N - 7,5 \text{ MHz} \dots f_N - 2,5 \text{ MHz}$	—	90	110	ns
	$f_N - 2,5 \text{ MHz} \dots f_N + 2,5 \text{ MHz}$	—	15	25	ns
	$f_N + 2,5 \text{ MHz} \dots f_N + 7,5 \text{ MHz}$	—	50	65	ns
Return Loss					
	$f_N - 2,5 \text{ MHz} \dots f_N + 2,5 \text{ MHz}$	10	11	—	dB
	$f_N - 7,0 \text{ MHz} \dots f_N + 7,0 \text{ MHz}$	8	10	—	dB
	$f_N - 7,5 \text{ MHz} \dots f_N + 7,5 \text{ MHz}$	5	8	—	dB
Impedance at f_N (without matching)¹					
Input: $Z_{\text{IN}} = R_{\text{IN}} \parallel C_{\text{IN}}$		—	72 $\parallel$ 0,4	—	$\Omega \parallel \text{pF}$
Output: $Z_{\text{OUT}} = R_{\text{OUT}} \parallel C_{\text{OUT}}$		—	73 $\parallel$ 0,2	—	$\Omega \parallel \text{pF}$
Temperature coefficient of frequency	TC_f	—	- 70	—	ppm/K

¹(port extensions directly at filter)



**SAW Components****B3807****Low-Loss Filter****326,4 MHz****Data Sheet****Matching network to 50 Ω**

(Element values depend upon PCB layout)

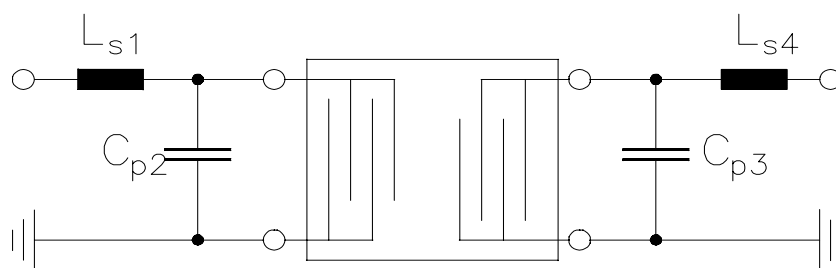

$$L_{s1} = 22 \text{ nH}$$
$$C_{p2} = 2,7 \text{ pF}$$

$$C_{p3} = 2,7 \text{ pF}$$
$$L_{s4} = 22 \text{ nH}$$

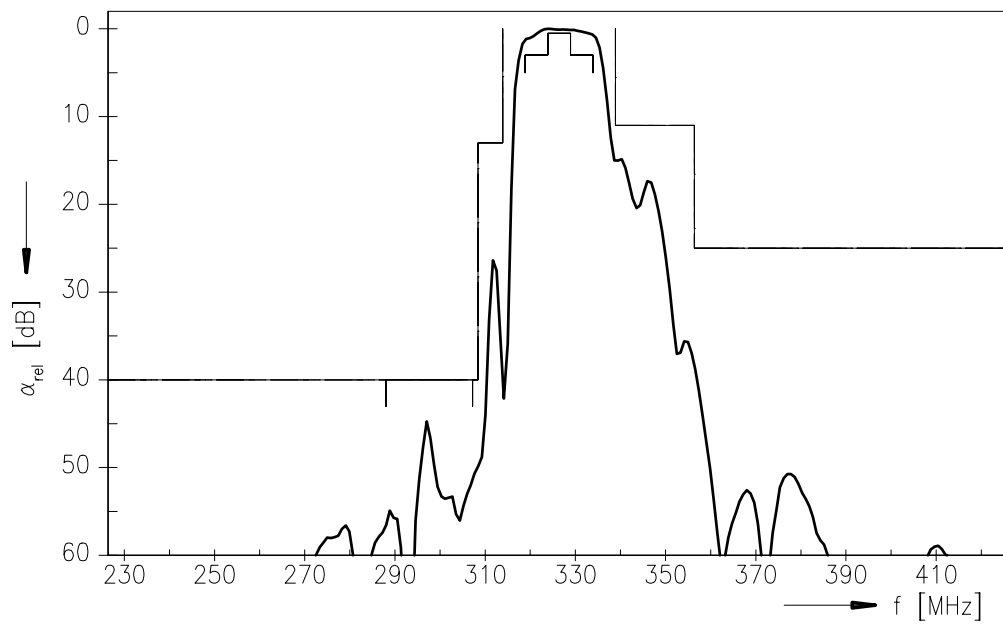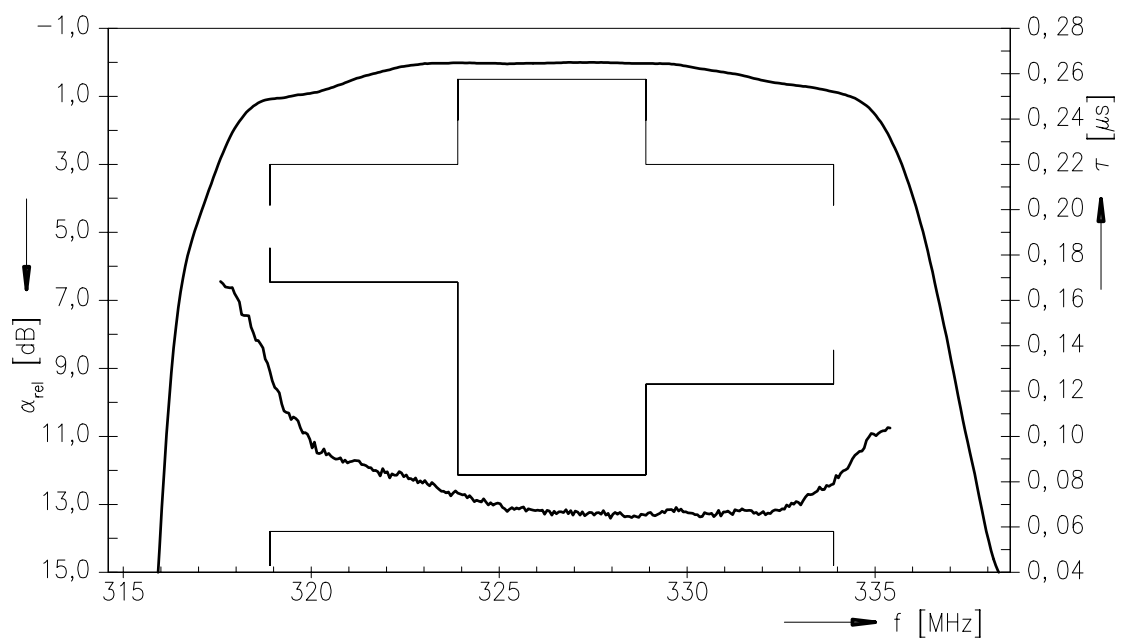**SAW Components****B3807****Low-Loss Filter****326,4 MHz****Data Sheet****Normalized frequency response****Normalized frequency response (pass band)**



SAW Components

B3807

Low-Loss Filter

326,4 MHz

Data Sheet

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC IS

P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.