

Silicon Schottky Diode


- Low barrier diode for detectors up to GHz frequencies
- Pb-free (RoHS compliant) package

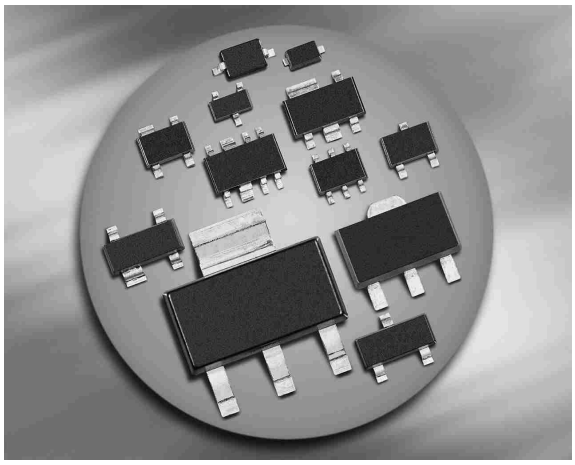


BAT62




BAT62-03W
BAT62-02V
BAT62-02W




BAT62-07W




BAT62-02L
BAT62-02LS



BAT62-07L4



BAT62-09S



ESD (**E**lectro**s**tatic **d**ischarge) sensitive device, observe handling precaution!

Type	Package	Configuration	L_S(nH)	Marking
BAT62-02W**	SCD80	single	0.6	62
BAT62	SOT143	anti-parallel pair	2	62s
BAT62-02L	TSLP-2-1	single, leadless	0.4	L
BAT62-02LS*	TSSLP-2-1	single, leadless	0.2	U
BAT62-02V	SC79	single	0.6	k
BAT62-03W	SOD323	single	1.8	white L
BAT62-07L4	TSLP-4-4	parallel pair, leadless	0.4	62
BAT62-07W	SOT343	parallel pair	1.8	62s
BAT62-09S	SOT363	parallel high, high isolation	1.6	69s

* Preliminary Data
** Not for new design

Maximum Ratings at T_A = 25 °C, unless otherwise specified

Parameter	Symbol	Value	Unit
Diode reverse voltage	V_R	40	V
Forward current	I_F	20	mA
Total power dissipation	P_{tot}		
BAT62, $T_S \leq$ 85 °C		100	
BAT62-02L, -07L4, -03W, $T_S \leq$ 108 °C		100	
BAT62-02W, -02V, $T_S \leq$ 109 °C		100	
BAT62-07W, $T_S \leq$ 103 °C		100	
BAT62-09S, $T_S \leq$ 105 °C		100	
Junction temperature	T_j	150	°C
Storage temperature	T_{stg}	-55 ... 150	

Thermal Resistance

Parameter	Symbol	Value	Unit
Junction - soldering point[1)]	R_{thJS}		
BAT62		≤ 650	
BAT62-02L, -07L4, -03W		≤ 420	
BAT62-02W, 02V		≤ 410	
BAT62-07W		≤ 470	
BAT62-09S		≤ tbd	

Electrical Characteristics at T_A = 25 °C, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Reverse current V_R = 40 V	I_R	-	-	10	µA
Forward voltage I_F = 2 mA	V_F	-	0.58	1	V
Forward voltage matching[2)] I_F = 2 mA	ΔV_F	-	-	20	mV

[1]For calculation of R_{thJA} please refer to Application Note AN077 (Thermal Resistance Calculation)


[2]ΔV_F is the difference between lowest and highest V_F in a multiple diode component.

Electrical Characteristics at T_A = 25 °C, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
AC Characteristics					
Diode capacitance V_R = 0 V, f = 1 MHz	C_T	-	0.35	0.6	pF
Differential resistance V_R = 0 V, f = 10 kHz	R_0	-	225	-	kΩ


Diode capacitance $C_T = f(V_R)$

f = 1MHz

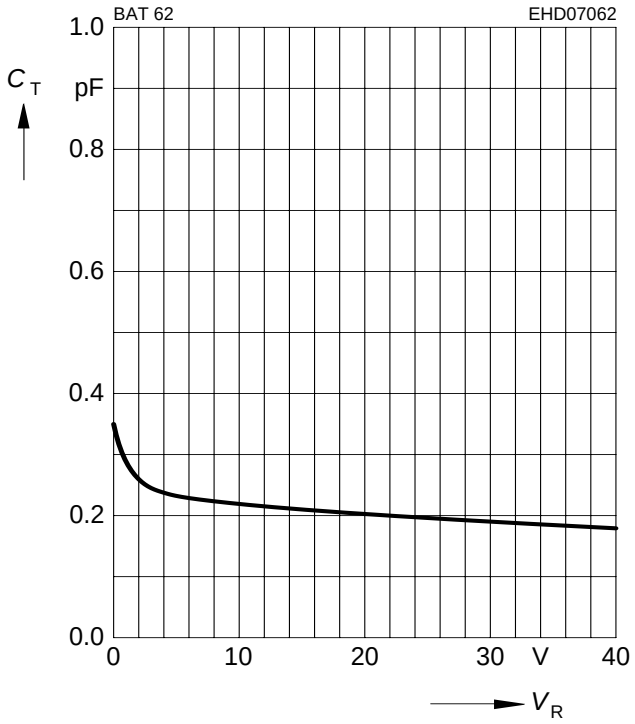


Reverse current $I_R = f(V_R)$

T_A = Parameter

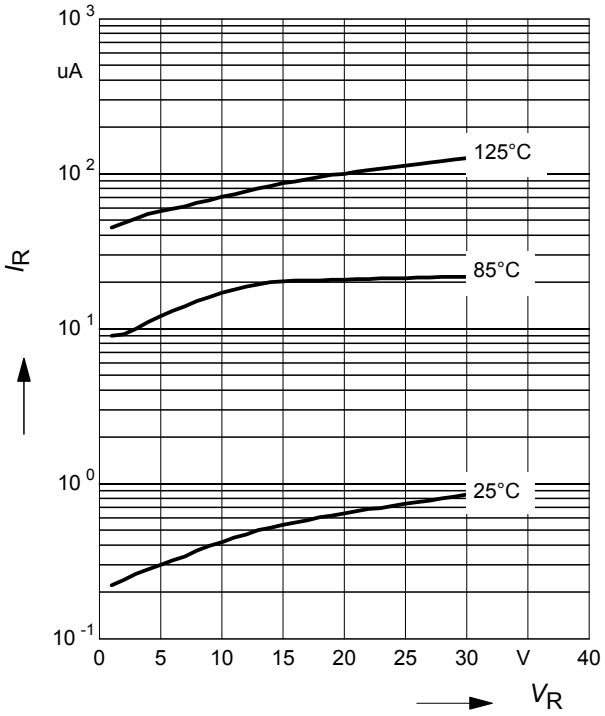


Forward current $I_F = f(V_F)$

T_A = Parameter

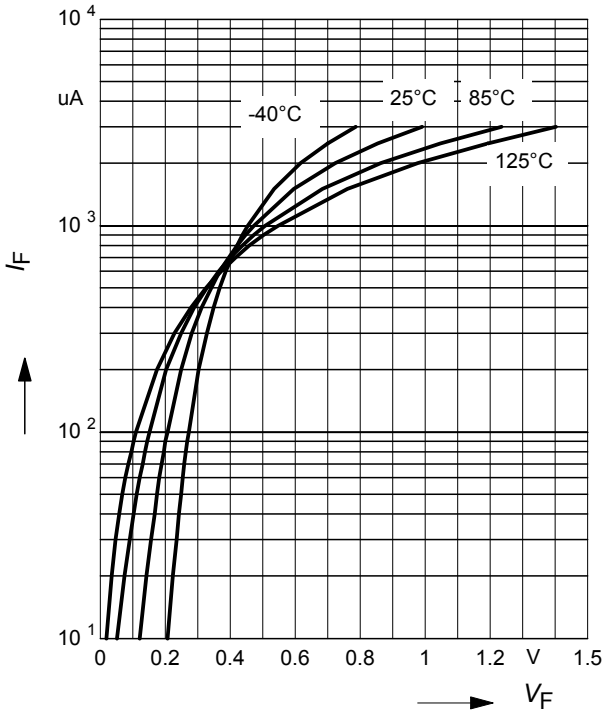


Forward current $I_F = f(T_S)$


BAT62

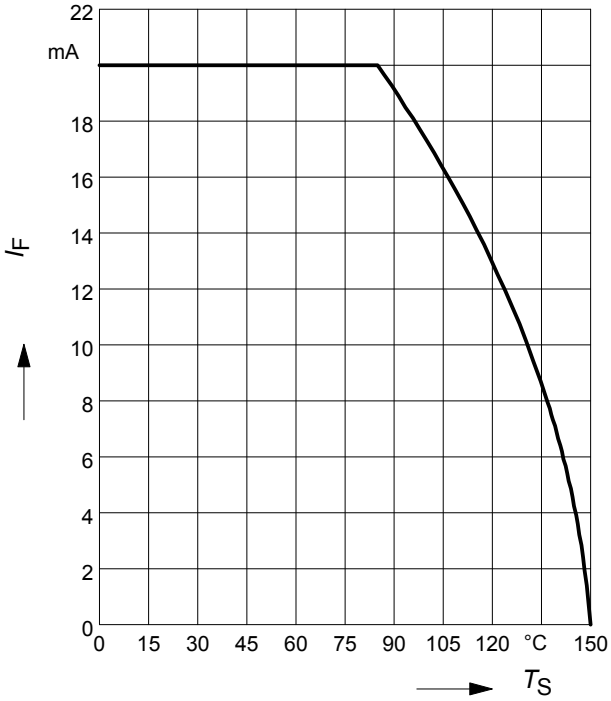


Forward current $I_F = f(T_S)$
BAT62-02L, -07L4

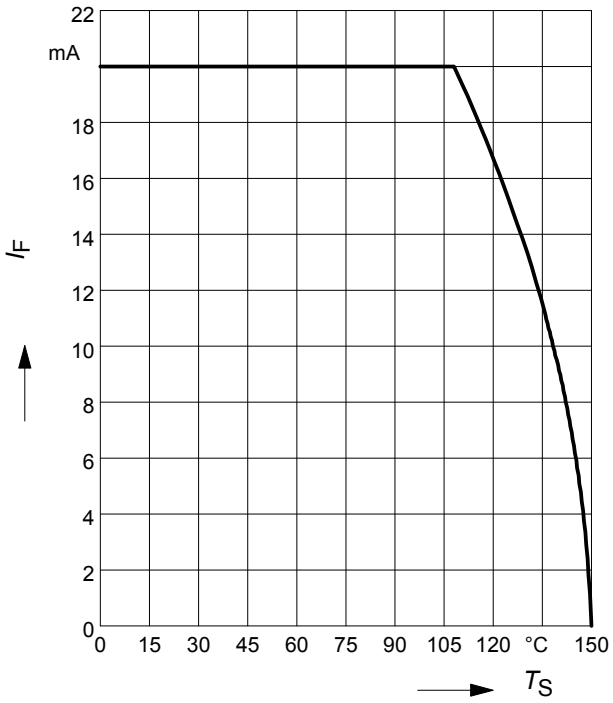


Forward current $I_F = f(T_S)$
BAT62-02W, -02V

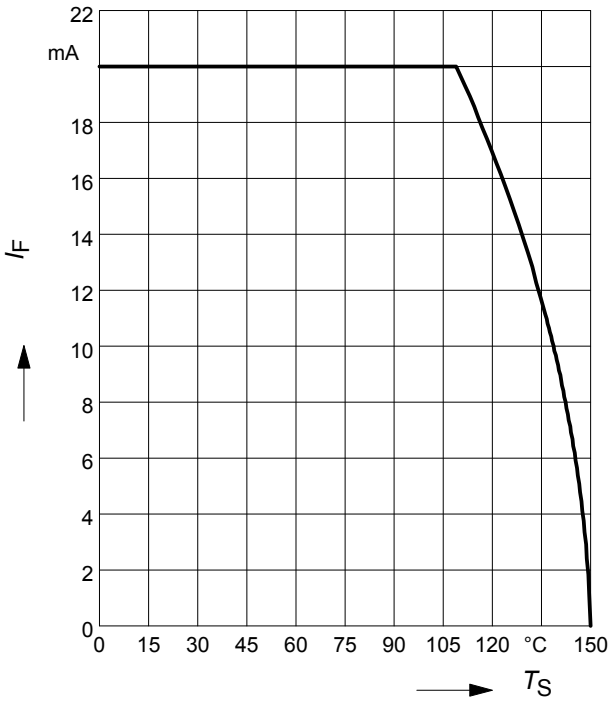

Forward current $I_F = f(T_S)$
BAT62-03W

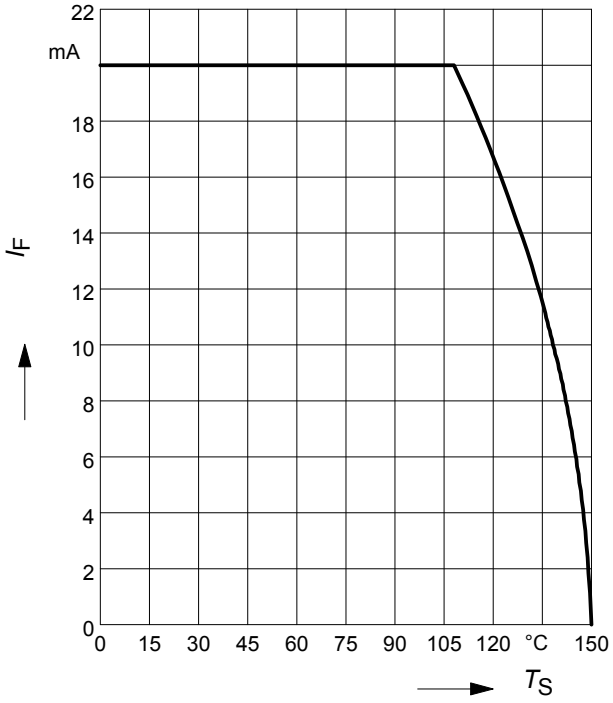


Forward current $I_F = f(T_S)$
BAT62-07W

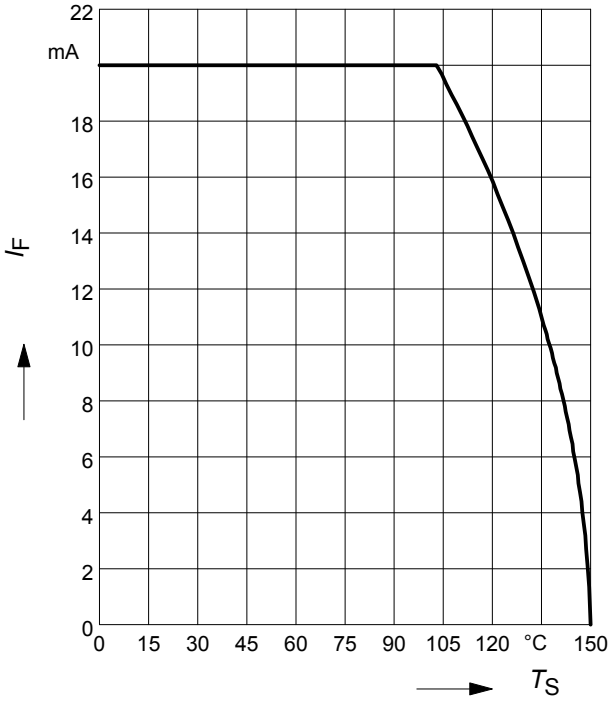

Permissible Puls Load $R_{thJS} = f(t_p)$


BAT62

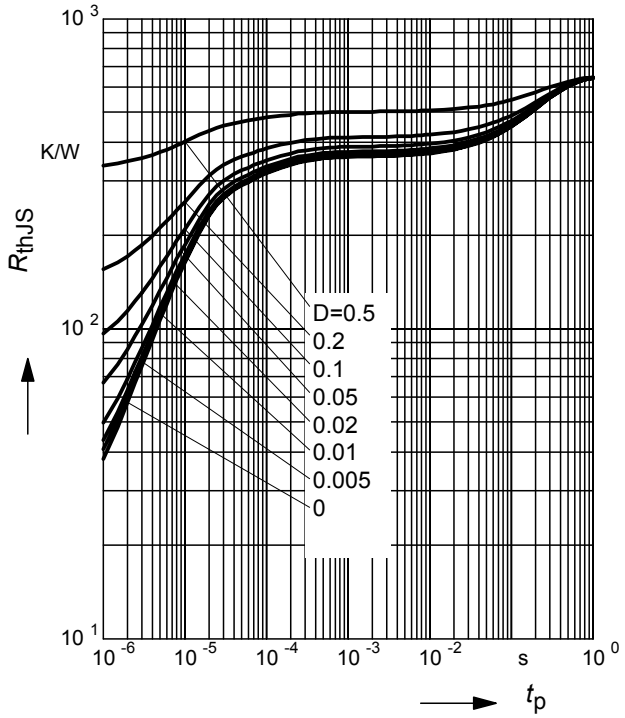

Permissible Pulse Load


$I_{Fmax}/ I_{FDC} = f(t_p)$

BAT62

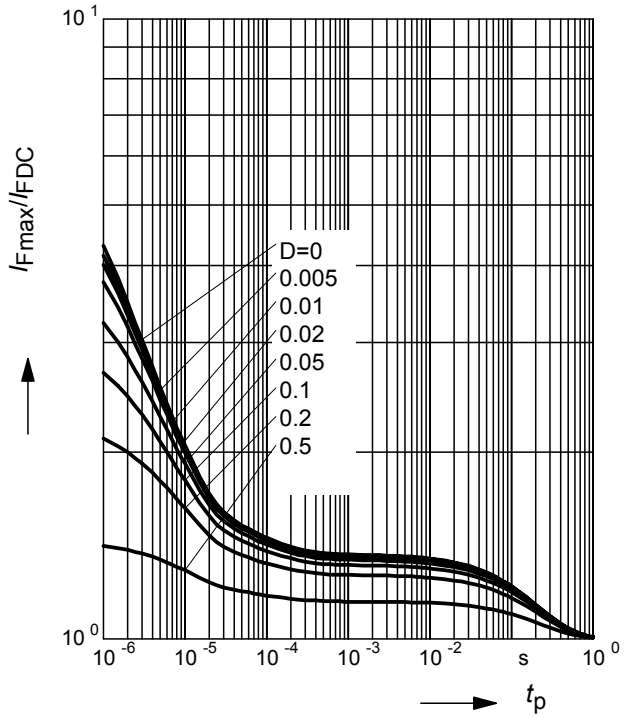

Permissible Puls Load $R_{thJS} = f(t_p)$


BAT62-02L, -07L4

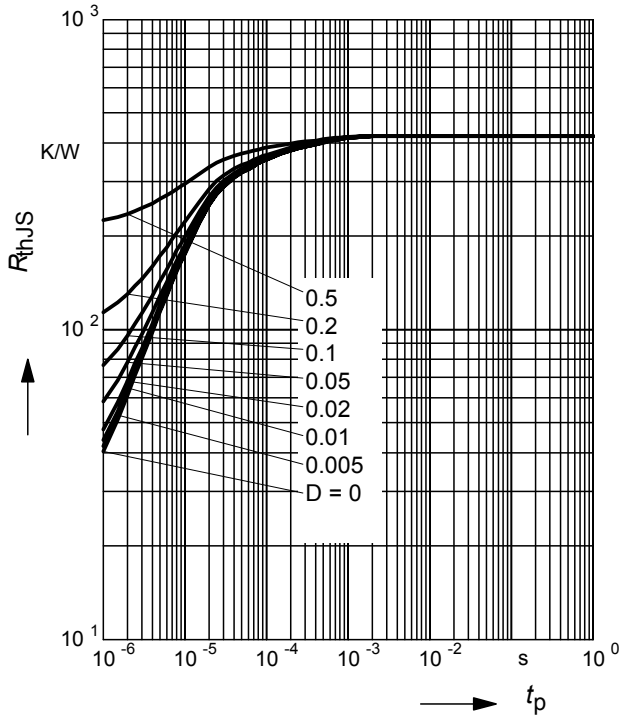

Permissible Pulse Load


$I_{Fmax}/ I_{FDC} = f(t_p)$

BAT62-02L, -07L4

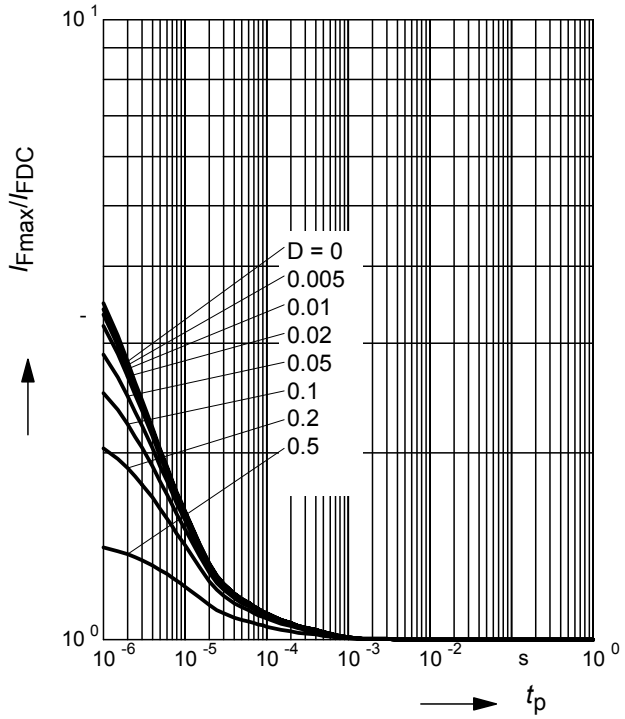

Permissible Puls Load $R_{thJS} = f(t_p)$


BAT62-02W, 02V

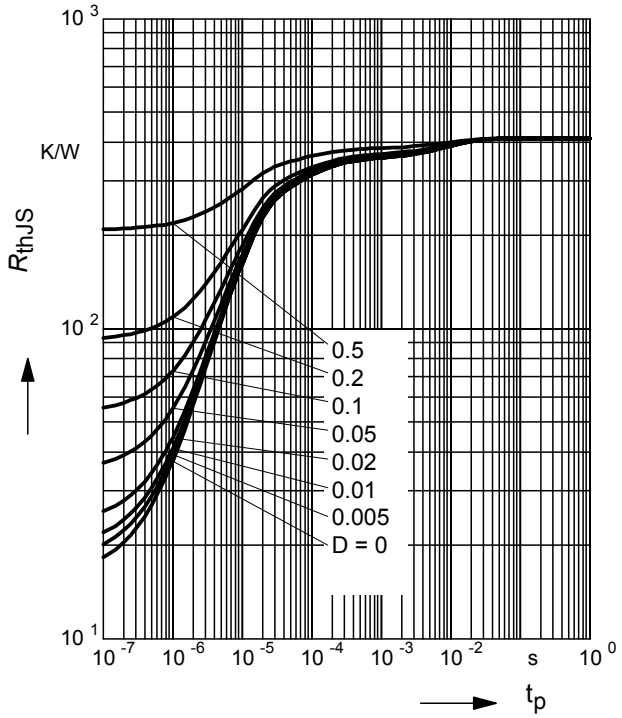

Permissible Pulse Load


$I_{Fmax}/I_{FDC} = f(t_p)$

BAT62-02W, -02V

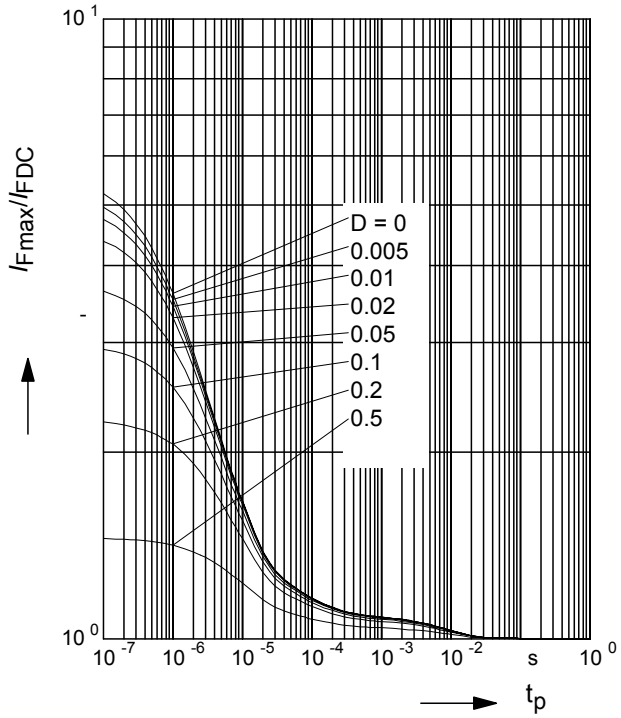

Permissible Puls Load $R_{thJS} = f(t_p)$


BAT62-03W

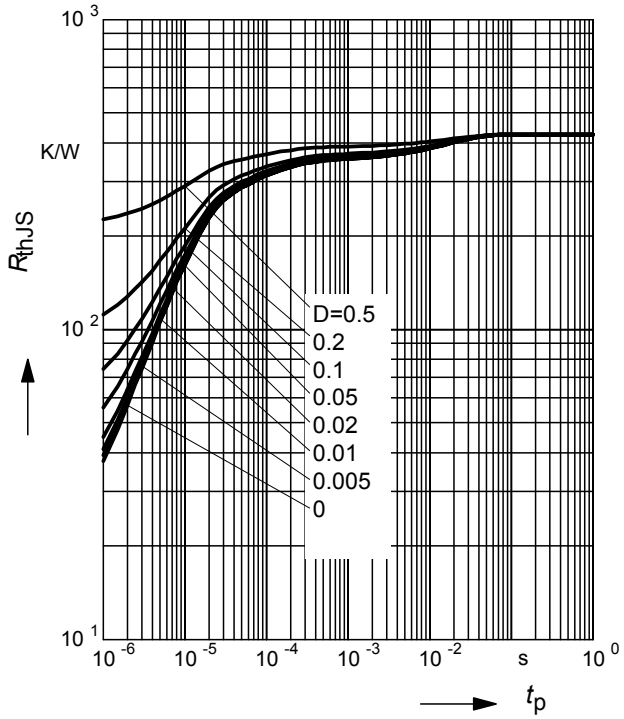

Permissible Pulse Load


$I_{Fmax}/I_{FDC} = f(t_p)$

BAT62-03W

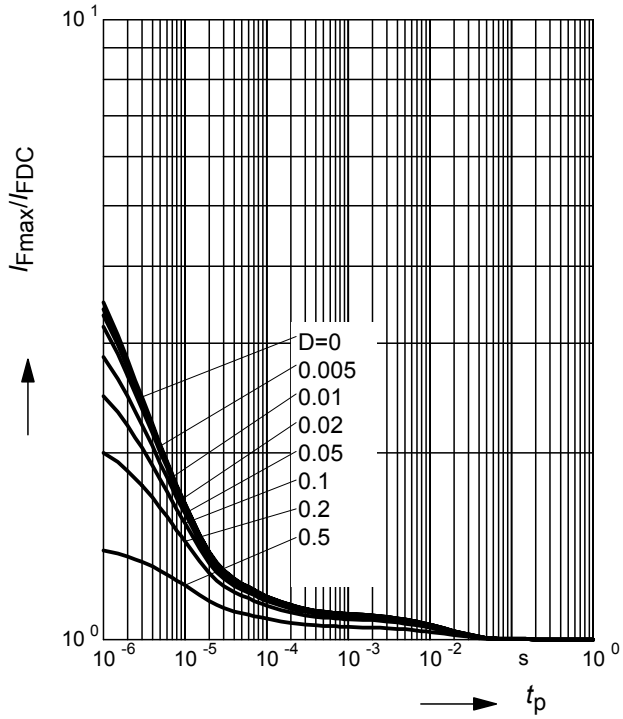

Permissible Puls Load $R_{thJS} = f(t_p)$


BAT62-07W

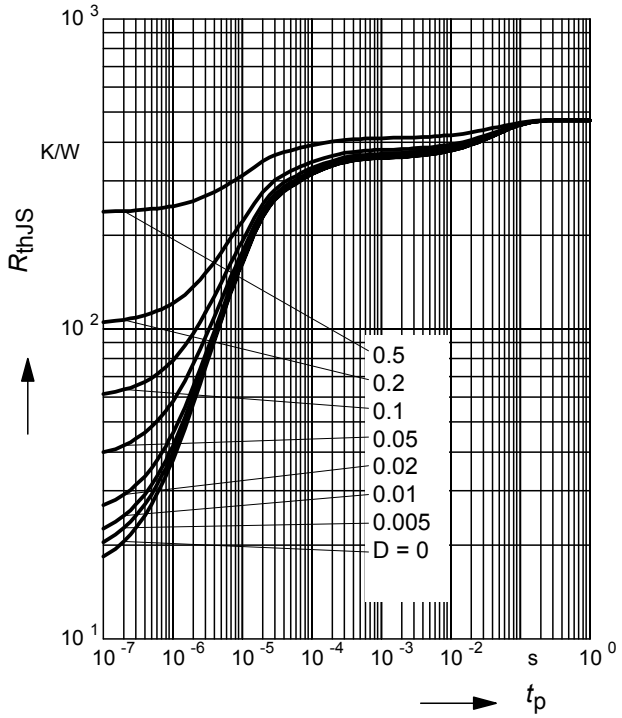

Permissible Pulse Load

$I_{Fmax}/ I_{FDC} = f(t_p)$


BAT62-07W

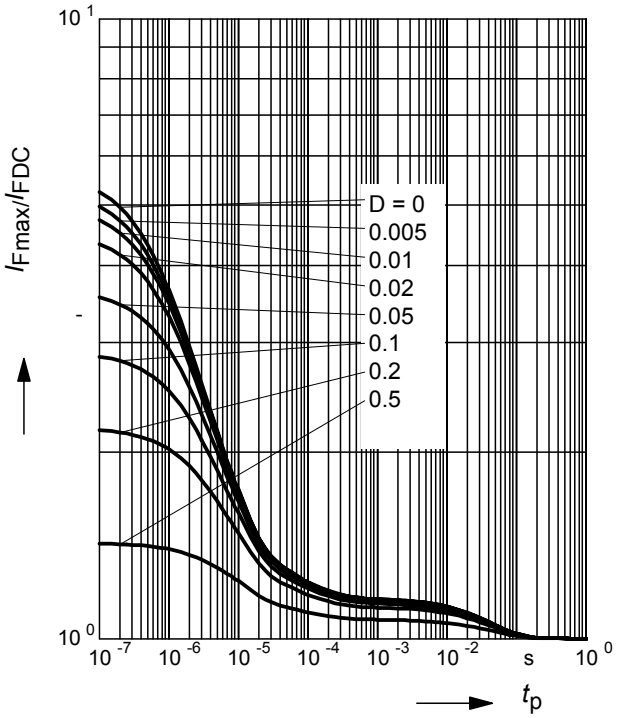


Rectifier voltage $V_{out} = f(V_{in})$

f = 900MHz


R_L = Parameter in kΩ

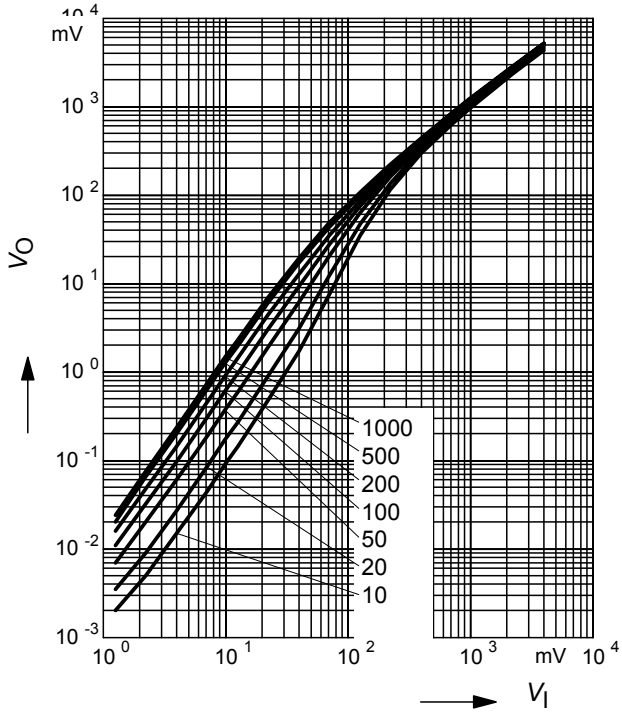


Testcircuit

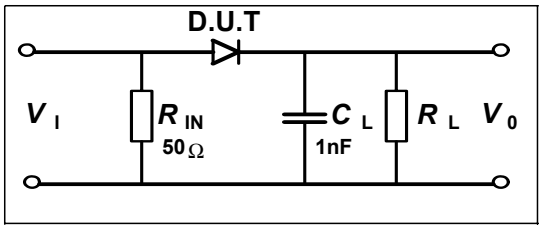


Package Outline

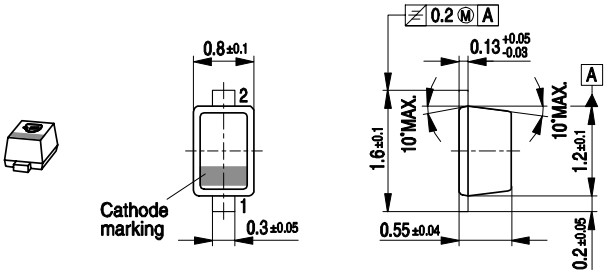

Foot Print




Marking Layout (Example)

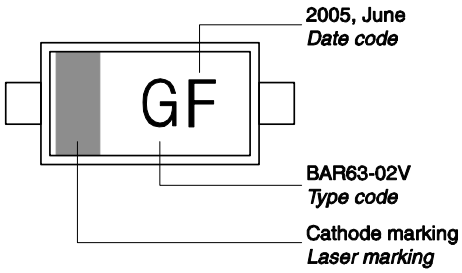


Standard Packing


Reel ø180 mm = 3.000 Pieces/Reel
Reel ø180 mm = 8.000 Pieces/Reel (2 mm Pitch)
Reel ø330 mm = 10.000 Pieces/Reel

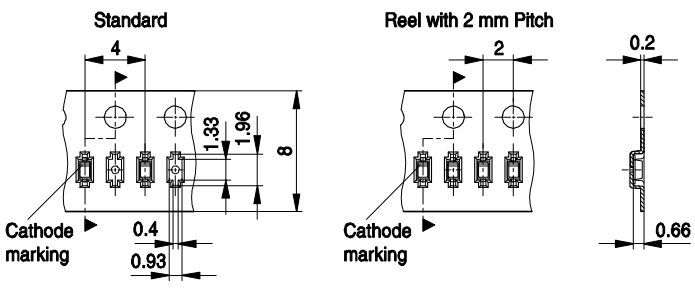


Package Outline

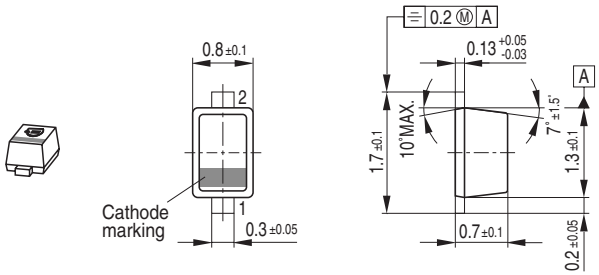

Foot Print




Marking Layout (Example)

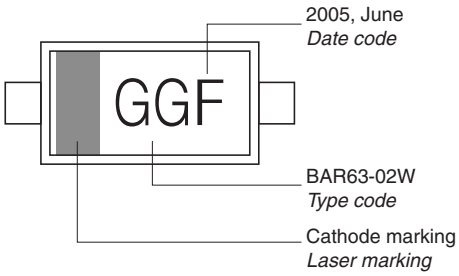

Standard Packing

Reel ø180 mm = 3.000 Pieces/Reel
Reel ø180 mm = 8.000 Pieces/Reel (2 mm Pitch)
Reel ø330 mm = 10.000 Pieces/Reel

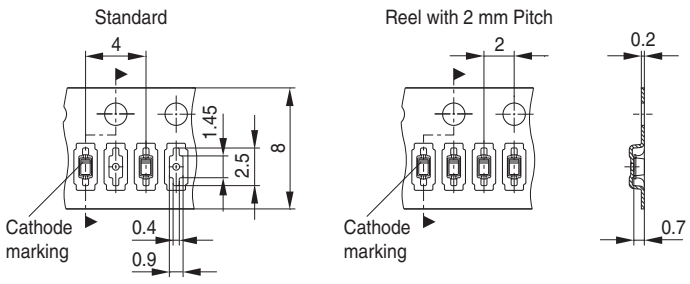


Date Code marking for discrete packages with one digit (SCD80, SC79, SC75[1]) CES-Code


Month	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014
01	a	p	A	P	a	p	A	P	a	p	A	P
02	b	q	B	Q	b	q	B	Q	b	q	B	Q
03	c	r	C	R	c	r	C	R	c	r	C	R
04	d	s	D	S	d	s	D	S	d	s	D	S
05	e	t	E	T	e	t	E	T	e	t	E	T
06	f	u	F	U	f	u	F	U	f	u	F	U
07	g	v	G	V	g	v	G	V	g	v	G	V
08	h	x	H	X	h	x	H	X	h	x	H	X
09	j	y	J	Y	j	y	J	Y	j	y	J	Y
10	k	z	K	Z	k	z	K	Z	k	z	K	Z
11	l	2	L	4	l	2	L	4	l	2	L	4
12	n	3	N	5	n	3	N	5	n	3	N	5

1) New Marking Layout for SC75, implemented at October 2005.


Package Outline

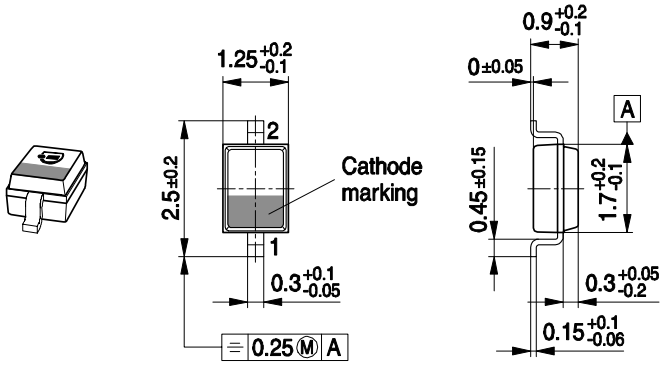

Foot Print




Marking Layout (Example)

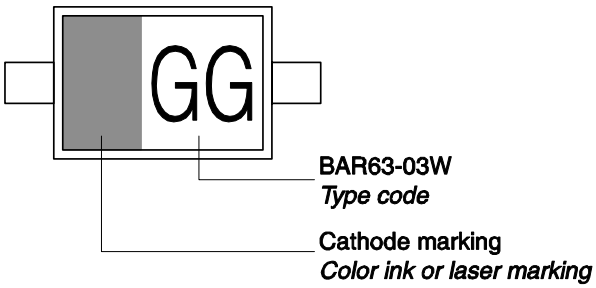


Standard Packing

Reel ø180 mm = 3.000 Pieces/Reel
Reel ø330 mm = 10.000 Pieces/Reel

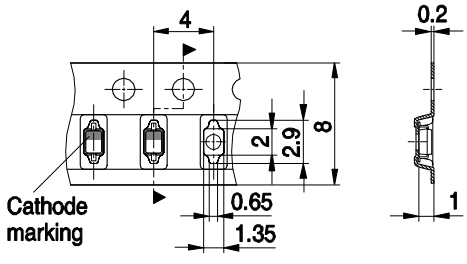

Package Outline




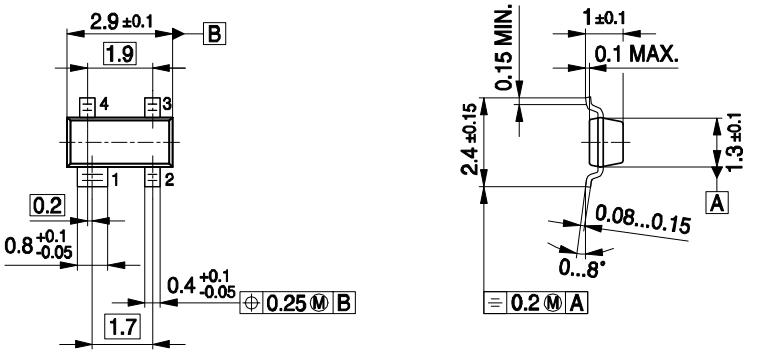

Note: Mold flash, protrusions or gate burrs of 0,2 mm max. per side are not included


SOT143-PO V09

Foot Print




SOT143-FPR V09

Marking Layout (Example)

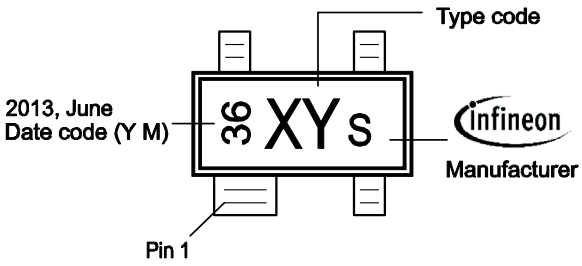

Standard Packing


Reel ø180 mm = 3.000 Pieces/Reel
Reel ø330 mm = 10.000 Pieces/Reel

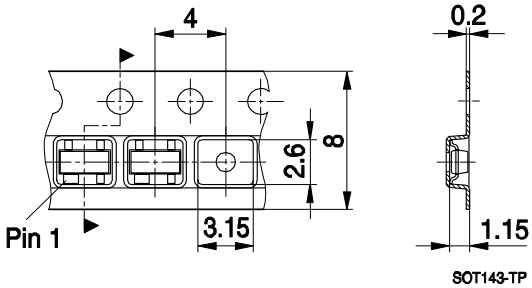


SOT143-TP

Package Outline




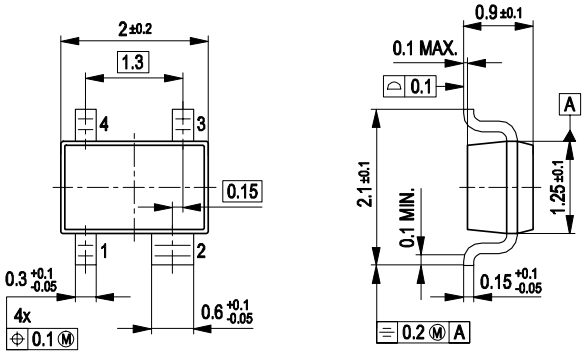

Foot Print




Marking Layout (Example)

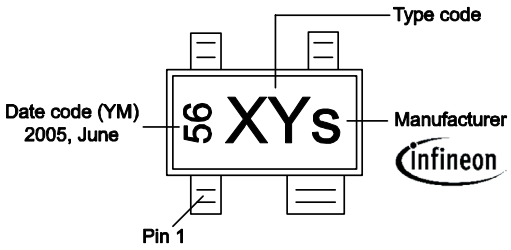


Standard Packing


Reel ø180 mm = 3.000 Pieces/Reel
Reel ø330 mm = 10.000 Pieces/Reel

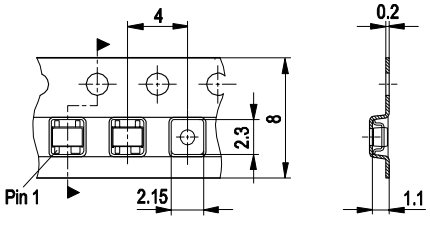

Package Outline

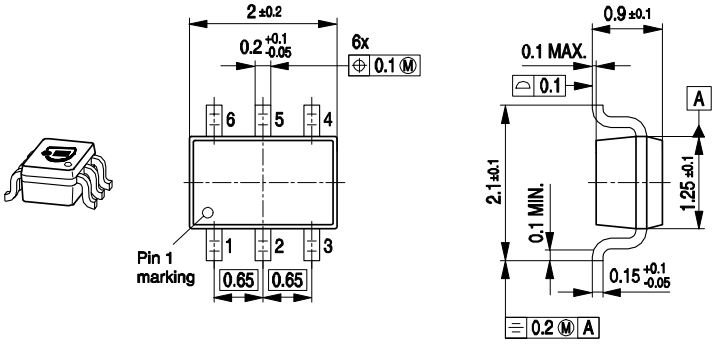


Foot Print



Marking Layout (Example)


Small variations in positioning of
Date code, Type code and Manufacture are possible.

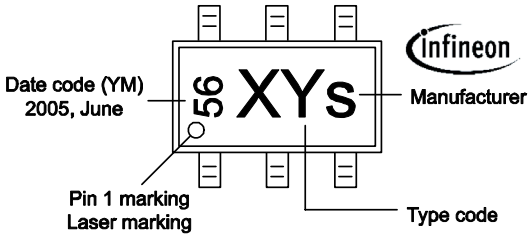


Standard Packing

Reel ø180 mm = 3.000 Pieces/Reel
Reel ø330 mm = 10.000 Pieces/Reel

For symmetric types no defined Pin 1 orientation in reel.

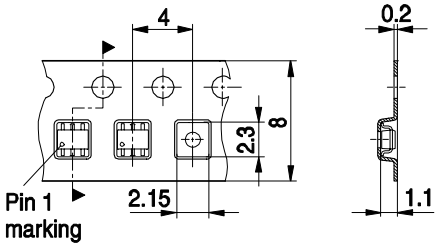


Package Outline

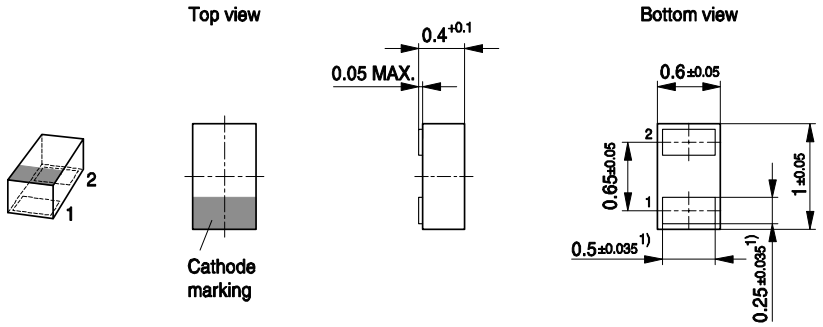


1) Dimension applies to plated terminal

Foot Print

For board assembly information please refer to Infineon website "Packages"

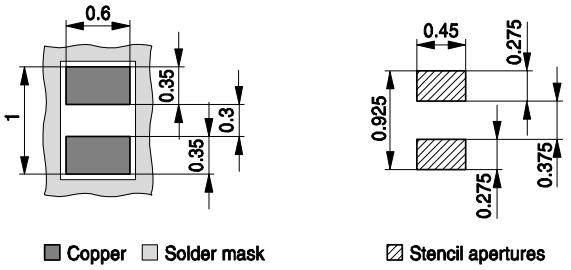


Marking Layout (Example)

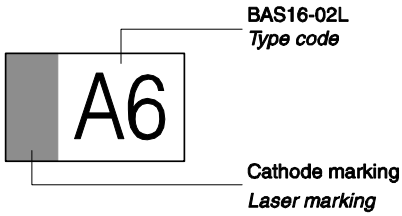


Standard Packing

Reel ø180 mm = 15.000 Pieces/Reel
Reel ø330 mm = 50.000 Pieces/Reel (optional)

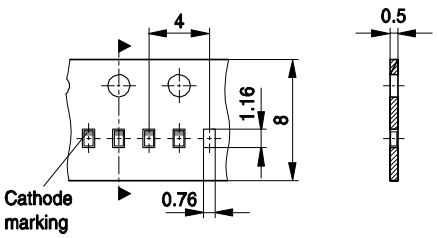


Package Outline

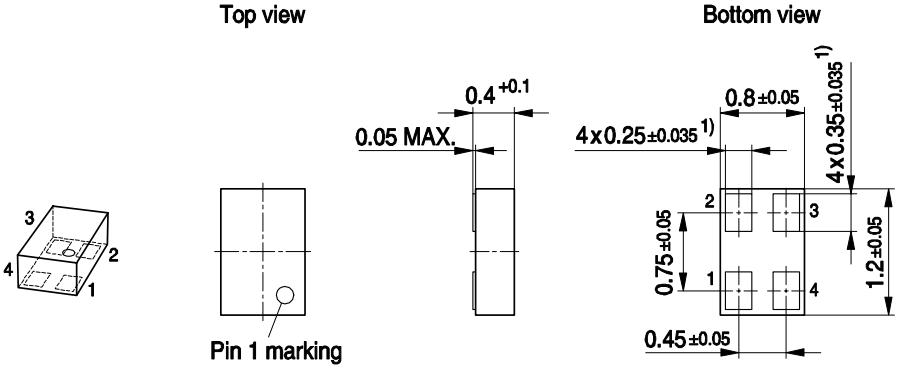


1) Dimension applies to plated terminal

Foot Print

For board assembly information please refer to Infineon website "Packages"

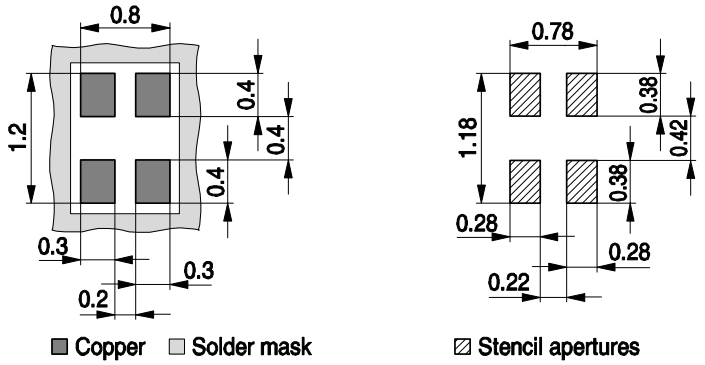


Marking Layout (Example)

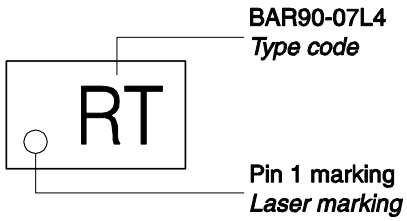


Standard Packing

Reel ø180 mm = 15.000 Pieces/Reel

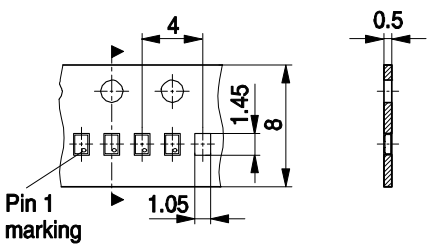


Package Outline

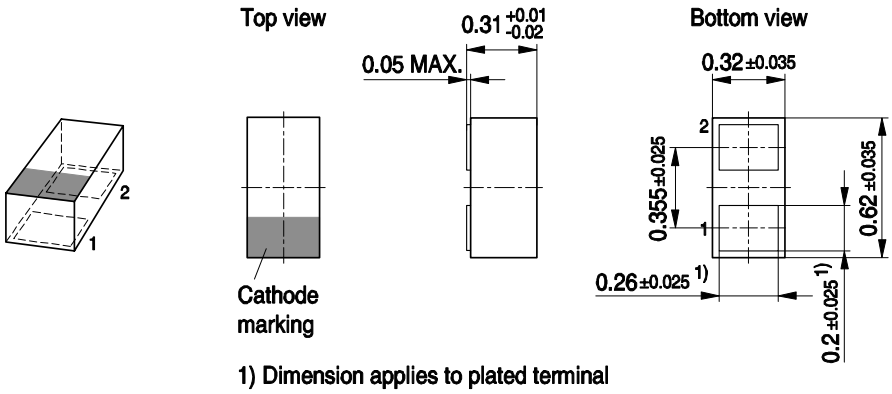


1) Dimension applies to plated terminal

Foot Print

For board assembly information please refer to Infineon website "Packages"

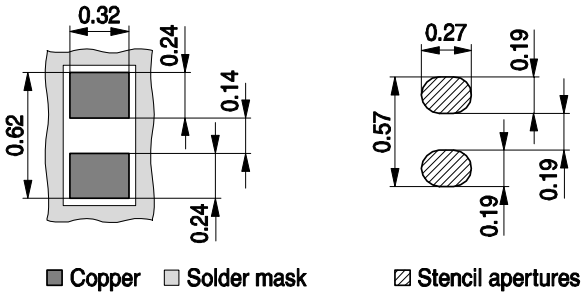


Marking Layout (Example)

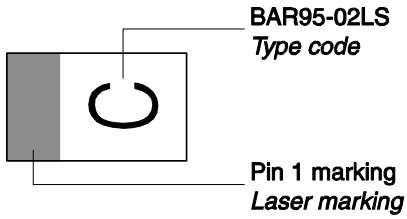

Standard Packing

Reel ø180 mm = 15.000 Pieces/Reel

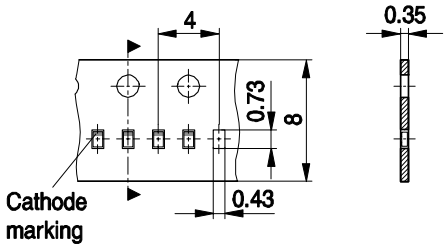

Edition 2009-11-16

Published by
Infineon Technologies AG
81726 Munich, Germany

© 2009 Infineon Technologies AG
All Rights Reserved.

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (<www.infineon.com>).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.
Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.