DATA SHEET

BFG135
NPN 7GHz wideband transistor

Product specification

1995 Sep 13

NPN 7GHz wideband transistor BFG135

DESCRIPTION

NPN silicon planar epitaxial transistor in a plastic SOT223 envelope, intended for wideband amplifier applications. The small emitter structures, with integrated emitter-ballasting resistors, ensure high output voltage capabilities at a low distortion level.

The distribution of the active areas across the surface of the device gives an excellent temperature profile.

PINNING

PIN	DESCRIPTION
1	emitter
2	base
3	emitter
4	collector

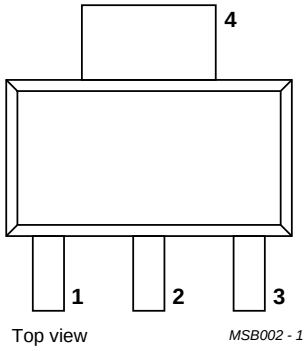


Fig.1 SOT223.

QUICK REFERENCE DATA

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	–	–	25	V
V_{CEO}	collector-emitter voltage	open base	–	–	15	V
I_C	DC collector current		–	–	150	mA
P_{tot}	total power dissipation	up to T_s = 145 °C (note 1)	–	–	1	W
h_{FE}	DC current gain	I_C = 100 mA; V_{CE} = 10 V; T_j = 25 °C	80	130	–	
f_T	transition frequency	I_C = 100 mA; V_{CE} = 10 V; f = 1 GHz; T_{amb} = 25 °C	–	7	–	GHz
G_{UM}	maximum unilateral power gain	I_C = 100 mA; V_{CE} = 10 V; f = 500 MHz; T_{amb} = 25 °C	–	16	–	dB
		I_C = 100 mA; V_{CE} = 10 V; f = 800 MHz; T_{amb} = 25 °C	–	12	–	dB
V_o	output voltage	d_{im} = −60 dB; I_C = 100 mA; V_{CE} = 10 V; R_L = 75 Ω; T_{amb} = 25 °C; $f_{(p+q-r)}$ = 793.25 MHz	–	850	–	mV

LIMITING VALUES

In accordance with the Absolute Maximum System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
V_{CBO}	collector-base voltage	open emitter	–	25	V
V_{CEO}	collector-emitter voltage	open base	–	15	V
V_{EBO}	emitter-base voltage	open collector	–	2	V
I_C	DC collector current		–	150	mA
P_{tot}	total power dissipation	up to T_s = 145 °C (note 1)	–	1	W
T_{stg}	storage temperature		−65	150	°C
T_j	junction temperature		–	175	°C

Note

1. T_s is the temperature at the soldering point of the collector tab.

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	THERMAL RESISTANCE
$R_{th\ j\text{-}s}$	thermal resistance from junction to soldering point	up to T_s = 145 °C (note 1)	30 K/W

Note

1. T_s is the temperature at the soldering point of the collector tab.

CHARACTERISTICS

T_j = 25 °C unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I_{CBO}	collector cut-off current	I_E = 0; V_{CB} = 10 V	–	–	1	μA
h_{FE}	DC current gain	I_C = 100 mA; V_{CE} = 10 V	80	130	–	
C_c	collector capacitance	$I_E = i_e$ = 0; V_{CB} = 10 V; f = 1 MHz	–	2	–	pF
C_e	emitter capacitance	$I_C = i_c$ = 0; V_{EB} = 0.5 V; f = 1 MHz	–	7	–	pF
C_{re}	feedback capacitance	I_C = 0; V_{CE} = 10 V; f = 1 MHz	–	1.2	–	pF
f_T	transition frequency	I_C = 100 mA; V_{CE} = 10 V; f = 1 GHz; T_{amb} = 25 °C	–	7	–	GHz
G_{UM}	maximum unilateral power gain	I_C = 100 mA; V_{CE} = 10 V; f = 500 MHz; T_{amb} = 25 °C	–	16	–	dB
		I_C = 100 mA; V_{CE} = 10 V; f = 800 MHz; T_{amb} = 25 °C	–	12	–	dB
V_o	output voltage	note 1	–	900	–	mV
		note 2	–	850	–	mV
d_2	second order intermodulation distortion	I_C = 90 mA; V_{CE} = 10 V; V_O = 50 dBmV; T_{amb} = 25 °C; $f_{(p+q)}$ = 450 MHz; f_p = 50 MHz; f_q = 400 MHz	–	–58	–	dB
		I_C = 90 mA; V_{CE} = 10 V; V_O = 50 dBmV; T_{amb} = 25 °C; $f_{(p+q)}$ = 810 MHz; f_p = 250 MHz; f_q = 560 MHz	–	–53	–	dB

Notes

1. d_{im} = –60 dB (DIN 45004B); I_C = 100 mA; V_{CE} = 10 V; R_L = 75 Ω; T_{amb} = 25 °C;
   $V_p = V_o$ at d_{im} = –60 dB; f_p = 445.25 MHz;
   $V_q = V_o$ –6 dB; f_q = 453.25 MHz;
   $V_r = V_o$ –6 dB; f_r = 455.25 MHz;
   measured at $f_{(p+q-r)}$ = 443.25 MHz.
2. d_{im} = –60 dB (DIN 45004B); I_C = 100 mA; V_{CE} = 10 V; R_L = 75 Ω; T_{amb} = 25 °C;
   $V_p = V_o$ at d_{im} = –60 dB; f_p = 795.25 MHz;
   $V_q = V_o$ –6 dB; f_q = 803.25 MHz;
   $V_r = V_o$ –6 dB; f_r = 805.25 MHz;
   measured at $f_{(p+q-r)}$ = 793.25 MHz.

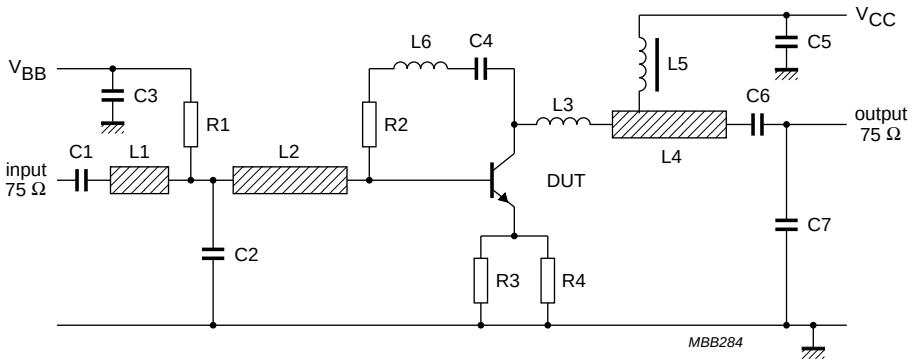


Fig.2 Intermodulation distortion and second order intermodulation distortion test circuit.

List of components (see test circuit)

DESIGNATION	DESCRIPTION	VALUE	UNIT	DIMENSIONS	CATALOGUE NO.
C1, C3, C5, C6	multilayer ceramic capacitor	10	nF		2222 590 08627
C2, C7	multilayer ceramic capacitor	1	pF		2222 851 12108
C4 (note 1)	miniature ceramic plate capacitor	10	nF		2222 629 08103
L1	microstripline	75	Ω	length 7 mm; width 2.5 mm	
L2	microstripline	75	Ω	length 22mm; width 2.5 mm	
L3 (note 1)	1.5 turns 0.4 mm copper wire			int. dia. 3 mm; winding pitch 1 mm	
L4	microstripline	75	Ω	length 19 mm; width 2.5 mm	
L5	Ferroxcube choke	5	μH		3122 108 20153
L6 (note 1)	0.4 mm copper wire	≈25	nH	length 30 mm	
R1	metal film resistor	10	kΩ		2322 180 73103
R2 (note 1)	metal film resistor	200	Ω		2322 180 73201
R3, R4	metal film resistor	27	Ω		2322 180 73279

Note

1. Components C4, L3, L6 and R2 are mounted on the underside of the PCB.
   The circuit is constructed on a double copper-clad printed circuit board with PTFE dielectric (ε_r = 2.2); thickness $\frac{1}{16}$ inch; thickness of copper sheet $\frac{1}{32}$ inch.

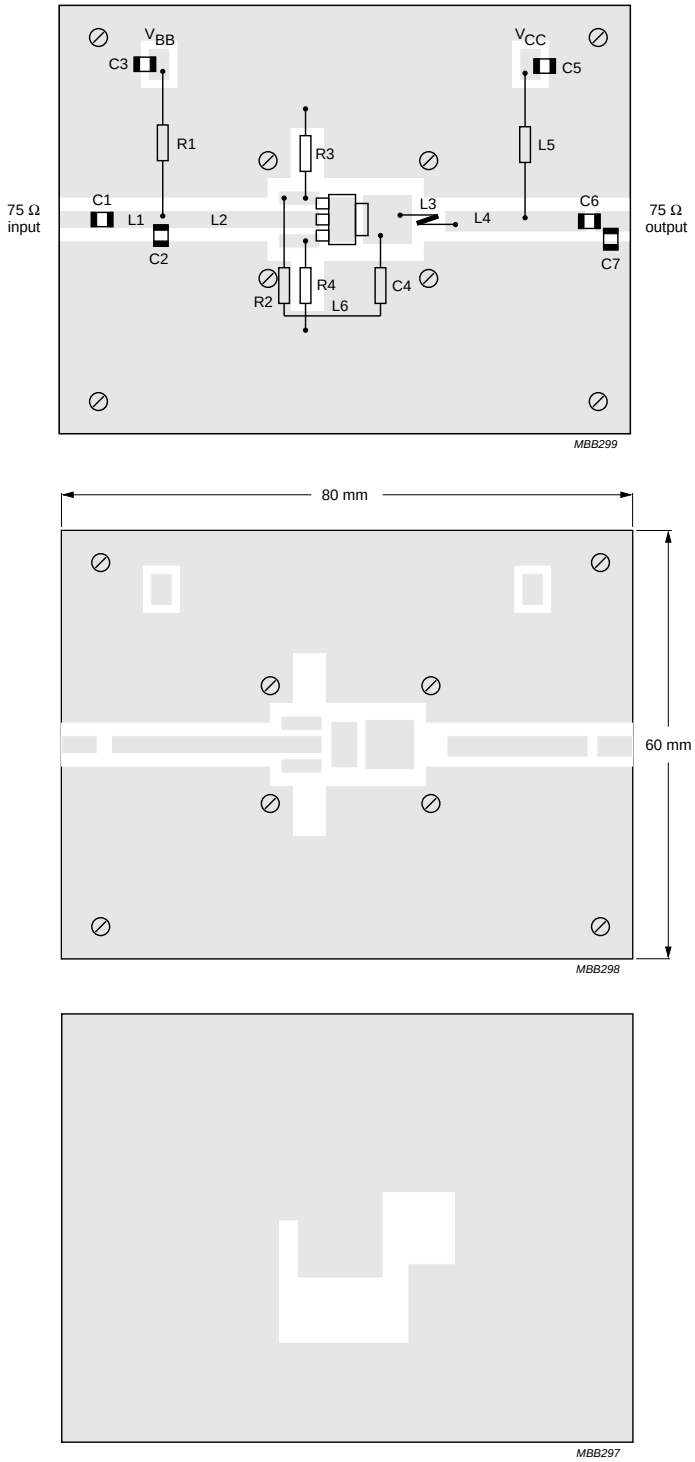


Fig.3 Intermodulation distortion test printed-circuit board.



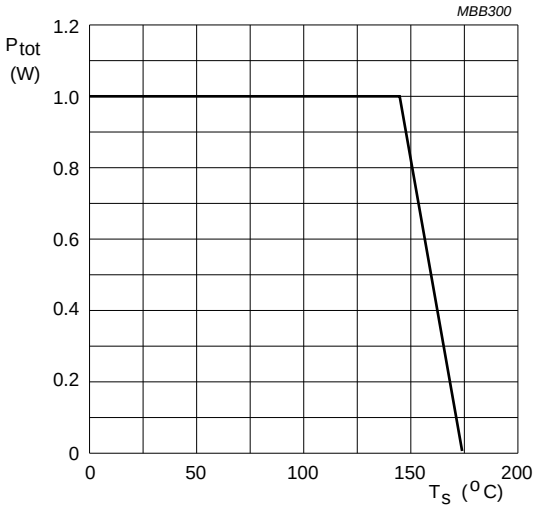


Fig.4 Power derating curve.

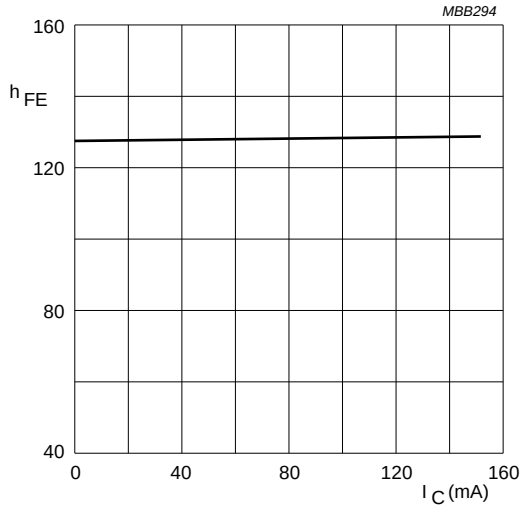


V_{CE} = 10 V; T_j = 25 °C.

Fig.5 DC current gain as a function of collector current.

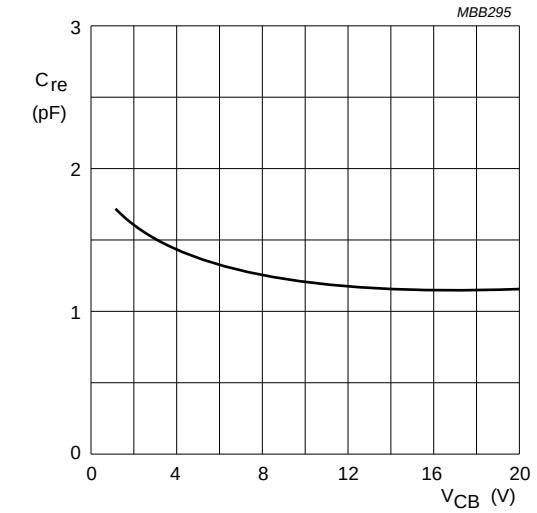


I_E = 0; f = 1 MHz; T_j = 25 °C.

Fig.6 Feedback capacitance as a function of collector-base voltage.

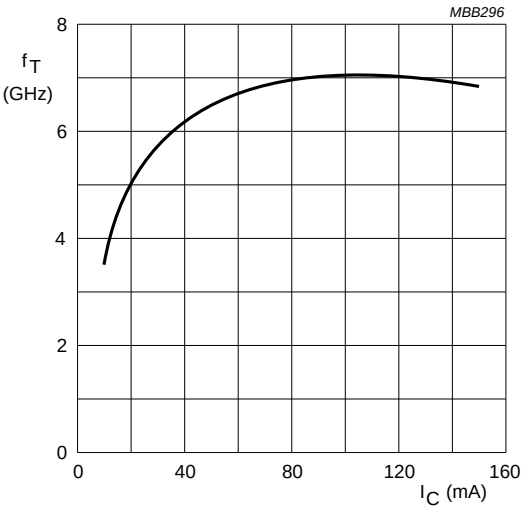


V_{CE} = 10 V; f = 1 GHz; T_{amb} = 25 °C.

Fig.7 Transition frequency as a function of collector current.

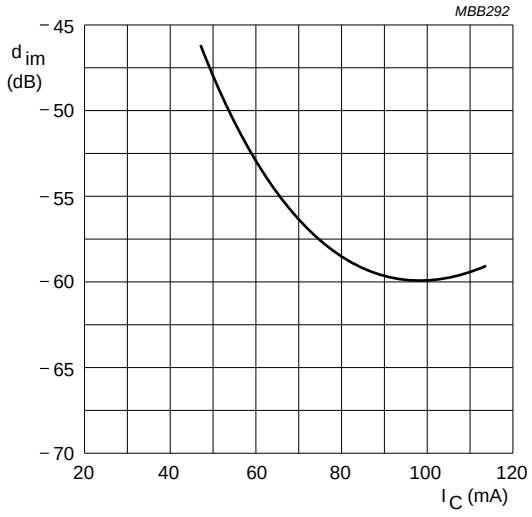


V_{CE} = 10 V; V_o = 900 mV; T_{amb} = 25 °C;
$f_{(p+q-r)}$ = 443.25 MHz.

Fig.8 Intermodulation distortion as a function of collector current.

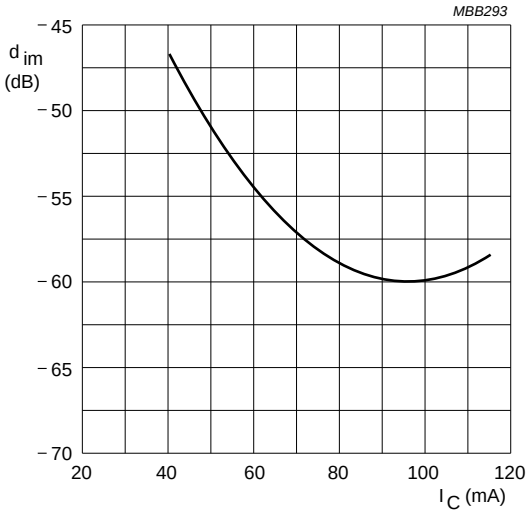


V_{CE} = 10 V; V_o = 850 mV; T_{amb} = 25 °C;
$f_{(p+q-r)}$ = 793.25 MHz.

Fig.9 Intermodulation distortion as a function of collector current.

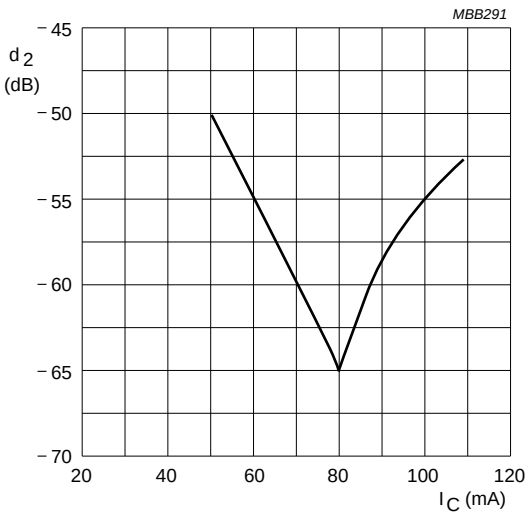


V_{CE} = 10 V; V_o = 50 dBmV; T_{amb} = 25 °C;
$f_{(p+q)}$ = 450 MHz.

Fig.10 Second order intermodulation distortion as a function of collector current.

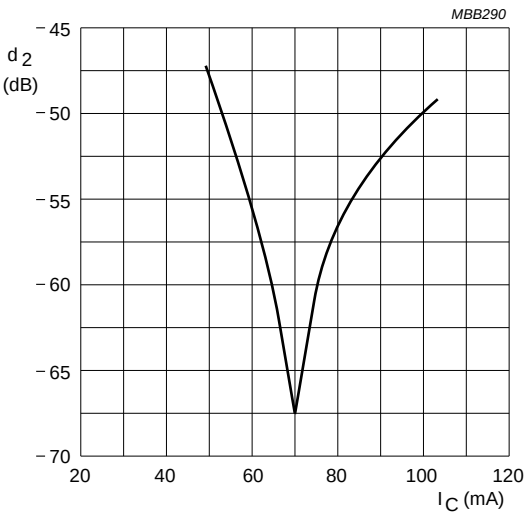


V_{CE} = 10 V; V_o = 50 dBmV; T_{amb} = 25 °C
$f_{(p+q)}$ = 810 MHz.

Fig.11 Second order intermodulation distortion as a function of collector current.

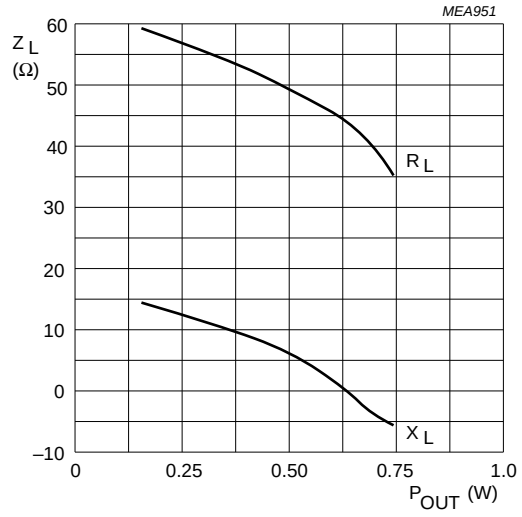


V_{CE} = 7.5 V; f = 900 MHz.

Fig.12 Load impedance as a function of output power.

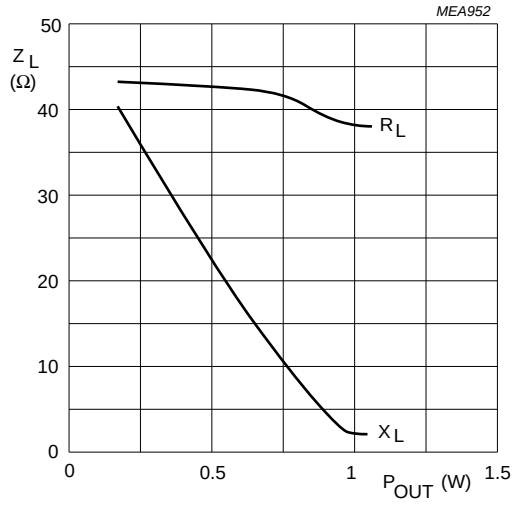


V_{CE} = 10 V; f = 900 MHz.

Fig.13 Load impedance as a function of output power.

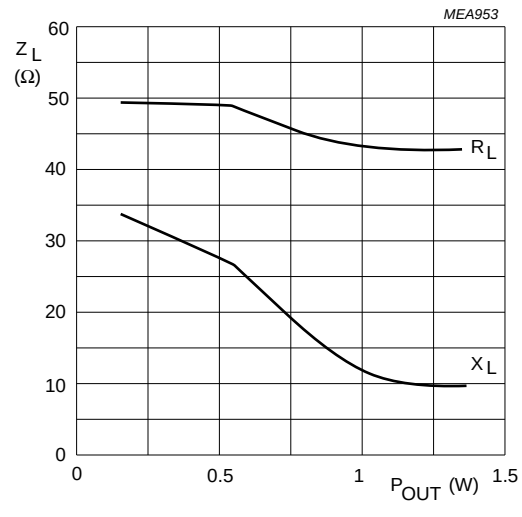


V_{CE} = 12.5 V; f = 900 MHz.

Fig.14 Load impedance as a function of output power.

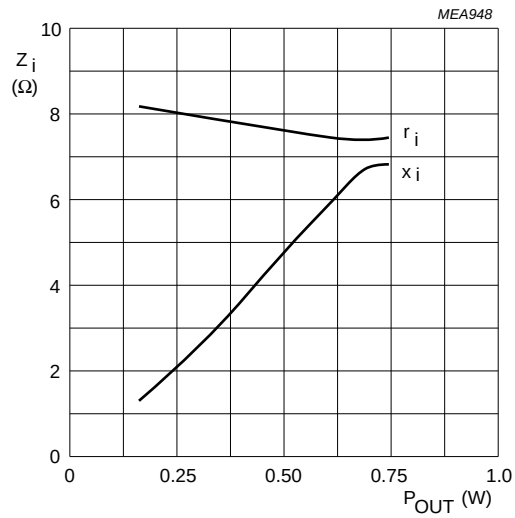


V_{CE} = 7.5 V; f = 900 MHz.

Fig.15 Input impedance as a function of output power.

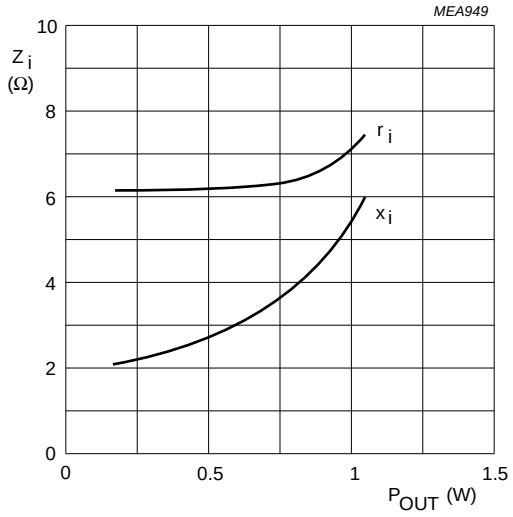


V_{CE} = 10 V; f = 900 MHz.

Fig.16 Input impedance as a function of output power.

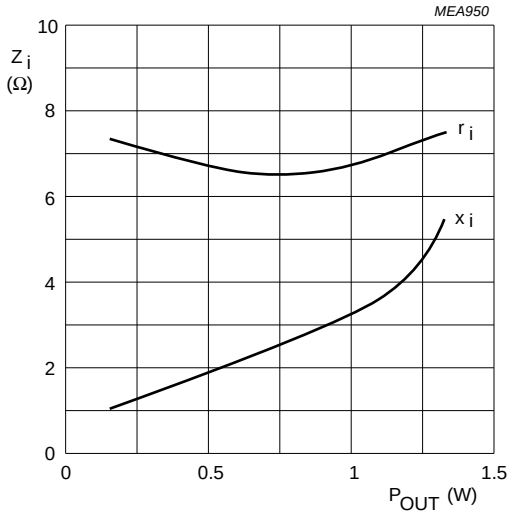


V_{CE} = 12.5 V; f = 900 MHz.

Fig.17 Input impedance as a function of output power.

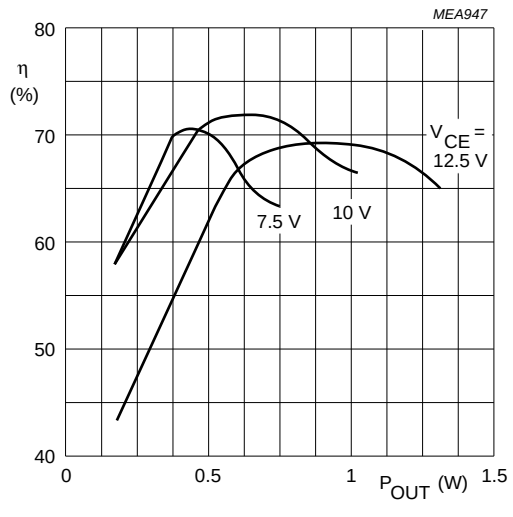


f = 900 MHz.

Fig.18 Efficiency as a function of output power.

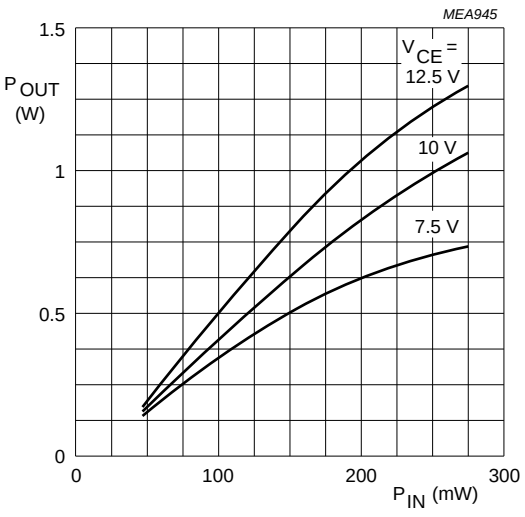


f = 900 MHz.

Fig.19 Output power as a function of input power.

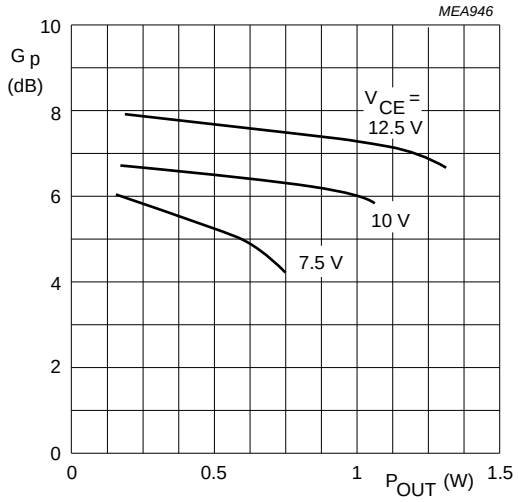


f = 900 MHz.

Fig.20 Power gain as a function of output power.

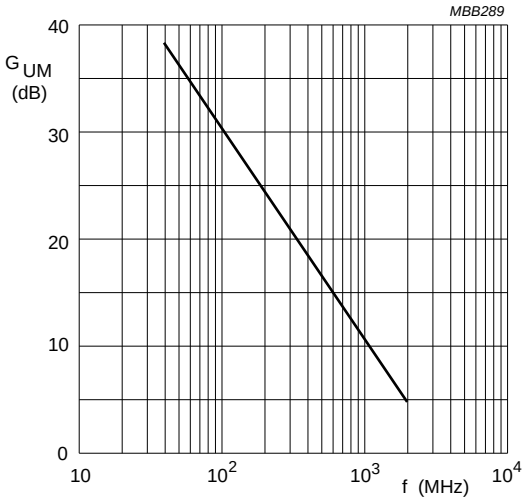


I_C = 100 mA; V_{CE} = 10 V; T_{amb} = 25 °C.

Fig.21 Maximum unilateral power gain as a function of frequency.

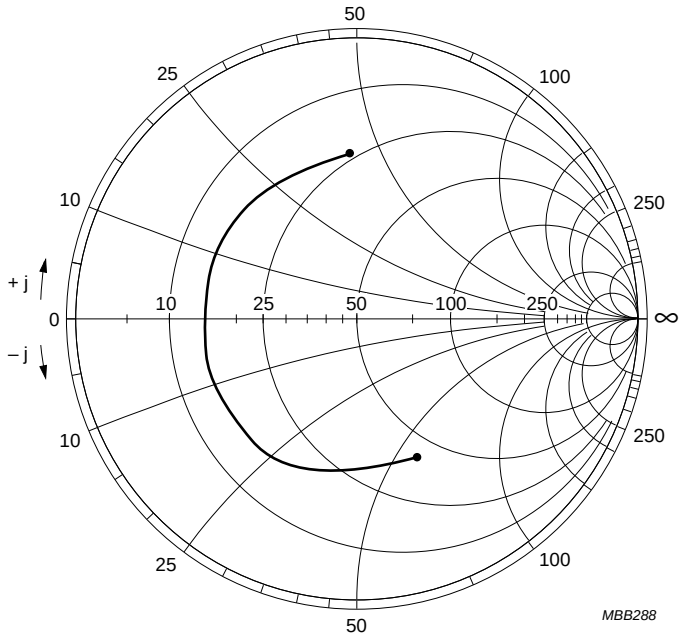


I_C = 100 mA; V_{CE} = 10 V; T_{amb} = 25 °C; Z_o = 50 Ω..

Fig.22 Common emitter input reflection coefficient (S_{11}).

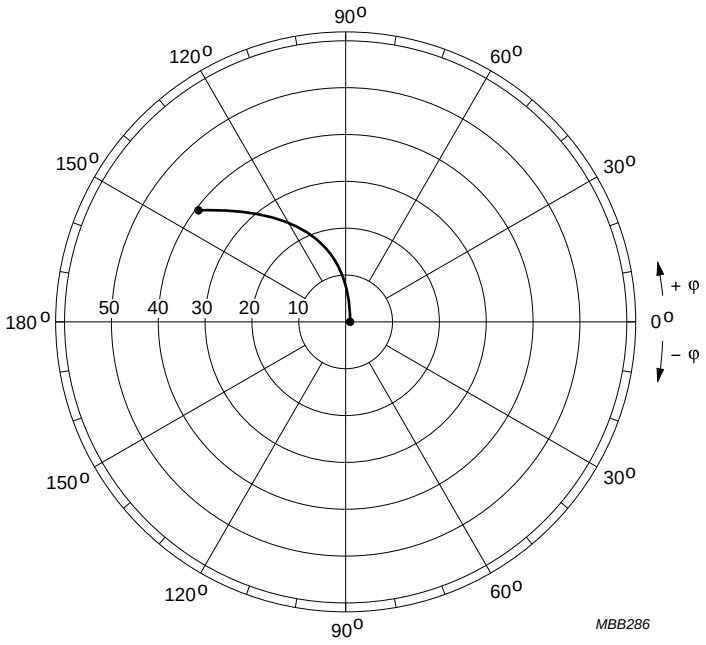


I_C = 100 mA; V_{CE} = 10 V; T_{amb} = 25 °C.

Fig.23 Common emitter forward transmission coefficient (S_{21}).

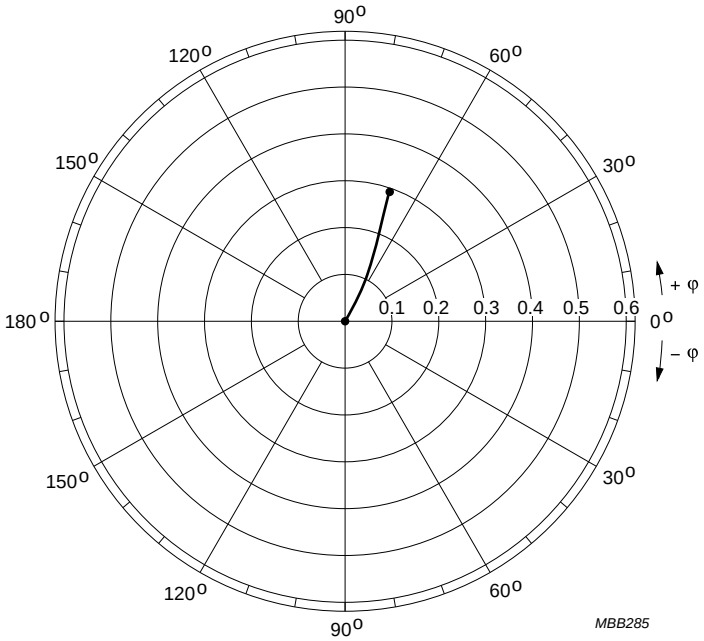

I_C = 100 mA; V_{CE} = 10 V; T_{amb} = 25 °C.

Fig.24 Common emitter reverse transmission coefficient (S_{12}).

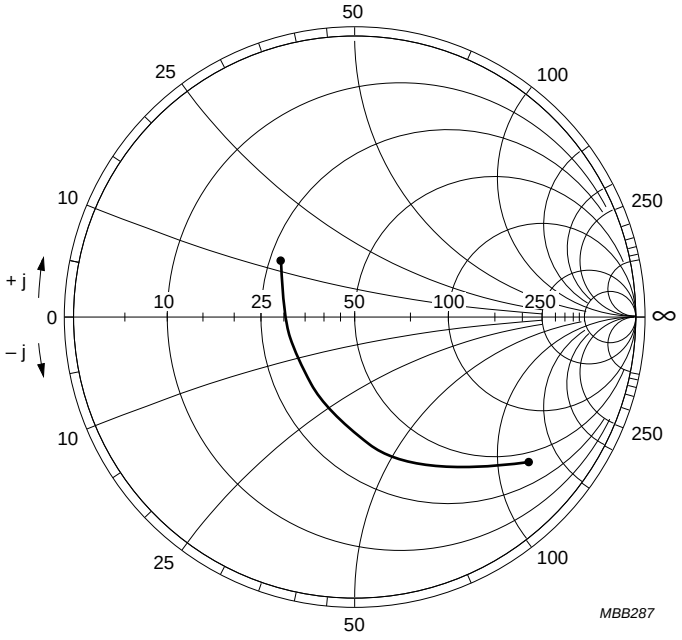


I_C = 100 mA; V_{CE} = 10 V; T_{amb} = 25 °C; Z_o = 50 Ω..

Fig.25 Common emitter output reflection coefficient (S_{22}).

PACKAGE OUTLINE

Plastic surface-mounted package with increased heatsink; 4 leads **SOT223**

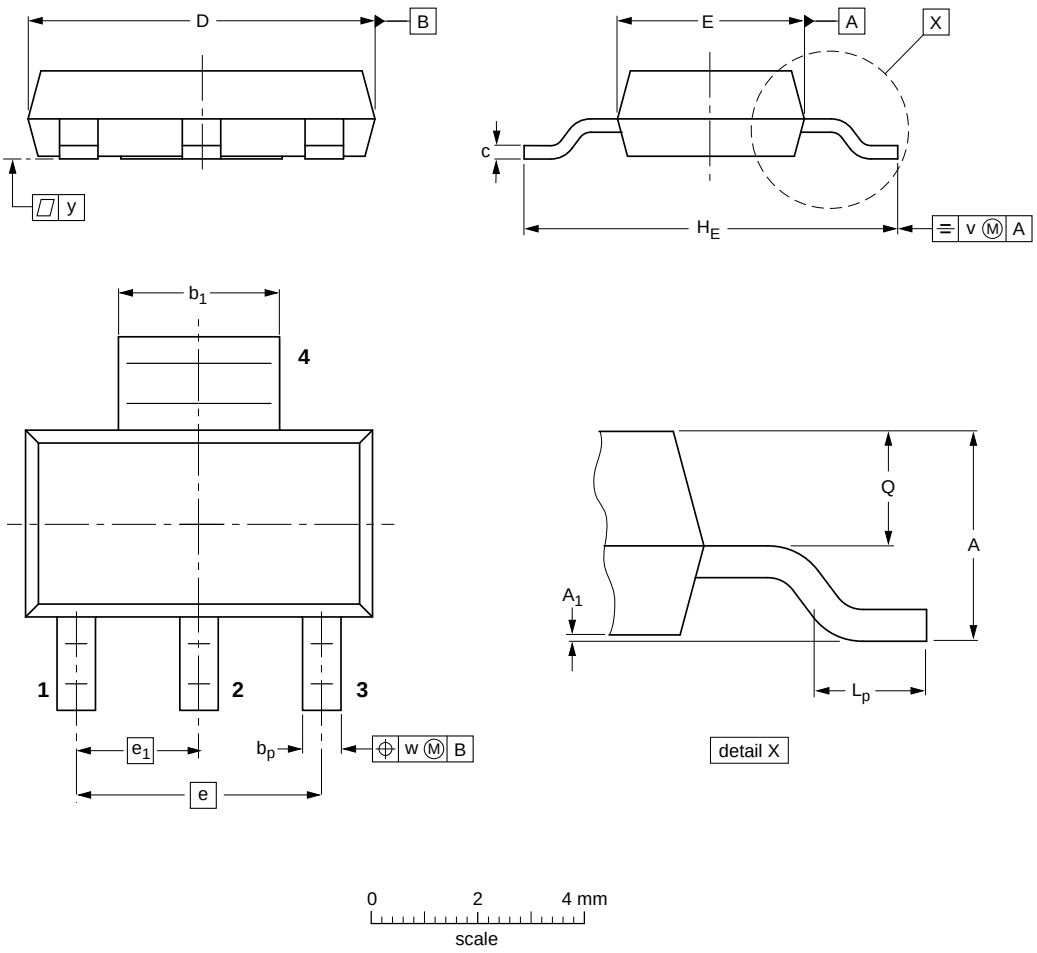

DIMENSIONS (mm are the original dimensions)

UNIT	A	A_1	b_p	b_1	c	D	E	e	e_1	H_E	L_p	Q	v	w	y
mm	1.8 1.5	0.10 0.01	0.80 0.60	3.1 2.9	0.32 0.22	6.7 6.3	3.7 3.3	4.6	2.3	7.3 6.7	1.1 0.7	0.95 0.85	0.2	0.1	0.1

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	JEITA			
SOT223			SC-73			~~04-11-10~~ 06-03-16

DATA SHEET STATUS

DOCUMENT STATUS[1]	PRODUCT STATUS[2]	DEFINITION
Objective data sheet	Development	This document contains data from the objective specification for product development.
Preliminary data sheet	Qualification	This document contains data from the preliminary specification.
Product data sheet	Production	This document contains the product specification.

Notes

1. Please consult the most recently issued document before initiating or completing a design.
2. The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nxp.com.

DEFINITIONS

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

DISCLAIMERS

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nxp.com/profile/terms, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

Non-automotive qualified products — Unless this data sheet expressly states that this specific NXP Semiconductors product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. NXP Semiconductors accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without NXP Semiconductors' warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond NXP Semiconductors' specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies NXP Semiconductors for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond NXP Semiconductors' standard warranty and NXP Semiconductors' product specifications.

NXP Semiconductors

provides High Performance Mixed Signal and Standard Product solutions that leverage its leading RF, Analog, Power Management, Interface, Security and Digital Processing expertise

Customer notification

This data sheet was changed to reflect the new company name NXP Semiconductors, including new legal definitions and disclaimers. No changes were made to the technical content, except for package outline drawings which were updated to the latest version.

Contact information

For additional information please visit: **http://www.nxp.com**
For sales offices addresses send e-mail to: **salesaddresses@nxp.com**

© NXP B.V. 2010

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Printed in The Netherlands R77/03/pp16 Date of release: 1995 Sep 13