

General Description


KR 2156-2-50 is a 2 MHz lowpass filter. The filter has a 2 MHz min 1 dB bandwidth and is designed for 50 Ω source and load impedance. Other passband frequencies, bandwidths and impedances are available. Please consult the factory.

Features


- 2 MHz lowpass
- 50 Ω
- DIP Package

Typical Performance

Passband Amplitude & Group Delay (1 dB/div & 100 nsec/div)

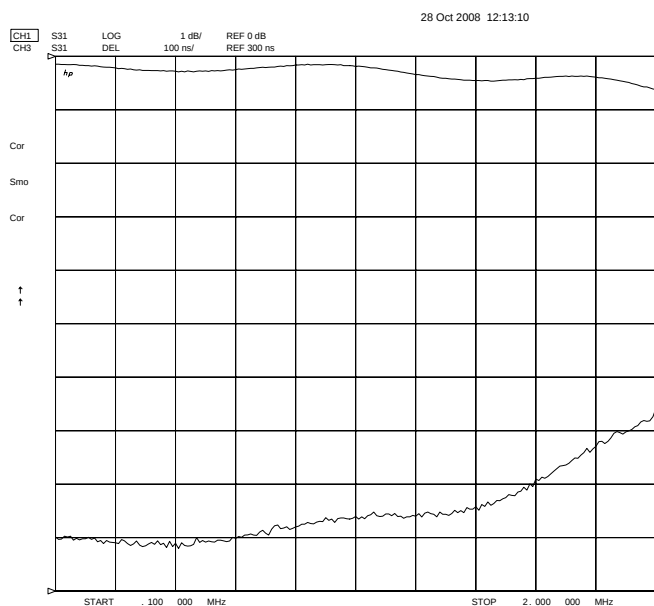

Overall Response (10 dB/div)

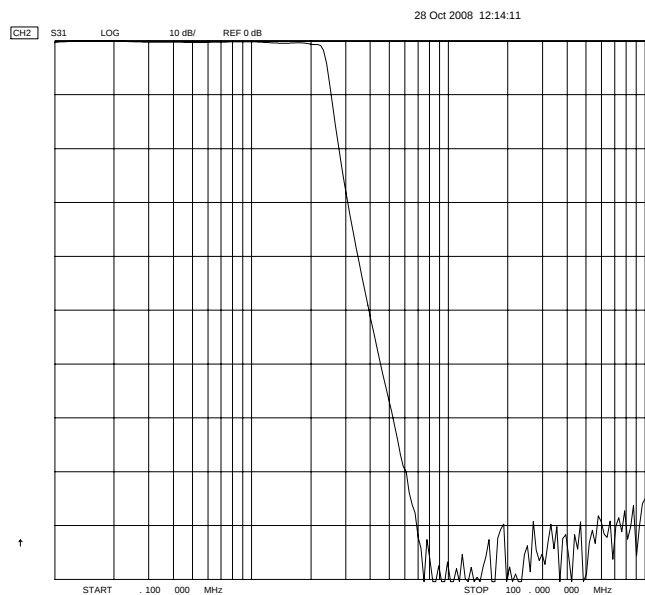


KR 2156-2-50

Specifications

Parameter	Specification
Filter type	Lowpass
Insertion Loss	< 0.5 dB
Attenuation at 2 MHz	< 1 dB
Attenuation at 3.75 MHz	> 40 dB
Source & Load	50 Ω

Physical Dimensions

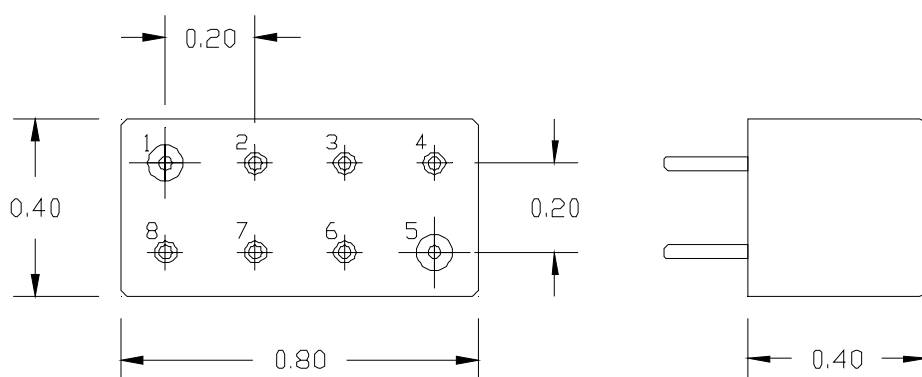

Metal Case
Pin 1 is Input Pin 5 is Output
All other Pins are Ground
All leads .030" diameter
Dimensions inches