

19.5 dB Bi-Directional Couplers, 0.5 - 400 MHz

**CH-/CHS-137
V4**


Features

- Low Cost
- Convenient Plug-In Mounting
- Fully Hermetic Package (CHS-137)
- MIL-STD-202 Screening Available


Description

Bi-Directional Couplers offer the ability to couple the power in two directions while maintaining directivity.

SF-1 (CHS-137)

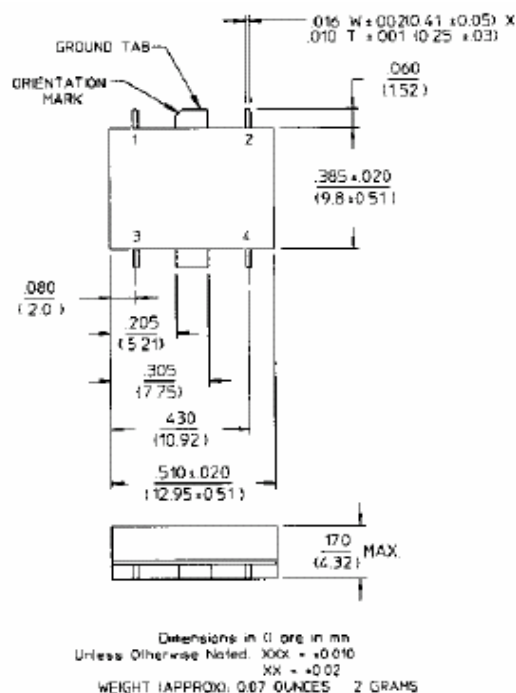

RH-1 (CH-137)

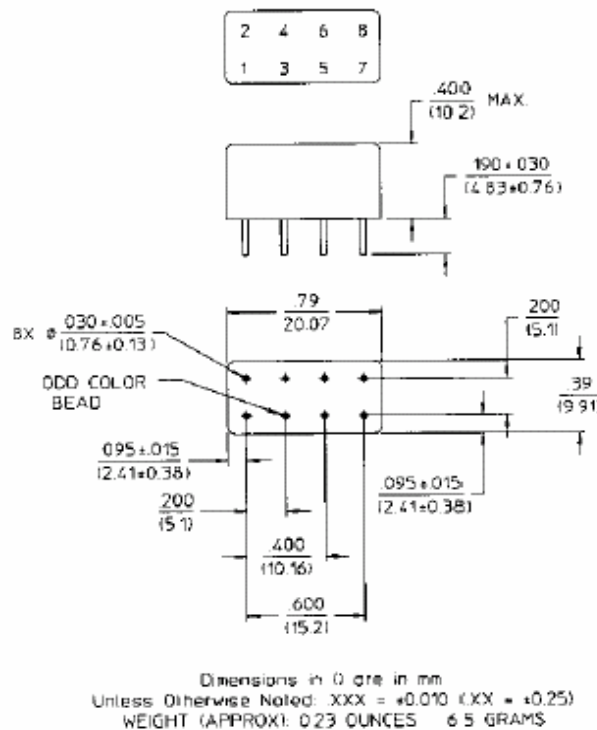

Pin Configuration (CH-137)

Pin No.	Function	Pin No.	Function
1		5	GND
2	GND	6	
3		7	GND
4		8	GND

Pin Configuration (CHS-137)

Pin No.	Function	Pin No.	Function
1	C	3	A
2	B	4	D

19.5 dB Bi-Directional Couplers, 0.5 - 400 MHz

**CH-/CHS-137
V4**

Electrical Specifications¹: T_A = -55°C to +85°C


Parameter	Test Conditions	Frequency	Units	Min	Typ	Max
Coupling	Input to Output	0.5 - 200 MHz 200 - 400 MHz	dB dB	19.0 19.0	19.5 20.0	20.0 21.0
VSWR	All Ports	5 - 200 MHz 0.5 - 400 MHz	Ratio Ratio	— —	— —	1.2:1 1.5:1
Directivity	Both Directions	0.5 - 50 MHz 50 - 200 MHz 200 - 400 MHz	dB dB dB	30 20 15	— — —	— — —
Main Line Loss ²	—	0.5 - 50 MHz 50 - 200 MHz 200 - 400 MHz	dB dB dB	— — —	— — —	0.5 0.4 0.6
Input Power	—	—	Watt	—	—	3.0

1. All specifications apply with 50 ohm source and load impedance.


2. Includes theoretical power split.

This product contains elements protected by United States Patent umber 3,426,298.

Functional Diagram (CH-137)

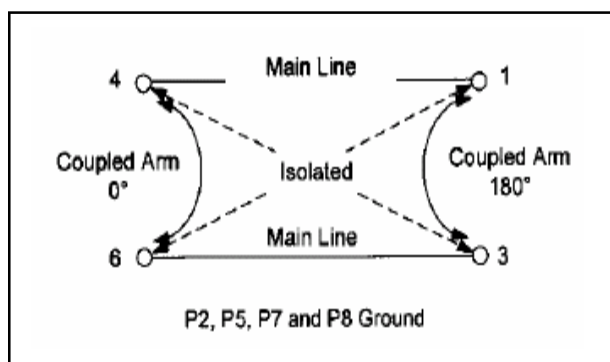



Functional Diagram (CHS-137)

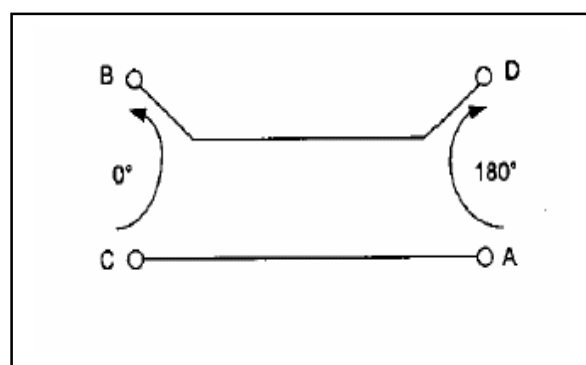

19.5 dB Bi-Directional Couplers, 0.5 - 400 MHz

CH-/CHS-137
V4

Typical Performance Curves

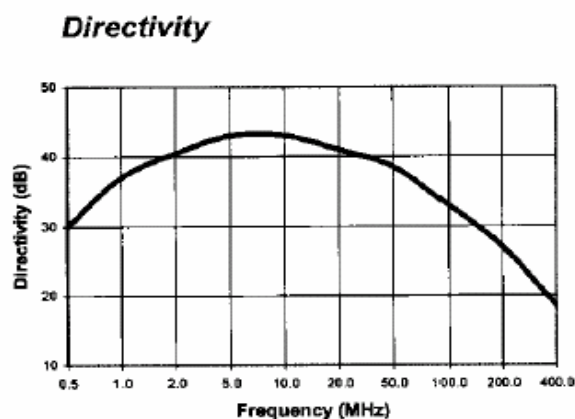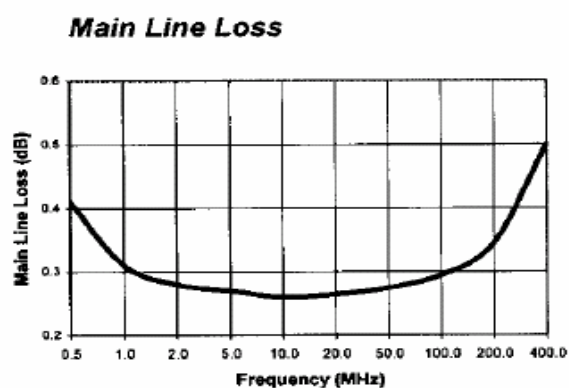

Ordering Information

Part Number	Package
CH-137 PIN	RH-1
CHS-137 PIN	SF-1

