


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-		A6	REVISED PER ECR-16-002072	18FEB2016	RS	DD
			A7	REVISED PER ECR-16-006606	10MAY2016	RS	DD
			A8	REVISED PER ECR-16-012107	25AUG2016	RS	PO
			A9	REVISED PER ECR-16-014606	18OCT2016	RK	ASM

D

11 FOR PART NUMBER 5-2213362-4 ONLY,
STRIP AND REMOVE INSULATION AS SHOWN.
LEAD WIRES TO BE SOLDER DIPPED.

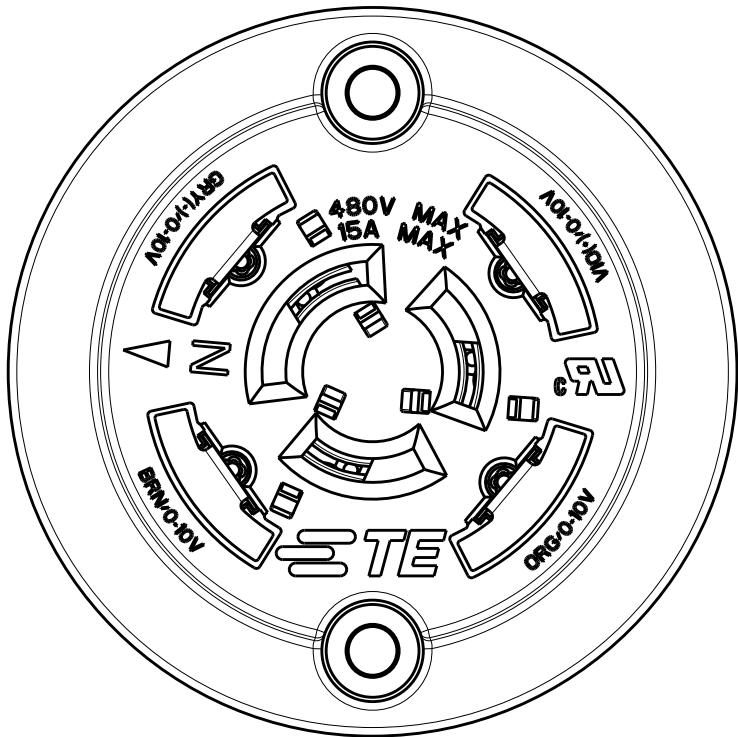

SEE SHEET 2 FOR
WIRING COLOR CODE

NOTES:

- 1.MATERIALS:
HOUSING: GLASS-FILLED THERMOPLASTIC, UL 94V-0 RATED DIMMING CONTACTS (2 OR 4) AND LINE VOLTAGE CONTACTS (3): COPPER ALLOY
- 2.FINISH:
DIMMING CONTACTS (2 OR 4): NICKEL UNDERPLATE ENTIRE CONTACT 0.127 µm MIN THICK. GOLD PLATE CONTACT PAD AREA (MATING FACE SIDE ONLY) 0.76 µm MIN THICK. MATTE TIN PLATE TAB ON BOTH SIDES 0.30 µm MIN THICK. LINE VOLTAGE CONTACTS (3): TIN PLATE.

3 LINE VOLTAGE CONDUCTORS (3):
14 AWG, 600V, 150°C RATED, COPPER 41/30 STRANDED
PER UL STYLE AWM 3321.

4 MATING INTERFACE PER ANSI C136.41-2013.

5 OPTIONAL DIMMING CONTACTS (2) SUPPLIED.

6 DIMMING CONDUCTORS (2 OR 4):
18 AWG, 600V, 150°C RATED, 16/30 STRANDED,
PER UL STYLE AWM 3321.

7 LINE VOLTAGE CONDUCTORS (3):
14 AWG, 600V, 105°C RATED, COPPER 41/30 STRANDED.
PER UL STYLE AWM 1015.


8 DIMMING CONDUCTORS (2 OR 4):
18 AWG, 600V, 105°C RATED, COPPER 16/30 STRANDED.
PER UL STYLE AWM 1015.

9 LUBRICATION: GOLD PLATED CONTACT PAD SURFACES OF DIMMING CONTACTS ARE LUBRICATED WITH A TRANSPARENT (NON-VISIBLE) LUBRICANT TO IMPROVE DURABILITY AND PERFORMANCE. AVOID CONTACT WITH THESE SURFACES WHICH MAY RESULT IN REMOVAL OF LUBRICANT.

10 PRELIMINARY.

341.1	304.8	291.3	7 AND	8	4 5	5-2213362-4 11 10
950.7	914.4	914.4	7 AND	8	4 5	4-2213362-4 10
1865.1	1828.8	1815.3	3 AND	6	2	3-2213362-1 10
736.3	700.0	686.5	7 AND	8	4 5	2-2213362-4
696.3	660.0	646.5	3 AND	6	4 5	2-2213362-2 10
696.3	660.0	646.5	3 AND	6	2	2-2213362-1
536.3	500.0	486.5	7 AND	8	4 5	1-2213362-4
536.3	500.0	486.5	7 AND	8	2	1-2213362-3 10
536.3	500.0	486.5	3 AND	6	2	1-2213362-1 10
341.1	304.8	291.3	7 AND	8	4 5	2213362-4
341.1	304.8	291.3	7 AND	8	2	2213362-3
341.1	304.8	291.3	3 AND	6	4 5	2213362-2
341.1	304.8	291.3	3 AND	6	2	2213362-1
C	A	B	WIRE STYLE		QUANTITY OF DIMMING CONTACTS	
OVERALL LENGTH	WIRE LENGTH				PART NO.	

B

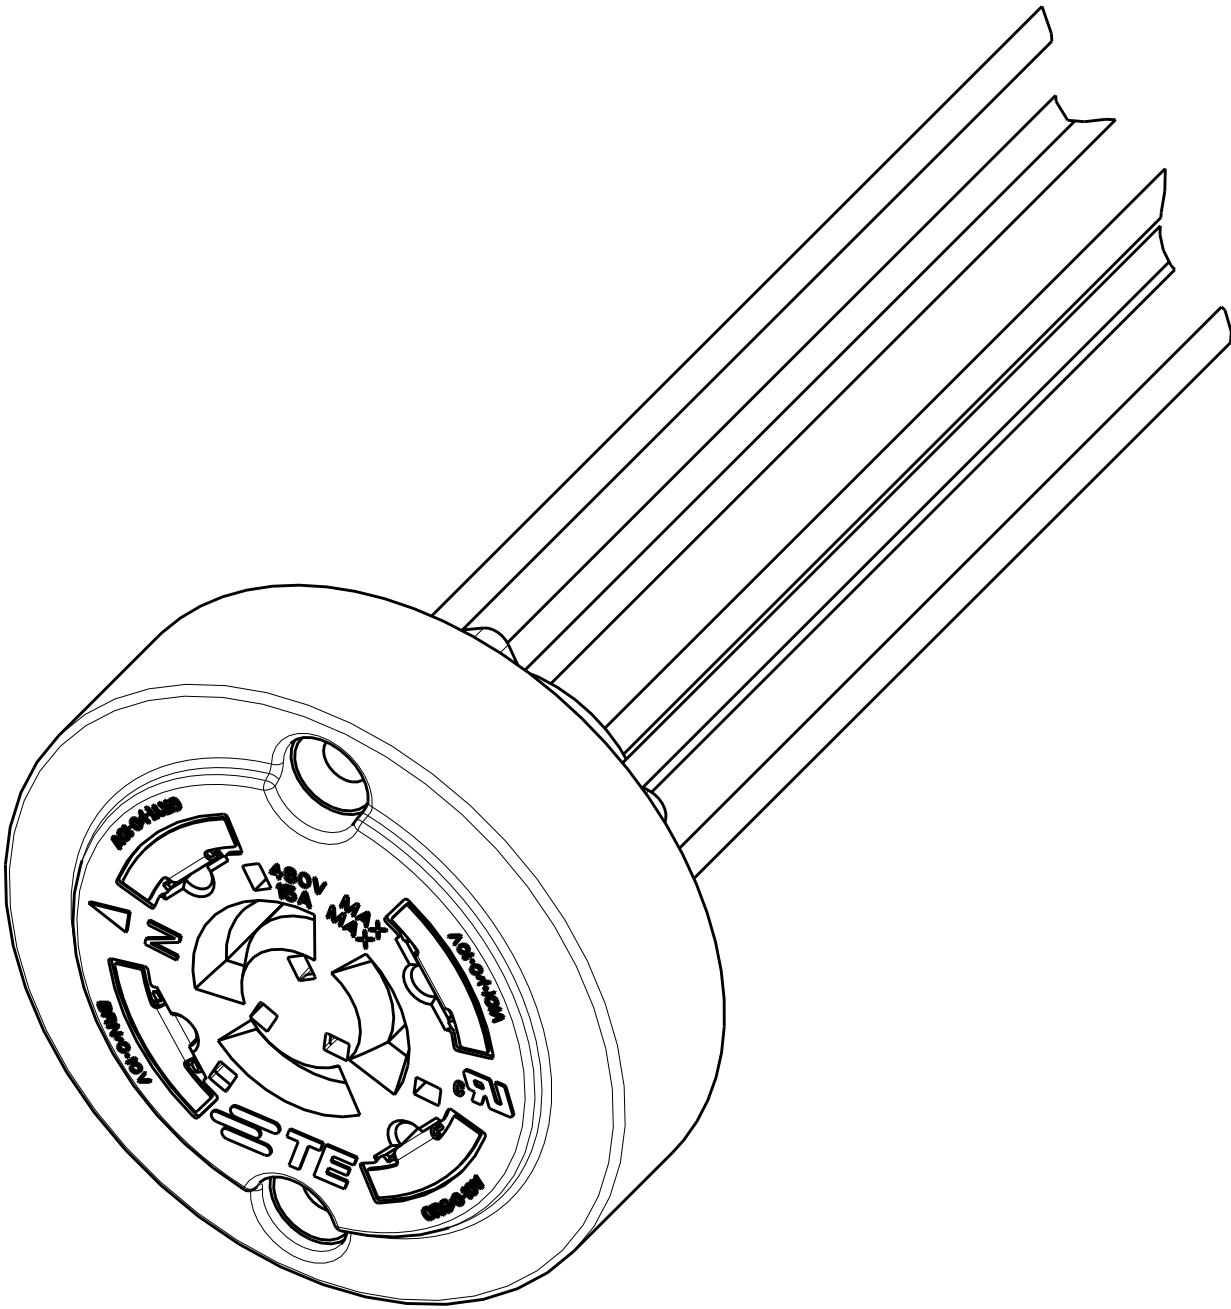

A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. SHAFFER 26 JUN 2013	TE Connectivity			
DIMENSIONS: mm		CHK E. HOWARD 26 JUN 2013				
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ±0.13 3 PLC ± 4 PLC ± ANGLES ± FINISH		APVD E. HOWARD 26 JUN 2013	NAME RECEPTACLE ASSEMBLY, DIMMABLE PHOTOCONTROL			
MATERIAL -		PRODUCT SPEC 108-32059 APPLICATION SPEC 114-32115 WEIGHT -	SIZE A2	CAGE CODE 00779	DRAWING NO C-2213362	RESTRICTED TO -
CUSTOMER DRAWING			SCALE 1:1	SHEET 1	OF 2	REV A9



D

C

B

A

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			-	SEE SHEET 1	-	-	-

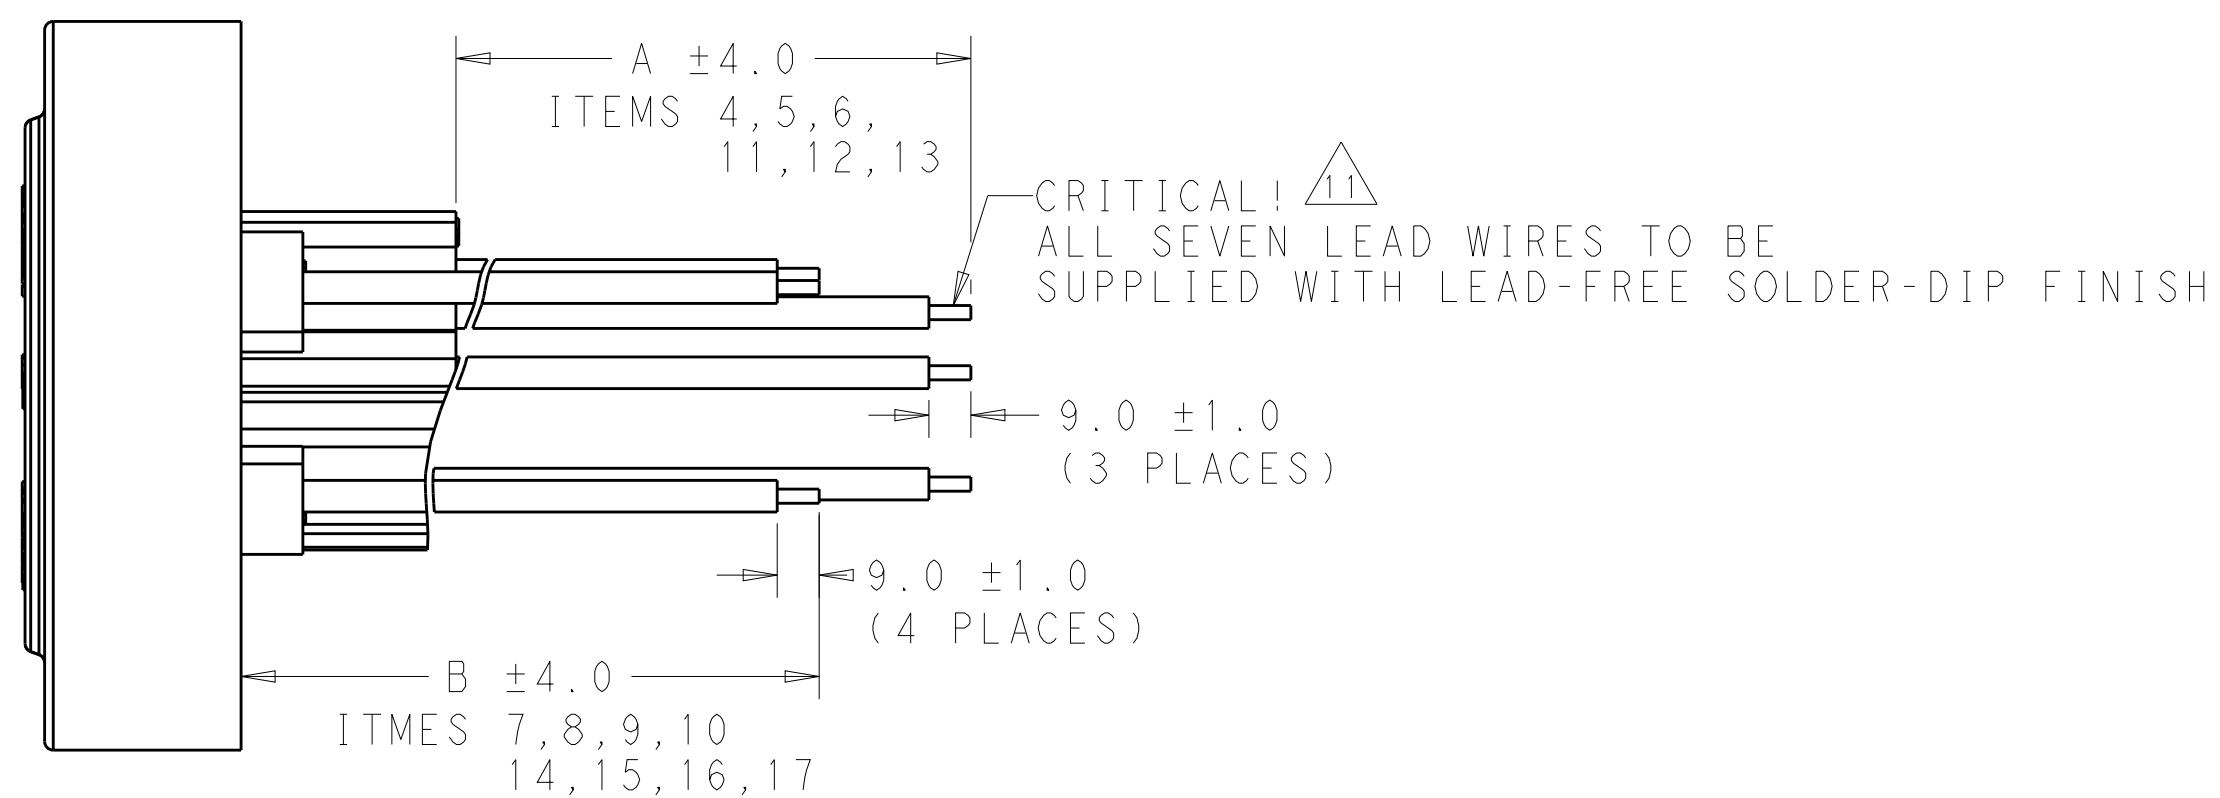

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. SHAFFER 26 JUN 2013	TE TE Connectivity					
DIMENSIONS: mm		CHK F. HOWARD 26 JUN 2013	NAME RECEPTACLE ASSEMBLY, DIMMABLE PHOTOCONTROL					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD F. HOWARD 26 JUN 2013						
		PRODUCT SPEC 108-32059						
0 PLC ± 1 PLC ± 2 PLC ±0.13 3 PLC ± 4 PLC ± ANGLES ± FINISH ±		APPLICATION SPEC 114-32115	SIZE A2	CAGE CODE 00779	DRAWING NO C-2213362	RESTRICTED TO -		
MATERIAL -		WEIGHT -	CUSTOMER DRAWING			SCALE 1:1	SHEET 2 of 2	REV A9