

20-TAP DIP DELAY LINE

$$T_D/T_R = 10$$

(SERIES 2214)**FEATURES**

- 20 taps of equal delay increment
- High bandwidth ($T_D/T_R = 10$)
- Low profile
- Epoxy encapsulated
- Meets or exceeds MIL-D-23859C

PACKAGES

N/C	1	24	N/C	2214-xxz	(DIP)
IN	2	23	T20	2214-xxzC4	(Gull-Wing)
T1	3	22	T19	xx = Delay (T_D)	
T2	4	21	T18	z = Impedance Code	
T3	5	20	T17		
T4	6	19	T16		
T5	7	18	T15		
T6	8	17	T14		
T7	9	16	T13		
T8	10	15	T12		
T9	11	14	T11		
GND	12	13	T10		

PIN DESCRIPTIONS

IN Signal Input
T1-T20 Tap Outputs
GND Ground

FUNCTIONAL DESCRIPTION

The 2214-series device is a fixed, single-input, twenty-output, passive delay line. The signal input (IN) is reproduced at the outputs (T1-T20) in equal increments. The delay from IN to T20 (T_D) is given by the device dash number. The characteristic impedance of the line is given by the letter code that follows the dash number (See Table). The rise time (T_R) of the line is 10% of T_D , and the 3dB bandwidth is given by $3.5 / T_D$.

SERIES SPECIFICATIONS

- Dielectric breakdown: 50 Vdc
- Distortion @ output: 10% max.
- Operating temperature: -55°C to +125°C
- Storage temperature: -55°C to +125°C
- Temperature coefficient: 100 PPM/°C


DASH NUMBER SPECIFICATIONS**DASH NUMBER SPECIFICATIONS**

Part Number	T_D (ns)	Delay per Tap (ns)	T_R (ns)	Imped. (Ω)	R_{DC} (Ω)
2214-50A	50.0 $\pm$ 2.5	2.5 $\pm$ 1.0	5.0	50	3.2
2214-60A	60.0 $\pm$ 3.0	3.0 $\pm$ 1.0	6.0	50	3.6
2214-80A	80.0 $\pm$ 4.0	4.0 $\pm$ 1.0	8.0	50	5.0
2214-100A	100 $\pm$ 5.0	5.0 $\pm$ 1.0	10.0	50	6.0
2214-150A	150 $\pm$ 7.5	7.5 $\pm$ 1.0	15.0	50	6.0
2214-200A	200 $\pm$ 10.0	10.0 $\pm$ 1.0	20.0	50	7.0
2214-50B	50.0 $\pm$ 2.5	2.5 $\pm$ 1.0	5.0	100	6.0
2214-60B	60.0 $\pm$ 3.0	3.0 $\pm$ 1.0	6.0	100	6.0
2214-80B	80.0 $\pm$ 4.0	4.0 $\pm$ 1.0	8.0	100	6.5
2214-100B	100 $\pm$ 5.0	5.0 $\pm$ 1.0	10.0	100	7.0
2214-150B	150 $\pm$ 7.5	7.5 $\pm$ 1.0	15.0	100	8.0
2214-200B	200 $\pm$ 10.0	10.0 $\pm$ 1.0	20.0	100	8.5
2214-300B	300 $\pm$ 15.0	15.0 $\pm$ 1.0	30.0	100	11.0
2214-400B	400 $\pm$ 20.0	20.0 $\pm$ 1.0	40.0	100	12.0


Part Number	T_D (ns)	Delay per Tap (ns)	T_R (ns)	Imped. (Ω)	R_{DC} (Ω)
2214-40C	40.0 $\pm$ 2.0	2.0 $\pm$ 1.0	4.0	200	7.0
2214-80C	80.0 $\pm$ 4.0	4.0 $\pm$ 1.0	8.0	200	8.0
2214-120C	120 $\pm$ 6.0	6.0 $\pm$ 1.0	12.0	200	10.0
2214-200C	200 $\pm$ 10.0	10.0 $\pm$ 1.0	20.0	200	13.0
2214-300C	300 $\pm$ 15.0	15.0 $\pm$ 1.0	30.0	200	12.0
2214-400C	400 $\pm$ 20.0	20.0 $\pm$ 1.0	40.0	200	15.0
2214-500C	500 $\pm$ 25.0	25.0 $\pm$ 1.3	50.0	200	17.0
2214-600C	600 $\pm$ 30.0	30.0 $\pm$ 1.5	60.0	200	23.0
2214-800C	800 $\pm$ 40.0	40.0 $\pm$ 2.0	80.0	200	38.0
2214-50D	50.0 $\pm$ 2.5	2.5 $\pm$ 1.0	5.0	250	7.0
2214-100D	100 $\pm$ 5.0	5.0 $\pm$ 1.0	10.0	250	10.0
2214-150D	150 $\pm$ 7.5	7.5 $\pm$ 1.0	15.0	250	12.0
2214-200D	200 $\pm$ 10.0	10.0 $\pm$ 1.0	20.0	250	22.0
2214-250D	250 $\pm$ 12.5	12.5 $\pm$ 1.0	25.0	250	21.0
2214-300D	300 $\pm$ 15.0	15.0 $\pm$ 1.0	30.0	250	23.0
2214-400D	400 $\pm$ 20.0	20.0 $\pm$ 1.0	40.0	250	26.0
2214-500D	500 $\pm$ 25.0	25.0 $\pm$ 1.3	50.0	250	30.0
2214-600D	600 $\pm$ 30.0	30.0 $\pm$ 1.5	60.0	250	37.0
2214-800D	800 $\pm$ 40.0	40.0 $\pm$ 2.0	80.0	250	41.0
2214-1000D	1000 $\pm$ 50.0	50.0 $\pm$ 2.5	100	250	47.0
2214-200G	200 $\pm$ 10.0	10.0 $\pm$ 1.0	20.0	500	20.0
2214-300G	300 $\pm$ 15.0	15.0 $\pm$ 1.0	30.0	500	37.0
2214-400G	400 $\pm$ 20.0	20.0 $\pm$ 1.0	40.0	500	40.0
2214-500G	500 $\pm$ 25.0	25.0 $\pm$ 1.3	50.0	500	45.0
2214-600G	600 $\pm$ 30.0	30.0 $\pm$ 1.5	60.0	500	52.0
2214-800G	800 $\pm$ 40.0	40.0 $\pm$ 2.0	80.0	500	80.0
2214-1000G	1000 $\pm$ 50.0	50.0 $\pm$ 2.5	100	500	100
2214-1200G	1200 $\pm$ 60.0	60.0 $\pm$ 3.0	120	500	110
2214-1500G	1500 $\pm$ 75.0	75.0 $\pm$ 3.8	150	500	130
2214-2000G	2000 $\pm$ 100	100 $\pm$ 5.0	200	500	156

©1997 Data Delay Devices


FUNCTIONAL DIAGRAM

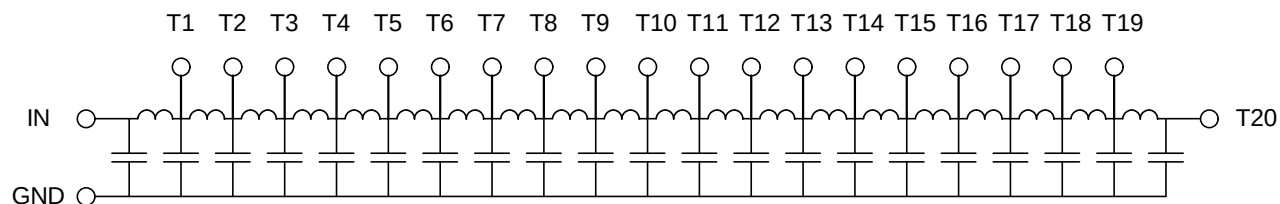

PACKAGE DIMENSIONS

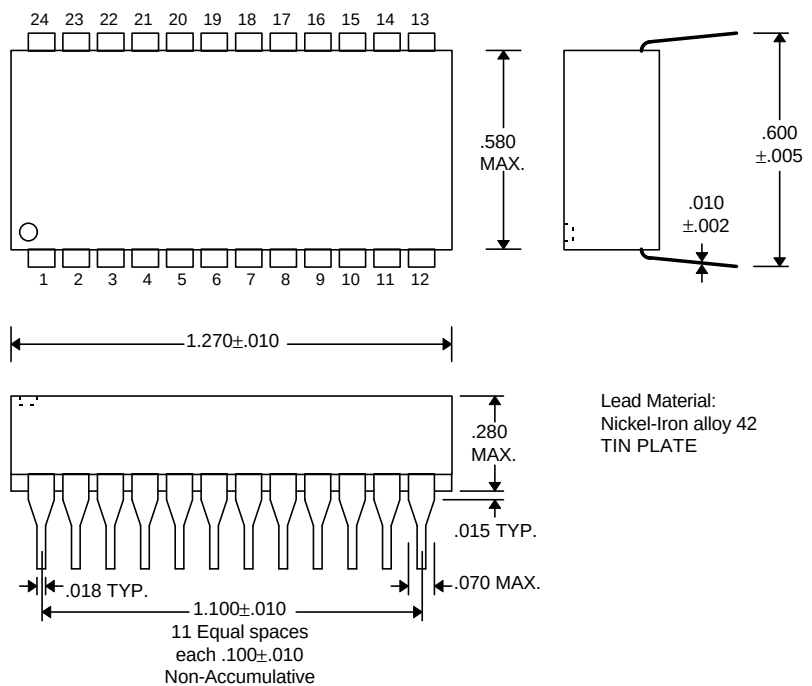

DIP (2214-xxz)

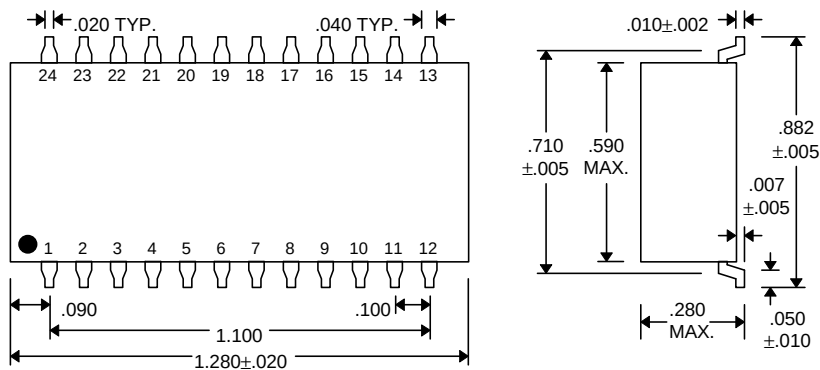

Gull-Wing (2214-xxzC4)

PASSIVE DELAY LINE TEST SPECIFICATIONS

TEST CONDITIONS

INPUT:


Ambient Temperature: $25^{\circ}\text{C} \pm 3^{\circ}\text{C}$
Input Pulse: High = 3.0V typical
 Low = 0.0V typical
Source Impedance: 50Ω Max.
Rise/Fall Time: 3.0 ns Max. (measured at 10% and 90% levels)

OUTPUT:


R_{load} : 10MΩ
 C_{load} : 10pf
Threshold: 50% (Rising & Falling)

Pulse Width ($T_D \leq 75\text{ns}$): $PW_{\text{IN}} = 100\text{ns}$
Period ($T_D \leq 75\text{ns}$): $PER_{\text{IN}} = 1000\text{ns}$
Pulse Width ($T_D > 75\text{ns}$): $PW_{\text{IN}} = 2 \times T_D$
Period ($T_D > 75\text{ns}$): $PER_{\text{IN}} = 10 \times T_D$

NOTE: The above conditions are for test only and do not in any way restrict the operation of the device.

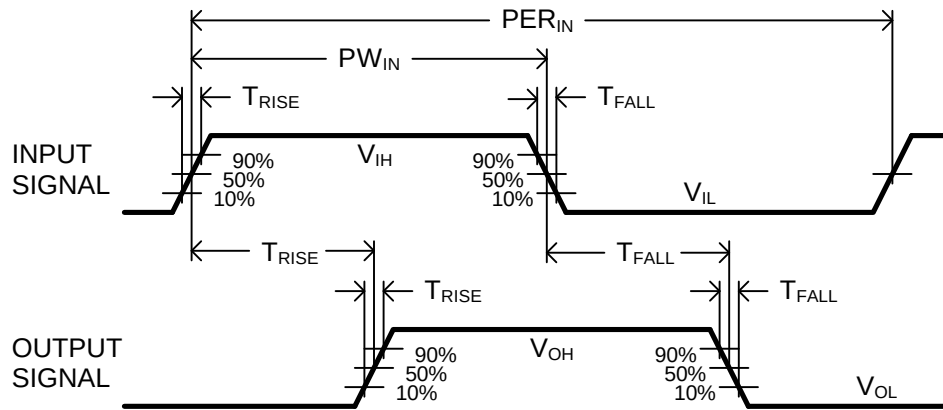

Timing Diagram For Testing

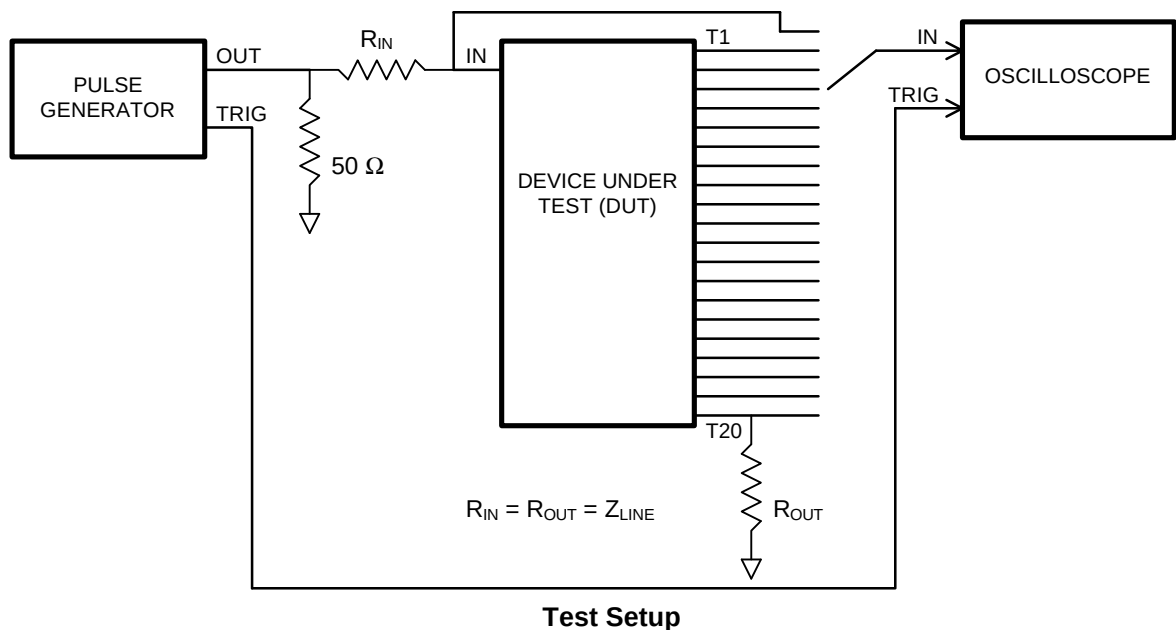

Test Setup