

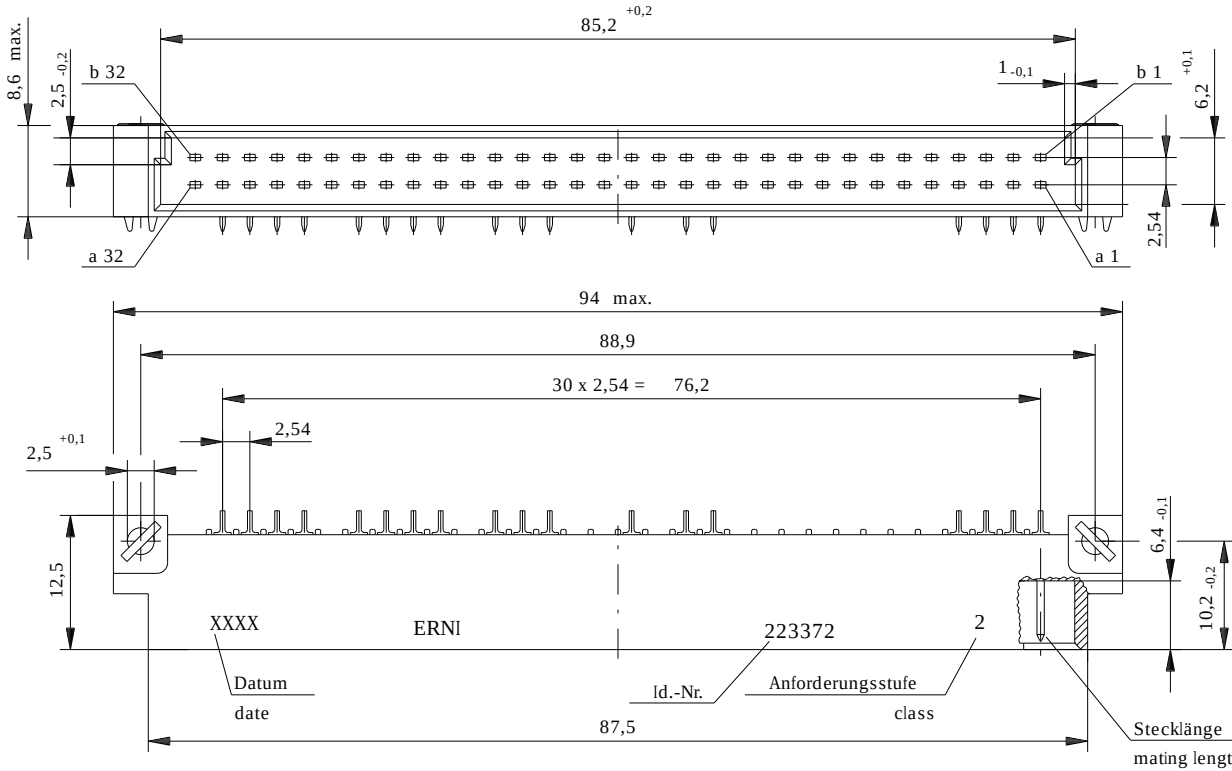




Stecklänge / mating length




E = early mate, late break / voreilend

S = standard

L = late mate, early break / nacheilend

Bestückungsplan / contact layout

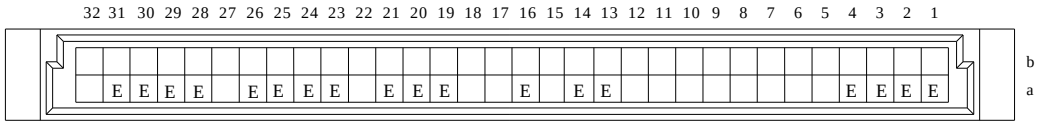

THR = through hole reflow

Isolierwerkstoff / housing material : PA46 GF30


Bauart 3 / type 3

Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles

Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2

Missing information and dimensions per IEC 60 603-2

Leiterplatten-Lochbild / PCB drillhole pattern

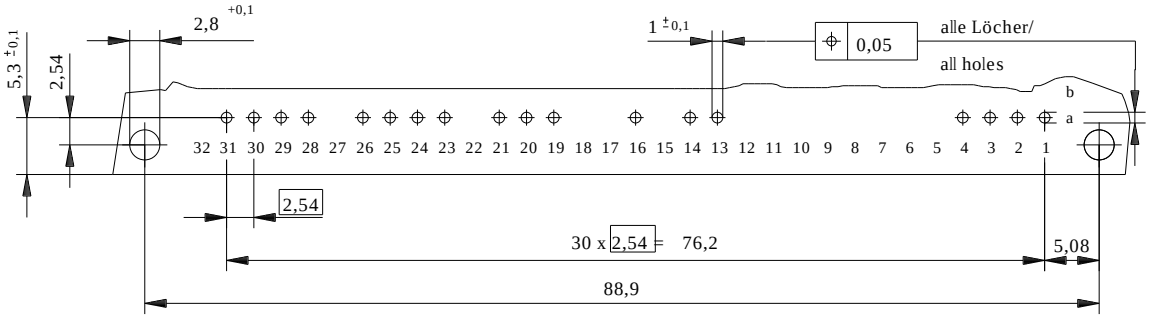

Information: Reihe a 1-4, 13, 14, 16, 19-21, 23-26, 28-31 bestückt / row a 1-4, 13, 14, 16, 19-21, 23-26, 28-31 assemble	Tolerances	All Dimensions in mm	Scale 2:1
All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Subject to modification without prior notice. Drawing will not be updated.		Designation: Messerleiste B 18 THR + Clip / Male Connector B 18 THR + Clip
	ERNI www.ERNI.com		223372 I
Index	Date	V:00046471.SZA	STVB

Consider protection memo from DIN 34