



Leiterplatten-Layout Vorschlag für SMT
PCB-Layout Proposal for SMT

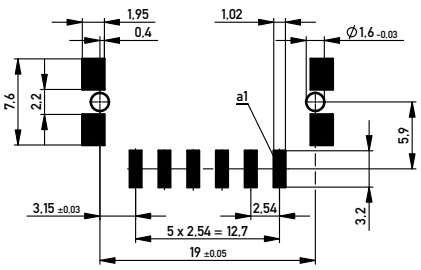

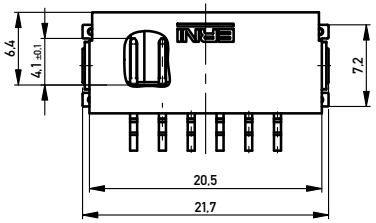






Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating


Anschlussbereich verzinnt 4-6 µm
Terminal Area 4-6 µm tin plating




Koplanarität der Anschlüsse ≤ 0,1 mm
Coplanarity Area of Termination ≤ 0,1 mm

Verpackt in Gurtverpackung
Tape on Reel Packaging
Verpackungseinheit: 440 Stück
Packaging unit: 440 pcs



Abspulrichtung - *Reel off Direction*

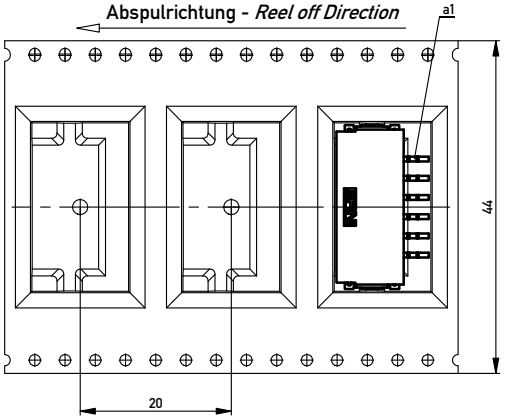

Ident-Nr. *part-no.*	Codierung *coding*	Farbe *color*	A	B	C	D	Bemerkung *note*
454195		weiß *white*	0,6	6,6	1,2	6,0	Codierung wie Variante schwarz *Encoding such variant black*
254702		rot *red*	4,2	3,0	4,8	2,4	
254701		grün *green*	3,0	4,2	3,6	3,6	
254700		blau *blue*	1,8	5,4	2,4	4,8	
254699		schwarz *black*	0,6	6,6	1,2	6,0	

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed

Information:

Tolerances

All Dimensions in mm

Scale 3:1

All rights reserved.
Only for Information.
To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.

Subject to modification without prior notice.
Drawing will not be updated.

Designation
M 2,54 SRC-A, 6-polig

ERNI www.ERNI.com

224913

I

A2

e 15.04.2013
Index Date

Class SRCA