
EVERLIGHT AMERICAS

DATASHEET

SMD ▪ PLCC
EAPL2835RA3

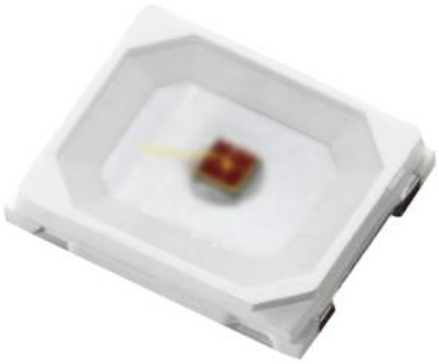

Features

- PLCC-2 package
- Top view Red LED
- Wide viewing angle
- Pb-free
- RoHS compliant

Description

The Everlight EAPL2835RA3 package has high efficacy, middle Power consumption, wide viewing angle and a compact form factor. These features make this package an ideal LED for all lighting applications.

Applications

- Decorative and Entertainment Lighting
- Agriculture Lighting
- General use

Copyright © 2013, Everlight Americas Inc. Release Date: 14.Oct, 2015. Issue No: DSE-00_Rev.

Device Selection Guide

Chip Materials	Emitted Color	Resin Color
AlGaInP	Red	Water Clear

Absolute Maximum Ratings ($T_{Soldering}$=25℃)

Parameter	Symbol	Rating	Unit
Forward Current	I_F	70	mA
Peak Forward Current (Duty 1/10 @10ms)	I_{FP}	140	mA
Power Dissipation	P_d	210	mW
Operating Temperature	T_{opr}	-40 ~ +85	℃
Storage Temperature	T_{stg}	-40 ~ +100	℃
Thermal Resistance (Junction / Soldering point)	$R_{th\ J-S}$	50	℃/W
Junction Temperature	T_j	115	℃
Soldering Temperature	T_{sol}	Reflow Soldering : 260 ℃ for 10 sec. Hand Soldering : 350 ℃ for 3 sec.	

Note:
The products are sensitive to static electricity and must be carefully taken when handling products

Electro-Optical Characteristics ($T_{Soldering}$=25℃)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Flux(1)	Φ	8.0	-----	12.0	lm	I_F=60mA
Forward Voltage(2)	V_F	2.2	-----	3.0	V	I_F=60mA
Viewing Angle	$2\theta_{1/2}$	-----	120	-----	deg	I_F=60mA
Reverse Current	I_R	-----	-----	50	μA	V_R =5V

Notes:
1. Tolerance of Radiometric Power: ±11%.
2. Tolerance of Forward Voltage: ±0.1V.

Copyright © 2013, Everlight Americas Inc. Release Date: 14.Oct, 2015. Issue No: DSE-00_Rev.

Bin Range of Luminous intensity

Bin Code	Min.	Max.	Unit	Condition
B6	8.0	8.5	lm	I_F=60mA
B7	8.5	9.0		
B8	9.0	9.5		
B9	9.5	10.0		
L1	10.0	11.0		
L2	11.0	12.0		

Note:
Tolerance of Luminous flux: ±11%.

Bin Range of Forward Voltage

Bin Code	Min.	Max.	Unit	Condition
29	2.2	2.3	V	I_F=60mA
30	2.3	2.4		
31	2.4	2.5		
32	2.5	2.6		
33	2.6	2.7		
34	2.7	2.8		
35	2.8	2.9		
36	2.9	3.0		

Note:
Tolerance of Forward Voltage: ±0.1V.


Dominant Wavelength Bins

Bin Code	Min.	Max.	Unit	Condition
R51	620.0	625.0	nm	I_F=60mA
R52	625.0	630.0		

Notes:
Dominant wavelength measurement tolerance: ±1nm.

Copyright © 2013, Everlight Americas Inc. Release Date: 14.Oct, 2015. Issue No: DSE-00_Rev.

Spectrum Distribution

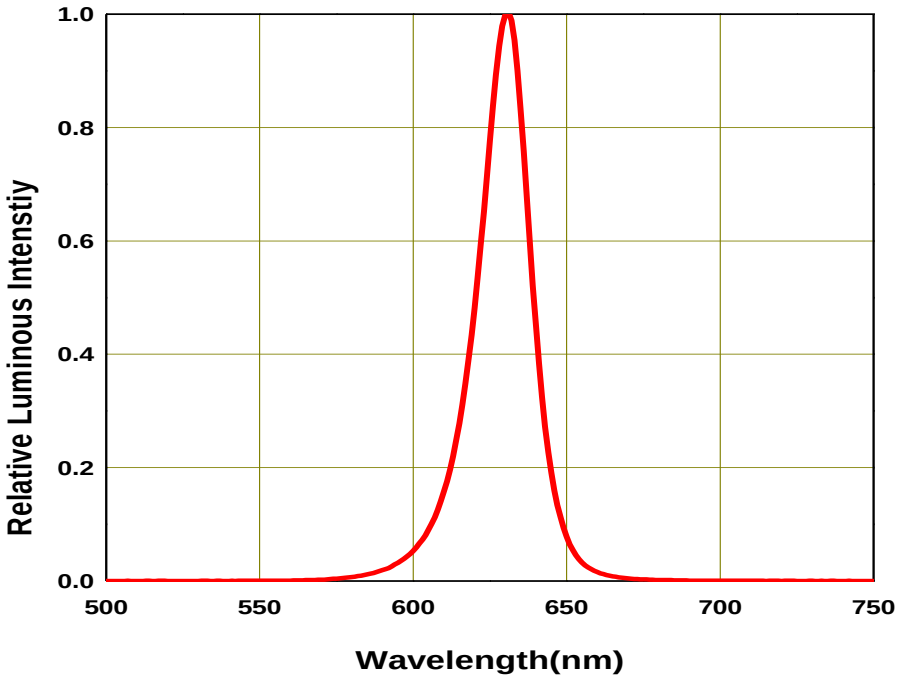

Typical Electro-Optical Characteristics Curves

Fig.1 – Forward Voltage Shift vs. Junction Temperature


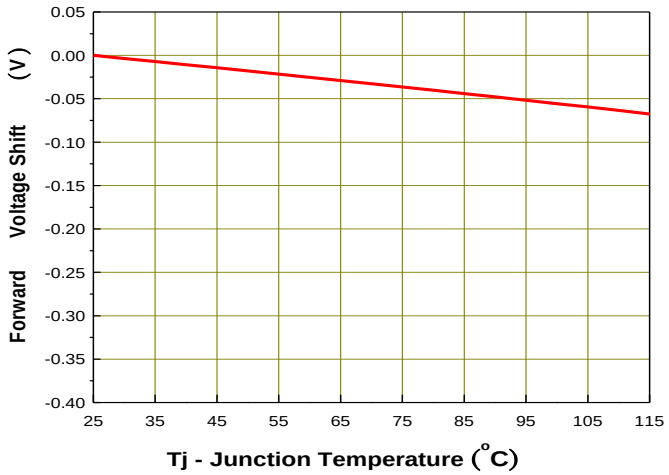


Fig.2 - Relative Luminous Intensity vs. Forward Current

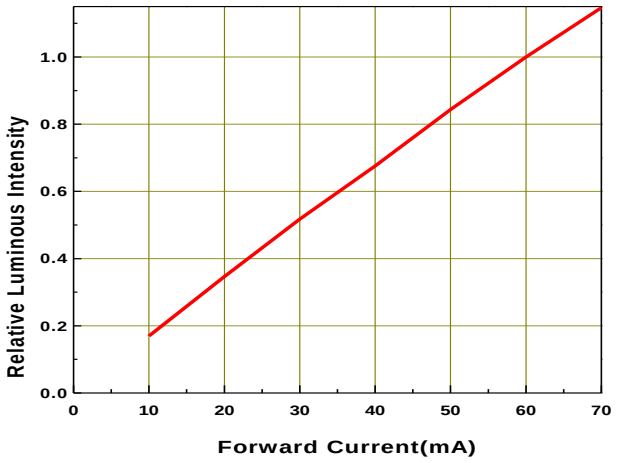

Copyright © 2013, Everlight Americas Inc. Release Date: 14.Oct, 2015. Issue No: DSE-00_Rev.

Typical Electro-Optical Characteristics Curves

Fig.3 - Relative Luminous Intensity vs. Junction Temperature

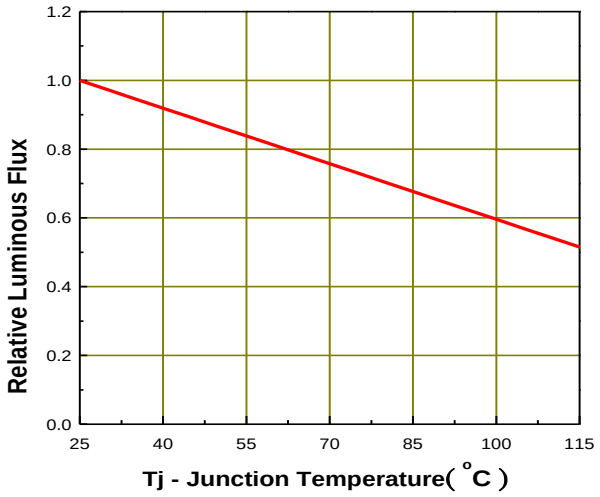


Fig.4 - Forward Current vs. Forward Voltage

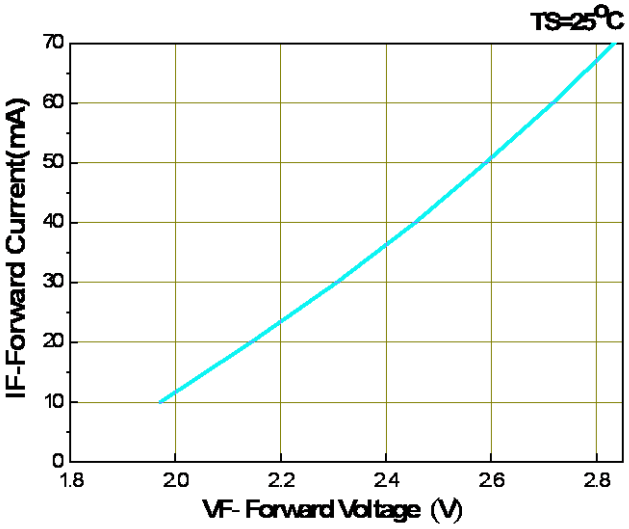


Fig.5 – Max. Driving Forward Current vs. Soldering Temperature

Rth j-s=50 ° C/W



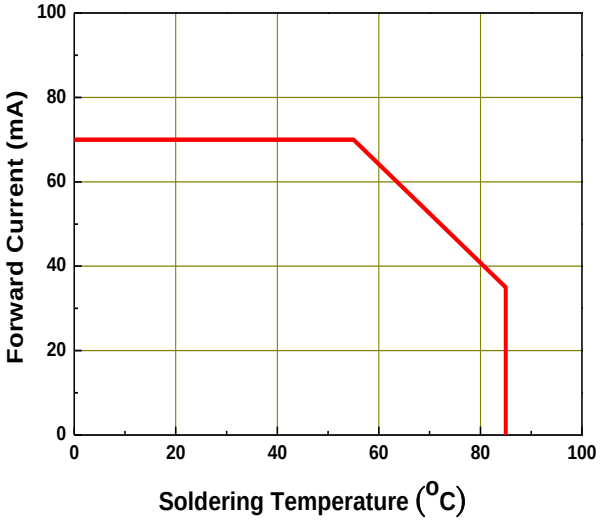


Fig.6 – Radiation Diagram

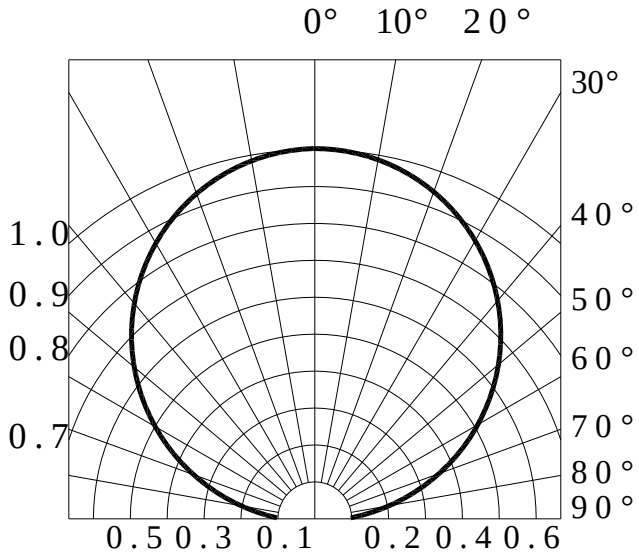

Copyright © 2013, Everlight Americas Inc. Release Date: 14.Oct, 2015. Issue No: DSE-00_Rev.

Package Dimension

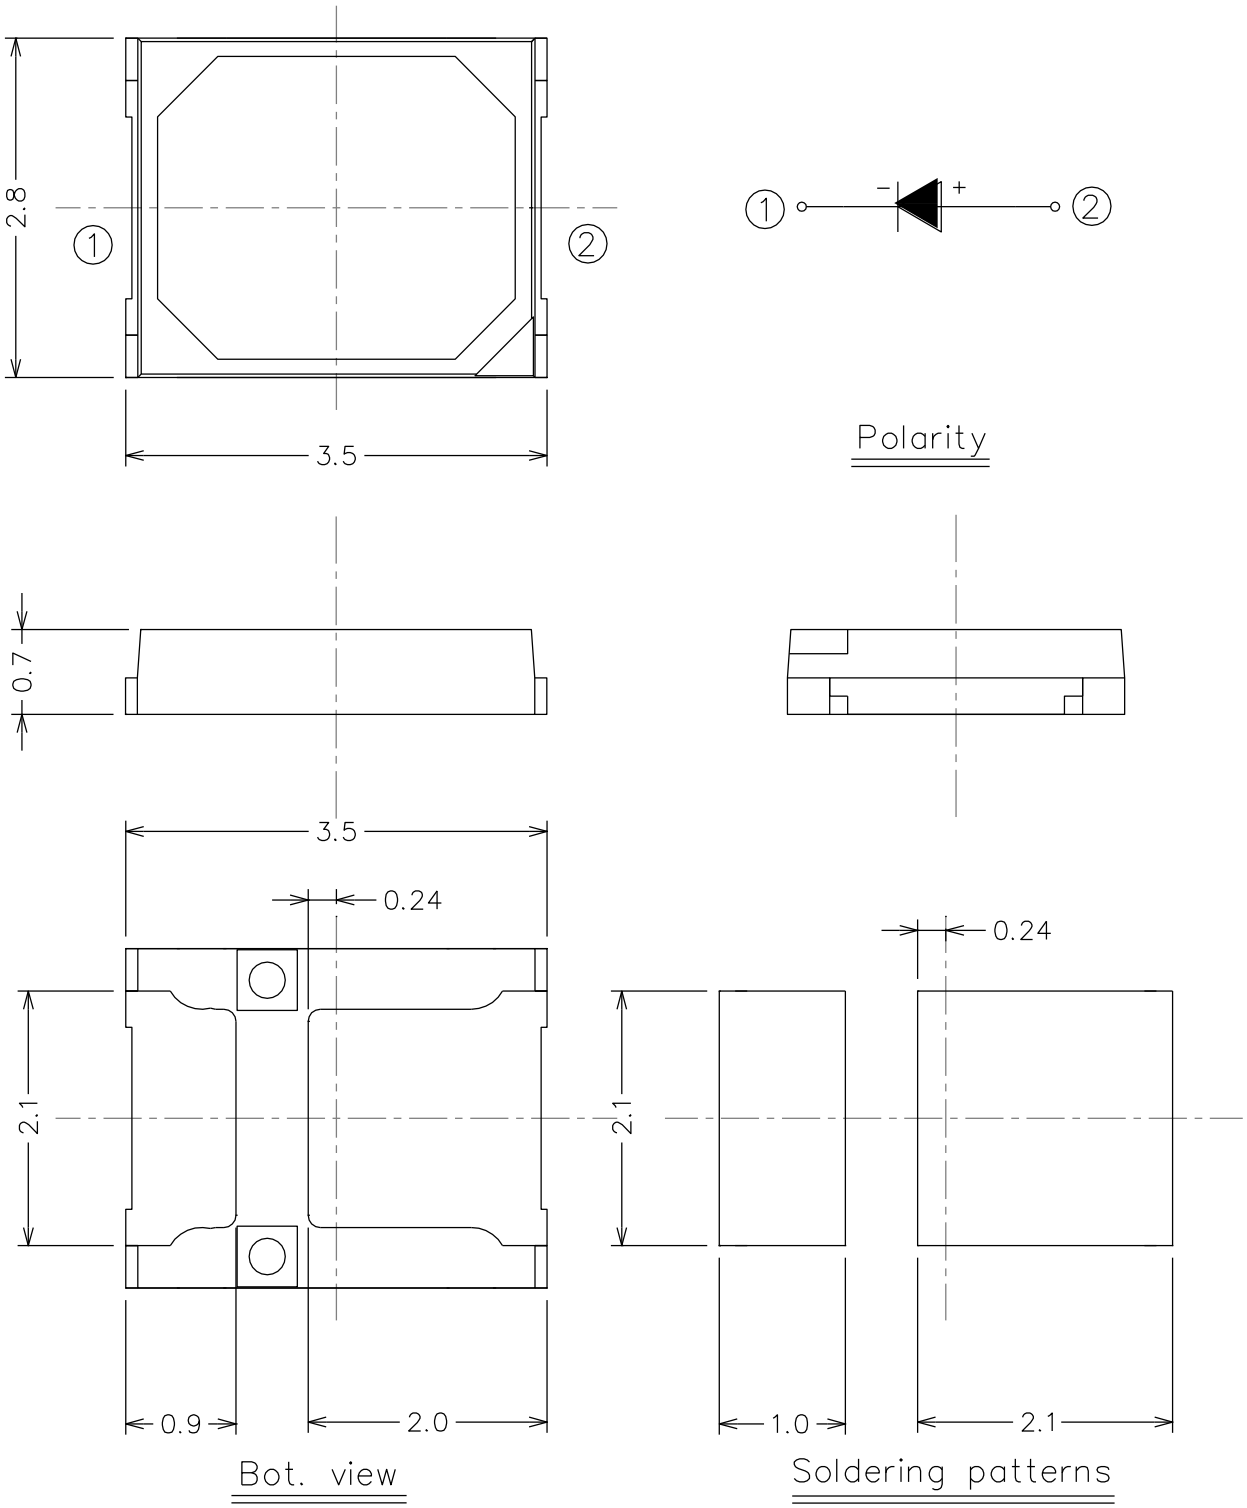


Note:
Tolerance unless mentioned is ±0.15 mm; Unit = mm

Copyright © 2013, Everlight Americas Inc. Release Date: 14.Oct, 2015. Issue No: DSE-00_Rev.


Moisture Resistant Packing Materials

Label Explanation

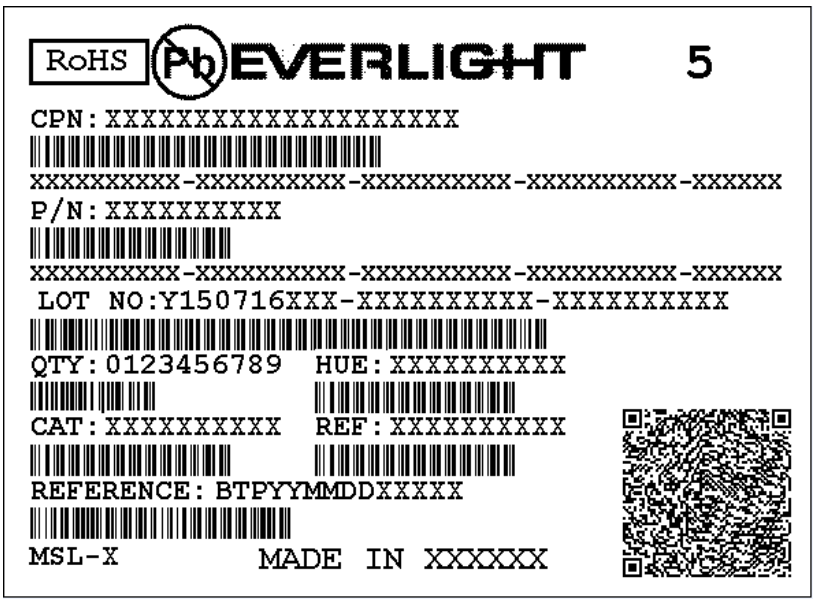

- CPN: Customer's Product Number
- P/N: Product Number
- QTY: Packing Quantity
- CAT: Luminous Intensity Rank
- HUE: Dom. Wavelength Rank
- REF: Forward Voltage Rank
- LOT No: Lot Number


Reel Dimensions

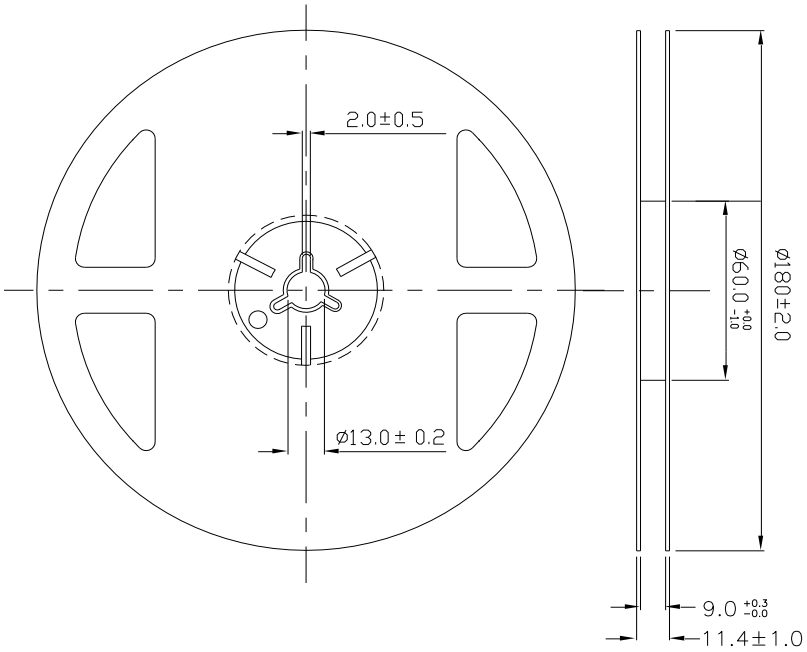

Note:
Tolerances unless mentioned ±0.1mm. Unit = mm


Copyright © 2013, Everlight Americas Inc. Release Date: 14.Oct, 2015. Issue No: DSE-00_Rev.

Carrier Tape Dimensions: Loaded Quantity 2000 pcs. Per Reel

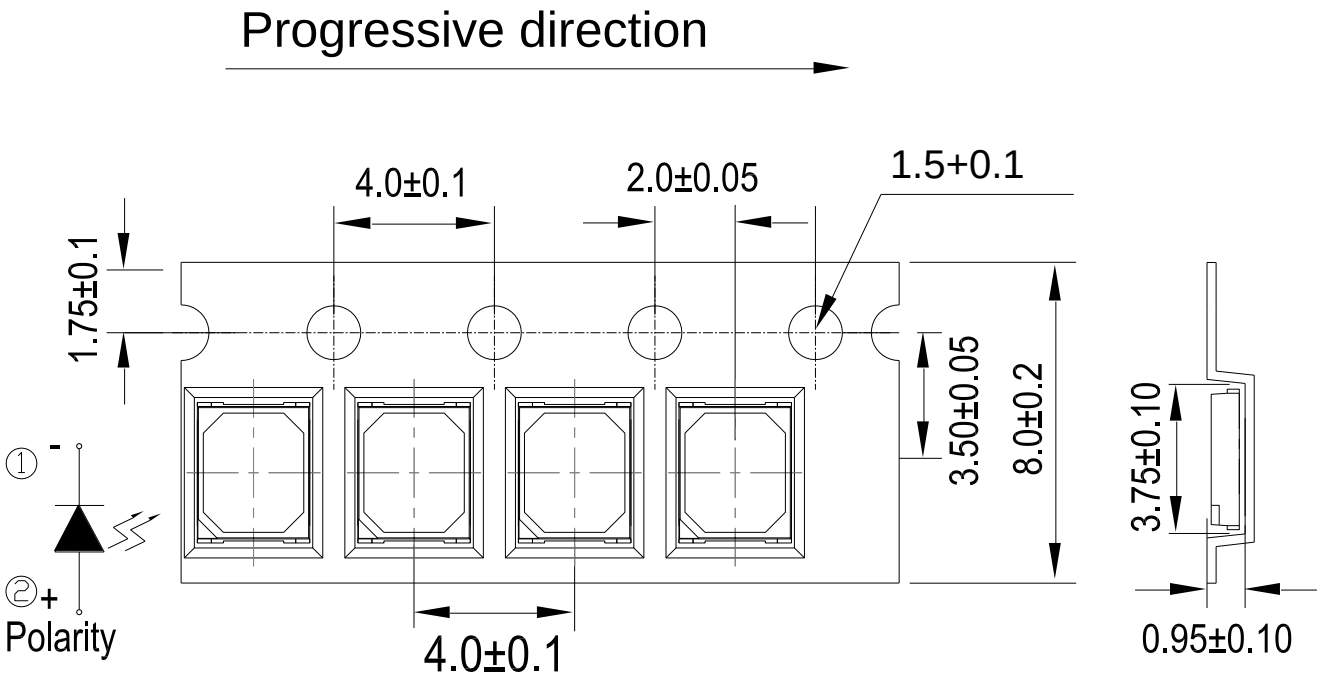

Note:
1.Tolerance unless mentioned is ±0.1mm; Unit = mm

Moisture Resistant Packing Process

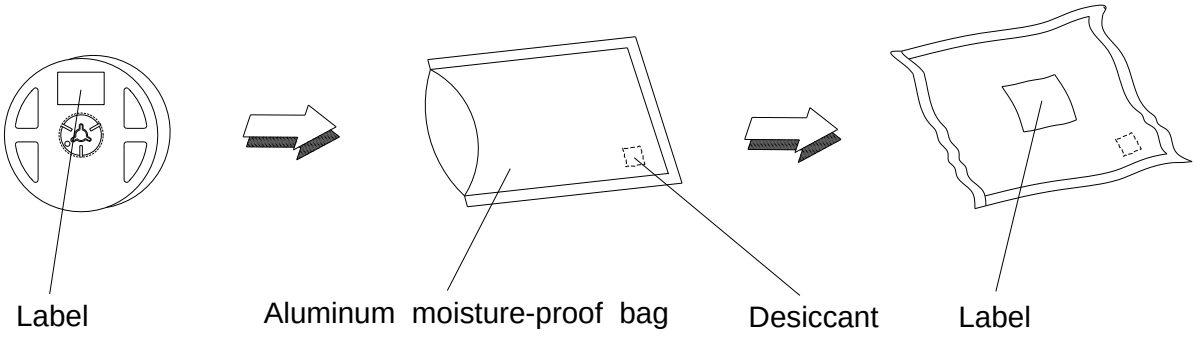

Copyright © 2013, Everlight Americas Inc. Release Date: 14.Oct, 2015. Issue No: DSE-00_Rev.

Reliability Test Items and Conditions


The reliability of products shall be satisfied with items listed below.
Confidence level：90%
LTPD：10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260℃/10sec.	6 Min.	22 PCS.	0/1
2	Thermal Shock	H : +100℃ 20min ∫ 10 sec L : -10℃ 20min	200 Cycles	22 PCS.	0/1
3	Temperature Cycle	H : +100℃ 30min ∫ 5 min L : -40℃ 30min	200 Cycles	22 PCS.	0/1
4	High Temperature/Humidity Reverse Bias	Ta=85℃,85%RH	1000 Hrs.	22 PCS.	0/1
5	High Temperature/Humidity Operation	Ta=85℃,85%RH, I_F = 35 mA	1000 Hrs.	22 PCS.	0/1
6	Low Temperature Storage	Ta=-40℃	1000 Hrs.	22 PCS.	0/1
7	High Temperature Storage	Ta=85℃	1000 Hrs.	22 PCS.	0/1
8	Low Temperature Operation Life	Ta=-40℃, I_F = 70 mA	1000 Hrs.	22 PCS.	0/1
9	High Temperature Operation/ Life#1	Ta=25℃, I_F = 70 mA	1000 Hrs.	22 PCS.	0/1
10	High Temperature Operation/ Life#2	Ta=55℃, I_F =70 mA	1000 Hrs.	22 PCS.	0/1
11	High Temperature Operation/ Life#3	Ta=85℃, I_F = 35 mA	1000 Hrs.	22 PCS.	0/1

Copyright © 2013, Everlight Americas Inc. Release Date: 14.Oct, 2015. Issue No: DSE-00_Rev.

Precautions for Use

1. Over-current-proof
   Customer must apply resistors for protection; otherwise slight voltage shift will cause big current change (Burn out will happen).
2. Storage
   2.1 Do not open moisture proof bag before the products are ready to use.
   2.2 Before opening the package: The LEDs should be kept at 30℃ or less and 90%RH or less.
   2.3 After opening the package: The LED's floor life is 168 Hrs under 30℃ or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
   2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.
   Baking treatment: 60±5℃ for 24 hours.
3. Soldering Condition
   3.1 Pb-free solder temperature profile

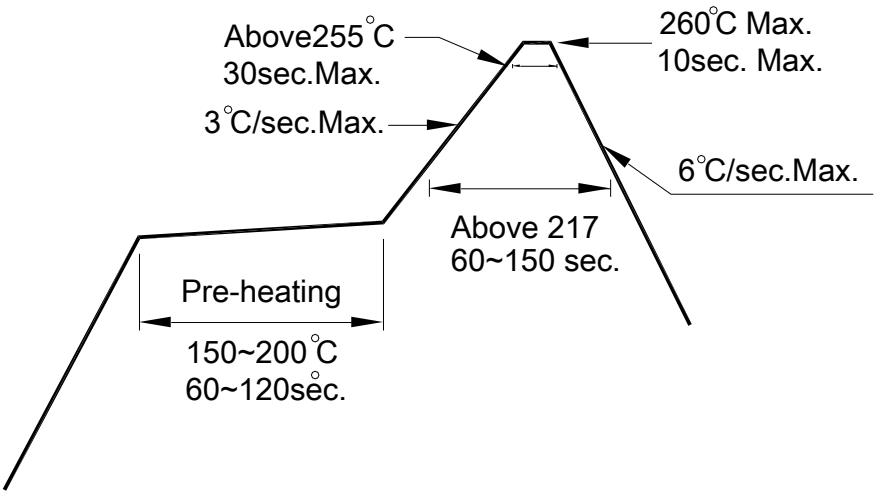

   3.2 Reflow soldering should not be done more than two times.
   3.3 When soldering, do not put stress on the LEDs during heating.
   3.4 After soldering, do not warp the circuit board.


Copyright © 2013, Everlight Americas Inc. Release Date: 14.Oct, 2015. Issue No: DSE-00_Rev.

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350℃ for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

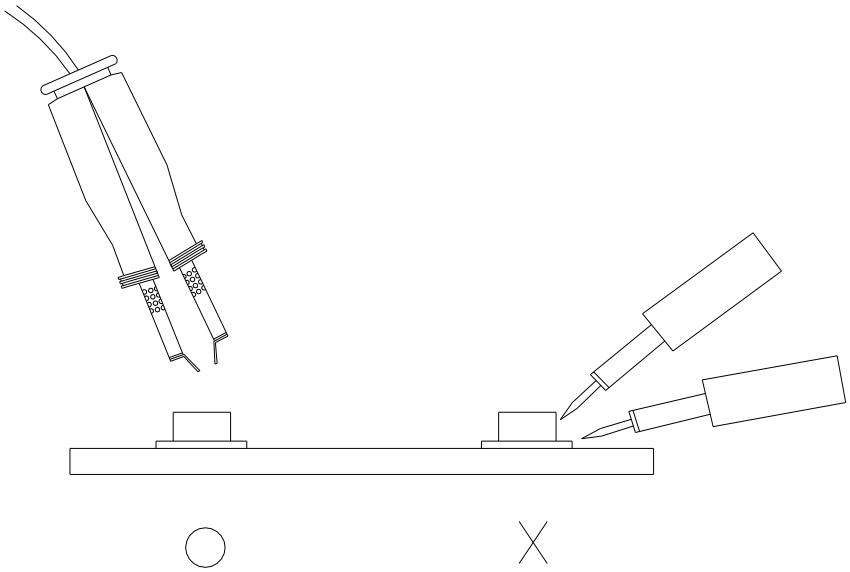

Copyright © 2013, Everlight Americas Inc. Release Date: 14.Oct, 2015. Issue No: DSE-00_Rev.