Shock-Safe Fuseholder, 6.3 x 32 mm, Fingergrip, Rear-Side, NF



250 VAC · 2.5 W / 10 A (NF)10 A (UL/CSA)

Description
- Screw type fuse carrier

Standards
- UL 4248-1 / UL 512
- CSA C22.2 no. 39
- NF C 93-436 - Modell HB02
- Contrôle de Conformité de Qualité (CCQ)

Approvals
- UL File Number: E41738
- CSA File Number: 23151

Weblinks
pdf-datasheet, html-datasheet, General Product Information, Packaging details, Approvals, CE declaration of conformity, RoHS, CHINA-RoHS, REACH, Distributor-Stock-Check, Detailed request for product


Technical Data


Fuse-Link	6.3 x 32 mm
Mounting	Panel Mount, Rear Side
Attachment	Fixing Nut
Terminal	Solder
Rated Voltage	250 VAC
Rated current	10 A (NF), 10 A (UL/CSA)
Rated Power Acceptance IEC	2.5 W / 10 A @ Ta 23 °C Admissible power acceptance at higher ambient temperature see derating curves
Degree of Protection	IP 40 / IP 67
Protection Class	Suitable for appliances with protection class I or II acc. to IEC 61140
Admissible Ambient Air Temp.	-40 °C to 85 °C
Climatic Category	40/085/21 acc. to IEC 60068-1
Material: Socket	Thermoset, black
Unit Weight	19 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	Type, Rated Voltage, Rated current, Approvals, HB2

Soldering Methods	Iron Soldering Profile
Contact Resistance	< mΩ at 20 mV
Resistance to Vibration	acc. to NF C 20-706 / IEC 60068-2-6, test Fc
Shocks	acc. to NF C 20-706 / IEC 60068-2-27
Bumps	acc. to NF C 20-729 / IEC 60068-2-29
Salt Mist	acc. to NF C 20-711 / IEC 60068-2-11
Dump Heat	acc. to NF C 20-604
Climatic Composite	acc. to NF C 20-619 Phases D and F
Admissible Torque on Fixing Nut	max 1.2 Nm
Plattendicke	max 5 mm

Dimension

54 mm

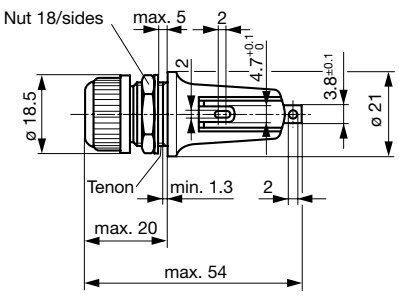



Mounting holes

All Variants

Holder	Cap	Fuse-Link	Degree of Protection	NF	VDE	SEV	GAM T1 NNO	Reference	Order Number
●	Fingergrip	6.3 x 32mm	IP 40	●	●	●		23312P	7092.2520
●	Fingergrip	6.3 x 32mm	IP 67					23312ERJJP	7092.2630

Most Popular.

Availability for all products can be searched real-time:http://www.schurter.com/Stock-Check/Stock-Check-SCHURTER

Packaging Unit Bulk (100 pcs.)

19.11.2016

The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments. Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability and test each product selected for their own applications.