

POWER RELAY

1 POLE - 6A (MEDIUM LOAD CONTROL)

SLIM TYPE

FTR-LY Series

RoHS compliant

■ FEATURES

- Slim(15.0mm(h) x 5.0 mm(w) x 28.0mm (l))
- 1 form C available
- Mounting space: 140mm², weight: 5.0g
- High insulation in small package
 - Insulation Distance (Between coil and contacts): 8mm (creepage/clearance)
 - Dielectric strength: 4,000 VAC
 - Surge strength: 6,000V
- UL, CSA, VDE, SEMKO, FIMKO, DEMKO, NEMKO compliance
- Contains no lead and features cadmium-free contacts
- Socket type available
- RoHS Compliant
Please see page 9 for more information
- Plastic sealed



■ ORDERING INFORMATION

[Example] FTR-LY A A 005 Y SK
 (a) (b) (c) (d) (e) (f)

(a)	Series Name	FTR-LY : FTR-LY Series	
(b)	Contact Arrangement	A : 1 form A C : 1 form C	P: 1 form A (Right Angle Type) R: 1 form C (Right Angle Type)
(c)	Coil Type	A : Standard (170 mW)	
(d)	Nominal Voltage	005 : 5 VDC, 012 : 12VDC,	006 : 6VDC, 024 : 24VDC, 048 : 48VDC (refer to COIL DATA chart)
(e)	Contact Material	E : AgNi Y : AgSnO ₂ V : AgSnO ₂ + Au (0.3μm)	
(f)	Socket Type	Nil : PCB mounting type SK : Socket mounting type (contact arrangement A and C only)	

Actual marking does not carry the type name : "FTR" and "SK"

E.g.: Ordering code: FTR-LYAA012Y

Actual marking: LYAA012Y

FTR-LY SERIES

■ PART NUMBERS

Ordering P/N	Series	Contact	Coil Power	Coil Voltage	Contact
FTR-LY(A,P)A005Y	FTR-LY	1 form A	170 mW	5	Y: AgSnO ₂
FTR-LY(A,P)A006Y				6	
FTR-LY(A,P)A009Y				9	
FTR-LY(A,P)A012Y				12	
FTR-LY(A,P)A018Y				18	
FTR-LY(A,P)A024Y				24	
FTR-LY(A,P)A048Y			217 mW	48	
FTR-LY(A,P)A060Y			175 mW	60	
FTR-LY(C,R)A005Y		1 form C	170 mW	5	
FTR-LY(C,R)A006Y				6	
FTR-LY(C,R)A009Y				9	
FTR-LY(C,R)A012Y				12	
FTR-LY(C,R)A018Y				18	
FTR-LY(C,R)A024Y				24	
FTR-LY(C,R)A048Y			217 mW	48	
FTR-LY(C,R)A060Y			175 mW	60	
FTR-LY(A,P)A005V		1 form A	170 mW	5	V: AgSnO ₂ +Au
FTR-LY(A,P)A006V				6	
FTR-LY(A,P)A009V				9	
FTR-LY(A,P)A012V				12	
FTR-LY(A,P)A018V				18	
FTR-LY(A,P)A024V				24	
FTR-LY(A,P)A048V			217 mW	48	
FTR-LY(A,P)A060V			175 mW	60	
FTR-LY(C,R)A005V		1 form C	170 mW	5	
FTR-LY(C,R)A006V				6	
FTR-LY(C,R)A009V				9	
FTR-LY(C,R)A012V				12	
FTR-LY(C,R)A018V				18	
FTR-LY(C,R)A024V				24	
FTR-LY(C,R)A048V			217 mW	48	
FTR-LY(C,R)A060V			175 mW	60	
FTR-LY(A,P)A005E		1 form A	170 mW	5	E: AgNi
FTR-LY(A,P)A006E				6	
FTR-LY(A,P)A009E				9	
FTR-LY(A,P)A012E				12	
FTR-LY(A,P)A018E				18	
FTR-LY(A,P)A024E				24	
FTR-LY(A,P)A048E			217 mW	48	
FTR-LY(A,P)A060E			175 mW	60	
FTR-LY(C,R)A005E		1 form C	170 mW	5	
FTR-LY(C,R)A006E				6	
FTR-LY(C,R)A009E				9	
FTR-LY(C,R)A012E				12	
FTR-LY(C,R)A018E				18	
FTR-LY(C,R)A024E				24	
FTR-LY(C,R)A048E			217 mW	48	
FTR-LY(C,R)A060E			175 mW	60	

FTR-LY SERIES

■ COIL DATA CHART

Coil Voltage	Nominal Voltage	Max. Coil Voltage* ¹	Coil Resistance (±10%)	Must Operate Voltage* ²	Must Release Voltage	Nominal Power
5	5 VDC	11.5 VDC	147 Ω	3.3 VDC	0.25 VDC	170 mW
6	6 VDC	13.8 VDC	211 Ω	4.0 VDC	0.3 VDC	170 mW
9	9 VDC	20.7 VDC	476 Ω	5.9 VDC	0.45 VDC	170 mW
12	12 VDC	27.6 VDC	847 Ω	7.9 VDC	0.6 VDC	170 mW
18	18 VDC	41.4 VDC	1,910 Ω	11.9 VDC	0.9 VDC	170 mW
24	24 VDC	55.2 VDC	3,390 Ω	15.9 VDC	1.2 VDC	170 mW
48	48 VDC	110.4 VDC	10,600 Ω	31.7 VDC	2.4 VDC	217 mW
60	60 VDC	138.0 VDC	20,570 Ω	39.6 VDC	3.0 VDC	175 mW

Note: All values in the table are measured at 20°C.

*1: No contact current at 20°C

*2: Specified values are subject to pulse wave voltage

■ SPECIFICATIONS

Item		FTR-LY (C, R) A (), (Y, E, V)	FTR-LY (A, P) A (), (Y, E, V)
Contact	Arrangement	1 form C	1 form A
	Material	Y: AgSnO ₂ , E: AgNi, V: AgSnO ₂ + Au 0.3μm	
	Resistance (initial)	Y, E: Maximum 100 mΩ at 6 VDC, 1 A V: Maximum 30 mΩ at 6 VDC, 1A	
	Rating	6 A, 250 VAC / 24 VDC	
	Maximum Carrying Current	6A	
	Maximum Switching Power	1,500 VA / 144 W	
	Maximum Switching Voltage	250 VAC	
	Minimum Switching Load* ¹	Y, E: 100 mA 5 VDC V: 10mA 5 VDC	
Coil	Operating Temperature	-40°C to +85°C (no frost)	
	Nominal Power	170 to 217 mW	
	Must Operate Power	74 to 76 mW	
Time Value	Operate Time (without diode)	Maximum 8 ms (at nominal voltage, no bounce)	
	Release Time (without diode)	Maximum 4 ms (at nominal voltage, no bounce)	
Life	Mechanical	10 x 10 ⁶ operations minimum	
	Electrical	50 x 10 ³ operations min. (N.O.) 30 x 10 ³ operations min. (N.C.) at 6 A, 250VAC/30VDC resistive	
Other	Vibration Resistance	Misoperation	10 to 55 Hz, at double amplitude of 1,0 mm
		Endurance	10-55Hz, at double amplitude of 1.5 mm
	Shock Resistance	Misoperation	Min. 50m/s ² (11±1ms)
		Endurance	Min. 1,000m/s ² (6±1ms)
	Weight	Approximately 5g	

*¹ Minimum switching loads mentioned above are reference values. Please perform the confirmation test with the actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

FTR-LY SERIES

■ INSULATION









Item		FTR-LY
Resistance (at 500 VDC)		Minimum 1,000 MΩ 1 min.
Dielectric Strength	open contacts	1,000 VAC (50/60 Hz) 1 min. 10mA detection current
	coil and contacts	4,000 VAC (50/60 Hz) 1 min. 10mA detection current
Surge Voltage (coil and contact)		6,000 V (1.2 x 50µs standard wave)
Clearance/Creepage		8 mm / 8 mm
(DIN EN61810-1 VDE0435)		
Voltage		250 V
Pollution		3
Isolation material group		IIIa
Isolation category / Reference voltage (VDE01106)		C / 250 V

■ SAFETY STANDARDS

Type	Compliance	Contact rating
UL	UL 508	Flammability: UL 94-V0 (plastics) 5A, 277 VAC (resistive) 5A, 30 VDC (resistive) 1/10 HP, 277VAC /125VAC Pilot duty: D300, C300, R300
	E63614	
CSA	C22.2 No. 14 LR 40304	
VDE 40006591	EN 61810-1 (VDE 0435-Port 201) 2004-07 EN 61984 (VDE 0627) EN 60730-1 (VDE 0631-Port 1) EN 60335-1 (VDE 0700-Port 1)	250VAC;6A 30VDC;6A 250VAC;6(1,5) 250VAC;3(1,5)
SEMKO	EN 61058-1:1992+A1 EN 61095:1993+A1+A11	250V, 6(3)A


FTR-LY SERIES

■ REFERENCE DATA

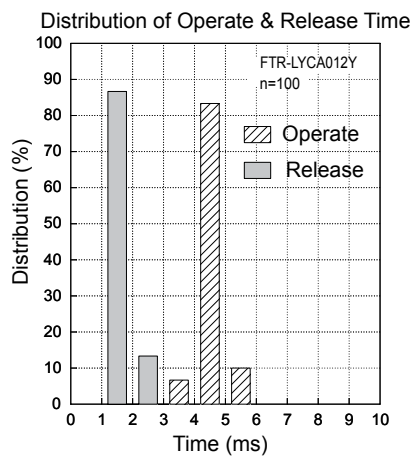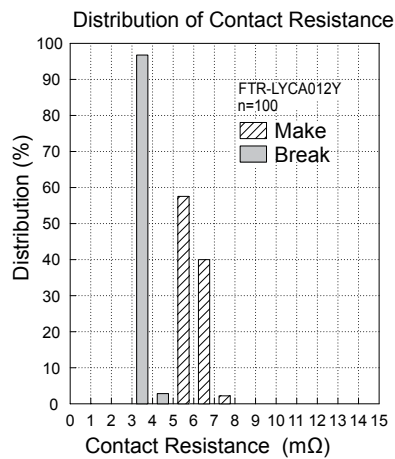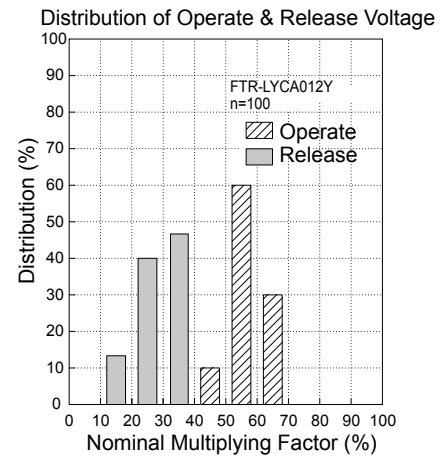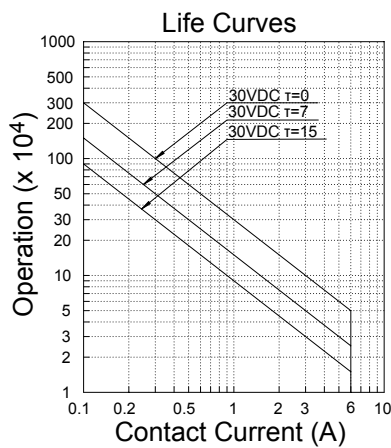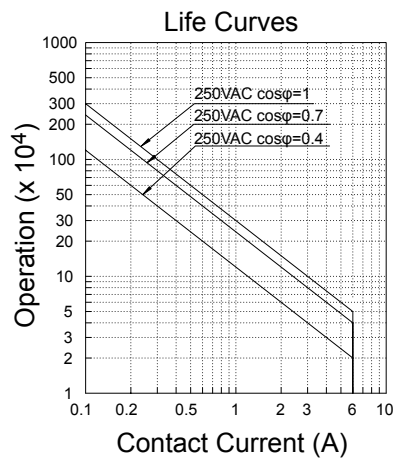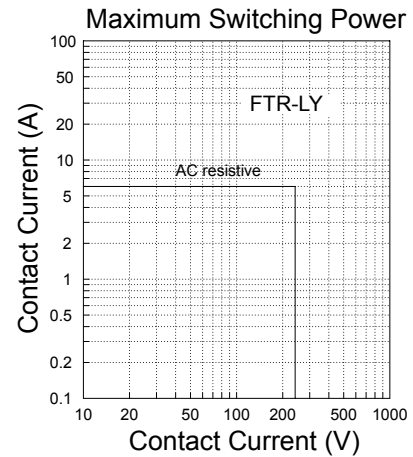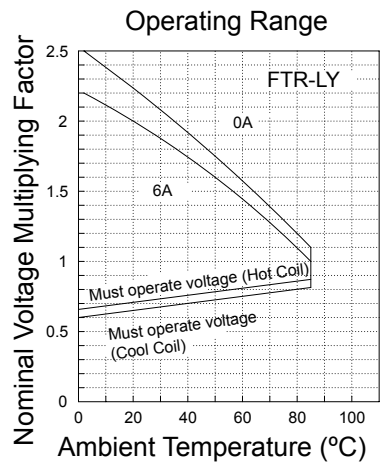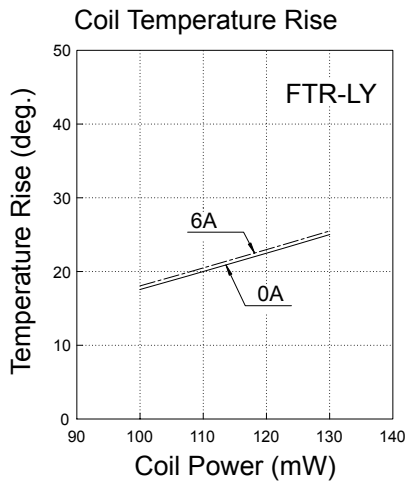


■ DIMENSIONS


Thru hole type

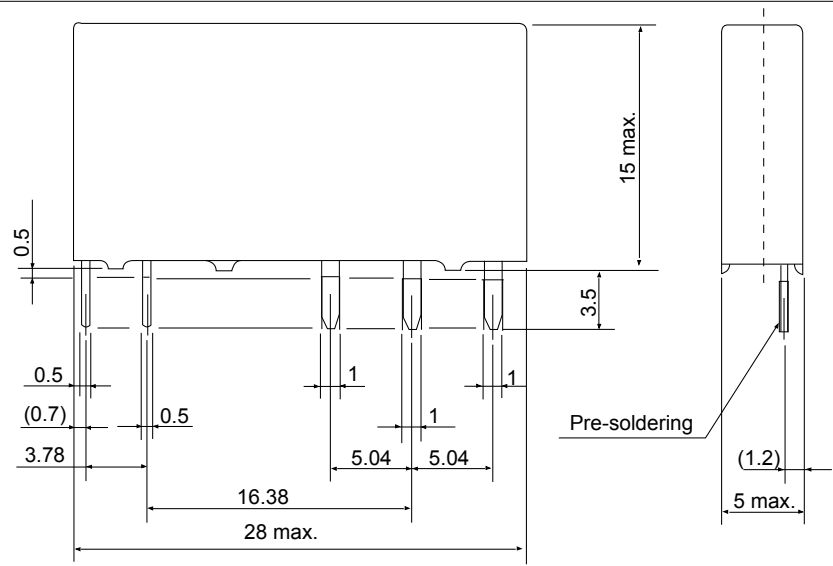

Drilling Plan (BOTTOM VIEW)



Wiring Diagram (BOTTOM VIEW)

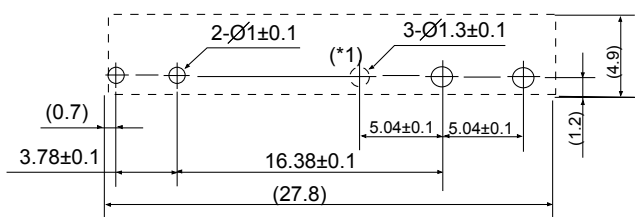


*1: This terminal is not applicable for 1 form A type


Unit: mm

■ DIMENSIONS


Right Angle type

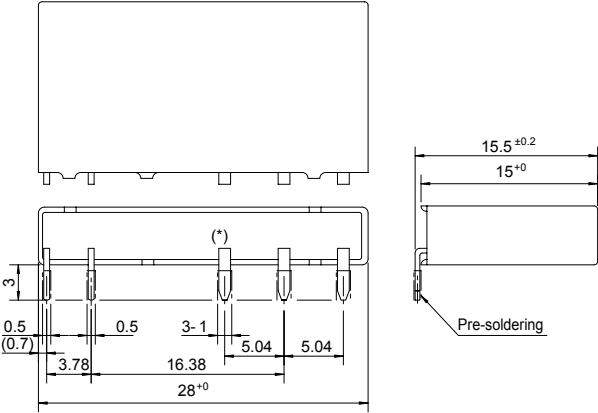

Drilling Plan (BOTTOM VIEW)



Wiring Diagram (BOTTOM VIEW)

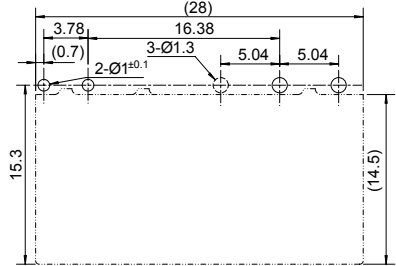


*: This terminal is not applicable for 1 form A type

Unit: mm

FTR-LY SERIES

■ DIMENSIONS


Socket type

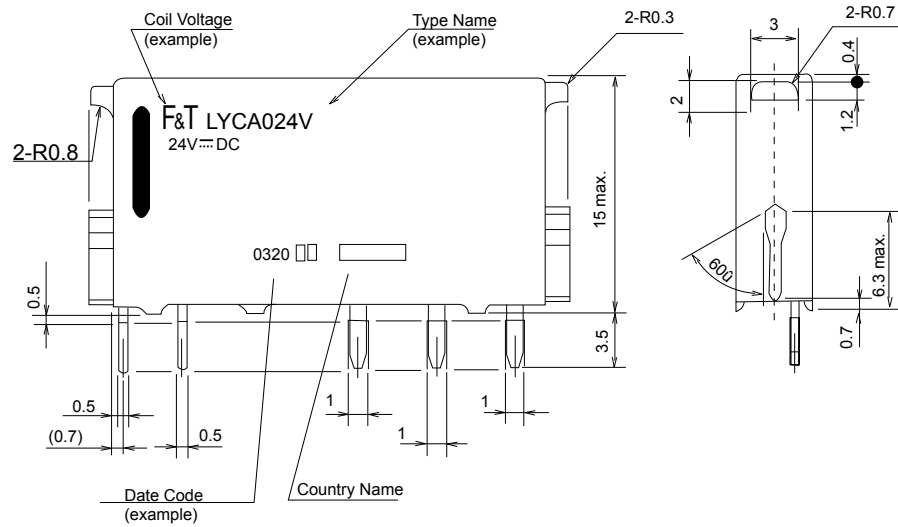

Schematics (BOTTOM VIEW)



PC Board Mounting Hole Layout (BOTTOM VIEW)

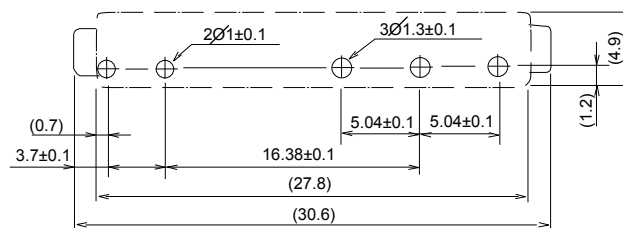

Unit: mm

Notes: 1. Socket ordering code

2. Standard IC socket is not recommended. Please use JM-6N

RoHS Compliance and Lead Free Relay Information

1. General Information

- Relays produced after the specific date code that is indicated on each data sheet are RoHS-compliant now. Please refer to RoHS-compliant Status Info.
(<http://www.fujitsu.com/us/downloads/MICRO/fcai/relays/lead-free-letter.pdf>)
- Lead free solder paste currently used in relays is Sn-3.0Ag-0.5Cu.
- Relays that are RoHS compliant do not contain the 5 hazardous materials that are restricted by RoHS directive (lead, mercury, chromium IV, PBB, PBDE and DecaBDE).
- It has been verified that using lead-free relays in leaded assembly process will not cause any problems (compatible).
- "LF" is marked on each outer and inner carton. (No marking on individual relays).

Note: Cadmium was exempted from RoHS on October 21, 2005. (Amendment to Directive 2002/95/EC)

2. Recommended Lead Free Solder Profile

- Recommended solder paste Sn-3.0Ag-0.5Cu.

Solder condition

Flow Solder condition:

Pre-heating: maximum 120°C
Soldering: dip within 5 sec. at
260°C solder bath

Solder by Soldering Iron:

Soldering Iron
Temperature: maximum 360°C
Duration: maximum 3 sec.

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays.

4. Tin Whisker

- Dipped SnAgCu solder is known as low risk tin whisker. No considerable length whisker was found by our in house test.

Fujitsu Components International Headquarter Offices

Japan

Fujitsu Component Limited
Gotanda-Chuo Building
3-5, Higashigotanda 2-chome, Shinagawa-ku
Tokyo 141, Japan
Tel: (81-3) 5449-7010
Fax: (81-3) 5449-2626
Email: promothq@ft.ed.fujitsu.com
Web: www.fcl.fujitsu.com

North and South America

Fujitsu Components America, Inc.
250 E. Caribbean Drive
Sunnyvale, CA 94089 U.S.A.
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970
Email: components@us.fujitsu.com
Web: <http://www.fujitsu.com/us/services/edevices/components/>

Europe

Fujitsu Components Europe B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950
Email: info@fceu.fujitsu.com
Web: emea.fujitsu.com/components/

Asia Pacific

Fujitsu Components Asia Ltd.
102E Pasir Panjang Road
#01-01 Citilink Warehouse Complex
Singapore 118529
Tel: (65) 6375-8560
Fax: (65) 6273-3021
Email: fcsl@fcsl.fujitsu.com
Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2009 Fujitsu Components America, Inc. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice.
Rev. February 2, 2009.